
**Plain washers for screw and washer
assemblies — Small, normal and large
series — Product grade A**

*Rondelles plates pour vis à rondelle plate incorporée — Séries étroite,
normale et large — Grade A*

STANDARDSISO.COM : Click to view the full PDF of ISO 10673:2009



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 10673:2009



COPYRIGHT PROTECTED DOCUMENT

© ISO 2009

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 10673 was prepared by Technical Committee ISO/TC 2, *Fasteners*, Subcommittee SC 10, *Product standards for fasteners*.

This second edition cancels and replaces the first edition (ISO 10673:1998), which has been technically revised.

STANDARDSISO.COM : Click to view the full PDF of ISO 10673:2009

Plain washers for screw and washer assemblies — Small, normal and large series — Product grade A

1 Scope

The International Standard specifies the characteristics of plain steel washers, small, normal and large series, of product grade A for metric screw and washer assemblies in accordance with ISO 10644:

NOTE 1 The product can be manufactured under the conditions defined in Clause 5.

NOTE 2 The manufacturing of screw and washer assemblies takes into consideration material and production procedure of screw and plain washer as well as the assembly process of components, in order to meet specification requirements.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3269, *Fasteners — Acceptance inspection*

ISO 4759-3, *Tolerances for fasteners — Part 3: Plain washers for bolts, screws and nuts — Product grades A and C*

ISO 6507-1, *Metallic materials — Vickers hardness test — Part 1: Test method*

ISO 10644:2009, *Screw and washer assemblies made of steel with plain washers — Washer hardness classes 200 HV and 300 HV*

3 Classification

Washers of product grade A for metric screw and washer assemblies are classified into three types:

- type S: small series, preferably for hexagon socket head cap screws and for cheese head screws.
- type N: normal series, preferably for hexagon head screws.
- type L: large series, preferably for hexagon head screws.

4 Dimensions

4.1 Washers type S

For washers type S (small series), see Figure 1 and Table 1.

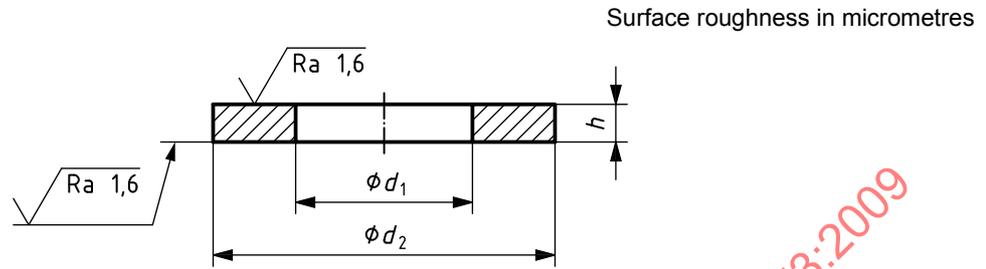


Figure 1 — Washer type S

Table 1 — Dimensions of washer type S

Dimensions in millimetres

Nominal size (Nominal thread diameter) d	Clearance hole d_1		Outside diameter d_2		Thickness h		
	nom. (min.)	max.	nom. (max.)	min.	nom.	max.	min.
2	1,75	1,85	4,5	4,2	0,6	0,65	0,55
2,5	2,25	2,35	5	4,7	0,6	0,65	0,55
3	2,75	2,85	6	5,7	0,6	0,65	0,55
3,5	3,2	3,32	7	6,64	0,8	0,85	0,75
4	3,6	3,72	8	7,64	0,8	0,85	0,75
5	4,55	4,67	9	8,64	1	1,06	0,94
6	5,5	5,62	11	10,57	1,6	1,68	1,52
8	7,4	7,55	15	14,57	1,6	1,68	1,52
10	9,3	9,52	18	17,57	2	2,09	1,91
12	11	11,27	20	19,48	2	2,09	1,91

4.2 Washers type N

For washers type N (normal series), see Figure 2 and Table 2.

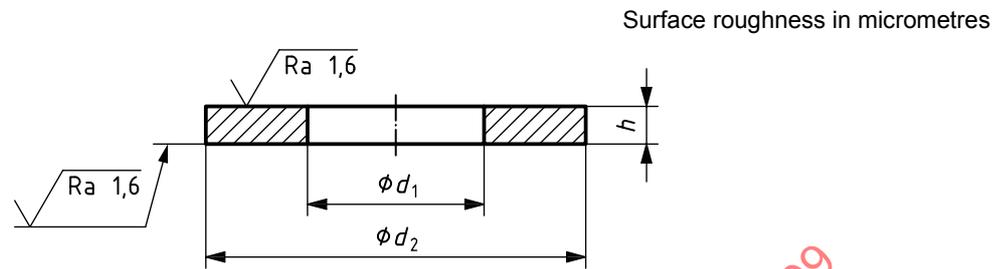


Figure 2 — Washer type N

Table 2 — Dimensions of washer type N

Dimensions in millimetres

Nominal size (Nominal thread diameter) d	Clearance hole d_1		Outside diameter d_2		Thickness h		
	nom. (min.)	max.	nom. (max.)	min.	nom.	max.	min.
2	1,75	1,85	5	4,7	0,6	0,65	0,55
2,5	2,25	2,35	6	5,7	0,6	0,65	0,55
3	2,75	2,85	7	6,64	0,6	0,65	0,55
3,5	3,2	3,32	8	7,64	0,8	0,85	0,75
4	3,6	3,72	9	8,64	0,8	0,85	0,75
5	4,55	4,67	10	9,64	1	1,06	0,94
6	5,5	5,62	12	11,57	1,6	1,68	1,52
8	7,4	7,55	16	15,57	1,6	1,68	1,52
10	9,3	9,52	20	19,48	2	2,09	1,91
12	11	11,27	24	23,48	2,5	2,6	2,4

4.3 Washers type L

For washers type L (large series), see Figure 3 and Table 3.

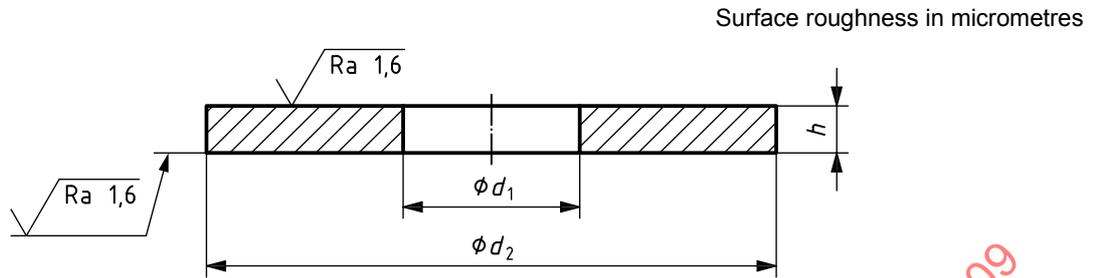


Figure 3 — Washer type L

Table 3 — Dimensions of washer type L

Dimensions in millimetres

Nominal size (Nominal thread diameter) d	Clearance hole d_1		Outside diameter d_2		Thickness h		
	nom. (min.)	max.	nom. (max.)	min.	nom.	max.	min.
2	1,75	1,85	6	5,7	0,6	0,65	0,55
2,5	2,25	2,35	8	7,64	0,6	0,65	0,55
3	2,75	2,85	9	8,64	0,8	0,85	0,75
3,5	3,2	3,32	11	10,57	0,8	0,85	0,75
4	3,6	3,72	12	11,57	1	1,06	0,94
5	4,55	4,67	15	14,57	1	1,06	0,94
6	5,5	5,62	18	17,57	1,6	1,68	1,52
8	7,4	7,55	24	23,48	2	2,09	1,91
10	9,3	9,52	30	29,48	2,5	2,6	2,4
12	11	11,27	37	36,38	3	3,11	2,89

5 Requirements and reference International Standards

See Table 4.

Table 4 — Requirements and reference International Standards

Assembly in relation to screw heat treatment		Washer to be assembled			
		after heat treatment of the screw (see method 2 in ISO 10644)		before heat treatment of the screw (see method 1 in ISO 10644)	
Material ^b		Steel		Heat treatable steel as agreed between screw manufacturer and washer supplier	
Mechanical properties	Hardness class	200 HV ^a	300 HV ^a	200 HV ^c	300 HV ^c
	Hardness range ^d	200 HV to 300 HV	300 HV to 370 HV	200 HV to 300 HV	300 HV to 370 HV
Tolerances	Product grade	A ^e			
	International Standard	ISO 4759-3			
Finish		Plain, i.e. washers to be supplied in natural finish or as agreed between screw manufacturer and washer supplier. All tolerances shall apply prior to the application of a plating or coating.			
Workmanship		Parts shall be uniform in quality and free of irregularities or detrimental defects. No protruding burrs shall appear on the washer.			
Acceptability		For the acceptance procedure, see ISO 3269.			
<p>^a Heat treated (HT) or work hardened (WH) to be defined in the designation. In case of no specification, the washer manufacturer can choose freely.</p> <p>^b Other materials as agreed between screw manufacturer and washer supplier.</p> <p>^c Hardness class after the heat treatment of the screw and washer assembly in accordance with ISO 10644.</p> <p>^d Hardness testing in accordance with ISO 6507-1. Test force: HV 2 for nominal thicknesses $h \leq 0,6$ mm; HV 10 for nominal thicknesses $0,6 \text{ mm} < h \leq 1,2$ mm; HV 30 for nominal thicknesses $h > 1,2$ mm.</p> <p>^e Product grade A does not apply to the tolerances of the clearance hole, d_1, and the thickness, h.</p>					

6 Designation

Plain washers shall be designated in accordance with the following examples.

EXAMPLE 1 A plain steel washer for screw and washer assemblies, type N (normal series), of nominal size 8 mm, hardness class 200 HV, work hardened (WH), manufactured by method 2 in accordance with ISO 10644:2009, Annex A, is designated as follows:

Washer ISO 10673-N-8-200 HV WH