

INTERNATIONAL STANDARD

ISO 11088

Fourth edition
2006-10-01

Corrected version
2007-01-15

Assembly, adjustment and inspection of an alpine ski/binding/boot (S-B-B) system

*Montage, réglage et contrôle d'un ensemble ski/fixation/chaussure
(SFC) pour skis alpins*

STANDARDSISO.COM : Click to view the full PDF of ISO 11088:2006



Reference number
ISO 11088:2006(E)

© ISO 2006

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 11088:2006

© ISO 2006

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword.....	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions.....	2
4 Skier's parameters	3
4.1 General.....	3
4.2 Weight method	3
5 Equipment parameters	3
5.1 Choice of new equipment	3
5.2 Visual inspection and preparation of used equipment.....	4
5.3 Assembly	4
5.4 Binding-to-boot fitting adjustments.....	4
5.5 Initial indicator adjustment	4
5.6 Functional check (inspection of functions)	4
5.7 Measurement of release moment.....	5
5.8 Report	5
Annex A (normative) Definition of skier type	6
Annex B (normative) Method of setting	7
Annex C (normative) Flow chart	9
Annex D (normative) Clean versus lubricated diagnostic test for boot/binding compatibility.....	10
Annex E (normative) Drill	11
Annex F (informative) Tibial width method.....	12
Bibliography	16

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 11088 was prepared by Technical Committee ISO/TC 83, *Sports and recreational equipment*, Subcommittee SC 3, *Ski bindings*.

This fourth edition cancels and replaces the third edition (ISO 11088:2004), subclauses 5.1, 5.7 and 5.8, and Annexes A, B, C and F of which have been technically revised.

This corrected version of ISO 11088:2006 includes the following correction:

— page 6, Table A.1

Replace the value “34 kg” by “22 kg”.

Introduction

International Standards exist for the components of the alpine ski/binding/boot (S-B-B) system, mainly intended for the component manufacturers. An International Standard (ISO 8061) also exists for the selection of release moments. The present International Standard is intended primarily for retailers. However, its aim is to include in one text the different phases of the choice of components, their assembly, adjustment and inspection in the form of practical procedures, and to provide tolerances for inspection and adjustment.

The inspection procedures and tolerances described in this International Standard apply to the condition of the S-B-B system before it leaves the ski shop and are not intended to be used to judge the condition of the equipment once it is put into use.

STANDARDSISO.COM : Click to view the full PDF of ISO 11088:2006

Assembly, adjustment and inspection of an alpine ski/binding/boot (S-B-B) system

1 Scope

This International Standard specifies assembly, adjustment and inspection procedures for the binding mechanisms of skis, integrating in a practical way, the requirements of those International Standards which are related to skis, bindings and boots.

It is intended for all individuals and institutions concerned with those procedures, and especially for sports retailers.

It is applicable to a ski/binding/boot system (S-B-B) for alpine skiing, of which at least one component is owned by the user.

NOTE In the case where the two components (SB and B) are rented, ISO 13993 gives a method of measurement by sampling as an alternative to systematic measurement, before delivery to the end-user.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 5355:2005, *Alpine ski-boots — Requirements and test methods*

ISO 8061:2004, *Alpine ski-bindings — Selection of release torque values*

ISO 8364, *Alpine skis and bindings — Binding mounting area — Requirements and test methods*

ISO 9462, *Alpine ski-bindings — Requirements and test methods*

ISO 9523:—¹⁾ *Touring ski-boots for adults — Interface with touring ski-bindings — Requirements and test methods*

ISO 11087, *Alpine ski-bindings — Retention devices — Requirements and test methods*

ISO 11110, *Winter-sports equipment — Test devices for the setting of the functional unit ski/boot/binding — Requirements and tests*

ISO 13992, *Alpine touring ski-bindings — Requirements and test methods*

1) To be published. (Revision of ISO 9523:1990)

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

fitting adjustment

procedure required to obtain geometric compatibility and correct functioning of different components

3.2

indicator value

Z-mark

release indicator value marked on the binding in accordance with ISO 9462

3.3

skier type

release adjustment criteria pertaining to the type of skiing to be undertaken, as assessed by the skier in accordance with Table A.1

NOTE 1 The designations L, A, S, which were used in ISO 8061:1984, have been replaced by types 1, 2 and 3, respectively, in ISO 8061:1991 and in ISO 8061:2004.

NOTE 2 If the skier desires a setting outside the tolerances of this International Standard, he or she can select such a setting at his or her own discretion. Ski-binding manufacturers should provide guidelines to shops and skiers regarding the recommended magnitude of such changes. Skiers should be clearly informed when these changes result in release values above the upper limit or below the lower limit defined in ISO 8061.

3.4

initial indicator position

release indicator position of the binding corresponding with the instructions given in Table B.1 or F.1

3.5 Release moment (values) M_Z and M_Y

3.5.1

selected individual release moment reference moment

(for a given skier) release moment determined in accordance with ISO 8061

3.5.2

measured release moment

(for a given S-B-B system) average or middle quantitative value of three consecutive release measurements in the same direction on the same unit

NOTE It is expressed in newton metres.

3.6

deviation accepted for the setting inspection tolerance

maximum difference between the **measured release moment** (3.5.2) and the **selected individual release moment** (3.5.1)

NOTE This difference, which may be reduced by the setting, is limited for M_Z to $\pm 15\%$ or 3 N·m (whichever is greater), and for M_Y to $\pm 15\%$ or 10 N·m (whichever is greater).

3.7

release adjustment

procedure for making the measured M_Z and M_Y values coincide with the selected individual M_Z and M_Y values within the limits stated in Table B.1 or F.1

3.8**trouble-shooting procedures**

additional procedures recommended by the equipment manufacturer

3.9**deviation accepted for the re-adjustment****re-adjustment tolerance**

maximum difference between the **measured release moment** (3.5.2) at the **initial indicator position** (3.4) and the **selected individual release moment** (3.5.1)

NOTE This difference, which may be reduced by re-adjustment, is limited for M_Z to $\pm 30\%$ or 6 N·m (whichever is greater), and for M_Y to $\pm 30\%$ or 10 N·m (whichever is greater).

4 Skier's parameters**4.1 General**

The individual release moment values are given in ISO 8061. The following procedure using discrete values may be considered as an acceptable approximation of the basic functions of ISO 8061.

4.2 Weight method

NOTE For the tibial width method, see Annex F.

4.2.1 Determine the skier's parameters:

- mass (weight);
- height;
- type (according to Annex A);
- age;
- sole length if necessary.

4.2.2 Using Table B.1, choose the individual release values of M_Z and M_Y .**5 Equipment parameters****5.1 Choice of new equipment**

The components shall be in conformance with the following International Standards:

- a) ISO 8364 for skis;
- b) ISO 5355 and ISO 9523 for boots;
- c) ISO 9462 and ISO 13992 for bindings;
- d) ISO 11087 for brakes.

The skier should receive specific recommendations concerning the selection of boot, binding and ski, if they are provided by the manufacturer.

5.2 Visual inspection and preparation of used equipment

If any of the components of the S-B-B system have been used, the installer shall carry out a visual check according to the following criteria. In addition to this, older equipment may require special attention as defined by the manufacturer.

- a) The edges and sole of the ski shall be properly prepared according to the recommendations of the ski manufacturer. Unused mounting holes, if any, shall be carefully filled in, according to the manufacturer's specifications.
- b) The condition of the boot sole shall meet the binding manufacturer's requirements. All buckles, fasteners and support areas shall be in good condition.

In cases where release is independent of the boot (e.g. some plate bindings), the inspection of the sole may be less exacting.

- c) The condition of the binding components shall meet the binding manufacturer's requirements (i.e. no broken, deformed, missing or worn-out parts).

Component guides or rotation points shall be free-moving, free of obvious rust, corrosion and dirt, etc.

The manufacturer's inspection and maintenance instructions shall be observed (including lubrication).

The brake shall not be deformed. Suspect components shall be repaired or exchanged.

5.3 Assembly

When assembling the system, comply with the instructions of the binding and ski manufacturers and use the proper tools.

The use of a drill according to Annex E is recommended. Once they are drilled, it is recommended that the holes be tapped and glue applied if this is required by the ski manufacturer. New holes shall not be drilled less than 10 mm from old holes (measured from centre of hole to centre of hole), even when they are filled in, unless otherwise specified by the ski or binding manufacturer.

When inserting the screws, take care not to damage the threads. A maximum tightening moment of 4 N·m shall fulfil this requirement, unless otherwise specified by the ski manufacturer.

5.4 Binding-to-boot fitting adjustments

Follow the binding manufacturer's instructions.

5.5 Initial indicator adjustment

The binding manufacturer shall provide a table similar to Table B.1 for his products.

Using Table B.1, adjust the bindings to the appropriate initial indicator position.

5.6 Functional check (inspection of functions)

Check visually that everything conforms to the binding manufacturer's instructions and operates correctly.

Check if the boot returns quickly to its initial position within less than 2 mm after a sideward displacement of approximately 10 mm.

5.7 Measurement of release moment

Precondition the binding by releasing each unit as required by the binding manufacturer.

Using a test device in accordance with ISO 11110, proceed as follows.

- a) Follow the test device manufacturer's instructions and check the calibration of the test device according to the manufacturer's procedures.
- b) Check that the measured $+M_Z$, $-M_Z$ and $+M_Y$ values are within the limits stated in Table B.1 and, if required, correct the release adjustment. If the first two successive release measurements in the same direction fall within the $\pm 15\%$ inspection tolerance range, it is not necessary to make a third release measurement.
- c) If the measured $+M_Z$, $-M_Z$ and $+M_Y$ values fall near opposite limits of the inspection tolerance range, the manufacturer's procedure for evaluation of non-symmetrical release shall be implemented.
- d) If the release values are out of the limit for re-adjustment (see 3.9), check the binding manufacturer's most recent instructions before proceeding. If no instructions are provided, the person mounting the bindings should conduct a clean versus lubricated diagnostic test in accordance with Annex D.
- e) If the measured $+M_Z$, $-M_Z$ and $+M_Y$ values are outside the $\pm 15\%$ inspection tolerance, consult the manufacturer's trouble-shooting instructions. After completing the trouble-shooting procedures, if the measured values fall within the $\pm 30\%$ limit for re-adjustment tolerance, re-adjustment of the binding may be undertaken. These re-adjustments shall achieve measured values as close as practical to the selected individual release moment, within the $\pm 15\%$ tolerance.

5.8 Report

An adjustment report is established by the ski shop and delivered to the user. It shall contain at least the following information:

- skier's parameters;
- indicator value;
- measured values of M_Z and M_Y , or pass/fail result of the system test.

NOTE The exact content of the report and its delivery conditions are defined by the national standard organizations.

Annex A (normative)

Definition of skier type

NOTE Taken from ISO 8061:2004, Annex A.

A.1 Skier types

A.1.1 It is the responsibility of the skier to determine his or her skier-type classification in accordance with Table A.1.

A.1.2 Skiers are classified by type of skiing into three types, 1, 2 and 3. The definitions are as follows.

- Type 1: cautious skiing on smooth slopes of gentle to moderate pitch. This type also applies to entry level skiers uncertain of their classification. Skiers who designate themselves as type 1 receive lower than average release/retention settings. This corresponds to an increased risk of inadvertent binding release, in order to gain increased capacity for release in the event of a fall.
- Type 2: skiers not classified in type 1 or type 3.
- Type 3: fast, aggressive skiing on slopes of moderate to steep pitch. Skiers who designate themselves as type 3 receive higher than average release/retention settings. This corresponds to decreased capacity for release in the event of a fall, in order to gain a decreased risk of inadvertent binding release.

These designations, 1, 2 and 3, should not be used by equipment manufacturers to categorize their products.

A.1.3 The information given in Table A.1 is an example of the kind of layout which may be used to assist the skier in determining his or her skier type.

Table A.1 — Determination of skier type

Type	1	2	3 ^a
Speed	Slow to moderate	Skiers that do not meet all the descriptions of either 1 or 3	Fast
Terrain	Gentle to moderate		Steep
Style	Cautious (or smooth)		Aggressive
^a Type 3 settings should not be used by skiers of 22 kg or less.			

A.1.4 The information given in A.1.2 can be used to assist the skier in determining the appropriate skier-type classification and to make him aware of the risks related to each classification.

A.2 Discretionary settings

A.2.1 Skiers 10 years of age and older of any type who desire a higher or lower setting than the setting of their skier type according to ISO 8061:2004, 4.3.4 a), 4.3.4 b), 4.3.4 c) or 4.3.4 d), may designate their preference with a + or – sign next to their skier type designation.

A.2.2 The use of these classifications in determining the release setting may be inappropriate for some types of competition skiing.

Annex B (normative)

Method of setting

B.1 Locate the skier's weight (mass) and height in the appropriate column. If weight and height are not on the same line, select the line closest to the top of the table.

B.2 Consider the skier type (see Annex A):

- for a type 1 skier, stay on the line and use the reference moment (M_Z and M_Y) on that line;
- for a type 2 skier, move down one line and use the reference moment (M_Z and M_Y) on that line;
- for a type 3 skier, move down two lines and use the reference moment (M_Z and M_Y) on that line.

B.3 Consider the skier's age.

For skiers who are 50 years or older, or under 10 years, move up one line.

B.4 The setting obtained after having considered skier type and age may be lowered or raised in the following cases.

- a) Skiers who have satisfactory experience with lower settings regarding the manufacturer's recommendations may request settings based on their experience.
- b) Skiers who have skiing experience without inadvertent releases may request a setting up to 15 % lower than that recommended by the manufacturer or one line up in Table B.1.
- c) Skiers having certain characteristics like neutral skiing technique, defensive attitude, high degree of control, etc. may request a setting up to 15 % lower than that recommended by the manufacturer or one line up in Table B.1.
- d) Skiers who have experienced inadvertent releases may request a setting up to 15 % higher than that recommended by the manufacturer or one line down in Table B.1.

B.5 Skiers may request settings that are different for twist and forward lean.

B.6 Using the boot sole length, determine the initial indicator value.

B.7 The deviation accepted for the setting (inspection tolerance, see 3.6) is equivalent, in Table B.1, to the difference between the value located one line above and the value located one line below the selected individual release moment (reference moment, see 3.5.1).

B.8 The deviation accepted for the re-adjustment (re-adjustment tolerance, see 3.9) is equivalent, in the table, to the difference between the value located 2 lines above and the value located 2 lines below the selected individual release moment (reference moment, see 3.5.1).

Table B.1 — Release value selection using skier's weight

Skier's parameters			Initial indicator value, Z (presetting), depending on boot sole length						Inspection parameters	
Skier's mass	Skier's height	Skier code	≤ 250 mm	251 mm to 270 mm	271 mm to 290 mm	291 mm to 310 mm	311 mm to 330 mm	≥ 331 mm	Twist M_Z	Forward lean M_Y
kg	m								N·m	N·m
									5 ^a	18 ^a
10 to 13		A	0,75	0,75					8	29
14 to 17		B	1	1	0,75				11	40
18 to 21		C	1,5	1,25	1				14	52
22 to 25		D	1,75	1,5	1,5	1,25			17	64
26 to 30		E	2,25	2	1,75	1,5	1,5		20	75
31 to 35		F	2,75	2,5	2,25	2	1,75	1,75	23	87
36 to 41		G	3,5	3	2,75	2,5	2,25	2	27	102
42 to 48	$\leq 1,48$	H		3,5	3	3	2,75	2,5	31	120
49 to 57	1,49 to 1,57	I		4,5	4	3,5	3,5	3	37	141
58 to 66	1,58 to 1,66	J		5,5	5	4,5	4	3,5	43	165
67 to 78	1,67 to 1,78	K		6,5	6	5,5	5	4,5	50	194
79 to 94	1,79 to 1,94	L		7,5	7	6,5	6	5,5	58	229
≥ 95	$\geq 1,95$	M			8,5	8	7	6,5	67	271
		N			10	9,5	8,5	8	78	320
		O			11,5	11	10	9,5	91	380
									105	452
									118 ^b	540 ^b

NOTE 1 The values are given for example purposes and may be written also in fractions.

NOTE 2 The initial indicator values given in this table are suggested values for the beginning of the procedure. A readjustment could be necessary in order to make the measured M_Z and M_Y values coincide with the selected individual M_Z and M_Y values within the limits stated in this table.

NOTE 3 For skiers of 13 kg and under, no further correction is appropriate.


NOTE 4 For skiers of 17 kg and under, skier type -1 (see A.2.1) is inappropriate.

^a Lowermost tolerance limit.

^b Uppermost tolerance limit.

Annex C
(normative)

Flow chart

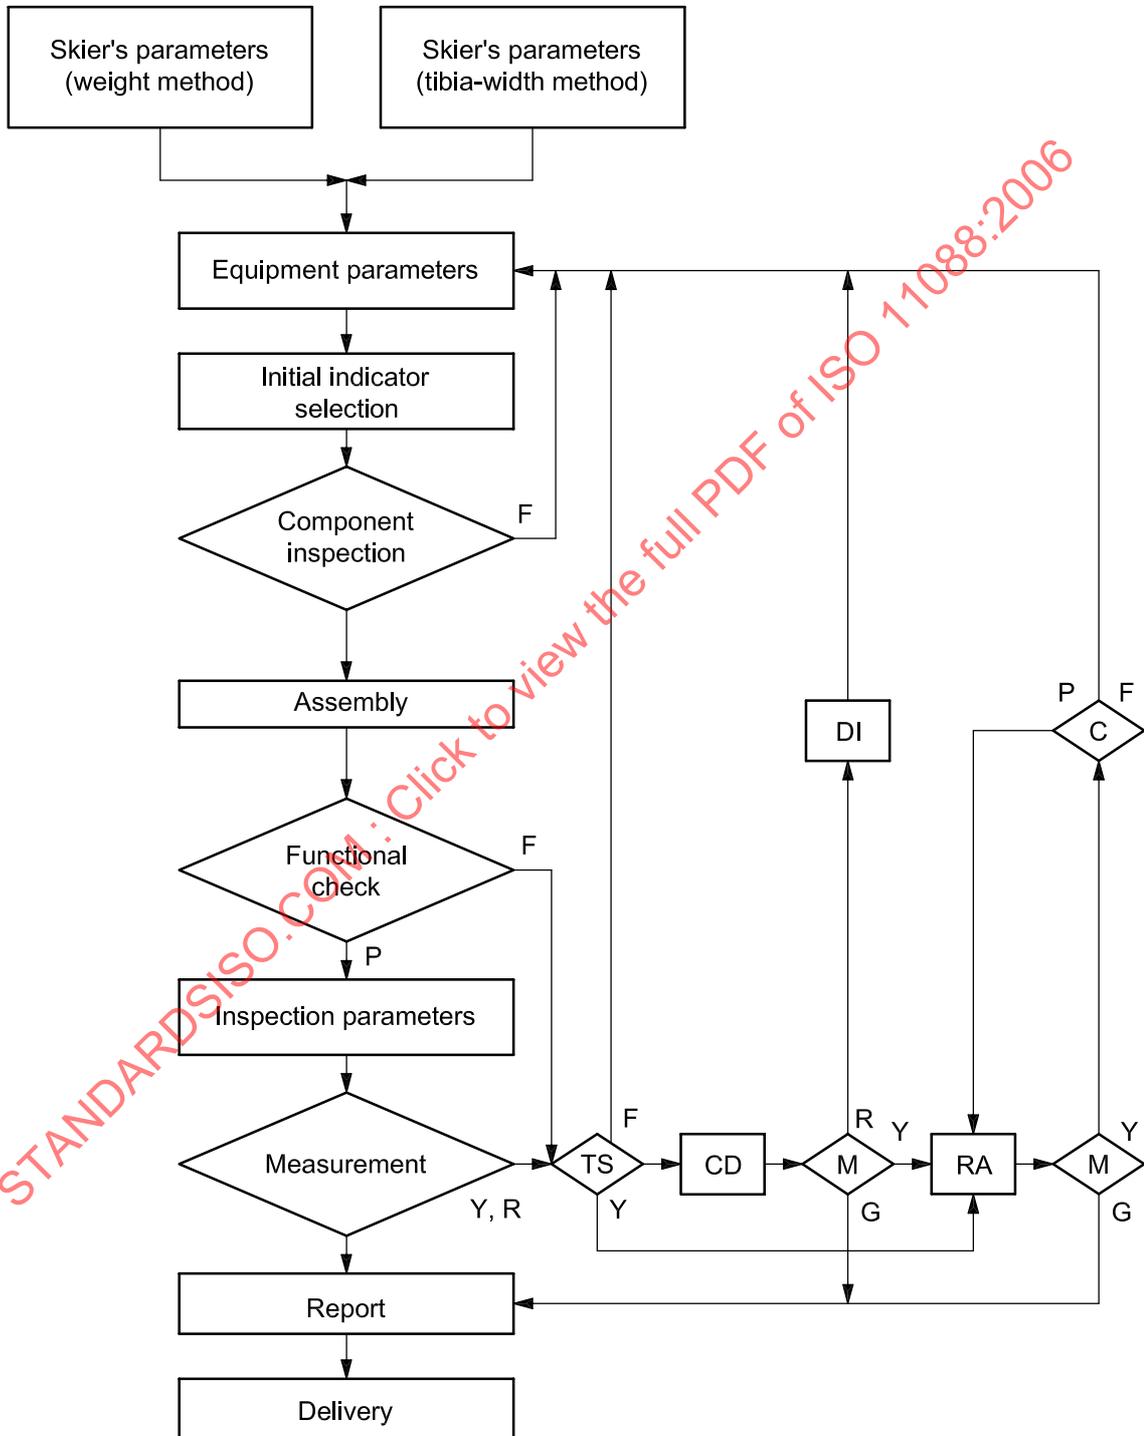

Key

- | | | |
|-------------------|--|--------------------------|
| P pass | G within ± 15 % | R greater than ± 30 % |
| TS trouble shoot | M remeasure | DI diagnostic inspection |
| F fail | Y greater than ± 15 %, not greater than ± 30 % | C check indicator run |
| CD correct defect | RA readjust | |

Annex D (normative)

Clean versus lubricated diagnostic test for boot/binding compatibility

Determine the measured release value in the S-B-B system in a clean state, i.e. without lubricant, according to the binding manufacturer's instructions.

Determine the measured release value in the S-B-B system after lubricating all contact points between boot and binding with a lubricant specified by the binding manufacturer, or, if not specified, using a soap and water solution.

Determine the relationship between the values measured in the lubricated and in the clean test by dividing the result in the lubricated test by the clean result in the test.

If the quotient is greater than 1,2 or less than 0,8, the system should be considered incompatible.


STANDARDSISO.COM : Click to view the full PDF of ISO 11088:2006

Annex E
(normative)

Drill

Figure E.1 illustrates a drill which is suitable for drilling holes for screws used for connecting the binding to the ski.

Dimensions in millimetres

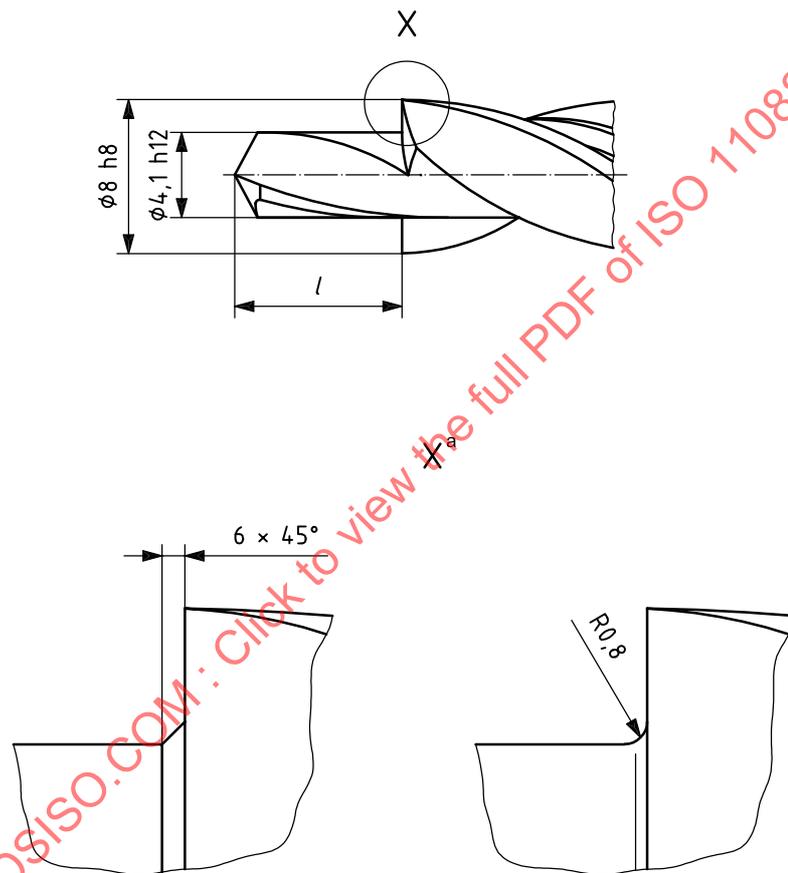

	Type A	Type C
<i>l</i>	9,0 ^{+0,5} ₀	7,0 ^{+0,5} ₀

Key

^a Design to be chosen.

Figure E.1 — Drill

Annex F (informative)

Tibial width method

F.1 Skier's parameters

F.1.1 Determine the following skier's parameters:

- tibial width;
- sex;
- type;
- age;
- sole length if necessary.

F.1.2 Using Table F.1, choose the individual release values of M_Z and M_Y .

F.2 Setting method (see Table F.1)

F.2.1 To determine the individual release moments, in decanewton metres, measure the maximum width of the tibial head by pressing a calliper square on to an uncovered, right angled lower leg of a sitting skier. Corrections shall be made for the age and type of skier.

F.2.2 To check parameters, see 5.7 for requirements.

F.2.3 The setting obtained after having considered skier type and age may be lowered or raised in the following cases.

- a) Skiers who have satisfactory experience with lower settings regarding the manufacturer's recommendations may request settings based on their experience.
- b) Skiers who have skiing experience without inadvertent releases may request a setting up to 15 % lower than recommended by the manufacturer.
- c) Skiers having certain characteristics like neutral skiing technique, defensive attitude, high degree of control, etc. may request a setting 15 % lower than recommended by the manufacturer.
- d) Skiers who have experienced inadvertent releases may request a setting up to 15 % higher than recommended by the manufacturer.

F.2.4 Skiers may request settings that are different for twist and forward lean.

F.2.5 Modify the initial indicator position depending on the boot sole length.

Table F.1 — Release value selection using skier's tibial width

Skier's parameters			
Tibia diameter measured with a tibia meter			Initial indicator value Z
mm			
Children up to age 15	Women	Men	
Up to 52			0,5
53 up to 61			1,0
62 up to 68			1,5
69 up to 73			2,0
74 up to 77			2,5
78 up to 81	Up to 73		3,0
82 up to 85	74 up to 78		3,5
86 up to 88	79 up to 83	Up to 76	4,0
89 up to 91	84 up to 87	77 up to 79	4,5
92 and above	88 up to 90	80 up to 82	5,0
	91 up to 94	83 up to 85	5,5
	95 and above	86 up to 88	6,0
		89 up to 91	6,5
		92 up to 94	7,0
		95 up to 96	7,5
		97 up to 99	8,0
		100 up to 101	8,5
		102 and above	9,0
			9,5
			10,0

Correction value in Z			
Age years	Skier type		
	1	2	3
Up to 15	- 0,5	0	+ 0,5
16 and 17	- 1,5	- 0,5	+ 0,5
18 up to 50	- 1	0	+ 1
51 up to 60	- 1,5	- 0,5	+ 0,5
61 and above	- 2	- 1	0

Skier type			
	1	2	3
Speed	Slow to moderate	Skiers that do not meet the descriptions of either 1 or 3	Fast
Terrain	Gentle to moderate		Steep
Style	Cautious (or undetermined)		Aggressive