
**Ships and marine technology — Piping
and machinery — Ballast water
sampling and analysis —**

**Part 1:
Discharge sampling port**

*Navires et technologie maritime — Tuyauterie et machines —
Échantillonnage et analyse de l'eau de ballast —*

Partie 1: Appareillage de prélèvement à l'évacuation



STANDARDSISO.COM : Click to view the full PDF of ISO 11711-1:2013



COPYRIGHT PROTECTED DOCUMENT

© ISO 2013

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Sampling port design	2
4.1 Colour.....	2
4.2 Materials.....	2
4.3 Configuration of a semi-permanent sample port.....	2
4.4 Installation.....	4
Annex A (informative) Sample pipe velocity profiles	6
Bibliography	7

STANDARDSISO.COM : Click to view the full PDF of ISO 11711-1:2013

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2. www.iso.org/directives

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received. www.iso.org/patents

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

The committee responsible for this document is ISO/TC 8, *Ships and marine technology*, Subcommittee SC 3, *Piping and machinery*.

ISO 11711 consists of the following parts, under the general title *Ships and marine technology — Piping and machinery — Ballast water sampling and analysis*:

— *Part 1: Discharge sampling port*

The following parts are under preparation:

— *Part 2: On-board ballast water sampling and sample processing*

— *Part 3: Analyses of ballast water samples*

Introduction

This part of ISO 11711 provides guidance to shipboard personnel and other concerned parties on the design and installation of the sampling port required to obtain representative samples of ballast water from the ballast water discharge piping prior to discharge. Parts 2 and 3 of this part of ISO 11711 will provide guidance on how to handle and process the samples on board the vessel, and on how to analyse the samples to determine compliance with ballast water discharge requirements, respectively.

Although it is recognized that sampling of the actual tanks is possible through various methods, the primary concern for port and flag state officials is verification of the efficacy of the ballast water management system (BWMS) in preventing the unwanted discharge. The only true way to measure what is being sent overboard in ballast water is to sample the ballast discharge as near as possible to the actual overboard.

NOTE This part of ISO 11711 is written for sampling after the BWMS treatment, and prior to the discharge of ballast water, in order to assess the effectiveness of the BWMS. However, sample ports can also be installed elsewhere on a vessel for other purposes, such as experimental assessment of prototype BWMSs. In such cases, similar sample ports could also be installed prior to the treatment (ballast uptake side) in order to make a comparison between the ballast uptake and discharge.

STANDARDSISO.COM : Click to view the full PDF of ISO 11711:2013

[STANDARDSISO.COM](https://standardsiso.com) : Click to view the full PDF of ISO 11711-1:2013

Ships and marine technology — Piping and machinery — Ballast water sampling and analysis —

Part 1: Discharge sampling port

1 Scope

This part of ISO 11711 provides guidance to shipboard personnel and other concerned parties on the materials, design, and installation of equipment used to take samples of treated ballast water from the ballast water discharge pipe onboard a vessel. The purpose of the sampling system is to enable the taking of a representative sample in order to verify that the ballast water management system (BWMS) is working as designed, i.e. the treatment is reducing the concentration of living organisms to levels established in discharge standards. The intent of the sampling installation is to provide a representative sample of the ballast water effluent with adequate pressure and flow.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 14726, *Ships and marine technology — Identification colours for the content of piping systems*

ISO 15614 (all parts), *Specification and qualification of welding procedures for metallic materials — Welding procedure test*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

ballast water

water with its suspended matter taken on board a ship to control trim, list, draught, stability or stresses of the ship

3.2

ballast water system

arrangement of pumps, piping and tanks on ships used to control vessel trim, draft and stability

Note 1 to entry: Benefits of this system can include increased propeller immersion and improved steering. One disadvantage of ballast water systems is the potential dispersal of harmful aquatic organisms.

3.3

ballast water management system

BWMS

equipment that processes ballast water such that the water discharged (the treated water) meets the specified performance requirements for elimination of harmful aquatic organisms

Note 1 to entry: The BWMS includes all associated control equipment, monitoring equipment, and sampling facilities.

**3.4
sampling point**

place in the ballast water piping where the sample is taken

**3.5
sampling port**

equipment installed to take the sample

**3.6
treatment**

process or combination of mechanical, physical, or chemical methods to kill, remove or render infertile, harmful or potentially harmful organisms within ballast water

4 Sampling port design

4.1 Colour

The sampling port and any associated piping, particularly valve handles, shall be appropriately coloured green in accordance with ISO 14726 to indicate a sea water system.

4.2 Materials

In order to prevent galvanic corrosion and potential leaking or flooding, the sampling port flange, piping and valves should be constructed of the same or galvanically compatible material as the ballast water discharge piping and be mechanically suitable for potential long-term installation.

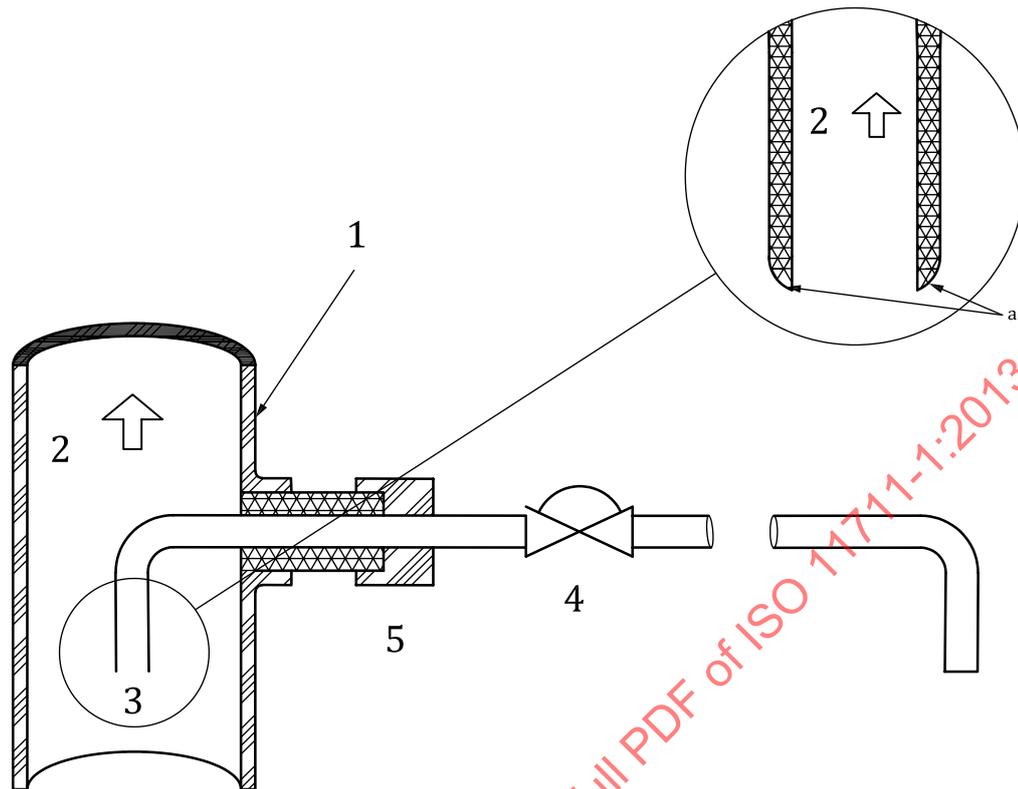
4.3 Configuration of a semi-permanent sample port

Samples shall be taken from the discharge line as near to the point of discharge as practicable and the location of the sample port shall take this into consideration. The sample port shall incorporate a system similar to that shown in [Figure 1](#). A one-valve configuration such as in [Figure 1](#) may be used provided the sampling pipe end is fitted with a removable pipe cap. As an alternative, a two-valve system may also be used, where the valve closest to the main ballast water discharge piping is designed to be either fully open (sampling mode) or fully closed. The second (sampling) valve should be a valve that does not cause organism mortality, such as a diaphragm valve. A flanged configuration provides for easy removal of the sample pipe for cleaning, repair or replacement.

Additional guidelines on sample port diameter sizing are contained in IMO Resolution MEPC.173(58) Annex, emphasizing the need for isokinetic (constant velocity) sampling.

The length of straight sample pipe (see [Figure 1](#)) facing into the flow can vary, but should not be less than one diameter of the sampling pipe. The radius of the pipe bend should be a minimum of 3 X diameter of sample pipe. The opening should face into the flow and be rounded at the edges to provide a smooth transition.

The sample port should be located within the central half of the main pipe (within one-half the radius of the main pipe axis) to ensure the sample is obtained from the well developed portion of turbulent flow and is thus representative.

**Key**

- | | | | |
|---|----------------------------------|---|-----------------|
| 1 | ballast water discharge pipe | 4 | diaphragm valve |
| 2 | direction of flow | 5 | pipe flange |
| 3 | ballast water sample intake pipe | a | Rounded edges. |

Figure 1 — Sample port design (sample pipe centre-located within R/2 of main pipe axis)

NOTE Dimensions and materials can vary depending on design and materials of main ballast water discharge pipe. However, the shape of the sampling pipe should be curved as indicated in Figure 1 to provide the smoothest flow possible.

4.3.1 Sample intake pipe

It is recommended that the sample intake pipe be standardized based on current or anticipated demands for ballast sample volumes and practical limits on such equipment. For example, if three tons of ballast water must be collected over a period of one hour, then the sampling port should support that demand.

NOTE It is uncommon for ballasting rates to exceed 3,65 m/s (12 feet per second), and possible for rates to reach near zero at the end of gravitating ballast.

Sample port size should be based on the combination of maximum sample flow rate and minimum ballast flow rate that yields the largest isokinetic diameter.

Thus, sampling should be understood before sizing the sample tube. The isokinetic diameter should be determined as follows:

$$Diso = Dm \sqrt{(Qiso / Qm)}$$

where

Diso, diameter of the sample port opening;

Dm, diameter of the main discharge line;

Qiso, volumetric flow through the sample port; and

Qm, volumetric flow through the discharge line.

The sample port diameter should be between 1,5 and 2 times the isokinetic diameter.

Sample port size is determined as follows. Determine the sample flow rate (*Qiso*) based on requisite sample volume and duration of sample collection. Using the diameter of the main ballast discharge line (*Dm*) and minimum and maximum ballast flow rates (*Qm*), determine the isokinetic diameter (*Diso*) at requisite sample flow. Size the sample port according to the nearest available pipe size that is 1,5 to 2 x *Diso*.

Table 1 provides example sample port sizing given a range of sample flows between 2,47 m³/h and 211,94 m³/h and typical ballast velocities between 1,21 m/s to 3,65 m/s. (See Table 1).

Table 1 — Example sample port size, ballast main velocity and sample flow rate

Ballast main velocity(m/s)	Sample port size (in)								
	0,75	1,00	1,25	1,50	2,00	2,50	3,00	3,50	4,00
	Sample port size (cm)								
	1,91	2,54	3,18	3,81	5,08	6,35	7,62	8,89	10,16
Sample flow rate (m ³ /h)									
3,65	7,45	13,25	20,70	29,80	52,98	82,79	119,21	162,26	211,94
2,43	4,96	8,82	13,78	19,84	35,27	55,12	79,37	108,03	141,10
1,21	2,47	4,39	6,86	9,88	17,56	27,44	39,52	53,79	70,26

4.3.2 Valve

If flow control of the sample flow rate is required, ball, gate, and butterfly valve types shall be avoided as they may cause significant shear forces which may result in organism mortality. For flow control, diaphragm valves or similar valve types shall be used to minimize sharp velocity transitions. For flow distribution, ball valves may be utilized in such a manner that they are either fully open or closed.

The valves shall be capped with a tamper proof seal that shall be broken only when sampling is performed by authorized persons.

4.4 Installation

In general, the sample port shall be installed after the treatment system and prior to overboard discharge, in order to verify the effectiveness of the treatment and to best ascertain the condition of the ballast water that is being discharged overboard.

Before any work is done to install sampling ports on existing ballast water discharge piping, the piping shall be certified isolated from system pressure and any potential ingress of water from the sea.

4.4.1 Location of the sample port in the ballast system

Sample ports should be installed in a section of the discharge pipe with as long a run of pipe as practicable, upstream and down, without elbows, tees or other fittings to avoid the negative effects of such fittings on flow conditions in the discharge line. Ideal sampling is from a long, straight vertical pipe section. In any case, computational fluid dynamics should be conducted to determine whether the location of the sampling point is appropriate for taking a representative sample.

4.4.2 Installation at the selected point

Sample piping shall be installed by the welding process in accordance with ISO 15614 procedures, classification society rules, or other international or national standards approved by the authority having jurisdiction in ship modifications.

There shall be a clear label or marking on the sampling piping or valves indicating the purpose of the assembly.

STANDARDSISO.COM : Click to view the full PDF of ISO 11711-1:2013