



**INTERNATIONAL STANDARD ISO 12098:1994**  
**TECHNICAL CORRIGENDUM 1**

Published 2001-03-15

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

**Commercial vehicles with 24 V systems — 15-pole connectors  
between towing vehicles and trailers — Dimensions and contact  
allocation**

**TECHNICAL CORRIGENDUM 1**

*Véhicules utilitaires équipés d'un système électrique 24 V — Connecteurs à 15 contacts pour liaison entre le véhicule tracteur et le véhicule tracté — Dimensions et affectation des contacts*

*RECTIFICATIF TECHNIQUE 1*


Technical Corrigendum 1 to International Standard ISO 12098:1994 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 3, *Electrical and electronic equipment*.

*Pages 2, 3 and 4*

Replace Figures 1, 2 and 3 with the following figures.



Dimensions in millimetres

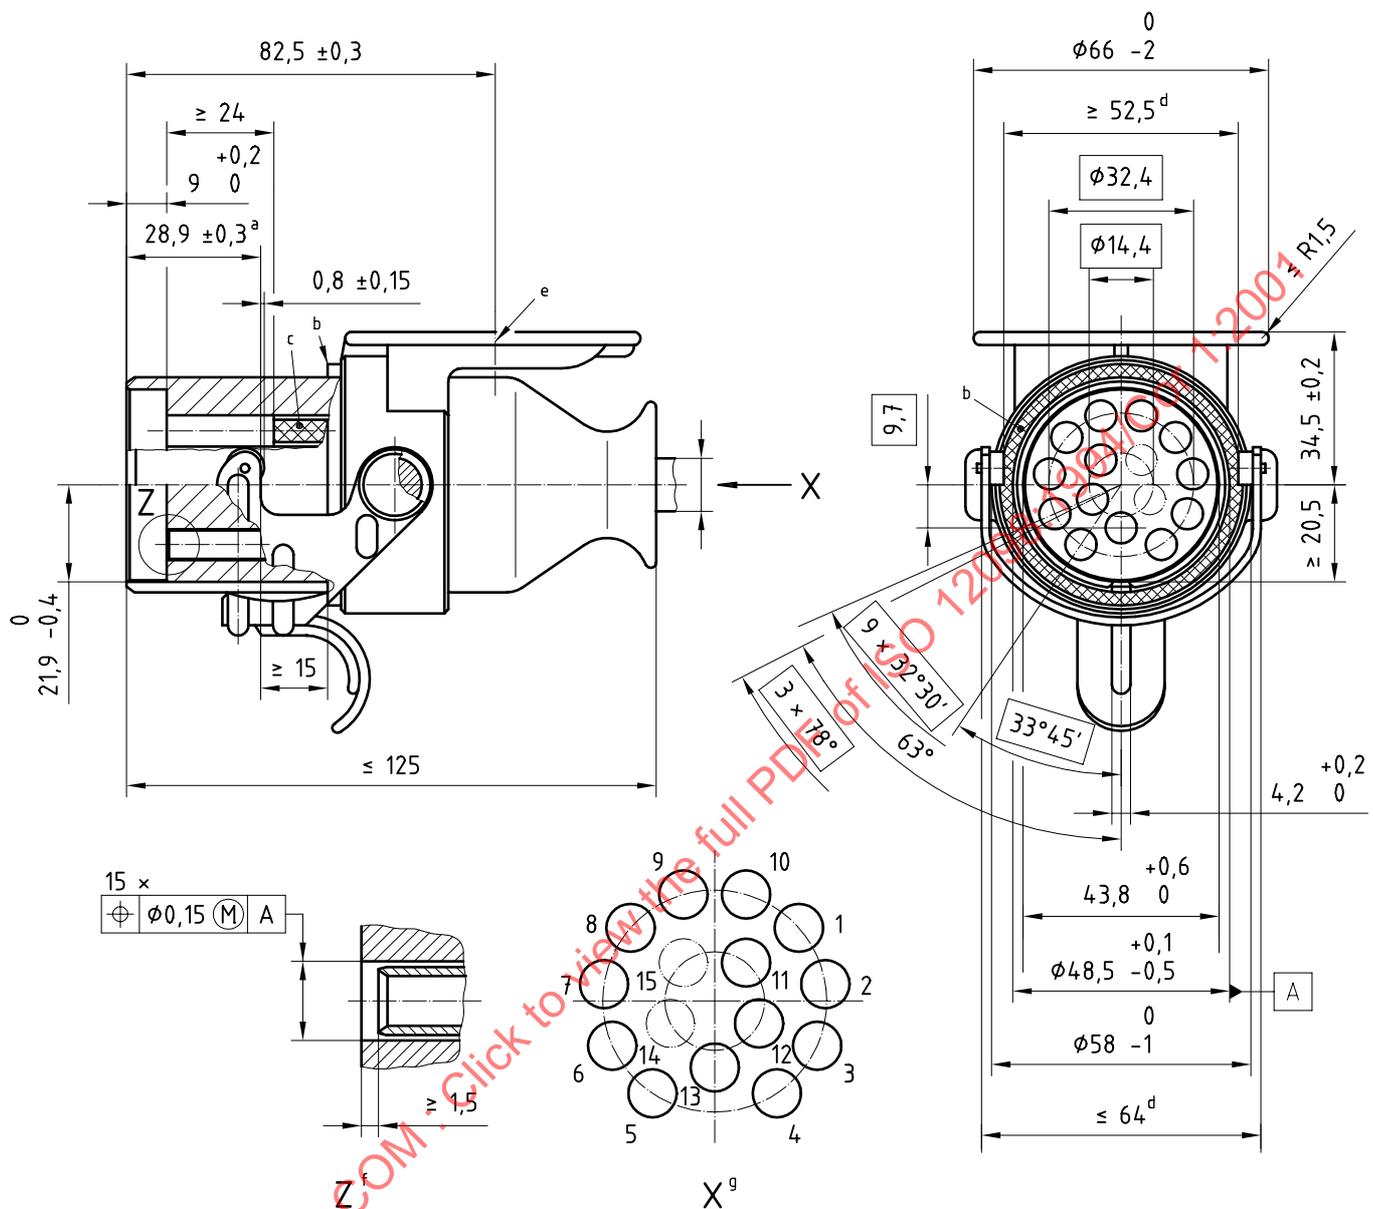

- a Locking lever in locked position
- b Flat seal ring
- c Insulating plug
- d Applies to parts which might contact the socket closing device
- e Centre of cover rest
- f Contact spring tube
- g Contact numbers at terminal face

Figure 2 — Plug