

---

---

**Hollow taper interface with flange contact  
surface —**

Part 2:  
**Receivers — Dimensions**

*Interfaces à cône creux-face. —*

*Partie 2: Nez de broche — Dimensions*

STANDARDSISO.COM : Click to view the full PDF of ISO 12164-2:2001



**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 12164-2:2001

© ISO 2001

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.ch](mailto:copyright@iso.ch)  
Web [www.iso.ch](http://www.iso.ch)

Printed in Switzerland

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this part of ISO 12164 may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 12164-2 was prepared by Technical Committee ISO/TC 29, *Small tools*.

ISO 12164 consists of the following parts, under the general title *Hollow taper interface with flange contact surface*:

- Part 1: *Shanks — Dimensions*
- Part 2: *Receivers — Dimensions*

Annex A of this part of ISO 12164 is for information only.

STANDARDSISO.COM : Click to view the full PDF of ISO 12164-2:2007

# Hollow taper interface with flange contact surface —

Part 2:

## Receivers — Dimensions

### 1 Scope

This part of ISO 12164 specifies dimensions for receivers with taper and flange contact surfaces for hollow taper shanks in accordance with ISO 12164-1 to be applied on machine tools (e.g. turning machines, drilling machines, milling machines and grinding machines). A range of sizes is specified.

This part of ISO 12164 specifies two styles of receiver. Style A is for automatic tool exchange and style C is for manual clamping which is achieved via holes in both the receiver and the tool shank.

Torque is transmitted via the tail end of the shank through keys as well as friction.

### 2 Normative references

There are no normative references at present.

ISO 1101:—<sup>1)</sup>, *Geometrical Product Specifications (GPS) — Geometrical tolerancing — Tolerances of form, orientation, location and run-out*

ISO 2768-1:1989, *General tolerances — Part 1: Tolerances for linear and angular dimensions without individual tolerance indications*

ISO 3040:1990, *Technical drawings — Dimensioning and tolerancing — Cones*

ISO 12164-1, *Hollow taper interface with flange contact surface — Part 1: Shanks — Dimensions*

### 3 Dimensions

#### 3.1 General

Dimensions of receivers for hollow taper shanks with flange contact surfaces for automatic tool exchange are specified in Figure 1 and Table 1, and additional dimensions of receivers for hollow taper shanks with flange contact surfaces for manual tool exchange are specified in Figure 2 and Table 2. Tolerancing of form, orientation, location and run-out is in accordance with ISO 1101. Dimensioning and tolerancing of cones is in accordance with ISO 3040. Details not specified shall be chosen expediently. Tolerances not specified shall be of tolerance class “m” in accordance with ISO 2768-1.

1) To be published. (Revision of ISO 1101:1983)



Table 1 — Dimensions

Dimensions in millimetres

Nominal size		32	40	50	63	80	100	125	160
$b_1$	$\pm 0,05$	6,8	7,8	10,3	12,3	15,8	19,78	24,78	29,78
$d_1$	min.	32	40	50	63	80	100	125	160
$d_2$		23,998	29,998	37,998	47,998	59,997	74,997	94,996	119,995
$d_3^a$		17	21	26	34	42	53	67	85
$d_4^b$	$\begin{matrix} +0,1 \\ 0 \end{matrix}$	23,28	29,06	36,85	46,53	58,1	72,6	92,05	116,1
$d_5$	$\begin{matrix} +0,2 \\ 0 \end{matrix}$	23,8	29,6	37,5	47,2	58,8	73,4	93	118
$l_1^b$	$\begin{matrix} +0,2 \\ 0 \end{matrix}$	16,5	20,5	25,5	33	41	51	64	81
$l_2$		3,2	4	5	6,3	8	10	12,5	16
$l_3$	$\begin{matrix} +0,2 \\ 0 \end{matrix}$	11,4	14,4	17,9	22,4	28,4	35,4	44,4	57,4
$l_4$	$\begin{matrix} +0,2 \\ 0 \end{matrix}$	13,4	16,9	20,9	26,4	32,4	40,4	51,4	64,4
$l_5$		0,8	0,8	1	1	1,5	1,5	2	2
$l_6$	$\begin{matrix} +0,1 \\ 0 \end{matrix}$	1	1	1,5	1,5	2	2	2,5	2,5
$l_7$	$\pm 0,1$	2	2	2	2,5	3	3	4	4
$r_1^c$	$\begin{matrix} 0 \\ -0,05 \end{matrix}$	1,5	2	2,5	3	4	5	6	8
$t$		0,001 5	0,001 5	0,002	0,002	0,002 5	0,003	0,003 5	0,003 5

<sup>a</sup> Depending on the clamping system.


<sup>b</sup> See note a to Figure 1.

<sup>c</sup>  $r_1$  tangent to  $b_1$  and  $d_4$ .

### 3.3 Receiver for hollow taper shank, style C

See Figure 2 and Table 2.

For non-specified dimensions, see Figure 1.

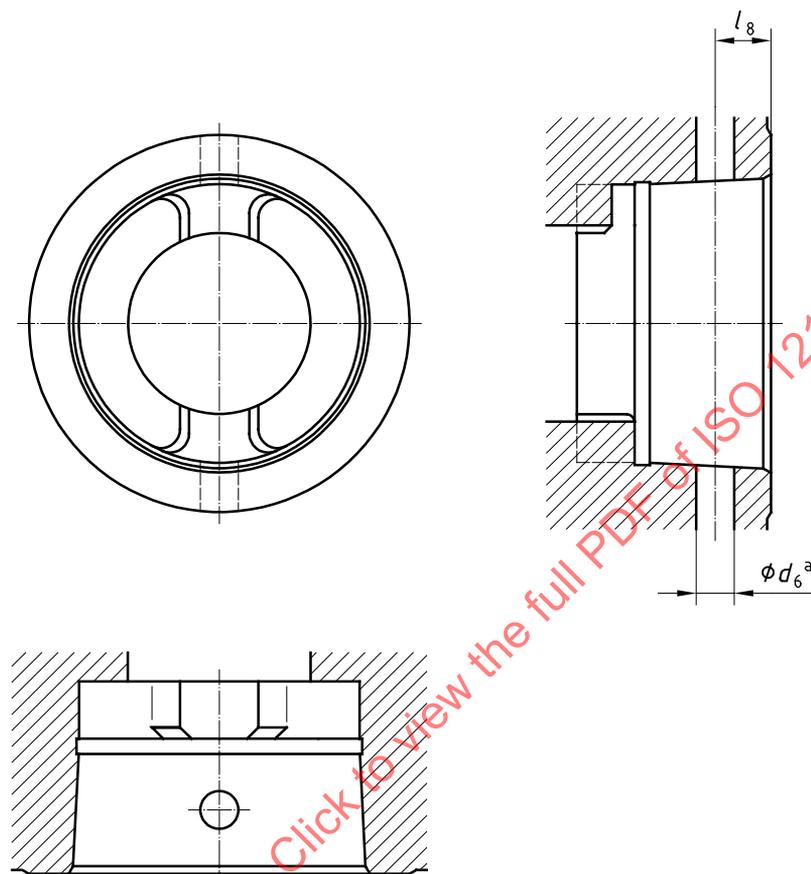

<sup>a</sup> Inside edge min. 0,5 mm  $\times$  45° chamfer.

Figure 2

Table 2 — Additional dimensions of style C<sup>a</sup>

		Dimensions in millimetres					
Nominal size		32	40	50	63	80	100
$l_8$	$\pm 0,1$	5	6	7,5	9	12	15
$d_6$		Hole diameter to be chosen by the manufacturer.					
<sup>a</sup> All other dimensions see style A.							

## 4 Designation

A receiver for hollow taper shanks in accordance with this part of ISO 12164 shall be designated by:

- a) "Receiver for hollow taper shank"
- b) Reference to this part of ISO 12164, i.e. ISO 12164-2;
- c) "HSK";
- d) Type: A or C;
- e) Nominal size, in millimetres.

EXAMPLE 1 A receiver for hollow taper shanks (HSK) for automatic tool exchange, of type A and with nominal size 50 mm is designated as follows:

**Receiver for hollow taper shank ISO 12164-2-HSK-A 50**

EXAMPLE 2 A receiver for hollow taper shanks (HSK) for manual tool exchange, of type C and with nominal size 50 mm is designated as follows:

**Receiver for hollow taper shank ISO 12164-2-HSK-C 50**

STANDARDSISO.COM : Click to view the full PDF of ISO 12164-2:2001