
**Hollow taper interface with flange contact
surface —**

Part 4:
**Dimensions of receivers for stationary
tools**

Interfaces à cône creux-face —

Partie 4: Dimensions des nez de broches pour outils non rotatifs

STANDARDSISO.COM : Click to view the full PDF of ISO 12164-4:2008



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 12164-4:2008



COPYRIGHT PROTECTED DOCUMENT

© ISO 2008

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 12164-4 was prepared by Technical Committee ISO/TC 29, *Small tools*.

ISO 12164 consists of the following parts, under the general title *Hollow taper interface with flange contact surface*:

- *Part 1: Shanks — Dimensions*
- *Part 2: Receivers — Dimensions*
- *Part 3: Dimensions of shanks for stationary tools*
- *Part 4: Dimensions of receivers for stationary tools*

STANDARDSISO.COM : Click to view the full PDF of ISO 12164-4:2008

Hollow taper interface with flange contact surface —

Part 4: Dimensions of receivers for stationary tools

1 Scope

This part of ISO 12164 specifies dimensions for receivers with taper and flange contact surfaces for hollow taper shanks in accordance with ISO 12164-3 to be applied to machine tools (e.g. turning machines, turning-mill machines). A range of sizes is specified.

This part of ISO 12164 specifies the receiver of type T. It is for automatic tool exchange and manual clamping, which is achieved via holes in both the receiver and the tool shank.

The torque is transmitted via the tail end of the shank through keys as well as friction.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 1101, *Geometrical Product Specifications (GPS) — Geometrical tolerancing — Tolerances of form, orientation, location and run-out*

ISO 2768-1, *General tolerances — Part 1: Tolerances for linear and angular dimensions without individual tolerance indications*

ISO 3040, *Technical drawings — Dimensioning and tolerancing — Cones*

3 Dimensions


3.1 General

Dimensions of receivers for hollow taper shanks with flange contact surface for stationary tools, type T, are specified in Figure 1, Table 1, and Annex A. Details not specified in Figures 1 shall be chosen expediently. Tolerancing of form, orientation, location and run-out is in accordance with ISO 1101. Dimensioning and tolerancing of cones are in accordance with ISO 3040. Tolerances not specified shall be of tolerance class «m» in accordance with ISO 2768-1.

3.2 Receiver for hollow taper shank, type T

The dimensions of receiver for hollow taper shanks, type T, shall be in conformance with Figure 1 and Table 1.

Dimensions in millimetres
Surface roughness values in micrometres

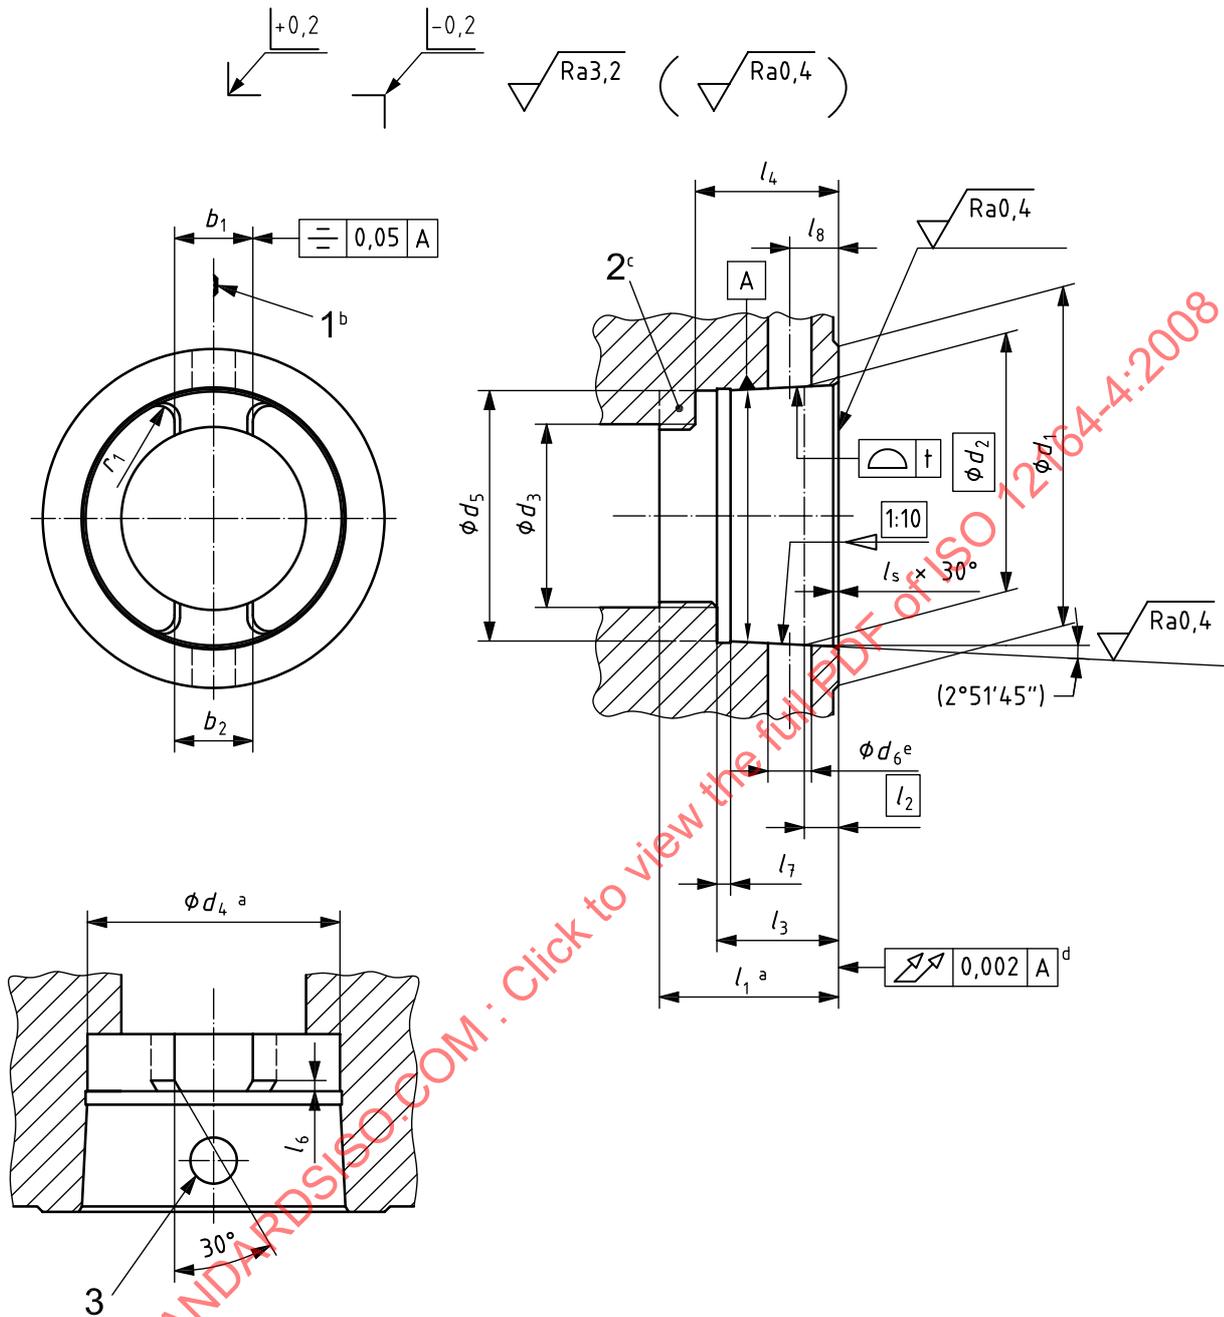

Key

- 1 cutting edge
- 2 tenon
- 3 hole for manual clamping
- a When tenons are inserted, the taper hole may be conical over the total length l_1 .
- b Position of the cutting edge for right-hand tools with single cutting edged.
- c Tenon alternative integrated or inserted.
- d Not convex.
- e Inside edge min. $0,5 \text{ mm} \times 45^\circ$ chamfer.

Figure 1 — Dimensions of receivers

Table 1 — Dimensions

Dimensions in millimetres

Nominal size	32	40	50	63	80	100	125	160
b_1 $\pm 0,05$	6,8	7,8	10,3	12,3	15,8	19,78	24,78	29,78
b_2 tol.	6,92	7,92	10,41	12,41	15,91	19,89	24,89	29,89
	$\begin{matrix} 0 \\ -0,025 \end{matrix}$				$\begin{matrix} 0 \\ -0,03 \end{matrix}$			
d_1 min.	32	40	50	63	80	100	125	160
d_2	23,998	29,998	37,998	47,998	59,997	74,997	94,996	119,995
d_3^a	17	21	26	34	42	53	67	85
d_4^b $\begin{matrix} +0,1 \\ 0 \end{matrix}$	23,28	29,06	36,85	46,53	58,1	72,6	92,05	116,1
d_5 $\begin{matrix} +0,2 \\ 0 \end{matrix}$	23,8	29,6	37,5	47,2	58,8	73,4	93	118
d_6	Hole diameter to be chosen by the manufacturer							
l_1^b $\begin{matrix} +0,2 \\ 0 \end{matrix}$	16,5	20,5	25,5	33	41	51	64	81
l_2	3,2	4	5	6,3	8	10	12,5	16
l_3 $\begin{matrix} +0,2 \\ 0 \end{matrix}$	11,4	14,4	17,9	22,4	28,4	35,4	44,4	57,4
l_4 $\begin{matrix} +0,2 \\ 0 \end{matrix}$	13,4	16,9	20,9	26,4	32,4	40,4	51,4	64,4
l_5	0,8	0,8	1	1	1,5	1,5	2	2
l_6 $\begin{matrix} +0,1 \\ 0 \end{matrix}$	1	1	1,5	1,5	2	2	2,5	2,5
l_7 $\pm 0,1$	2	2	2	2,5	3	3	4	4
l_8 $\pm 0,1$	5	6	7,5	9	12	15	—	—
r_1^c $\begin{matrix} 0 \\ -0,05 \end{matrix}$	1,5	2	2,5	3	4	5	6	8
t	0,001 5	0,001 5	0,002	0,002	0,002 5	0,003	0,003 5	0,003 5

^a Depending on the clamping system.

^b See note a to Figure 1.

^c r_1 tangent to b_1 or b_2 and d_4 .

4 Design — Hole for manual clamping

Design without hole for manual clamping is standard.

Design with hole for manual clamping is optional.

5 Designation

A receiver for hollow taper shank (HSK) in accordance with this part of ISO 12164 shall be designated by the following:

- a) "Receiver for hollow taper shank";
- b) reference to this part of ISO 12164, i.e. ISO 12164-4;
- c) "HSK";
- d) type: T for stationary tools;
- e) nominal size, in millimetres.

EXAMPLE A receiver for hollow taper shank with flange contact surface (HSK) for stationary tools (type T) with nominal size 50 mm is designated as follows:

Receiver for hollow taper shank ISO 12164-4-HSK-T 50

STANDARDSISO.COM : Click to view the full PDF of ISO 12164-4:2008

Annex A (informative)

Recommendations for use and application

A.1 Clamping system

The clamping system should be specified by the manufacturer of the receiver or machine tool spindle. The system should provide sufficient clamping force to ensure contact of the shank flange with the receiver face, as well as seating of the taper by elastic deformation. The torque transmitting capacity of the interface is substantially determined by the size of the clamping force.

A.2 Clamping forces

The recommended clamping forces are shown in Table A.1.

The clamping forces are only applied to the hollow shanks for stationary tools (type T).

Table A.1

Nominal size, mm	32	40	50	63	80	100	125	160
Clamping force, kN	5	8	14	24	37	55	86	150

Lower clamping forces can be sufficient when operational loads are low (e.g. cutting and feed forces in finish machining). Conversely, higher clamping forces can be required when high operational loads are encountered (e.g. cutting and feed forces in heavy machining).

A.3 Information about speeds and torque

The manufacturer should provide information regarding permissible speeds and torque transmitting capacities.