
**Cinematography — Manufacturer-
printed, latent image identification
on 16 mm, 35 mm and 65 mm motion-
picture film — Specifications and
dimensions**

Cinématographie — Identification d'image latente, imprimée par le fabricant, sur films cinématographiques 16 mm, 35 mm et 65 mm — Spécifications et dimensions

STANDARDSISO.COM : Click to view the full PDF of ISO 12222:2017



STANDARDSISO.COM : Click to view the full PDF of ISO 12222:2017



COPYRIGHT PROTECTED DOCUMENT

© ISO 2017, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

	Page
Foreword	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 General format	2
5 Human-readable key numbers	3
5.1 Human-readable key number specifications applicable to 16 mm, 35 mm and 65 mm film.....	3
5.1.1 General.....	3
5.1.2 Alphabetic characters.....	3
5.1.3 Numerical characters.....	7
5.2 Human-readable key number specifications applicable to 16 mm film only.....	7
5.2.1 Dimensions.....	7
5.2.2 Reference mark.....	7
5.2.3 Alignment with respect to perforations.....	8
5.2.4 Frame identification.....	8
5.2.5 Repeat frequency.....	8
5.2.6 Orientation.....	8
5.3 Human-readable key number specifications applicable to 35 mm film only.....	9
5.3.1 Dimensions.....	9
5.3.2 Reference mark.....	9
5.3.3 Alignment with respect to perforations.....	9
5.3.4 Frame identification.....	10
5.3.5 Repeat frequency.....	10
5.3.6 Orientation.....	10
5.3.7 Mid-foot key number.....	11
5.4 Human-readable key number specifications applicable to 65 mm film only.....	11
5.4.1 Dimensions.....	11
5.4.2 Reference mark.....	12
5.4.3 Alignment with respect to perforations.....	12
5.4.4 Frame identification.....	12
5.4.5 Repeat frequency.....	12
5.4.6 Orientation.....	13
5.4.7 Mid-foot key number, format A.....	13
5.4.8 Mid-foot key number, format B.....	14
6 Machine-readable key numbers	14
6.1 Machine-readable key number specifications applicable to 16 mm, 35 mm and 65 mm film.....	14
6.1.1 General.....	14
6.1.2 Repeat frequency.....	14
6.1.3 Format.....	14
6.2 Machine-readable key number specifications applicable to 16 mm film only.....	15
6.3 Machine-readable key number specifications applicable to 35 mm film only.....	15
6.4 Machine-readable key number specifications applicable to 65 mm film only.....	16
7 Optional manufacturer information (applicable to 16 mm, 35 mm and 65 mm film)	17
7.1 Recommended minimum information.....	17
7.1.1 Manufacturer's name.....	17
7.1.2 Film type.....	17
7.2 Optional information.....	18
7.3 Repeat distance.....	18
8 Optional density measurement patch	18
8.1 General.....	18

8.2	Shape and size	18
8.3	Colour and density	18
8.4	Repeat frequency	18
9	Bar code scanner and density specifications	19
9.1	Scanner spectral sensitivity	19
9.2	Quality of machine-readable messages	19
9.2.1	Measurement methodology	19
9.2.2	Modulation specification	19
9.3	Density of printed machine-readable messages	19
10	Colour of edge print information	20

STANDARDSISO.COM : Click to view the full PDF of ISO 12222:2017

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 36, *Cinematography*.

This fourth edition cancels and replaces the second edition (ISO 12222:1998), [subclauses 3.1](#), [Clause 4](#), [5.1.1](#), [5.4.5](#), [5.4.6](#), [5.4.7](#), [6.1.3.3 b\)](#), [6.1.3.3 d\)](#), [6.4.7](#), [6.4.8](#) and [7.3](#), [Figures 3](#), [6](#) and [8](#), and [Tables 1](#), [4](#) and [5](#) of which have been technically revised. [Subclause 5.4.8](#) was added.

STANDARDSISO.COM : Click to view the full PDF of ISO 12222:2017

Cinematography — Manufacturer-printed, latent image identification on 16 mm, 35 mm and 65 mm motion-picture film — Specifications and dimensions

1 Scope

1.1 This document specifies the position and dimensions of machine-readable identification numbers on 16 mm, 35 mm and 65 mm motion-picture film. These numbers are intended to be a machine-readable version of the latent image key number. This document also specifies the encoding format to be used for these machine-readable numbers, as well as the area scanned and the spectral characteristics of the scanner.

1.2 This document also specifies the position, dimensions and content of human-readable identification (key) numbers for use on 16 mm, 35 mm and 65 mm motion-picture films intended for original photography or intermediate printing which also include the machine-readable key number described in 1.1.

NOTE These numbers normally are exposed onto the film at the time of manufacture.

1.3 This document further specifies an area that may be used for optional manufacturer-specific film-type identification information.

1.4 This document also specifies an area on the film which is not to be exposed by the film manufacturer, thus leaving it available for customer data recording.

1.5 Finally, this document specifies an optional frame line index mark for 35 mm and 65 mm film.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 69, *Cinematography — 16 mm motion-picture and magnetic film — Cutting and perforating dimensions*

ISO 491, *Cinematography — 35 mm motion-picture film and magnetic film — Cutting and perforating dimensions*

ISO 3023, *Cinematography — 65 mm and 70 mm unexposed motion-picture film — Cutting and perforating dimensions*

ANSI/AIM BC4-1995, *Uniform Symbology Specification — Code 128*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

3.1

key number

edge number

footage number

identification number that is printed with ink or exposed onto the film at the time of manufacture

Note 1 to entry: The numbers are placed at regular intervals, typically every 20 perforations for 16 mm film, 64 perforations for 35 mm film and 120 perforations for 65 mm film. For the purposes of this document, the key numbers are latent-image exposed.

3.2

bar edge

<bar code> that point where the transmittance is halfway between the maximum transmittance of the adjacent space and the minimum transmittance of the adjacent bar

3.3

scan transmittance profile

<bar code> record of the transmittance measured as a function of distance along the entire bar code symbol

3.4

symbol contrast

SC

<bar code> difference between the largest transmittance (T_{\max}) and smallest transmittance (T_{\min}) in a scan transmittance profile

3.5

minimum edge contrast

EC_{\min}

<bar code> minimum difference between a space transmittance (T_s) and the adjoining bar transmittance (T_b)

3.6

modulation

MOD

<bar code> ratio of minimum edge contrast (EC_{\min}) to symbol contrast (SC)

4 General format

The general format of the latent-image identification information shall be as shown in [Figure 1](#) for 16 mm film, [Figure 2](#) for 35 mm film, and [Figures 3 a\)](#) and [3 b\)](#) for 65 mm film.

No latent information shall be placed along the upper edge of the film, as shown in [Figures 1, 2](#) and [3](#). This area is reserved for data recording at the time of photography.

This identification information is intended to be exposed onto film cut and perforated in accordance with ISO 69, ISO 491 or ISO 3023.

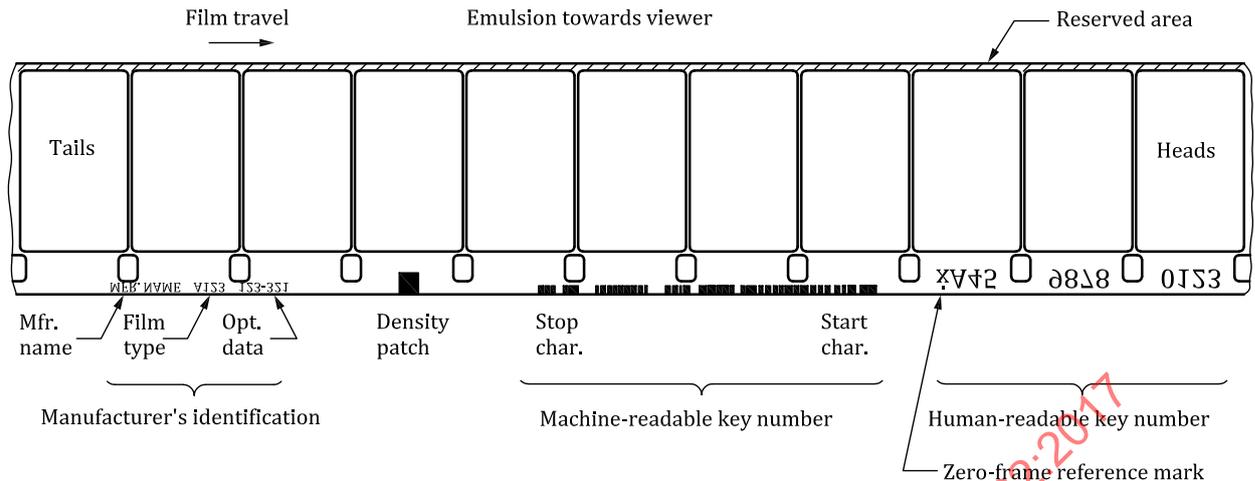


Figure 1 — General format on 16 mm film

5 Human-readable key numbers

5.1 Human-readable key number specifications applicable to 16 mm, 35 mm and 65 mm film

5.1.1 General

An incrementing, human-readable key number shall be printed onto the film at the time of manufacture. The film shall be supplied to the user with the lowest number at the outside of the roll unless the sales format of the unit shown states differently. The human-readable key number shall consist of two alphabetic characters and 10 numerical characters. For 16 mm film, this alphanumeric code shall be separated into three groups of four characters, as shown in Figure 1. For 35 mm and 65 mm film, this alphanumeric code shall be separated into groups of two alphabetic characters and two, four and four digits, separated by spaces, as shown in Figures 2, 3 a) and 3 b).


5.1.2 Alphabetic characters

The first two alphabetic characters of the key number identify the manufacturer and film type. The character set used shall be the normal upper-case letters A through Z.

- The first character shall identify the film manufacturer alphabetic code according to Table 1. Other letters are reserved for future assignment by ISO/TC 36.
- The second character shall be a film-type identifier. The film type identifier will be used in one of two ways per the manufacturer's preference.
- The second character is used alone to identify film type.
- The second character is used in conjunction with the first character as a two-character film type identifier.
- The second character is chosen at the discretion of the film manufacturer.


Table 1 — Manufacturer alphabetic codes

Manufacturer	Code
AGFA-GEVAERT, N.V.	A
EASTMAN KODAK CO.	E, K, V
FUJIFILM CO.	F
ILFORD LIMITED	I
Other or nondesignated	(as assigned or blank)

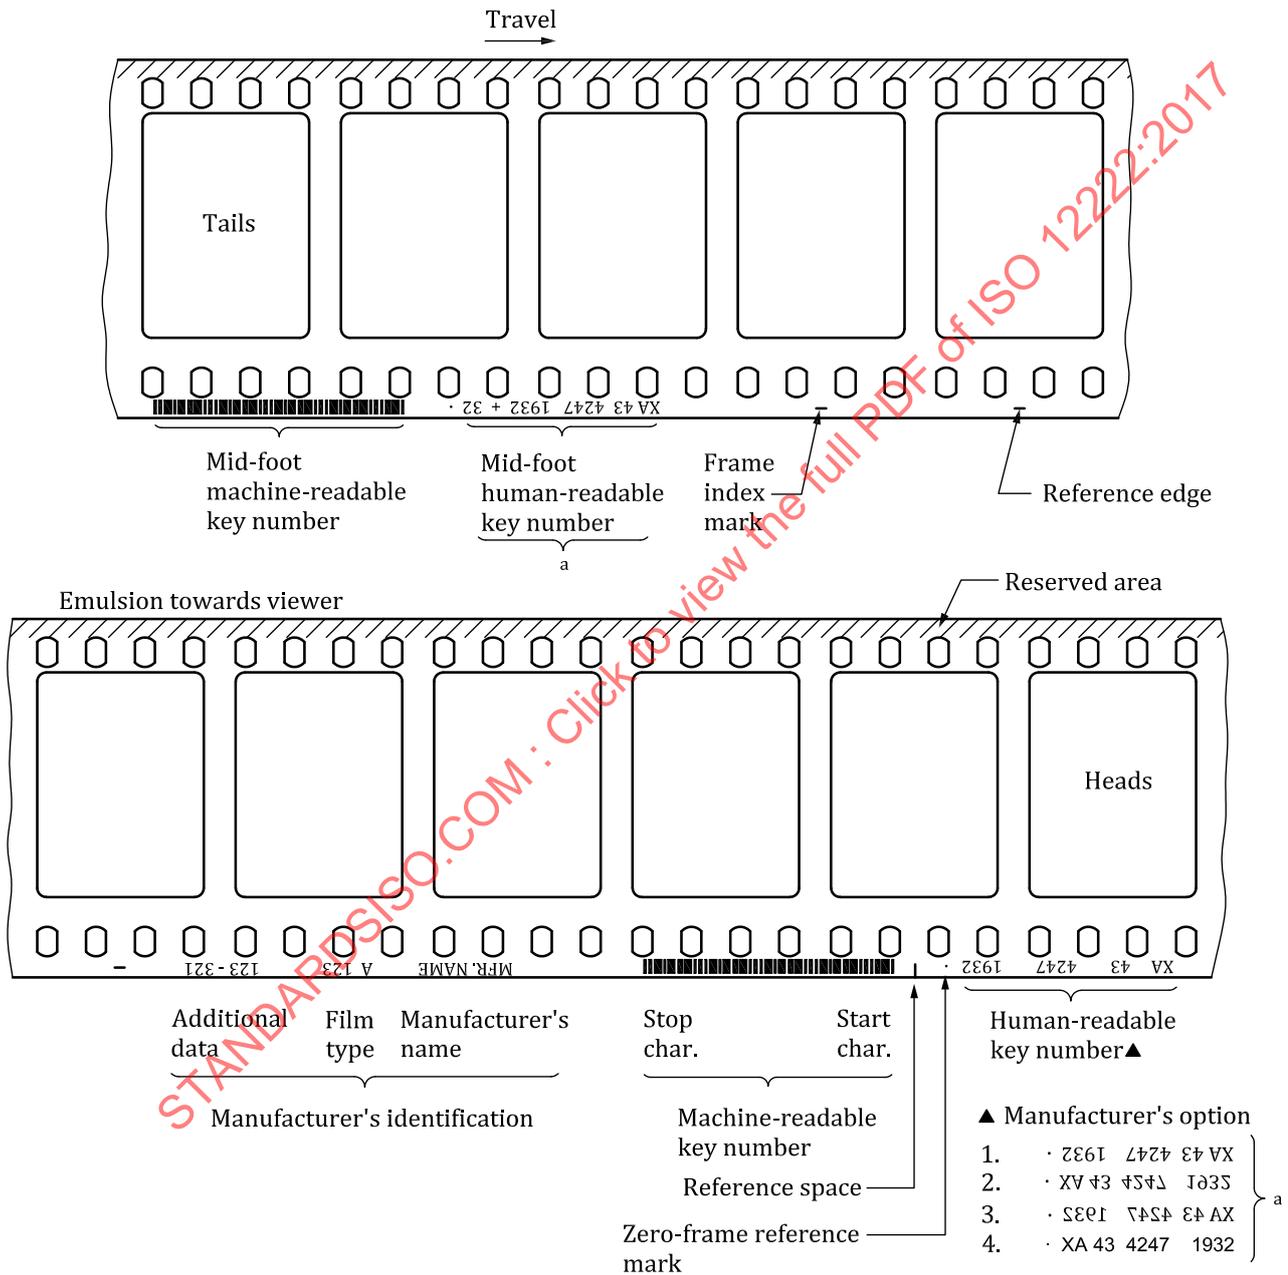


^a Human-readable key number orientation is the manufacturer's option.

Figure 2 — General format on 35 mm film

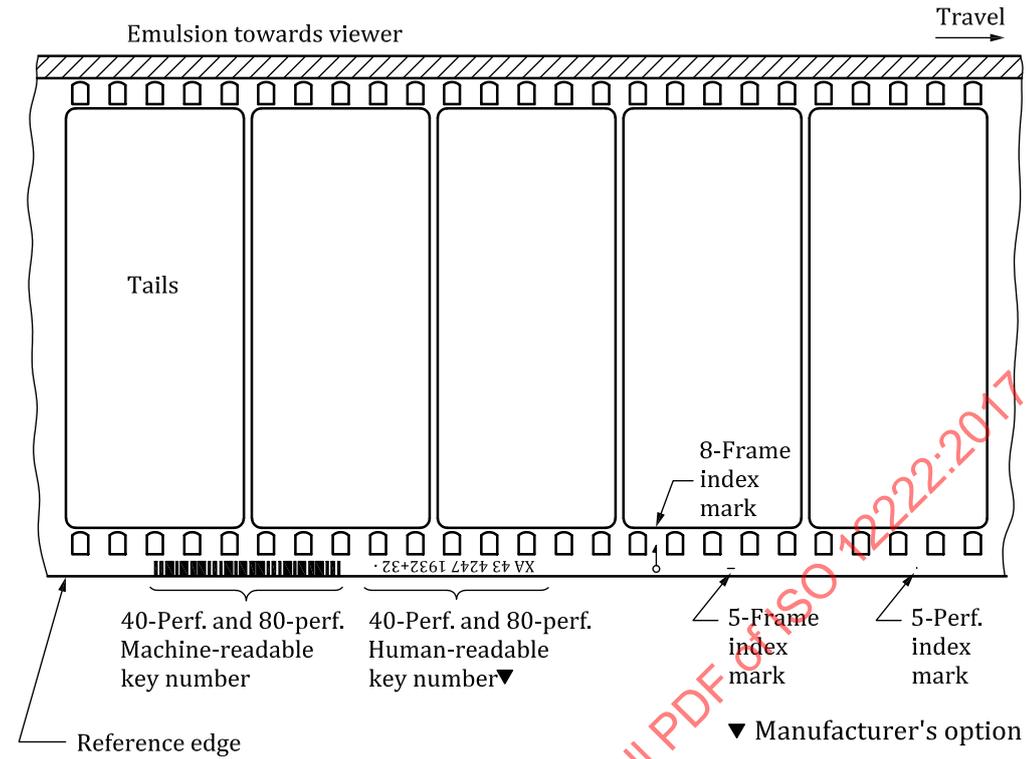


^a Human-readable key number orientation is the manufacturer's option.

- | | |
|------------------------|-----|
| 1. · · XA 43 4247 1932 | } a |
| 2. · · XA 43 4247 1932 | |
| 3. · · XA 43 4247 1932 | |
| 4. · · XA 43 4247 1932 | |

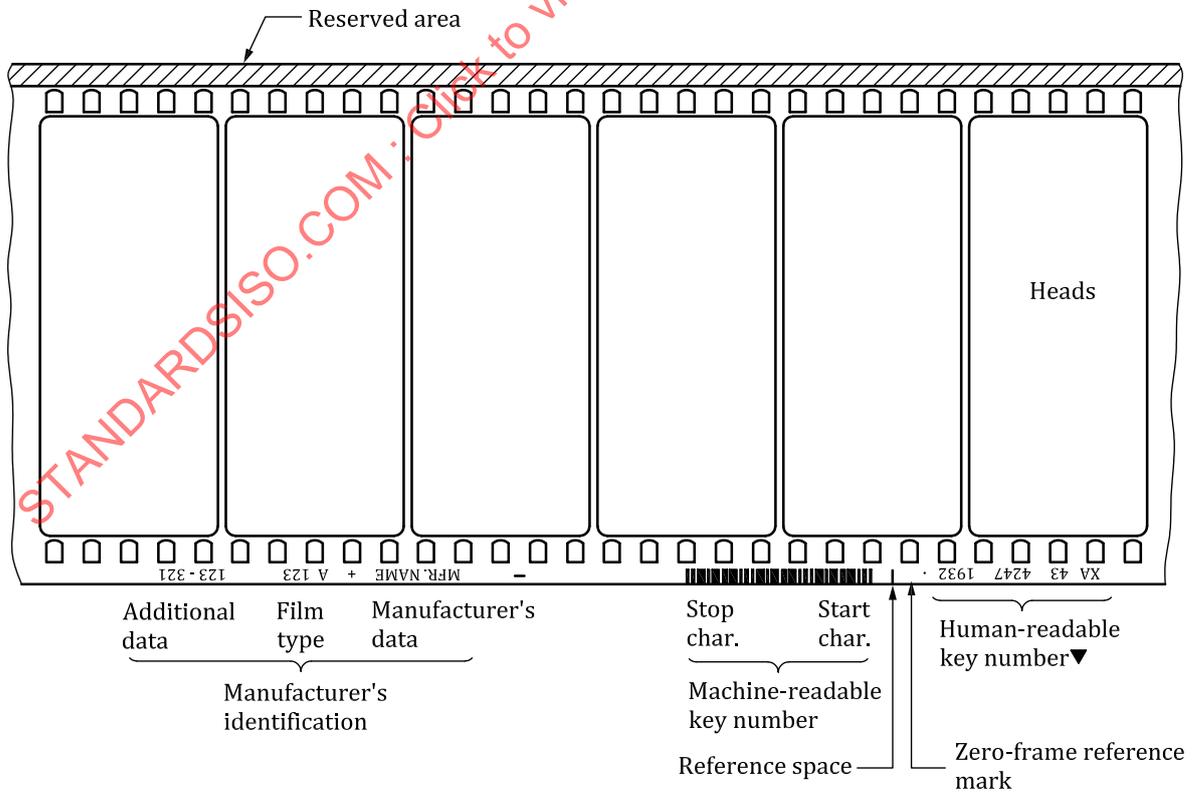

a) General format on 65 mm film (format A)

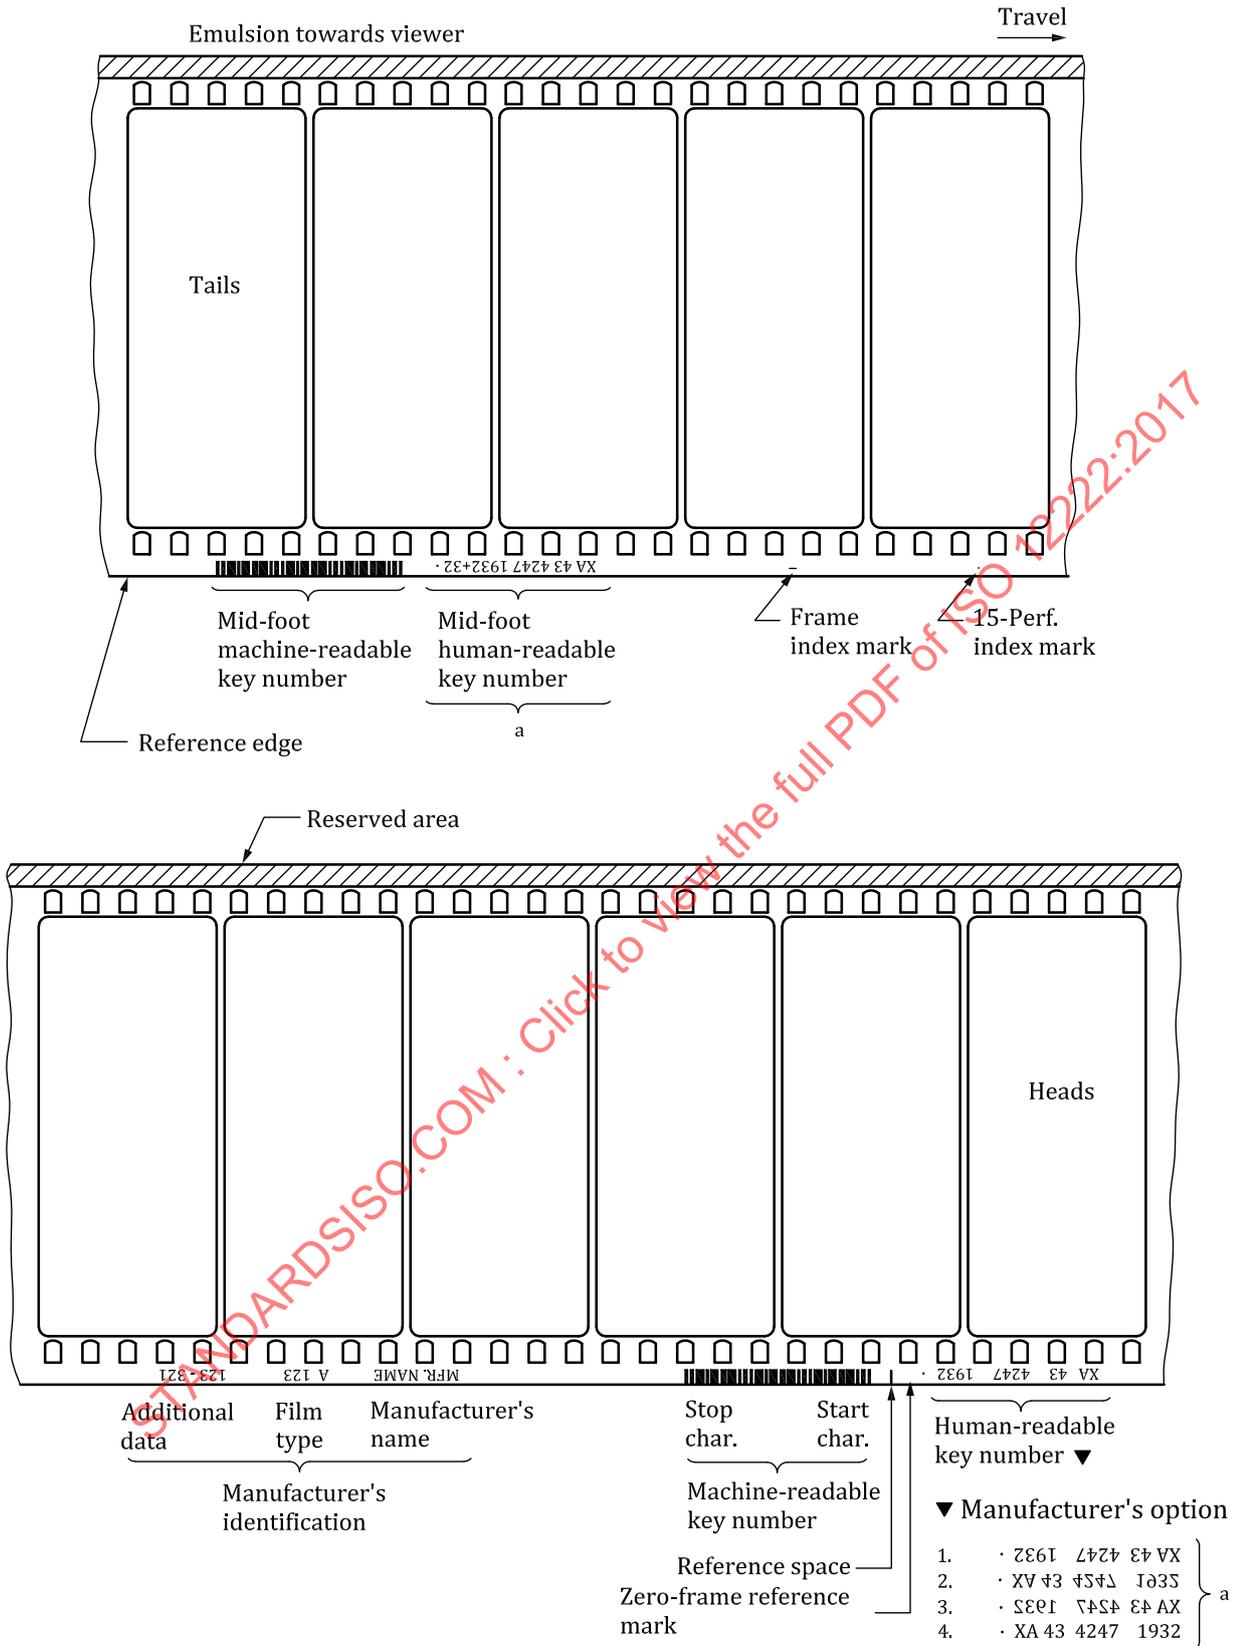

^a Human-readable key number orientation is the manufacturer's option.

b) Special format on 65 mm film (format B)

Figure 3 — Formats A and B on 65 mm film

5.1.3 Numerical characters

For the 10 numerical characters of the key number, only the digits 0, 1, 2, 3, 4, 5, 6, 7, 8 and 9 shall be used, and they shall be in normal counting sequence. It is recommended, although not required, that the “ten thousands” place should not be allowed to increment within a single roll of film.

5.2 Human-readable key number specifications applicable to 16 mm film only

5.2.1 Dimensions

The height and width of the human-readable key numbers shall be as specified in [Figure 4](#) and [Table 2](#). Note that the height of the first character is less than that of the others to allow for the reference mark specified in [5.2.2](#). The width of each human-readable character is left to the manufacturer's discretion, but it should be wide enough for good legibility, while still maintaining dimension *F*. A character height-to-width ratio of 14:10 and a space between characters of 2/14 of a character height is recommended.

5.2.2 Reference mark

A zero-frame reference mark shall be printed between the first human-readable key number and the edge of the film, as shown in [Figure 1](#). This may be above or below the character, depending upon which of the possible orientations allowed in [5.2.6](#) is used. The zero-frame reference mark shall be a filled circle with a diameter as given by dimension *B*₃ of [Table 2](#).

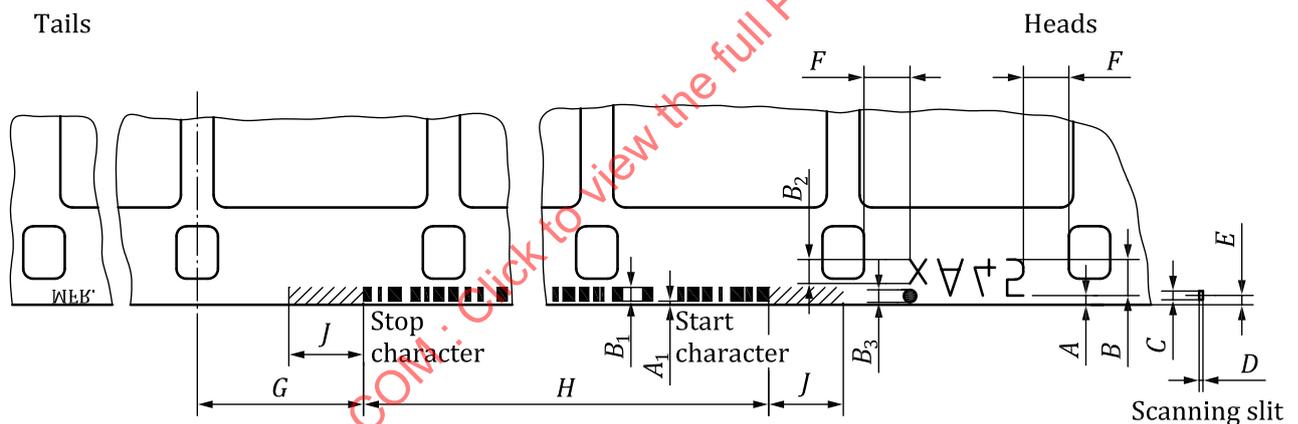


Figure 4 — Key number position and dimensions on 16 mm film

Table 2 — Key number dimensions on 16 mm film

Symbol in Figure 4	Parameter	Dimensions			
		mm		in	
		nom.	tol.	nom.	tol.
<i>A</i>	Edge of film to bottom of characters	0,292	±0,076	0,011 5	±0,003 0
<i>A</i> ₁	Edge of film to bottom of bars	0,10	±0,08	0,004	±0,003
<i>B</i>	Height of characters	1,334	±0,076	0,052 5	±0,003 0
<i>B</i> ₁	Height of bars and manufacturer's information	0,478	±0,076	0,018 8	±0,003 0
<i>B</i> ₂	Height of first character	0,84 min. to 0,99 max.		0,033 min. to 0,039 max.	
<i>B</i> ₃	Height of zero-frame reference mark	0,46 min. to 0,61 max.		0,018 min. to 0,024 max.	
<i>C</i>	Scanning slit length	0,15	max.	0,006	max.
<i>D</i>	Scanning slit width	0,13	max.	0,005	max.
<i>E</i>	Edge of film to centreline of scanning slit	0,33	±0,05	0,013	±0,002

Table 2 (continued)

Symbol in Figure 4	Parameter	Dimensions			
		mm		in	
		nom.	tol.	nom.	tol.
<i>F</i>	Key number to edge of perforation	0,76	min.	0,030	min.
<i>G</i>	Bar code displacement	4,78	±0,51	0,188	±0,020
<i>H</i>	Length of bar code	23,432	±0,508	0,922 5	±0,020 0
<i>J</i>	Quiet zone (no-print area)	2,54	min.	0,100	min.

5.2.3 Alignment with respect to perforations

The numbers shall be printed so that each of the three groups of four characters is centred between two perforations. To ensure visibility, the human-readable key numbers shall not be printed closer to the perforation than the distance specified as dimension *F* in Figure 4 and Table 2.

5.2.4 Frame identification

Since the key number is longer than one frame, the following rule shall be applied to frame identification.

- The frame immediately above the zero-frame reference mark is the one referenced by that key number. Other frames are specified by an offset which is written as (an) additional digit(s) separated from the key number by a plus sign. Figure 5 shows an example of this rule.

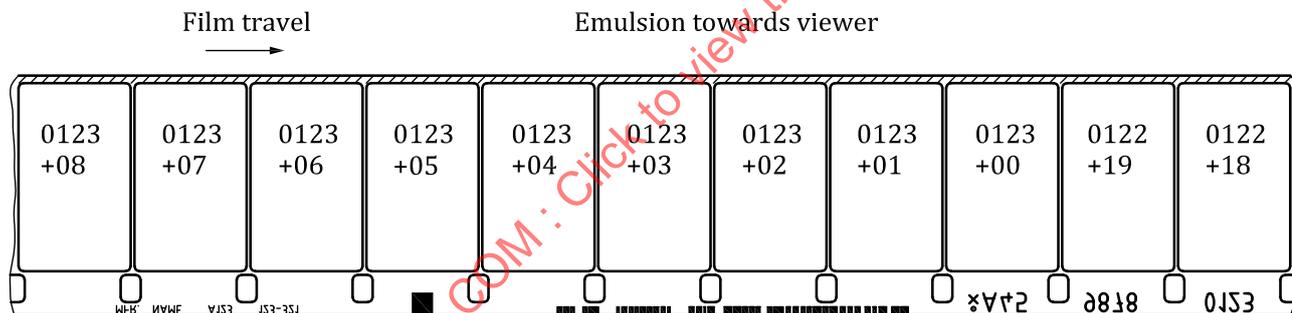


Figure 5 — Alignment of zero-frame reference mark on 16 mm film

5.2.5 Repeat frequency

The spacing from one key number to the next shall be 20 perforations.

5.2.6 Orientation

The key number may be placed in one of two orientations at the discretion of the film manufacturer. When the original negative film is held with the emulsion towards the viewer and the head towards the right, the numbers may be in either of the following orientations:

- right side up, reading from tail to head;
- upside down, reading from tail to head.

In all cases, regardless of the orientation, the dot shall be above the trailing character (closest to the tail), as shown in Figure 1. The human-readable key number shall precede the machine-readable key number, i.e. the human-readable key number shall be closer to the head of the roll.

5.3 Human-readable key number specifications applicable to 35 mm film only

5.3.1 Dimensions


The height and width of the human-readable key numbers shall be as specified in [Figure 6](#) and [Table 3](#).

5.3.2 Reference mark

A zero-frame reference mark shall be printed adjacent to the digit of the human-readable key number that is closest to the tail of the film, as shown in [Figure 2](#). The zero-frame reference mark shall be a filled circle with a diameter of 0,64 mm to 0,76 mm (0,025 in to 0,030 in).

5.3.3 Alignment with respect to perforations

The numbers shall be printed so that the centreline of the zero-frame reference mark is aligned with the centreline of a perforation, within the tolerance shown in [Figure 6](#) and [Table 3](#).

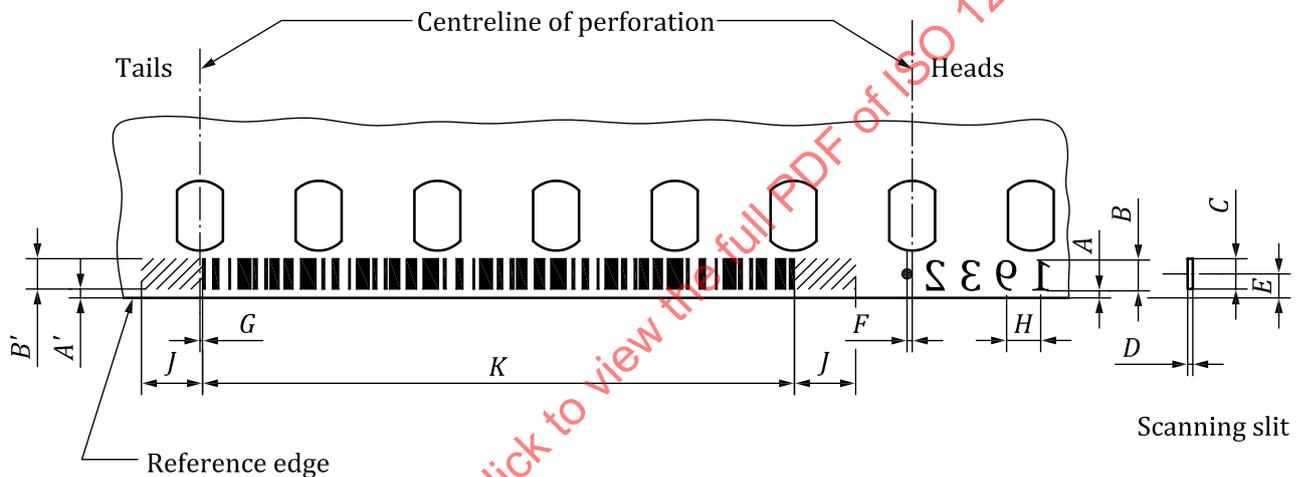

NOTE This drawing shows emulsion towards the viewer. Normal film travel is from left to right.

Figure 6 — Key number position and dimensions on 35 mm film

Table 3 — Key number dimensions on 35 mm film

Symbol in Figure 6	Parameter	Dimensions			
		mm		in	
		nom.	tol.	nom.	tol.
A	Edge of film to bottom of characters	0,23	±0,13	0,009	±0,005
A'	Edge of film to bottom of bars	0,23	+0,13 -0,23	0,009	+0,005 -0,009
B	Height of characters	1,52	±0,10	0,060	±0,004
B'	Height of bars	1,52	+0,25 -0,10	0,060	+0,010 -0,004
C	Scanning slit length	0,97	max.	0,038	max.
D	Scanning slit width	0,13	max.	0,005	max.
E	Edge of film to centreline of scanning slit	0,89	±0,05	0,035	±0,002
F	Zero-frame reference mark displacement	0,0	±1,0	0,00	±0,04
G	Barcode displacement	0,0	±1,0	0,00	±0,04

Table 3 (continued)

Symbol in Figure 6	Parameter	Dimensions			
		mm		in	
		nom.	tol.	nom.	tol.
H	Character-to-character spacing	1,52	(nom.)	0,060	(nom.)
J	Quiet zone (no-print area)	2,54	min.	0,100	min.
K	Length of bar code	23,432	±1,016	0,922 5	±0,040 0

5.3.4 Frame identification

The alignment specified in 5.3.3 is intended to facilitate frame identification with a minimum of confusion, even though the picture frame may have one of several positions relative to the key number. The following rule shall be applied to frame identification.

- The frame immediately above the zero-frame reference mark is the one referenced by that key number. Other frames are specified by an offset which is written as an additional digit(s) separated from the key number by a plus sign. Figure 7 shows an example of this rule.

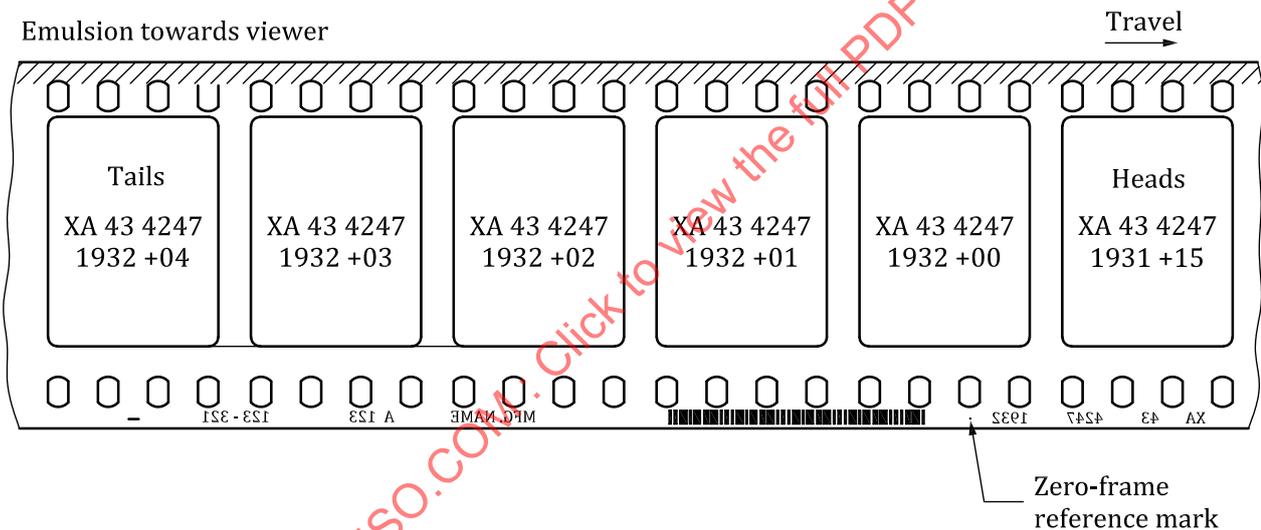


Figure 7 Alignment of zero-frame reference mark on 35 mm film

5.3.5 Repeat frequency

The spacing from one key number to the next shall be 64 perforations.

5.3.6 Orientation

The number may be placed in one of several orientations at the discretion of the film manufacturer. When the original negative film is held with the emulsion towards the viewer and the head towards the right, the numbers may be in any one of the following orientations:

- right side up, reading from head to tail;
- upside down, reading from head to tail;
- right side up, reading from tail to head;
- upside down, reading from tail to head.

In all cases, regardless of the orientation, the dot shall be to the left (closer to the tail) and adjacent to the trailing (closest to the tail) character, as shown in Figure 2. The human-readable key number shall precede the machine-readable key number, i.e. the human-readable key number shall be closer to the head of the roll.

5.3.7 Mid-foot key number

A mid-foot key number, as shown in Figure 2, shall be placed halfway between each key number. The mid-foot key number shall have two parts: a mid-foot human-readable key number and a mid-foot machine-readable key number.

The mid-foot human-readable key number shall consist of a zero-frame reference mark, an adjacent key number that shall be nearer the head end of the roll, and an offset in perforations which shall always be 32. The mid-foot key number shall thus have the format “XA 12 3456 7890 + 32”. The mid-foot key number shall have the same orientation as the standard human-readable key number (see 5.3.6). All characters shall be small in size (approximately half-size).

5.4 Human-readable key number specifications applicable to 65 mm film only

5.4.1 Dimensions

The height and width of the human-readable key numbers shall be as specified in Figure 8 and Table 4.

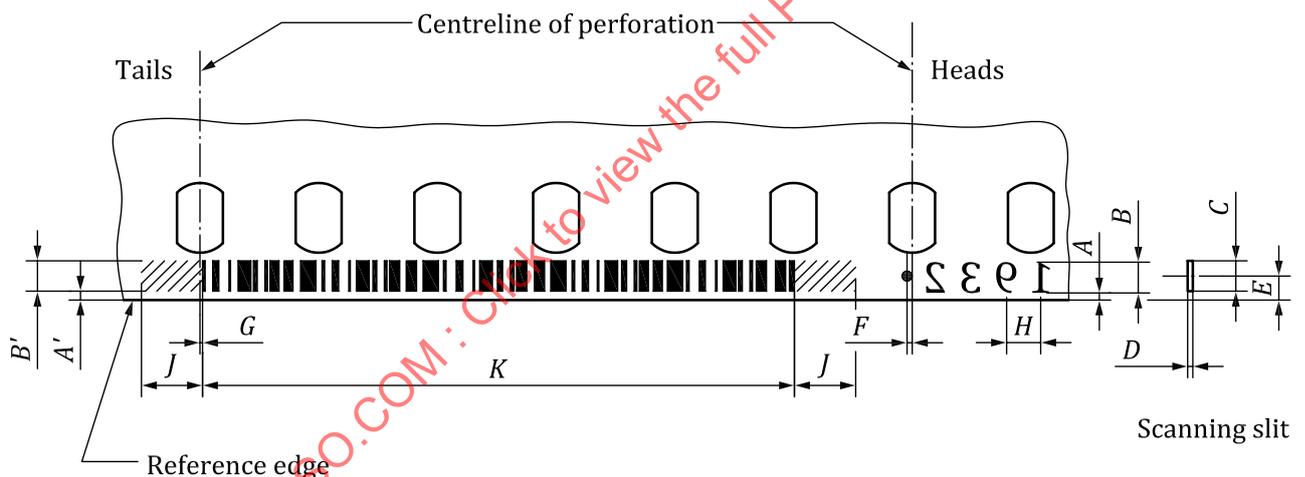


Figure 8 — Key number position and dimensions on 65 mm film, format A and format B

Table 4 — Key number dimensions on 65 mm film, format A and format B

Symbol in Figure 8	Parameter	Dimensions			
		mm		in	
		nom.	tol.	nom.	tol.
A	Edge of film to bottom of characters	0,23	±0,13	0,009	±0,005
A'	Edge of film to bottom of bars	0,23	+0,13 -0,23	0,009	+0,005 -0,009
B	Height of characters	1,52	±0,10	0,060	±0,004
B'	Height of bars	1,52	+0,25 -0,10	0,060	+0,010 -0,004
C	Scanning slit length	0,97	max.	0,038	max.
D	Scanning slit width	0,13	max.	0,005	max.
E	Edge of film to centreline of scanning slit	0,89	±0,05	0,035	±0,002

Table 4 (continued)

Symbol in Figure 8	Parameter	Dimensions			
		mm		in	
		nom.	tol.	nom.	tol.
<i>F</i>	Zero-frame reference mark displacement	0,0	±1,0	0,00	±0,04
<i>G</i>	Bar code displacement	0,0	±1,0	0,00	±0,04
<i>H</i>	Character-to-character spacing	1,52	(nom.)	0,060	(nom.)
<i>J</i>	Quiet zone (no-print area)	2,54	min.	0,100	min.
<i>K</i>	Length of bar code	23,432	±1,016	0,922 5	±0,040 0

5.4.2 Reference mark

A zero-frame reference mark shall be printed adjacent to the character of the human-readable key number that is closest to the tail of the film, as shown in [Figure 3](#). The zero-frame reference mark shall be a filled circle with a diameter of approximately 0,64 mm to 0,76 mm (0,025 in to 0,030 in).

5.4.3 Alignment with respect to perforations

The numbers shall be printed so that the centreline of the zero-frame reference mark is aligned with the centreline of a perforation, within the tolerance shown in [Figure 8](#) and [Table 4](#).

5.4.4 Frame identification

The alignment specified in [5.4.3](#) is intended to facilitate frame identification with a minimum of confusion, even though the picture frame may have one of several positions relative to the key number. The following rule shall be applied to frame identification.

- The frame immediately above the zero-frame reference mark is the one referenced by that key number. Other frames are specified by an offset which is written as an additional digit(s) separated from the key number by a plus sign. [Figure 9](#) shows an example of this rule.

5.4.5 Repeat frequency

The spacing from one key number to the next shall be 120 perforations for format A and 80 perforations for format B.

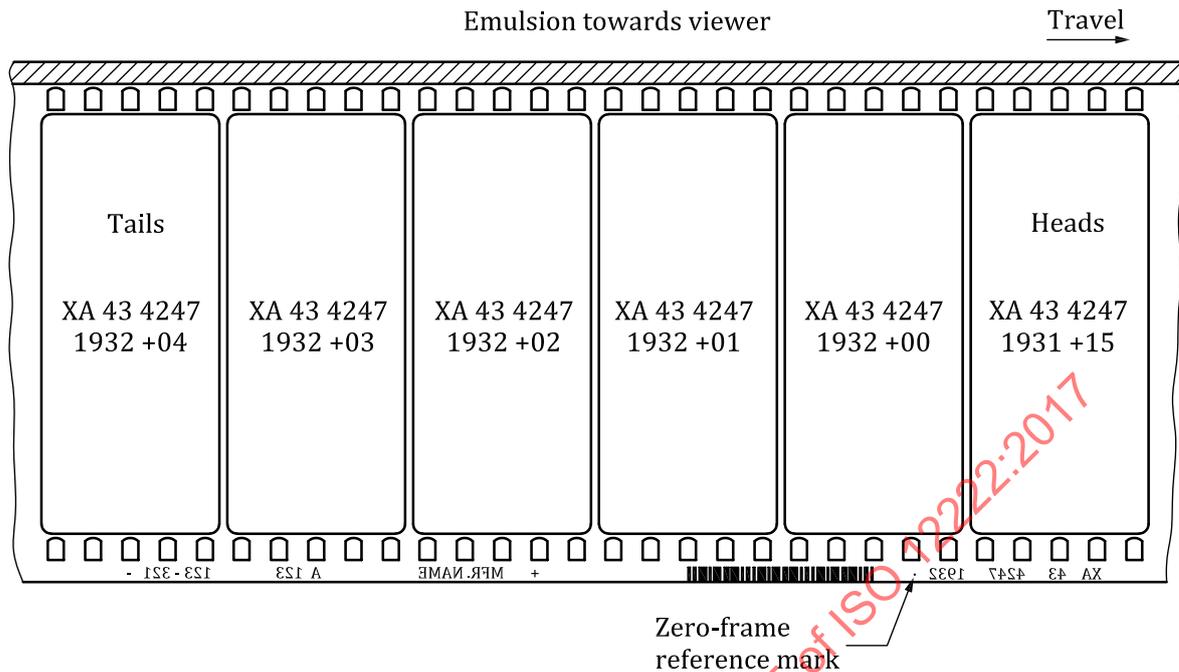


Figure 9 — Alignment of zero-frame reference mark on 65 mm film

5.4.6 Orientation

The number may be placed in one of several orientations at the discretion of the film manufacturer. When the original negative film is held with the emulsion towards the viewer and the head towards the right, the numbers may be in any one of the following orientations:

- right side up, reading from head to tail;
- upside down, reading from head to tail;
- right side up, reading from tail to head;
- upside down, reading from tail to head.

In all cases, regardless of the orientation, the dot shall be to the left (closer to the tail) and adjacent to the trailing (closest to the tail) character, as shown in Figures 3 a) and 3 b). The human-readable key number shall precede the machine-readable key number, i.e. the human-readable key number shall be closer to the head of the roll.

5.4.7 Mid-foot key number, format A

A 40-perf. intermediate key number, as shown in Figure 3 a), shall be placed one-third of the way between each key number. The 40-perf. key number shall have two parts: a 40-perf. intermediate human-readable key number and a 40-perf. intermediate machine-readable key number.

An 80-perf. intermediate key number, as shown in Figure 3 a), shall be placed two-thirds of the way between each key number. The 80-perf. key number shall have two parts: an 80-perf. intermediate human-readable key number and an 80-perf. intermediate machine-readable key number.

The intermediate human-readable key numbers shall consist of a zero-frame reference mark, an adjacent key number that shall be nearer the head end of the roll, and an offset in perforations which shall always be 40 for the 40-perf. intermediate key number and 80 for the 80-perf. intermediate key number. The 40-perf. intermediate key number shall have the format "XA 12 3456 7890 + 40." The 80-perf. intermediate key number shall have the format "XA 12 3456 7890 + 80." Both intermediate key

numbers shall have the same orientation as the standard human-readable key numbers (see 5.4.6). All characters shall be small in size (approximately half-size).

5.4.8 Mid-foot key number, format B

A mid-foot key number, as shown in Figure 3 b), shall be placed halfway between each key number. The mid-foot key number shall have two parts: a mid-foot human-readable key number and a mid-foot machine-readable key number.

The mid-foot human-readable key number shall consist of a zero-frame reference mark, an adjacent key number that shall be nearer the head end of the roll, and an offset in perforations which shall always be 40. The mid-foot key number shall thus have the format "XA 12 3456 7890 + 40". The mid-foot key number shall have the same orientation as the standard human-readable key number (see 5.4.6). All characters shall be small in size (approximately half-size).

6 Machine-readable key numbers

6.1 Machine-readable key number specifications applicable to 16 mm, 35 mm and 65 mm film

6.1.1 General

Machine-readable key numbers are intended to be a machine-readable version of the immediately adjacent human-readable key numbers. The machine-readable key numbers shall consist of a series of bars and spaces of varying width that meet the bar code specification of USS 128. Code subset C of this specification, which allows double-density numerical digits, shall be used.

6.1.2 Repeat frequency

The machine-readable message shall be immediately adjacent to the human-readable key number and shall repeat at the same frequency.

6.1.3 Format

6.1.3.1 The data portion of the message shall be of fixed length and shall consist of 16 digits. Since code subset C encodes two digits per bar code character, this corresponds to eight bar code characters. In addition, quiet zones, a start character (for code C), a check sum character and a stop character shall be recorded. Including the start and stop characters, the entire message shall be 11 bar code characters.

6.1.3.2 The start character shall be nearest the head end of the film and the stop character shall be nearest the tail end of the film, regardless of the orientation of the human-readable characters, i.e. when the film is transported in the normal direction of travel past a fixed scanning position, the start character shall be read first.

6.1.3.3 The eight bar code characters (16 data digits) are defined as follows:

- a) The first character shall be encoded with a two-digit manufacturer code. These codes shall be assigned in accordance with Table 5. Other codes are reserved for future assignment by ISO/TC 36.
- b) The second character shall be a two-digit product specification code assigned at the discretion of the manufacturer. If the manufacturer does not wish to identify the product, the digits 00 shall be encoded.

Table 5 — Machine-readable manufacturer codes

Manufacturer	Code on 16 mm film	Code on 35 mm and 65 mm, format B film	Code on 65 mm, format A film
AGFA-GEVAERT, N.V.	11	01	21
EASTMAN KODAK CO.	12	02	22
FUJIFILM CO.	13	03	23
ILFORD LIMITED	14	04	24
Other or nondesignated	10	00	20

- c) The third through seventh characters shall be encoded with the 10 numerical characters of key number information. These shall provide the same information as in the immediately adjacent human-readable key number. The third character shall contain the most significant digits and the seventh character shall contain the least significant digits.
- d) The eighth character shall be encoded with a two-digit offset in perforations from the zero-frame reference mark. This offset shall be 00 for 16 mm film. For 35 mm film, this offset shall be 00 for the key numbers described in c) and shall be 32 for the mid-foot key number described in 6.3.7. For 65 mm film, format A, this offset shall be 00 for the key numbers described in c), 40 for the 40-perf. intermediate key number, and 80 for the 80-perf. intermediate key number described in 6.4.7. For 65 mm film, format B, this offset shall be 00 for the key numbers described in c) and shall be 40 for the mid-foot key numbers described in 6.4.7.
- e) The check sum is equal to the modulo 103 sum of the value of the start character and the weighted values of the eight data characters as specified in ANSI/AIM BC4 (USS 128).

6.2 Machine-readable key number specifications applicable to 16 mm film only

6.2.1 The dimensions and lateral location of the machine-readable identification numbers shall be as specified in [Figure 4](#) and [Table 2](#).

6.2.2 The nominal width of the narrowest bar or space shall be 0,190 mm (0,007 5 in). All other bars and spaces are to be integer multiples of the narrowest bar in accordance with ANSI/AIM BC4-1995, Code 128. The total bar code message, which consists of 123 elements (not counting the quiet zones), shall have a length given by dimension *H* of [Table 2](#).

For measurement purposes, the width of the bar is the distance between two bar edges (see [3.2](#)).

6.2.3 The recording shall be made so that the azimuth of the record is at an angle of $90^\circ \pm 1^\circ$ to the reference edge of the film.

6.2.4 The lateral location, length and width of the scanned area shall be as specified in [Figure 4](#) and [Table 2](#).

6.2.5 The reproducing (scanning) slit image shall be positioned at an angle of $90^\circ \pm 1^\circ$ to the reference edge of the film.

6.3 Machine-readable key number specifications applicable to 35 mm film only

6.3.1 The dimensions and lateral location of the machine-readable identification numbers shall be as specified in [Figure 6](#) and [Table 3](#).

6.3.2 The nominal width of the narrowest bar or space shall be 0,190 mm (0,007 5 in). All other bars and spaces are to be integer multiples of the narrowest bar in accordance with ANSI/AIM BC4-1995, Code 128. The total bar code message, which consists of 123 elements (not counting the quiet zones), shall have a length as given by dimension *K* of [Table 3](#).

For measurement purposes, the width of the bar is the distance between two bar edges (see [3.2](#)).

6.3.3 The message shall be printed so that the trailing edge of the last character (the stop character) is longitudinally aligned with the centreline of a perforation, that perforation being six perforations displaced from the perforation specified in [5.3.2](#), within the tolerance shown in [Figure 6](#).

6.3.4 The recording shall be made so that the azimuth of the record is at an angle of $90^\circ \pm 1^\circ$ to the reference edge of the film.

6.3.5 The lateral location, length and width of the scanned area shall be as specified in [Figure 6](#) and [Table 3](#).

6.3.6 The reproducing (scanning) slit image shall be positioned at an angle of $90^\circ \pm 1^\circ$ to the reference edge of the film.

6.3.7 A mid-foot key number, as shown in [Figure 2](#), shall be placed halfway between each key number. The mid-foot key number shall have two parts: a mid-foot human-readable key number and a mid-foot machine-readable key number.

The mid-foot machine-readable key number shall consist of a bar-coded message in exactly the same format as specified in [6.1.3](#). The offset-in-perforations digits shall be set to 32.

6.3.8 An optional frame index mark in the form of a hyphen may be placed on the film every four perforations, except where it would overlay some other edge information, as shown in [Figure 2](#). The index marks shall be aligned midway between the perforations coincident with a possible position of the frameline.

The frame index mark shall be aligned longitudinally such that, were it to be printed, a mark would fall on the reference space, defined as the space between the perforation above the zero-frame reference mark and the perforation immediately to its left (towards the tail of the film).

6.4 Machine-readable key number specifications applicable to 65 mm film only

6.4.1 The dimensions and lateral location of the machine-readable identification numbers shall be as specified in [Figure 8](#) and [Table 4](#).

6.4.2 The nominal width of the narrowest bar or space shall be 0,190 mm (0,007 5 in). All other bars and spaces are to be integer multiples of the narrowest bar in accordance with ANSI/AIM BC4-1995, Code 128. The total bar code message, which consists of 123 elements (not counting the quiet zones), shall have a length as given by dimension *K* of [Table 4](#).

For measurement purposes, the width of the bar is the distance between two bar edges (see [3.2](#)).

6.4.3 The message shall be printed so that the trailing edge of the last character (the stop character) is longitudinally aligned with the centreline of a perforation, that perforation being six perforations displaced from the perforation specified in [5.4.2](#), within the tolerance shown in [Figure 8](#) and [Table 4](#).

6.4.4 The recording shall be made so that the azimuth of the record is at an angle of $90^\circ \pm 1^\circ$ to the reference edge of the film.