
Rolling bearings — Instrument precision bearings —

Part 2:

Boundary dimensions, tolerances and characteristics of inch series bearings

Roulements — Roulements de précision pour instruments —

Partie 2: Dimensions d'encombrement, tolérances et caractéristiques, séries inch

STANDARDSISO.COM : Click to view the full PDF of ISO 1224-2:2007



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 1224-2:2007



COPYRIGHT PROTECTED DOCUMENT

© ISO 2007

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword.....	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions.....	1
4 Symbols	2
5 Characteristics	4
6 Bearing types	4
7 Boundary dimensions	4
8 Tolerances	6
8.1 Tolerance class 5A	6
8.2 Tolerance class 4A	7
8.3 Chamfer dimension limits.....	8
9 Radial internal clearance	9
10 Bore and outside diameter classification	9
11 Torque test conditions	9
11.1 General.....	9
11.2 Test conditions	9
11.3 Correlation of test results on different types of test equipment	10
12 Limitations of bearing yield rates	10
Annex A (informative) Imperial unit information	12

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 1224-2 was prepared by Technical Committee ISO/TC 4, *Rolling bearings*.

This first edition of ISO 1224-2, together with ISO 1224-1, cancels and replaces ISO 1224:1984, which has been technically revised.

ISO 1224 consists of the following parts, under the general title *Rolling bearings — Instrument precision bearings*:

- *Part 1: Boundary dimensions, tolerances and characteristics of metric series bearings*
- *Part 2: Boundary dimensions, tolerances and characteristics of inch series bearings*

Rolling bearings — Instrument precision bearings —

Part 2:

Boundary dimensions, tolerances and characteristics of inch series bearings

1 Scope

This part of ISO 1224 specifies the characteristics that define instrument precision rolling bearings, inch series, their types, boundary dimensions, tolerances and internal clearance, classifications used for selective assembly, torque definitions and test condition, and limitations of bearing yield rates.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 15, *Rolling bearings — Radial bearings — Boundary dimensions, general plan*

ISO 582, *Rolling bearings — Chamfer dimensions — Maximum values*

ISO 1132-1, *Rolling bearings — Tolerances — Part 1: Terms and definitions*

ISO 5593:1997, *Rolling bearings — Vocabulary*

ISO 15241, *Rolling bearings — Symbols for quantities*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 1132-1, ISO 5593 and the following apply.

3.1

perpendicularity of inner ring bore with respect to the face

⟨basically cylindrical surface⟩ total variation of the relative position, in a radial direction parallel with the plane tangential to the reference face of the inner ring, of points on the same generatrix of the bore at a distance from the side faces of the ring equal to 1,2 times the largest axial single chamfer dimension

3.2

axial runout of outer ring flange back face of assembled bearing

⟨radial groove ball bearing⟩ difference between the largest and the smallest of the axial distances between the back face of the outer ring flange, in different angular positions of this ring, at a radial distance from the outer ring axis equal to half the mean diameter of the flange back face, and a point in a fixed position relative to the inner ring

NOTE For a measurement to be valid, the inner and outer ring raceways shall be in contact with all the balls.

3.3

torque quality

torque quality of an instrument ball bearing is a function of average and maximum torques

NOTE Maximum torque is most frequently specified for slow speed (near zero) applications and for limited arcs of travel. Where considerable rotation is involved, average torque may be the criterion.

3.4

maximum torque

maximum value of torque recorded during any test cycle

3.5

average torque

arithmetic mean value of the torque readings obtained during the test cycle

3.6

test load

specified axial load coincident with the axis of rotation of the bearing

4 Symbols


For the purposes of this document, the symbols given in ISO 15241 and the following apply.

The symbols (except those for tolerances) shown in Figure 1 and the values given in the Tables 1 to 7 denote nominal dimensions unless specified otherwise.

B	inner ring width
C	outer ring width
C_1	outer ring flange width
D	outside diameter of bearing
D_1	outside diameter of outer ring flange
d	bore diameter
K_{ea}	radial runout of outer ring of assembled bearing
K_{ia}	radial runout of inner ring of assembled bearing
r	chamfer dimension (except where r_1 is applicable)
$r_{s \min}$	smallest single chamfer dimension of r
$r_{s \max}$	largest single chamfer dimension of r
r_1	chamfer dimension of front face of angular contact ball bearing inner and outer rings
$r_{1s \min}$	smallest single chamfer dimension of r_1
$r_{1s \max}$	largest single chamfer dimension of r_1
S_D	perpendicularity of outer ring outside surface with respect to the face ¹⁾

S_d	perpendicularity of inner ring face with respect to the bore ¹⁾
S_{dr}	perpendicularity of inner ring bore with respect to the face ¹⁾
S_{ea}	axial runout of outer ring of assembled bearing ¹⁾
S_{ea1}	axial runout of outer ring flange back face of assembled bearing ¹⁾
S_{ia}	axial runout of inner ring of assembled bearing ¹⁾
V_{Bs}	variation of inner ring width
V_{Cs}	variation of outer ring width
V_{C1s}	variation of outer ring flange width
V_{Dmp}	variation of mean outside diameter
V_{Dsp}	variation of outside diameter in a single plane
V_{dmp}	variation of mean bore diameter
V_{dsp}	variation of bore diameter in a single plane
Δ_{Bs}	deviation of a single inner ring width
Δ_{Cs}	deviation of a single outer ring width
Δ_{C1s}	deviation of a single outer ring flange width
Δ_{Dmp}	deviation of mean outside diameter in a single plane
Δ_{Ds}	deviation of a single outside diameter
Δ_{D1s}	deviation of a single outside diameter of outer ring flange
Δ_{dmp}	deviation of mean bore diameter in a single plane
Δ_{ds}	deviation of a single bore diameter

1) For angular contact ball bearings, the back face of a ring is the reference face.

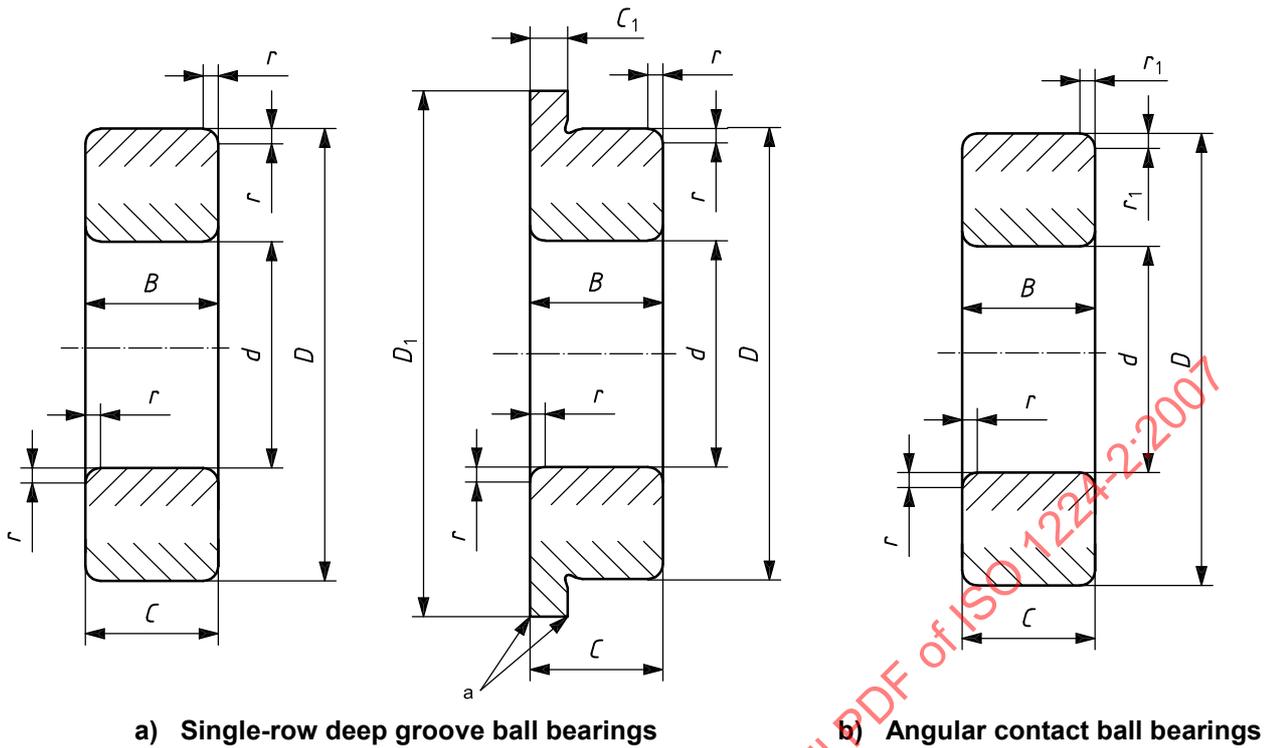

a Broken corner.

Figure 1 — Instrument precision bearing

5 Characteristics

Satisfactory performance of instrument precision bearings necessitates that they be produced to special tolerances, as given in Clause 8. In addition, these bearings shall be particularly free from foreign matter and meet one or more specific requirements in the following categories:

- a) low or uniform torque or both, either at starting or in rotation (this requirement does not apply to bearings with seals);
- b) smooth running or vibration limitations;
- c) limitations of bearing yield rates.

Due to the many specialized requirements that exist in instrument applications, specification of these categories should be established only after full agreement between the manufacturer and the customer.

6 Bearing types

Single row deep groove ball bearings meet the majority of the requirements and may be open or capped, with or without flanged outer ring. However, for specific applications, angular contact ball bearings, non-separable or with separable inner ring, may be required.

7 Boundary dimensions

Boundary dimensions for inch series instrument precision bearings are given in Table 1.

Table 1 — Inch series bearings

Dimensions in millimetres

<i>d</i>	<i>D</i>	<i>B</i> and <i>C</i>	<i>r</i> 's min ^a	<i>r</i> '1s min ^a	Flanged bearings		Applicable types of bearing
					<i>D</i> ₁	<i>C</i> ₁	
0,635	2,54	0,792	0,08	0,08	—	—	open
1,016	3,175	1,191	0,08	0,08	—	—	open
1,191	3,967	1,588	0,08	0,08	5,16	0,33	open
1,191	3,967	2,38	0,08	0,08	5,16	0,79	capped
1,397	4,762	1,984	0,08	0,08	5,94	0,58	open
1,397	4,762	2,779	0,08	0,08	5,94	0,79	capped
1,984	6,35	2,38	0,08	0,08	7,52	0,58	open
1,984	6,35	3,571	0,08	0,08	7,52	0,79	capped
2,38	4,762	1,588	0,08	0,08	5,94	0,46	open
2,38	4,762	2,38	0,08	0,08	5,94	0,79	capped
2,38	7,938	2,779	0,13	0,08	9,12	0,58	open
2,38	7,938	3,571	0,13	0,08	9,12	0,79	capped
3,175	6,35	2,38	0,08	0,08	7,52	0,58	open
3,175	6,35	2,779	0,08	0,08	7,52	0,79	capped
3,175	7,938	2,779	0,08	0,08	9,12	0,58	open
3,175	7,938	3,571	0,08	0,08	9,12	0,79	capped
3,175	9,525	2,779	0,13	0,08	10,72	0,58	open
3,175	9,525	3,571	0,13	0,08	10,72	0,79	capped
3,175	9,525	3,967	0,3	0,15	11,18	0,76	open, capped
3,175	12,7	4,366	0,3	0,15	—	—	open, capped
3,967	7,938	2,779	0,08	0,08	9,12	0,58	open
3,967	7,938	3,175	0,08	0,08	9,12	0,91	capped
4,762	7,938	2,779	0,08	0,08	9,12	0,58	open
4,762	7,938	3,175	0,08	0,08	9,12	0,91	capped
4,762	9,525	3,175	0,08	0,08	10,72	0,58	open
4,762	9,525	3,175	0,08	0,08	10,72	0,79	capped
4,762	12,7	3,967	0,3	0,15	—	—	open
4,762	12,7	4,978	0,3	0,15	14,35	1,07	open ^b , capped
5,555	7,938	2,779	0,08	0,08	—	—	open
6,35	9,525	3,175	0,08	0,08	10,72	0,58	open
6,35	9,525	3,175	0,08	0,08	10,72	0,91	capped
6,35	12,7	3,175	0,13	0,08	13,89	0,58	open
6,35	12,7	4,762	0,13	0,08	13,89	1,14	capped
6,35	15,875	4,978	0,3	0,15	17,53	1,07	open, capped
6,35	19,05	5,558	0,41	0,2	—	—	open
6,35	19,05	7,142	0,41	0,2	—	—	capped
7,938	12,7	3,967	0,13	0,08	13,89	0,79	open, capped
9,525	15,875	3,967	0,25	0,13	17,53	1,07	open
9,525	15,875	4,978	0,25	0,13	17,53	1,07	capped
9,525	22,225	5,558	0,41	0,2	—	—	open
9,525	22,225	7,142	0,41	0,2	24,61	1,57	open ^b , capped

^a Maximum chamfer dimensions are given in Table 6.

^b Open bearing with flange only.

8 Tolerances

8.1 Tolerance class 5A

See Tables 2 and 3.

Table 2 — Inner ring

Tolerance values in micrometres

<i>d</i> mm		Δ_{dmp}		Δ_{ds}		V_{dsp}	V_{dmp}	Δ_{Bs}^b		V_{Bs}	K_{ia}	S_{dr}^c		S_{ia}
>	≤	high	low	high	low	max.	max.	high	low	max.	max.	high	low	
0,6 ^a	10	0	-5	0	-5	3	3	0	-25	5	3,5	7	7	

^a This diameter is included in the group.

^b The tolerance for the total width of the inner rings of a matched pair or a matched stack is 0 to -200 μm times the number of bearings in the mounting.

^c Perpendicularity of inner ring face with respect to the bore (S_d) is

$$S_d = S_{dr} \times d_1 / 2(B - 2,4r_{s \max})$$

where S_{dr} is obtained from Table 2 and d_1 is the mean diameter of inner ring face.

Table 3 — Outer ring

Tolerance values in micrometres

<i>D</i> mm	Δ_{Dmp}		Δ_{Ds}				V_{Dsp} and V_{Dmp}		Δ_{Cs}^b		V_{Cs}	K_{ea}	S_D	S_{ea}	S_{ea1}	Δ_{C1s}		V_{C1s}	Δ_{D1s}		
	high	low	open	capped	open	capped	open	capped	high	low	max.	max.	max.	max.	max.	high	low	max.	high	low	
2 ^a	18	0	-5	0	-5	+1	-6	3	5	0	-25	5	5	8	8	10	0	-50	5	0	-25
18	30	0	-6	0	-6	+1	-7	3	5	0	-25	5	6	8	8	10	0	-50	5	0	-25

^a This diameter is included in the group.

^b The tolerance for the total width of the outer rings of a matched pair or a matched stack is 0 to -200 μm times the number of bearings in the mounting.

8.2 Tolerance class 4A

See Tables 4 and 5.

Table 4 — Inner ring

Tolerance values in micrometres

d mm		Δ_{dmp}		Δ_{ds}		V_{dsp}	V_{dmp}	Δ_{Bs}^b		V_{Bs}	K_{ia}	S_{dr}^c	S_{ia}
>	≤	high	low	high	low	max.	max.	high	low	max.	max.	max.	max.
0,6 ^a	10	0	-5	0	-5	2,5	2,5	0	-25	2,5	2,5	3	3

^a This diameter is included in the group.

^b The tolerance for the total width of the inner rings of a matched pair or a matched stack is 0 to -200 μm times the number of bearings in the mounting.

^c Perpendicularity of inner ring face with respect to the bore (S_d) is

$$S_d = S_{dr} \times d_1 / 2(B - 2,4r_{s \max})$$

where S_{dr} is obtained from Table 4 and d_1 is the mean diameter of inner ring face.

Table 5 — Outer ring

Tolerance values in micrometres

D mm		Δ_{Dmp}		Δ_{Ds}				V_{Dsp} and V_{Dmp}		Δ_{Cs}^b		V_{Cs}	K_{ea}	S_D	S_{ea}	S_{ea1}	Δ_{C1s}		V_{C1s}	Δ_{D1s}	
>	≤	high	low	open		capped		open	capped	high	low	max.	max.	max.	max.	max.	high	low	max.	low	max.
2 ^a	18	0	-5	0	-5	+1	-6	2,5	5	0	-25	2,5	3,5	4	5	8	0	-50	2,5	0	-25
18	30	0	-5	0	-5	+1	-6	2,5	5	0	-25	2,5	4	4	5	8	0	-50	2,5	0	-25

^a This diameter is included in the group.

^b The tolerance for the total width of the outer rings of a matched pair or a matched stack is 0 to -200 μm times the number of bearings in the mounting.

8.3 Chamfer dimension limits

The maximum chamfer dimensions corresponding to the minimum chamfer dimensions given in Table 1 are specified in Table 6.

Table 6 — Maximum chamfer dimensions

Dimensions in millimetres

<i>d</i>	<i>D</i>	<i>B</i> and <i>C</i>	<i>r</i> 's max		<i>r</i> '1s max	
			Radial direction	Axial direction	Radial direction	Axial direction
0,635	2,54	0,792	0,18	0,18	0,18	0,18
1,016	3,175	1,191	0,18	0,18	0,18	0,18
1,191	3,967	1,588	0,23	0,23	0,18	0,18
1,191	3,967	2,38	0,23	0,3	0,23	0,3
1,397	4,762	1,984	0,23	0,23	0,23	0,23
1,397	4,762	2,779	0,23	0,3	0,23	0,3
1,984	6,35	2,38	0,23	0,3	0,23	0,3
1,984	6,35	3,571	0,23	0,3	0,23	0,3
2,38	4,762	1,588	0,2	0,2	0,2	0,2
2,38	4,762	2,38	0,2	0,3	0,2	0,3
2,38	7,938	2,779	0,3	0,61	0,25	0,25
2,38	7,938	3,571	0,3	0,61	0,25	0,25
3,175	6,35	2,38	0,23	0,3	0,23	0,3
3,175	6,35	2,779	0,23	0,3	0,23	0,3
3,175	7,938	2,779	0,25	0,46	0,25	0,46
3,175	7,938	3,571	0,25	0,46	0,25	0,46
3,175	9,525	2,779	0,3	0,61	0,25	0,25
3,175	9,525	3,571	0,3	0,61	0,25	0,25
3,175	9,525	3,967	0,56	0,99	0,3	0,3
3,175	12,7	4,366	0,56	0,99	0,3	0,3
3,967	7,938	2,779	0,23	0,3	0,23	0,3
3,967	7,938	3,175	0,23	0,3	0,23	0,3
4,762	7,938	2,779	0,23	0,3	0,23	0,3
4,762	7,938	3,175	0,23	0,3	0,23	0,3
4,762	9,525	3,175	0,25	0,46	0,25	0,46
4,762	9,525	3,175	0,25	0,46	0,25	0,46
4,762	12,7	3,967	0,56	0,99	0,3	0,3
4,762	12,7	4,978	0,56	0,99	0,3	0,3
5,555	7,938	2,779	0,23	0,3	0,23	0,3
6,35	9,525	3,175	0,2	0,3	0,2	0,3
6,35	9,525	3,175	0,2	0,3	0,2	0,3
6,35	12,7	3,175	0,3	0,61	0,25	0,25
6,35	12,7	4,762	0,3	0,61	0,25	0,25
6,35	15,875	4,978	0,56	0,99	0,3	0,3
6,35	19,05	5,558	0,71	0,99	0,51	0,51
6,35	19,05	7,142	0,71	0,99	0,51	0,51
7,938	12,7	3,967	0,3	0,61	0,25	0,25
9,525	15,875	3,967	0,51	0,79	0,3	0,3
9,525	15,875	4,978	0,51	0,79	0,3	0,3
9,525	22,225	5,558	0,71	0,99	0,51	0,51
9,525	22,225	7,142	0,71	0,99	0,51	0,51

9 Radial internal clearance

The radial internal clearance of single-row radial contact groove ball bearings is given in Table 7.

Table 7 — Radial internal clearance of single-row radial contact groove ball bearings

Clearance values in micrometres

d mm		Group 2		Group N		Group 3	
>	≤	min.	max.	min.	max.	min.	max.
0,6 ^a	10	0	6	4	11	10	20

^a This diameter is included in the group.

10 Bore and outside diameter classification

When required for selective assembly to shafts or housings, instrument precision rolling bearings may be classified into specific size groupings in accordance with the following provisions:

- a) method for size determination:
 - outside diameter: the largest diameter measured;
 - bore diameter: the smallest diameter measured;
- b) two equal range groups for each basic diameter, unless agreed otherwise;
- c) due to difficulties in gauge correlation between the manufacturer and the customer, the classifications shall be considered only as guides for selective assembly and not as absolute size segregations in borderline cases;
- d) unless special arrangement is made with the manufacturer, random and not specific quantities of size groupings shall be supplied.

11 Torque test conditions

11.1 General

Torque of ball bearings may be specified as “running torque” or “starting torque” as defined in ISO 5593:1997, 06.01.02 and 06.01.01, respectively.

The standard unit of torque is the micronewton metre. Convenient multiples thereof may be also used.

The axis position of the bearing should be vertical unless specified otherwise.

11.2 Test conditions

11.2.1 Ambient conditions

Testing should be carried out in a controlled atmosphere, in clean surroundings and on a vibration-free base. Temperature range should be from 20 °C to 25 °C and relative humidity should be maintained below 55 %.

11.2.2 Pre-test condition of bearings

Before testing, bearing should be demagnetized and cleaned thoroughly with suitably filtered, clean mineral solvent. Bearings should be lubricated with the specified quantity and quality of lubricant. Bearings should be rotated slowly to distribute the lubricant.

11.2.3 Test load

The axial load (see 3.6) should be as follows:

- for bearings having an outside diameter less than or equal to 8 mm (0,312 5 in): 0,75 N;
- for bearings having an outside diameter over 8 mm (0,312 5 in): 1,5 N or 4 N as agreed.

11.2.4 Extent of testing

Tests should be conducted in such a manner as to ensure compliance within specified torque limits in both directions of rotation and in both directions of loading on single-row, non-filling slot bearings. For angular contact ball bearings and others that support axial loading in one direction only, torque specifications should apply only under the normal direction of loading.

11.2.4.1 Running torque

The test should be conducted with at least 720° of rotation of the specified rotating ring of the bearing.

11.2.4.2 Starting torque

The test should be conducted with a specified minimum number of starts, each start to be defined with a specified minimum arc of travel.

11.2.4.3 Retest provisions

Bearings that fail to pass the specified test should be demagnetized, cleaned, lubricated and retested. Bearing failing the second test should again be demagnetized, cleaned, lubricated and retested. All bearings failing to pass the third test should be considered as failing the test.

11.3 Correlation of test results on different types of test equipment

Since the average torque values (see 3.5) and maximum torque values (see 3.4) of any two rolling bearings are never exactly identical and, furthermore, since different types of test equipment exhibit different degrees of extent and exaggeration of peak torque values, correlation of measurement between different types of test equipment can prove difficult to resolve. The specification of torque values should, therefore, be agreed between the manufacturer and the customer on the basis of a particular type and design of test equipment, unless the correlation of test results on different test equipment is well established and understood.

12 Limitations of bearing yield rates

Special requirements for accurate positional control of a rotating member in relation to its support may necessitate limitations of bearing yield rates. These yield rate limitations are governed by specialized control of bearing contact angles and/or preload.

Contact angle is established by the magnitude of bearing radial internal clearance, internal design and applied axial preload and largely governs the magnitudes of the axial and radial yield rates. When tolerances on contact angle are specified, normal radial internal clearance standards do not apply.

Axial preload is established by axially loading one bearing against another either by an adjustment system external to the bearings or by the use of axially preloaded matched pairs of bearings which, when the appropriate rings are clamped together, establishes the required magnitude of axial loading within the pair. In such cases, the normal tolerances that apply to the individual ring width may be exceeded.

Due to many specialized requirements that exist in this field of application and since axial preloading and contact angle controls affect endurance life and restraining torques, specifications should be established only after full agreement between the manufacturer and the customer.

STANDARDSISO.COM : Click to view the full PDF of ISO 1224-2:2007

Annex A
(informative)

Imperial unit information

Tables A.1 to A.7 give the Imperial (non-SI) unit information that is the basis for the normative portion of this International Standard.

Table A.1 — Boundary dimensions — Inch series bearings

Dimensions in inches

<i>d</i>	<i>D</i>	<i>B</i> and <i>C</i>	<i>r</i> _{s min} ^a	<i>r</i> _{1s min} ^a	Flanged bearings		Applicable types of bearing
					<i>D</i> ₁	<i>C</i> ₁	
0,025	0,1	0,031 2	0,003	0,003	—	—	open
0,04	0,125	0,046 9	0,003	0,003	—	—	open
0,046 9	0,156 2	0,062 5	0,003	0,003	0,203	0,013	open
0,046 9	0,156 2	0,093 7	0,003	0,003	0,203	0,031	capped
0,055	0,187 5	0,078 1	0,003	0,003	0,234	0,023	open
0,055	0,187 5	0,109 4	0,003	0,003	0,234	0,031	capped
0,078 1	0,25	0,093 7	0,003	0,003	0,296	0,023	open
0,078 1	0,25	0,140 6	0,003	0,003	0,296	0,031	capped
0,093 7	0,187 5	0,062 5	0,003	0,003	0,234	0,018	open
0,093 7	0,187 5	0,093 7	0,003	0,003	0,234	0,031	capped
0,093 7	0,312 5	0,109 4	0,005	0,003	0,359	0,023	open
0,093 7	0,312 5	0,140 6	0,005	0,003	0,359	0,031	capped
0,125	0,25	0,093 7	0,003	0,003	0,296	0,023	open
0,125	0,25	0,109 4	0,003	0,003	0,296	0,031	capped
0,125	0,312 5	0,109 4	0,003	0,003	0,359	0,023	open
0,125	0,312 5	0,140 6	0,003	0,003	0,359	0,031	capped
0,125	0,375	0,109 4	0,005	0,003	0,422	0,023	open
0,125	0,375	0,140 6	0,005	0,003	0,422	0,031	capped
0,125	0,375	0,156 2	0,012	0,006	0,44	0,03	open, capped
0,125	0,5	0,171 9	0,012	0,006	—	—	open, capped
0,156 2	0,312 5	0,109 4	0,003	0,003	0,359	0,023	open
0,156 2	0,312 5	0,125	0,003	0,003	0,359	0,036	capped
0,187 5	0,312 5	0,109 4	0,003	0,003	0,359	0,023	open
0,187 5	0,312 5	0,125	0,003	0,003	0,359	0,036	capped
0,187 5	0,375	0,125	0,003	0,003	0,422	0,023	open
0,187 5	0,375	0,125	0,003	0,003	0,422	0,031	capped
0,187 5	0,5	0,156 2	0,012	0,006	—	—	open
0,187 5	0,5	0,196	0,012	0,006	0,565	0,042	open ^b , capped
0,218 7	0,312 5	0,109 4	0,003	0,003	—	—	open
0,25	0,375	0,125	0,003	0,003	0,422	0,023	open
0,25	0,375	0,125	0,003	0,003	0,422	0,036	capped
0,25	0,5	0,125	0,005	0,003	0,547	0,023	open
0,25	0,5	0,187 5	0,005	0,003	0,547	0,045	capped
0,25	0,625	0,196	0,012	0,006	0,69	0,042	open, capped
0,25	0,75	0,218 8	0,016	0,008	—	—	open

Table A.1 — Boundary dimensions — Inch series bearings (continued)

Dimensions in inches

<i>d</i>	<i>D</i>	<i>B</i> and <i>C</i>	<i>r_s</i> min ^a	<i>r_{1s}</i> min ^a	Flanged bearings		Applicable types of bearing
					<i>D</i> ₁	<i>C</i> ₁	
0,25	0,75	0,281 2	0,016	0,008	—	—	capped
0,312 5	0,5	0,156 2	0,005	0,003	0,547	0,031	open, capped
0,375	0,625	0,156 2	0,01	0,005	0,69	0,042	open
0,375	0,625	0,196	0,01	0,005	0,69	0,042	capped
0,375	0,875	0,218 8	0,016	0,008	—	—	open
0,375	0,875	0,281 2	0,016	0,008	0,969	0,062	open ^b , capped

^a Maximum chamfer dimensions are given in Table A.6.
^b Open bearing with flange only.

Table A.2 — Tolerance class 5A — Inner ring

Tolerance values in 0,000 1 inches

<i>d</i> in		Δ_{dmp}		Δ_{ds}		<i>V_{dsp}</i>	<i>V_{dmp}</i>	Δ_{Bs} ^b		<i>V_{Bs}</i>	<i>K_{ia}</i>	<i>S_{dr}</i> ^c	<i>S_{ia}</i>
>	≤	high	low	high	low	max.	max.	high	low	max.	max.	max.	max.
0,024 ^a	0,394	0	-2	0	-2	1,2	1,2	0	-10	2	1,5	3	3

^a This diameter is included in the group.
^b The tolerance for the total width of the inner rings of a matched pair or a matched stack is 0 to -0,007 9 inches multiplied by the number of bearings in the mounting.
^c Perpendicularity of inner ring face with respect to the bore (*S_d*) is

$$S_d = S_{dr} \times d_1 / 2(B - 2,4r_{s \max})$$

where *S_{dr}* is obtained from Table A.2 and *d₁* is the mean diameter of inner ring face.

Table A.3 — Tolerance class 5A — Outer ring

Tolerance values in 0,000 1 inches

<i>D</i> in	Δ_{Dmp}		Δ_{Ds}				<i>V_{Dsp}</i> and <i>V_{Dmp}</i>		Δ_{Cs} ^b		<i>V_{Cs}</i>	<i>K_{ea}</i>	<i>S_D</i>	<i>S_{ea}</i>	<i>S_{ea1}</i>	Δ_{C1s}		<i>V_{C1s}</i>		Δ_{D1s}		
	high	low	high	low	high	low	open	capped	high	low	max.	max.	max.	high	low	high	low	high	low	high	low	max.
0,079 ^a	0,709	0	-2	0	-2	+0,4	-2,4	1,2	2	0	-10	2	2	3,1	8	3,1	0	-20	2	0	-10	-10
0,709	1,181	0	-2,4	0	-2,4	+0,4	-3	1,2	2	0	-10	2	2,4	3,1	8	3,1	0	-20	2	0	-10	-10

^a This diameter is included in the group.
^b The tolerance for the total width of the outer rings of a matched pair or a matched stack is 0 to -0,007 9 inches multiplied by the number of bearings in the mounting.