

---

---

**Spherical plain bearings —**  
**Part 4:**  
Spherical plain bearing rod ends

*Rotules lisses —*

*Partie 4: Embouts à rotule*

STANDARDSISO.COM : Click to view the full PDF of ISO 12240-4:1998



## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standard bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 12240-4 was prepared by Technical Committee ISO/TC 4, *Rolling bearings*, Subcommittee SC 7, *Spherical plain bearings*.

This first edition cancels and replaces ISO 6126:1987 of which it constitutes a technical revision.

ISO 12240 consists of the following parts, under the general title *Spherical plain bearings*:

- *Part 1: Radial spherical plain bearings*
- *Part 2: Angular contact radial spherical plain bearings*
- *Part 3: Thrust spherical plain bearings*
- *Part 4: Spherical plain bearing rod ends*

© ISO 1998

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization  
Case postale 56 • CH-1211 Genève 20 • Switzerland  
Internet iso@iso.ch

Printed in Switzerland

# Spherical plain bearings —

## Part 4:

### Spherical plain bearing rod ends

#### 1 Scope

This part of ISO 12240 specifies dimensions, tolerances and radial internal clearances for various dimension series of spherical plain bearing rod ends.

The dimensions and tolerances specified in this part of ISO 12240 have been selected to permit the design and use of spherical plain bearing rod ends which incorporate radial spherical plain bearings having various sliding material combinations.

The specified tolerance values apply for finished spherical plain bearing rod ends before any coating, plating, ring splitting or fracturing.

Spherical plain bearing rod ends need not conform to the designs illustrated but compliance is required as regards dimensions, tolerances and radial internal clearances specified.

NOTE — Spherical plain bearing rod ends for airframe applications and specific spherical plain bearing rod ends for direct connection to hydraulic cylinders are not covered by this part of ISO 12240.

#### 2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this part of ISO 12240. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this part of ISO 12240 are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 582:1995, *Rolling bearings – Chamfer dimensions – Maximum values.*

ISO 965-1:1992, *ISO general purpose metric screw threads – Tolerances – Part 1: Principles and basic data.*

ISO 1132-1:—<sup>1)</sup>, *Rolling bearings – Tolerances – Part 1: Terms and definitions.*

ISO 6811:1998, *Spherical plain bearings – Vocabulary.*

ISO 12240-1:1998, *Spherical plain bearings – Part 1: Radial spherical plain bearings.*

1) To be published. (Revision of ISO 1132:1980)

### 3 Definitions and symbols

For the purposes of this part of ISO 12240, the definitions given in ISO 1132-1 and ISO 6811 apply. The symbols (except those for tolerances) shown in the figures and the values given in the tables denote nominal dimensions unless specified otherwise.

$B$	Inner ring width
$C$	Outer ring width
$C_1$	Width of rod end eye
$D$	Outside diameter of bearing outer ring
$d$	Bore diameter of inner ring
$d_1$	Outside diameter of inner ring face
$d_2$	Outside diameter of rod end eye
$d_3$	Rod end shank diameter
$d_4$	Rod end shank shoulder diameter
$d_5$	Rod end shank diameter with welding end
$d_6$	Centre pin diameter
$d_k$	Sphere diameter
$G$	Diameter of thread
$h, h_1, h_2$	Centre height of rod end
$l_1, l_3$	Thread length
$l_2, l_4, l_6$	Overall length of rod end
$l_5$	Length of shoulder on rod end shank
$l_7$	Length of the flat surface from the bearing bore centre to the shank
$l_8$	Length of the locating pin
$r_{s \min}^{2)}$	Smallest single chamfer dimension, inner ring
$r_{1s \min}^{2)}$	Smallest single chamfer dimension, outer ring
$V_{dmp}$	Variation of mean bore diameter
$V_{dp}$	Variation of bore diameter in a single radial plane
$W$	Width across flats
$\alpha$	Angle of tilt
$\Delta_{Bs}$	Deviation of a single inner ring width
$\Delta_{dmp}$	Deviation of mean bore diameter in a single plane

2) The corresponding maximum chamfer dimensions are given in table 1 of ISO 582:1995.

#### 4 Dimension series for spherical plain bearing rod ends

A distinction is made between two basic dimension series in the case of spherical plain bearing rod ends.

Dimension series E and G have been designed so as to permit the insertion of dimension series E or G radial spherical plain bearings into the cylindrical bore of a rod end eye.

In dimension series E and G a distinction is also made between different spherical plain bearing rod end types according to the shank design, i.e. external or internal thread, normal or strengthened form, or welding end type.

Dimension series K has been designed so as to permit the insertion of dimension series K radial spherical plain bearings into the cylindrical or sphered bore of a rod end eye.

In dimension series K a distinction is made between different spherical plain bearing rod end types according to the shank design, i.e. external or internal thread. A choice of sliding material combination is provided for a two piece (integral design, see figure 5) spherical plain bearing rod end.

#### 5 Angles of tilt $\alpha$

The specified angles of tilt (approximate values) represent the angles by which the axes of the inner ring and of the outer ring may be inclined in relation to each other without reducing the projected theoretical contact area of the two bearing rings when the two ring axes are parallel to each other.

NOTE — Attention is drawn to the fact that after mounting a spherical plain bearing rod end on a shaft, the angle through which the rod end can tilt may be restricted by the design of the adjacent components.

#### 6 Dimensions, tolerances and radial internal clearances

##### 6.1 Dimensions

See figures 1 to 6 and tables 1 to 5.

The position of the lubricating nipple may vary according to the size of the spherical plain bearing rod end.

In case of type B, the lubricating nipple may be positioned at the shank.

The position and size of the lubricating nipple shall be the subject of agreement.

Type and design of lubricating nipple at manufacturer's discretion.



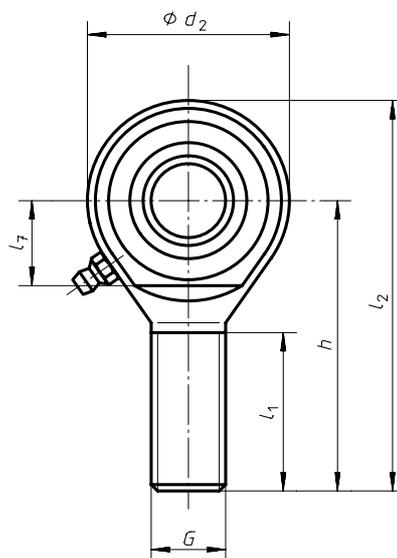


Figure 1 — Spherical plain bearing rod end with external thread type M

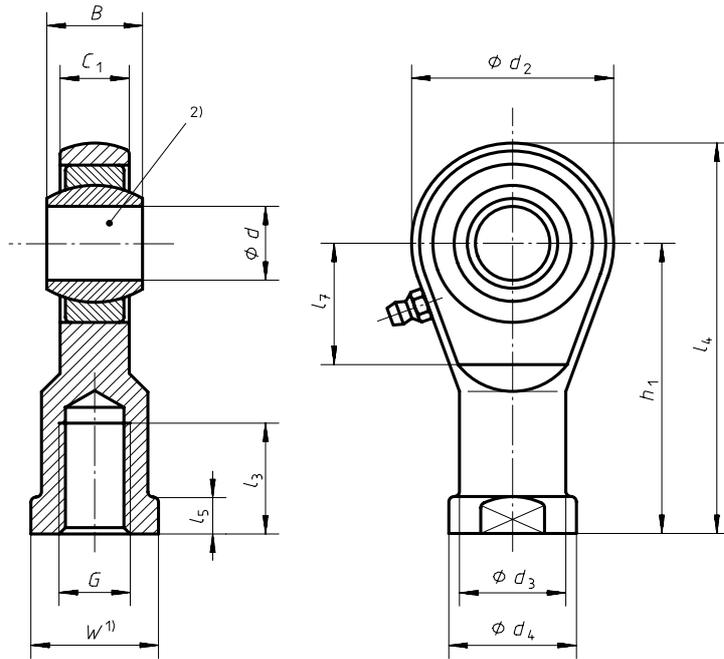

1) Values for widths across flats are not specified in this part of ISO 12240.  
2) See figure 6.

Figure 2 — Spherical plain bearing rod end with internal thread type F

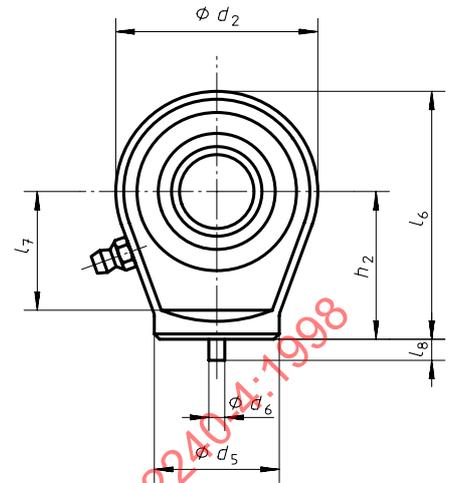

$l_8 = 6 \text{ mm}$

Figure 3 — Spherical plain bearing rod end with welding shank type S

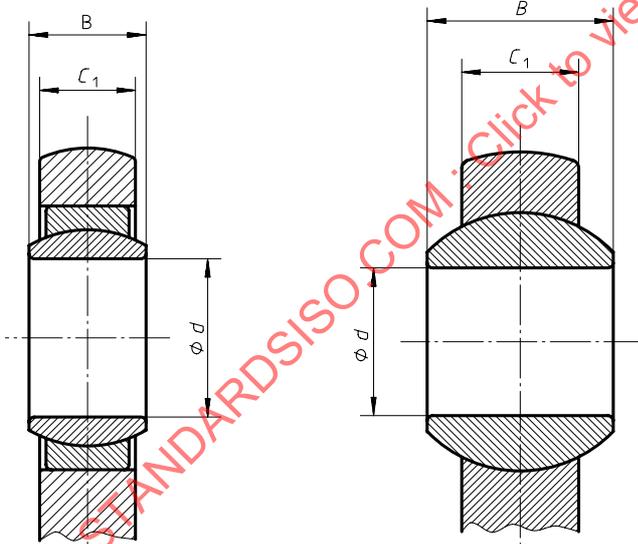


Figure 4 — Spherical plain bearing rod end with mounted spherical plain radial bearing (cartridge design)

Figure 5 — Spherical plain bearing rod end with inner ring only (integral design) <sup>3)</sup>

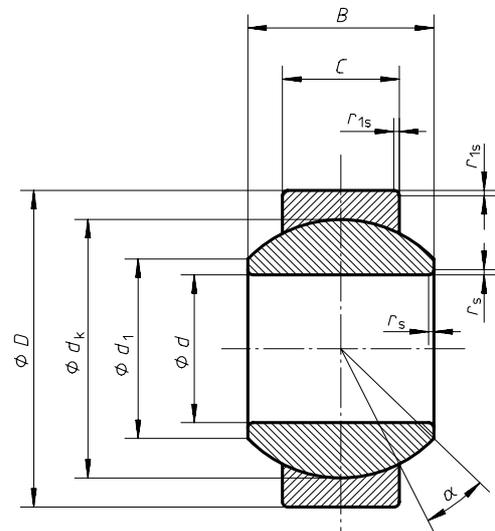


Figure 6 — Spherical plain radial bearing in accordance with ISO 12240-1

3) This design can apply for types M and F of the K-series.

Table 1 — Spherical plain bearing rod ends, dimension series E

d	With external or internal thread or welding shank										With external thread					With internal thread					With welding shank					
	D <sup>1)</sup>	d <sub>1</sub>	B	C <sup>1)</sup>	d <sub>k</sub> <sup>2)</sup>	r <sub>s</sub>	r <sub>s</sub> <sup>1)</sup>	α	G	C <sub>1</sub>	d <sub>2</sub>	l <sub>7</sub>	h	l <sub>1</sub>	l <sub>2</sub>	h <sub>1</sub>	l <sub>3</sub>	l <sub>4</sub>	l <sub>5</sub>	d <sub>3</sub>	d <sub>4</sub>	h <sub>2</sub>	l <sub>6</sub>	d <sub>5</sub>	d <sub>6</sub>	
mm	mm	mm	mm	mm	mm	min. mm	min. mm	°		max. mm	max. mm	min. mm	mm	min. mm	max. mm	mm	min. mm	max. mm	mm	mm	max. mm	mm	max. mm	max. mm	mm	mm
5 <sup>3)</sup>	14	8	6	4	10	0,3	0,3	13	M5	4,5	22	10	36	16	49	30	11	43	5	11	14	-	-	-	-	-
6 <sup>3)</sup>	14	8	6	4	10	0,3	0,3	13	M6	4,5	22	10	36	16	49	30	11	43	5	11	14	-	-	-	-	-
8 <sup>3)</sup>	16	10	8	5	13	0,3	0,3	15	M8	6,5	25	11	42	21	56	36	15	50	5	13	17	-	-	-	-	-
10 <sup>3)</sup>	19	13	9	6	16	0,3	0,3	12	M10	7,5	30	13	48	26	65	43	15	60	6,5	16	20	24	40	16	3	3
12 <sup>3)</sup>	22	15	10	7	18	0,3	0,3	10	M12	8,5	35	17	54	28	73	50	18	69	6,5	19	23	27	45	19	3	3
15 <sup>4)</sup>	26	18	12	9	22	0,3	0,3	8	M14	10,5	41	19	63	34	85	61	21	83	8	22	27	31	52	22	4	4
17 <sup>4)</sup>	30	20	14	10	25	0,3	0,3	10	M16	11,5	47	22	69	36	94	67	24	92	10	25	31	35	59	25	4	4
20 <sup>4)</sup>	35	24	16	12	29	0,3	0,3	9	M20×1,5	13,5	54	24	78	43	107	77	30	106	10	28	36	38	66	29	4	4
25	42	29	20	16	35	0,6	0,6	7	M24×2	18	65	30	94	53	128	94	36	128	12	35	44	45	78	35	4	4
30	47	34	22	18	40	0,6	0,6	6	M30×2	20	75	34	110	65	149	110	45	149	15	42	52	51	89	42	4	4
35	55	39	25	20	47	0,6	1	6	M36×3	22	84	40	140	82	184	125	60	169	15	47	60	61	104	49	4	4
40	62	45	28	22	53	0,6	1	7	M39×3	24	94	46	150	86	199	142	65	191	18	52	67	69	118	54	4	4
45	68	50	32	25	60	0,6	1	7	M42×3	28	104	50	163	92	217	145	65	199	20	58	72	77	132	60	6	6
50	75	55	35	28	66	0,6	1	6	M45×3	31	114	58	185	104	244	160	68	219	20	62	77	88	150	64	6	6
60	90	66	44	36	80	1	1	6	M52×3	39	137	73	210	115	281	175	70	246	20	70	90	100	173	72	6	6
70	105	77	49	40	92	1	1	6	M56×4	43	162	85	235	125	319	200	80	284	20	80	100	115	199	82	6	6
80	120	88	55	45	105	1	1	6	M64×4	48	182	98	270	140	364	230	85	324	25	95	112	141	237	97	6	6

1) Reference only; not for integral design.

2) Reference only.

3) These spherical plain bearing rod ends do not have provision for relubrication.

4) These spherical plain bearing rod ends have provision for relubrication through a lubrication hole and not through a lubricating nipple.

Table 2 — Spherical plain bearing rod ends, according to dimension series E, with strengthened shank, dimension series EH

d	With external or internal thread											With external thread					With internal thread				
	D <sup>1)</sup>	d <sub>1</sub>	B	C <sup>1)</sup>	d <sub>k</sub> <sup>2)</sup>	r <sub>s</sub>	r <sub>18</sub> <sup>1)</sup>	α	G	C <sub>1</sub>	d <sub>2</sub>	l <sub>7</sub>	h	l <sub>1</sub>	l <sub>2</sub>	h <sub>1</sub>	l <sub>3</sub>	l <sub>4</sub>	l <sub>5</sub>	d <sub>3</sub>	
mm	mm	mm	mm	mm	mm	min. mm	min. mm	°		max. mm	max. mm	min. mm	mm	min. mm	max. mm	mm	min. mm	max. mm	mm	mm	mm
35	55	39	25	20	47	0,6	1	6	M36×3	22	84	40	130	82	174	130	60	174	25	49	
40	62	45	28	22	53	0,6	1	7	M42×3	24	94	46	145	90	194	145	65	194	25	58	
45	68	50	32	25	60	0,6	1	7	M45×3	28	104	50	165	95	219	165	65	219	30	65	
50	75	55	35	28	66	0,6	1	6	M52×3	31	114	58	195	110	254	195	68	254	30	70	
60	90	66	44	36	80	1	1	6	M60×4	39	137	73	225	120	296	225	70	296	35	82	
70	105	77	49	40	92	1	1	6	M72×4	43	162	85	265	132	349	265	80	349	40	92	
80	120	88	55	45	105	1	1	6	M80×4	48	182	98	295	147	389	295	85	389	45	105	

1) Reference only; not for integral design.

2) Reference only.

STANDARDSISO.COM · Click to view the full PDF of ISO 12240-4:1998

Table 3 — Spherical plain bearing rod ends, dimension series G

d mm	With external or internal thread or welding shank										With external thread					With internal thread					With welding shank				
	D <sup>1)</sup> mm	d <sub>1</sub> ≈ mm	B mm	C <sup>1)</sup> mm	d <sub>k</sub> <sup>2)</sup> mm	r <sub>s</sub> min. mm	r <sub>s</sub> <sup>1)</sup> min. mm	α	G	C <sub>1</sub> max. mm	d <sub>2</sub> max. mm	l <sub>7</sub> min. mm	h mm	l <sub>1</sub> min. mm	l <sub>2</sub> max. mm	h <sub>1</sub> mm	l <sub>3</sub> min. mm	l <sub>4</sub> max. mm	l <sub>5</sub> ≈ mm	d <sub>3</sub> ≈ mm	d <sub>4</sub> max. mm	h <sub>2</sub> mm	l <sub>6</sub> max. mm	d <sub>5</sub> max. mm	d <sub>6</sub> mm
4 3)	14	7	7	4	10	0,3	0,3	20	M5	4,5	22	10	36	16	49	30	11	43	5	11	14	—	—	—	—
5 3)	14	7	7	4	10	0,3	0,3	20	M6	4,5	22	10	36	16	49	30	11	43	5	11	14	—	—	—	—
6 3)	16	9	9	5	13	0,3	0,3	21	M8	6,5	25	11	42	21	56	36	15	50	5	13	17	—	—	—	—
8 3)	19	11	11	6	16	0,3	0,3	21	M10	7,5	30	13	48	26	65	43	15	60	6,5	16	20	24	40	16	3
10 3)	22	13	12	7	18	0,3	0,3	18	M12	8,5	35	17	54	28	73	50	18	69	6,5	19	23	27	45	19	3
12 4)	26	16	15	9	22	0,3	0,3	18	M14	10,5	41	19	63	34	85	61	21	83	8	22	27	31	52	22	4
15 4)	30	19	16	10	25	0,3	0,3	16	M16	11,5	47	22	69	36	94	67	24	92	10	25	31	35	59	25	4
17 4)	35	21	20	12	29	0,3	0,3	19	M20×1,5	13,5	54	24	78	43	107	77	30	106	10	28	36	38	66	29	4
20	42	24	25	16	35	0,6	0,3	17	M24×2	18	65	30	94	53	128	94	36	128	12	35	44	45	78	35	4
25	47	29	28	18	40	0,6	0,6	17	M30×2	20	75	34	110	65	149	110	45	149	15	42	52	51	89	42	4
30	55	34	32	20	47	0,6	1	17	M36×3	22	84	40	140	82	184	125	60	169	15	47	60	61	104	49	4
35	62	39	35	22	53	0,6	1	16	M39×3	24	94	46	150	86	199	142	65	191	18	52	67	69	118	54	4
40	68	44	40	25	60	0,6	1	17	M42×3	28	104	50	163	92	217	145	65	199	20	58	72	77	132	60	6
45	75	50	43	28	66	0,6	1	15	M45×3	31	114	58	185	104	244	160	68	219	20	62	77	88	150	64	6
50	90	57	56	36	80	0,6	1	17	M52×3	39	137	73	210	115	281	175	70	246	20	70	90	100	173	72	6
60	105	67	63	40	92	1	1	17	M56×4	43	162	85	235	125	319	200	80	284	20	80	100	115	199	82	6
70	120	77	70	45	105	1	1	16	M64×4	48	182	98	270	140	364	230	85	324	25	95	112	141	237	97	6

1) Reference only; not for integral design.

2) Reference only.

3) These spherical plain bearing rod ends do not have provision for relubrication.

4) These spherical plain bearing rod ends have provision for relubrication through a lubrication hole and not through a lubricating nipple.

Table 4 — Spherical plain bearing rod ends, according to dimension series G, with strengthened shank, dimension series GH

d	With external or internal thread											With external thread					With internal thread				
	D <sup>1)</sup> mm	d <sub>1</sub> ≈ mm	B mm	C <sup>1)</sup> mm	d <sub>t</sub> <sup>2)</sup> mm	r <sub>s</sub> min. mm	r <sub>1s</sub> <sup>1)</sup> min. mm	α ≈ °	G	C <sub>1</sub> max. mm	d <sub>2</sub> max. mm	l <sub>7</sub> min. mm	h	l <sub>1</sub> min. mm	l <sub>2</sub> max. mm	h <sub>1</sub> mm	l <sub>3</sub> min. mm	l <sub>4</sub> max. mm	l <sub>5</sub> ≈ mm	d <sub>3</sub> ≈ mm	
30	55	34	32	20	47	0,6	1	17	M36×3	22	84	40	130	82	174	130	60	174	25	49	
35	62	39	35	22	53	0,6	1	16	M42×3	24	94	46	145	90	194	145	65	194	25	58	
40	68	44	40	25	60	0,6	1	17	M45×3	28	104	50	165	95	219	165	65	219	30	65	
45	75	50	43	28	66	0,6	1	15	M52×3	31	114	58	195	110	254	195	68	254	30	70	
50	90	57	56	36	80	0,6	1	17	M60×4	39	137	73	225	120	296	225	70	296	35	82	
60	105	67	63	40	92	1	1	17	M72×4	43	162	85	265	132	349	265	80	349	40	92	
70	120	77	70	45	105	1	1	16	M80×4	48	182	98	295	147	389	295	85	389	45	105	

1) Reference only; not for integral design.

2) Reference only.

STANDARDSISO.COM: Click to view the full PDF of ISO 12240-4:1998

Table 5 — Spherical plain bearing rod ends, dimension series K

d	With external or internal thread											With external thread					With internal thread				
	D <sup>1)</sup>	d <sub>1</sub>	B	C <sup>1)</sup>	d <sub>k</sub> <sup>2)</sup>	r <sub>s</sub>	r <sub>ts</sub> <sup>1)</sup>	α	G	C <sub>1</sub>	d <sub>2</sub>	l <sub>7</sub>	h	l <sub>1</sub>	l <sub>2</sub>	h <sub>1</sub>	l <sub>3</sub>	l <sub>4</sub>	l <sub>5</sub>	d <sub>3</sub>	d <sub>4</sub>
mm	mm	mm	mm	mm	mm	min. mm	min. mm	°		max. mm	max. mm	min. mm	mm	min. mm	max. mm	mm	min. mm	max. mm	mm	mm	max. mm
5 <sup>3)</sup>	13	7,7	8	6	11,1	0,3	0,3	13	M5	7,5	19	9	33	19	44	27	8	38	4	9	12
6	16	8,9	9	6,75	12,7	0,3	0,3	13	M6	7,5	21	10	36	21	48	30	9	42	5	10	14
8	19	10,3	12	9	15,8	0,3	0,3	14	M8	9,5	25	12	42	25	56	36	12	50	5	12,5	17
10	22	12,9	14	10,5	19	0,3	0,3	13	M10	11,5	29	14	48	28	64	43	15	59	6,5	15	20
12	26	15,4	16	12	22,2	0,3	0,3	13	M12	12,5	33	16	54	32	72	50	18	68	6,5	17,5	23
14	29	16,8	19	13,5	25,4	0,3	0,3	16	M14	14,5	37	18	60	36	80	57	21	77	8	20	27
16	32	19,3	21	15	28,5	0,3	0,3	15	M16	15,5	43	21	66	37	89	64	24	87	8	22	29
18	35	21,8	23	16,5	31,7	0,3	0,3	15	M18×1,5	17,5	47	23	72	41	97	71	27	96	10	25	32
20	40	24,3	25	18	34,9	0,3	0,6	14	M20×1,5	18,5	51	25	78	45	106	77	30	105	10	27,5	37
22	42	25,8	28	20	38,1	0,3	0,6	15	M22×1,5	21	55	27	84	48	114	84	33	114	12	30	40
25	47	29,5	31	22	42,8	0,3	0,6	15	M24×2	23	61	30	94	55	127	94	36	127	12	33,5	44
30	55	34,8	37	25	50,8	0,3	0,6	17	M30×2	27	71	35	110	66	148	110	45	148	15	40	52
35	65	40,3	43	30	59	0,6	1	16	M36×2	32	81	40	140	85	183	125	56	168	20	49	60
40	72	44,2	49	35	66	0,6	1	16	M42×2	37	91	45	150	90	198	142	60	190	25	57	69
50	90	55,8	60	45	82	0,6	1	14	M48×2	47	117	58	185	105	246	160	65	221	25	65	78

1) Reference only; not for integral design.

2) Reference only.

3) This spherical plain bearing rod end does not have provision for relubrication.