

# INTERNATIONAL STANDARD

**ISO**  
**12368**

First edition  
2001-05-01

---

---

## **Agricultural vehicles — Mechanical hook- type connections on towing vehicles — Test methods and requirements**

*Véhicules agricoles — Liaisons mécaniques de type crochet sur véhicules tracteurs — Méthodes d'essai et exigences*

STANDARDSISO.COM : Click to view the full PDF of ISO 12368:2001



Reference number  
ISO 12368:2001(E)

© ISO 2001

**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 12368:2001

© ISO 2001

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.ch](mailto:copyright@iso.ch)  
Web [www.iso.ch](http://www.iso.ch)

Printed in Switzerland

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 12368 was prepared by Technical Committee ISO/TC 23, *Tractors and machinery for agriculture and forestry*, Subcommittee SC 2, *Common tests*.

STANDARDSISO.COM : Click to view the full PDF of ISO 12368:2001



# Agricultural vehicles — Mechanical hook-type connections on towing vehicles — Test methods and requirements

## 1 Scope

This International Standard specifies a dynamic test method for mechanical hook-type connections and hook coupling devices, as well as a static test of their keeper plates. It is applicable to hooks meeting the requirements of ISO 6489-1 used on towing vehicles with an unladen mass of up to 10 t. Towing vehicles with a greater unladen mass are nevertheless treated as 10 t towing vehicles, especially with regard to their reference mass.

## 2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this International Standard. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 6489-1, *Agricultural vehicles — Mechanical connections between towed vehicles and towing vehicles — Part 1: Dimensions of hitch-hooks*

ISO 20019:—<sup>1)</sup>, *Agricultural vehicles — Mechanical connections on towed vehicles — Dimensions for hitch rings*

89/173/EEC, *Council of Europe Directive of 21 December 1988 on the approximation of the laws of the Member States relating to certain components and characteristics of wheeled agricultural or forestry tractors*

## 3 Terms and definitions

For the purposes of this International Standard, the following terms and definitions apply.

### 3.1

#### **unladen mass**

mass of the unladen towing vehicle in working order with tanks and radiators full, including any protective structure, track equipment or additional front-wheel-drive components required for normal use, but not including operator, optional ballast weights, additional wheel equipment, special equipment or loads

### 3.2

#### **reference mass**

$m_R$

mass, not less than the unladen mass, selected by the manufacturer for calculation of the force to be used in the test

---

1) To be published. (Revision of ISO 5692:1979)

### 3.3

#### **hook coupling device**

hook, together with its keeper plate, locking mechanism and all load-carrying components needed for its installation on a towing vehicle chassis

### 3.4

#### **keeper plate**

part that ensures that the hitch ring cannot become detached from the hook

See ISO 20019.

### 3.2

#### **vertical static load**

S

maximum permissible static load at the hook, as declared by the manufacturer, applied vertically to a hitch ring

See ISO 20019.

## 4 Test equipment

### 4.1 Strength

The test equipment and the means of ensuring that the hook coupling device is fixed firmly to the bedplate shall be such that they do not deflect significantly in relation to the hook coupling device under loading.

### 4.2 Load application

#### 4.2.1 Hook coupling device


The means of applying a force to the hook coupling device (see Figure 1) shall comply with the following requirements.

- a) The dynamic force application frequency shall not exceed 5 Hz unless it can be demonstrated that the natural frequency is not affecting the load pattern.
- b) The force shall be applied by means of a hitch ring whose maximum dimensions are in accordance with ISO 20019.
- c) The force applied shall, during the whole test, be kept to within  $\pm 2\%$  of the maximum force limits set as calculated.
- d) The loading direction shall, during the whole test, be kept to within  $\pm 3^\circ$  of the original set direction downwards and  $\pm 1,5^\circ$  from the set sideways inclination.

#### 4.2.2 Keeper plate

The means of applying a force to the keeper plate (see Figure 2) and hook shall comply with the following requirements.


- a) The static force shall be applied by means of a hitch ring whose dimensions are in accordance with ISO 20019.
- b) The force applied shall be within  $\pm 2\%$  of the calculated force, and the upward inclination within  $\pm 3^\circ$ .

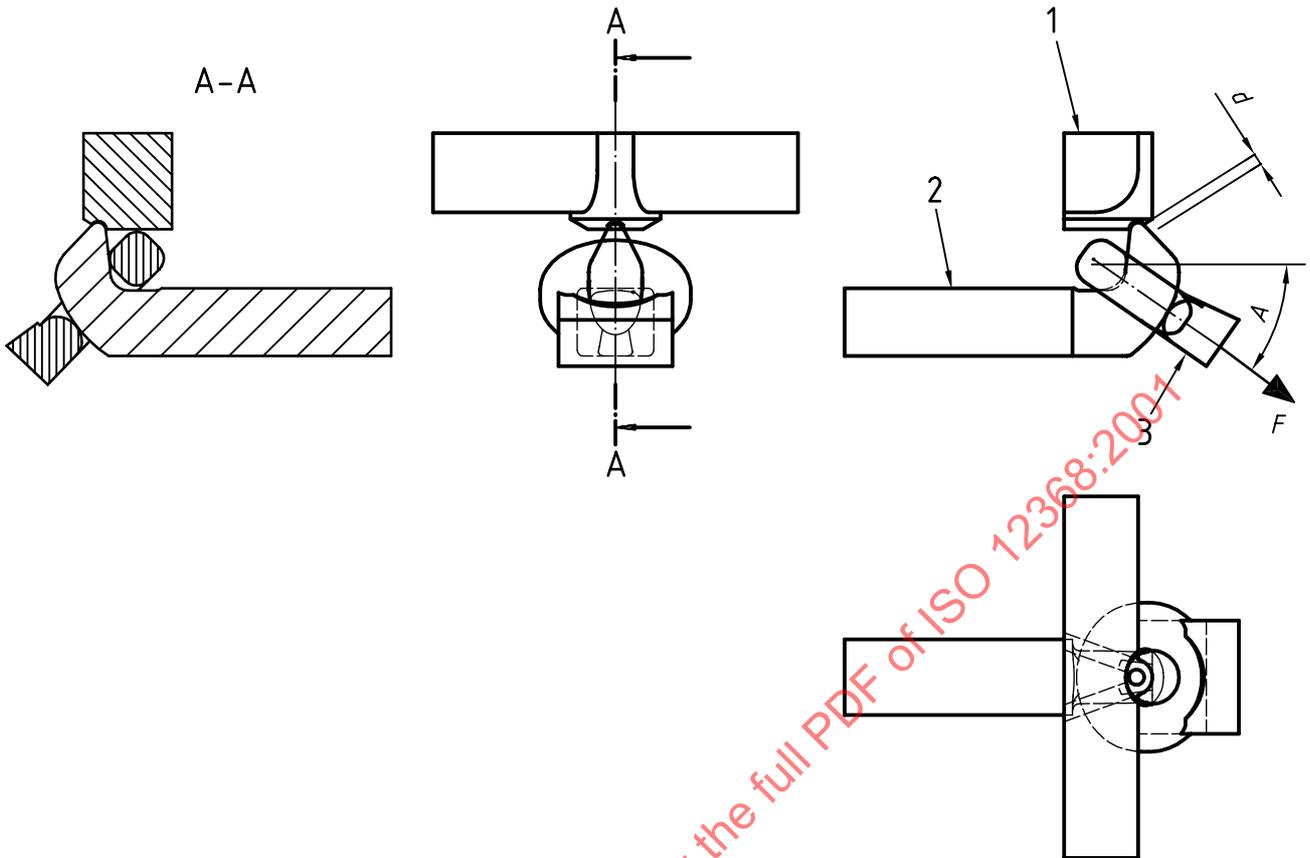

**Key**

- 1 Keeper plate
- 2 Hook
- 3 Ring

**Figure 1 — Hook coupling device dynamic test load application**

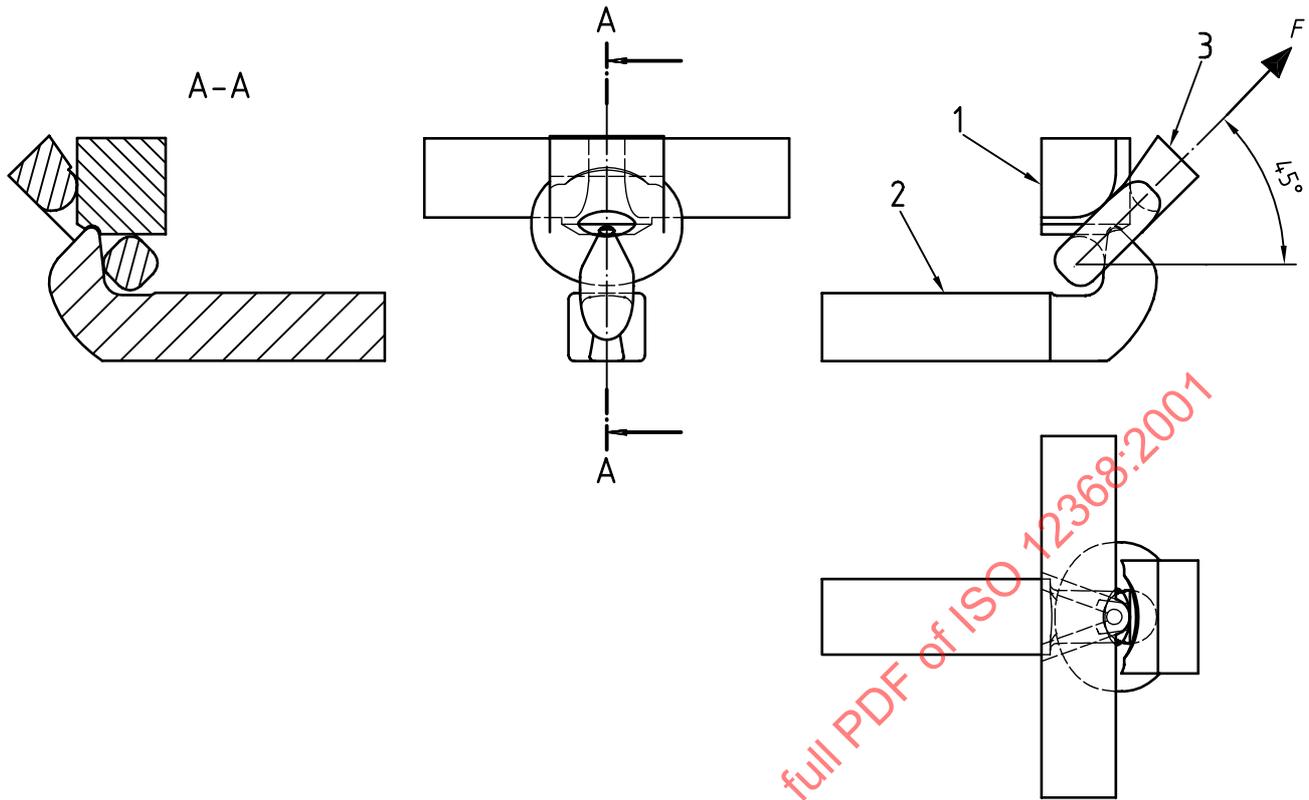

**Key**

- 1 Keeper plate
- 2 Hook
- 3 Ring

**Figure 2 — Keeper plate static test load application**

**5 Preparation of hook coupling device**

The hook coupling device shall be to production specification and fitted on the test bed or towing vehicle chassis with all parts, and only those parts, needed for installation on a towing vehicle.

The assembly shall be secured to the bedplate so that the members connecting the assembly and the bedplate do not deflect significantly. The assembly shall not receive any support under loading other than that due to the initial attachment.

**6 Test conditions**

The hook coupling device, in the locked position, shall be dynamically tested with a pulsating tensile force of the magnitude and direction specified in clauses 7 and 8.

After completion of the dynamic test, the keeper plate shall be tested with a static tensile force according to clause 9.

The tests shall be conducted at an ambient temperature of at least 10 °C.

## 7 Determination of test force and load direction

### 7.1 Test force

The determination of the test force,  $F$ , is valid for

- towing vehicle/trailer assemblies whose combined total mass does not exceed 40 t, and
- a ratio between the unladen mass of the towing vehicle and the maximum laden mass of the towing vehicle equal to 1,5 (as adopted in 89/173/EEC, Annex IV).

The test force,  $F$ , expressed in newtons, is determined using the following equation:

$$F = (F_h^2 + F_v^2)^{1/2}$$

where

$F_h$  is a horizontal force, in newtons:

$$F_h = 12m_R$$

where  $m_R$  is the reference mass in kilograms;

NOTE This is a simplified version of the formula for the horizontal force,  $F_h$ , found in 89/173/EEC.

$F_v$  is a vertical force, in newtons:

$$F_v = 15S$$

where  $S$  is the static vertical load, in kilograms (if a value is not available, use  $S = 0,6m_R$ ).

When selecting the value  $S$ , the limitation on the vertical static load given in ISO 6489-1 shall be taken into account.

### 7.2 Load direction

The downward angle of load direction,  $A$ , is defined as:

$$\tan A = \frac{F_v}{F_h}$$

In addition, the load direction shall be inclined  $5^\circ$  to the side of the longitudinal plane.

## 8 Dynamic test of hook coupling device

Load the hook coupling device with a pulsating tensile force,  $F$ , according to clause 4.

Before the test, check that hook coupling device conforms to the requirements given in clause 5; conduct the test under the conditions given in clause 6.

Calculate the test force and load direction using the formulae given in 7.1 and 7.2.

During the whole test, the force shall alternate between  $0,05F$  and  $1,0F$ . For steel components, test for  $1 \times 10^6$  load cycles.