
**Optics and optical instruments —
Ancillary devices for geodetic
instruments —**

**Part 3:
Tribrachs**

*Optique et instruments d'optique — Équipements annexes pour les
instruments géodésiques —*

Partie 3: Embases

STANDARDSISO.COM : Click to view the full PDF of ISO 12858-3:2005



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 12858-3:2005

© ISO 2005

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Type W tribrachs	2
4.1 Nomenclature	2
4.2 General features — Dimensions	3
5 Type Z tribrachs	6
5.1 Nomenclature	6
5.2 General features — Dimensions	7
6 Requirements	9
6.1 General	9
6.2 Connection between the tribrach and the tripod	9
6.3 Torsional rigidity	9
6.4 Foot screw	10
6.5 Protection from corrosion	10
6.6 Clamp knob or clamp screw	10
6.6.1 Type W	10
6.6.2 Type Z	10
6.7 Circular level	10
7 Designation and marking	10
Annex A (informative) Recommendations for Type W tribrachs with improved stability	11

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 12858-3 was prepared by Technical Committee ISO/TC 172, *Optics and photonics*, Subcommittee SC 6, *Geodetic and surveying instruments*.

ISO 12858 consists of the following parts, under the general title *Optics and optical instruments — Ancillary devices for geodetic instruments*:

- *Part 1: Invar levelling staffs*
- *Part 2: Tripods*
- *Part 3: Tribrachs*

Introduction

ISO 12858 consists of a series of parts which detail specifications for ancillary devices to be used with geodetic instruments in surveying. This third part specifies requirements for Tribrachs.

Additional parts, covering further ancillary devices, may be added to ISO 12858 as the need arises.

STANDARDSISO.COM : Click to view the full PDF of ISO 12858-3:2005

Optics and optical instruments — Ancillary devices for geodetic instruments —

Part 3: Tribrachs

1 Scope

This part of ISO 12858 specifies the most important requirements of tribrachs used in geodesy for the connection of the instrument's body with its base.

The requirements in this part of ISO 12858, however, do not guarantee the full interchangeability of the instrument's body with tribrachs of different manufacturers, but give the detailed specifications of the clamp system to ensure the reliable mounting and clamping without prejudicing their performance and their usefulness. There are mainly two types of tribrach in use, categorized in this part of ISO 12858 as Types W and Z.

This part of ISO 12858 is applicable to tribrachs which are used for levels, theodolites, tacheometers, GPS equipment, EDM instruments and in combination with targets, reflectors, antennae etc.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 2768-1, *General tolerances — Part 1: Tolerances for linear and angular dimensions without individual tolerance indications*

ISO 9849, *Optics and optical instruments — Geodetic and surveying instruments — Vocabulary*

ISO 12858-2:1999, *Optics and optical instruments — Ancillary devices for geodetic instruments — Tripods*


3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 9849 apply.

4 Type W tribrachs

4.1 Nomenclature

The names of the most important parts of a Type W tribrach are given in Figure 1.

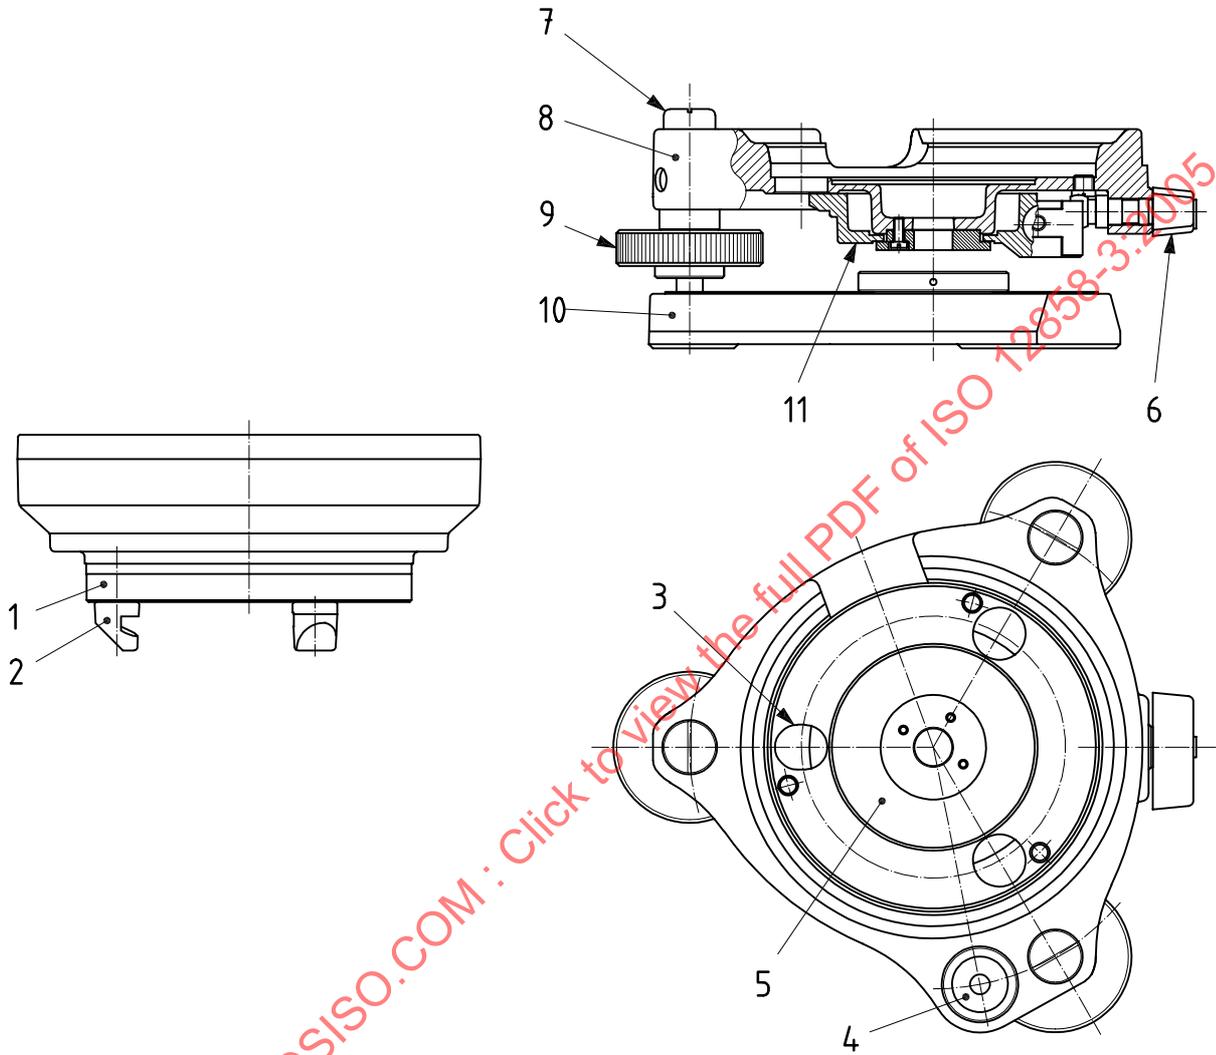

Key

- 1 pivot
- 2 hook
- 3 guide hole
- 4 circular level
- 5 socket
- 6 clamp knob
- 7 foot-screw cap
- 8 tribrach plate
- 9 foot-screw knob
- 10 base plate
- 11 fixing star


Figure 1 — Nomenclature for Type W tribrachs

4.2 General features — Dimensions

The mechanical properties and the base part of instruments shall comply with the values given in Table 1. The shape of the tribrach and the body as shown in Figures 2, 3 and 4 are examples for information only.

Table 1 — Mechanical properties of Type W tribrachs

Description	Symbol	Unit	Dimensions		Figure No.
			Nom.	Tol.	
Centring diameter	$\varnothing A$	mm	80	$\begin{matrix} -0,02 \\ -0,07 \end{matrix}$	2
Pitch circle diameter	$\varnothing B$	mm	65		2
Pitch circle angle	C	°	120		2
Orientation tolerance of hook flank	a	mm	0,1		2
Location tolerance of hook flank	b	mm	0,2		2
Lead angle of hook flank	D	°	95		3
Angle of hook flank	E	°	120		3
Radial height of root	F	mm	1	$\pm 0,1$	3
Working position of bearing flank ($\varnothing 58$)	G	mm	3,5		3
Axial height of bearing flank ($\varnothing 58$)	H	mm	7,88		3
Flank location tolerance	c	mm	0,04		3
Angularity of flank	d	mm	0,025		3
Diameter of hook	$\varnothing I$	mm	11	$\begin{matrix} 0 \\ -0,05 \end{matrix}$	3

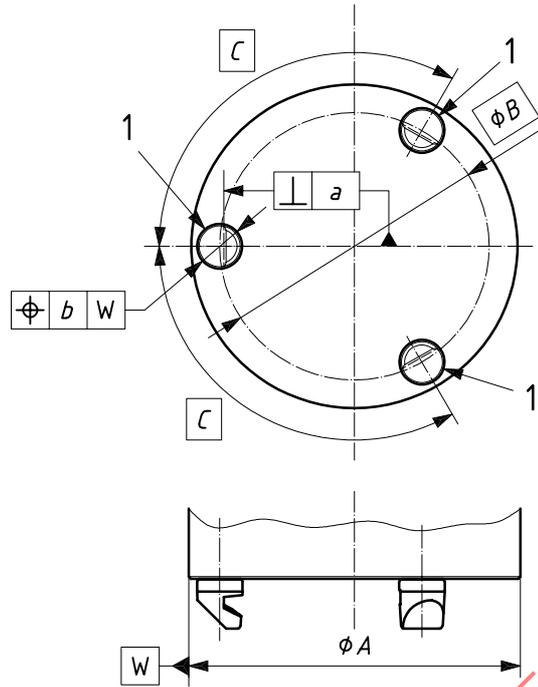


Key

1 hook (see Figure 3)

NOTE See Table 1 for explanation of symbols.


Figure 2 — Vertical axis holder of the instrument

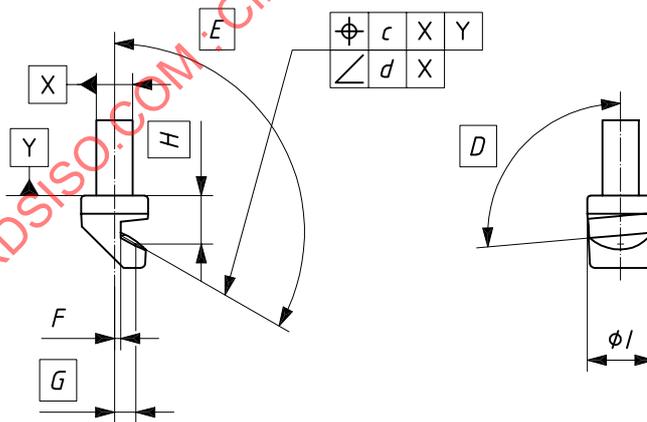

NOTE See Table 1 for explanation of symbols.

Figure 3 — Details of the hook

Dimensions in millimetres

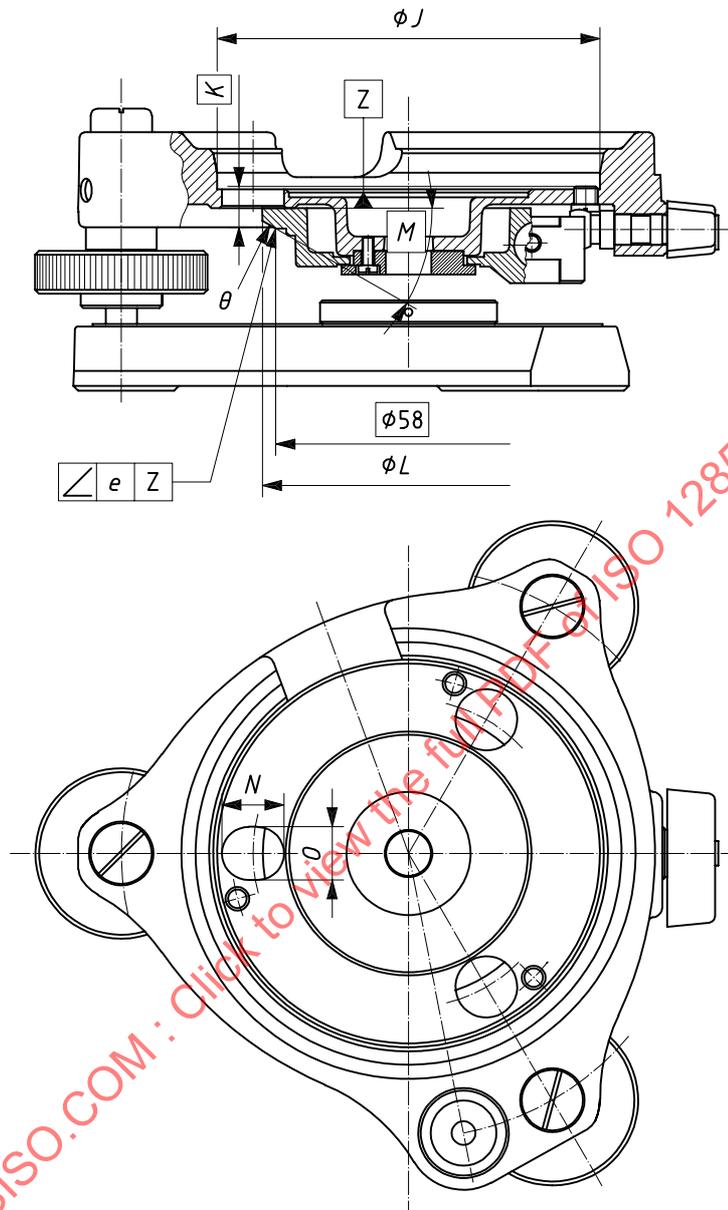


NOTE See Annex A for explanation of symbols.

Figure 4 — The tribach dish and fixing star

5 Type Z tribrachs

5.1 Nomenclature

The names of the most important parts of a Type Z tribrach are given in Figure 5.

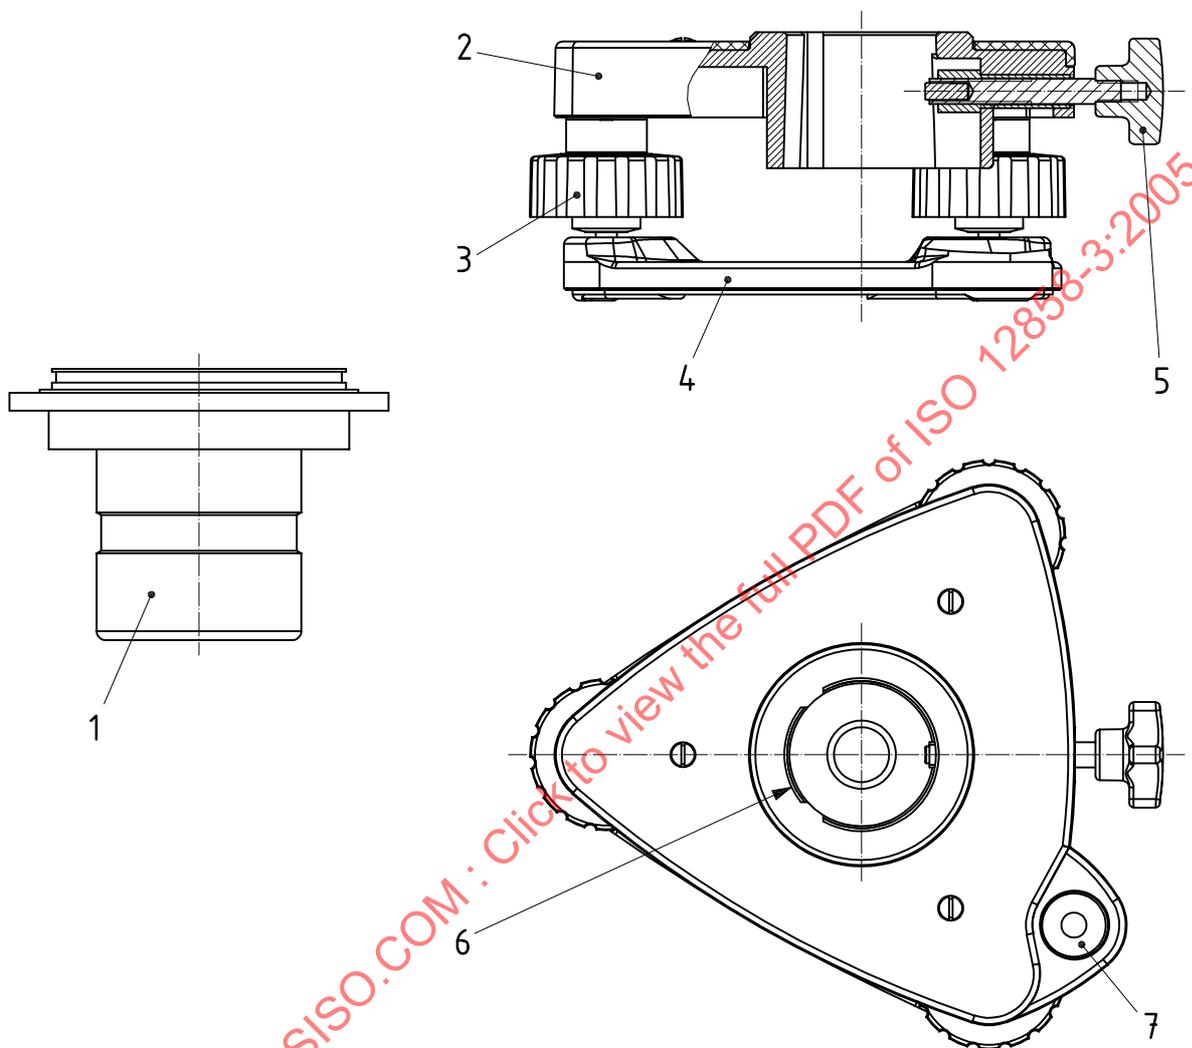

Key

- 1 pivot
- 2 tribrach plate
- 3 foot-screw knob
- 4 base plate
- 5 clamp screw
- 6 pivot hole
- 7 circular level

Figure 5 — Nomenclature for Type Z tribrachs


5.2 General features — Dimensions

The mechanical properties and the base part of instruments shall comply with the values given in Table 2. The shape of the tribrach and the body as shown in Figures 6, 7, 8 and 9 are examples given for information only.

Table 2 — Mechanical properties of Type Z tribrachs


Description	Symbol	Unit	Dimensions		Figure No.
			Nom.	Tol. ^a	
Pivot diameter	$\varnothing A$	mm	34	h8	6
Constriction diameter	$\varnothing B$	mm	32,5		6
Pivot length	C	mm	33		6
Constriction length	D	mm	17	$^{+0,2}_0$	6
Pivot partial length	E	mm	11	$^0_{-0,2}$	6
Tolerance of the orthogonality	a	mm	0,01		6
Phase angle	F	°	60		6
Contact diameter	$\varnothing G$	mm	45		7
Distance clamp screw	H	mm	14	$\pm 0,2$	7
Total pivot hole length	I	mm	33,5		7
Free diameter pivot hole	$\varnothing K$	mm	> 35		8
Function diameter pivot hole	$\varnothing L$	mm	33,96	$^{+0,04}_0$	8
Max. distance to interface	N	mm	48,2		9
Max. width for an interface	O	mm	35		9

^a For unspecified tolerances: ISO 2768-m.

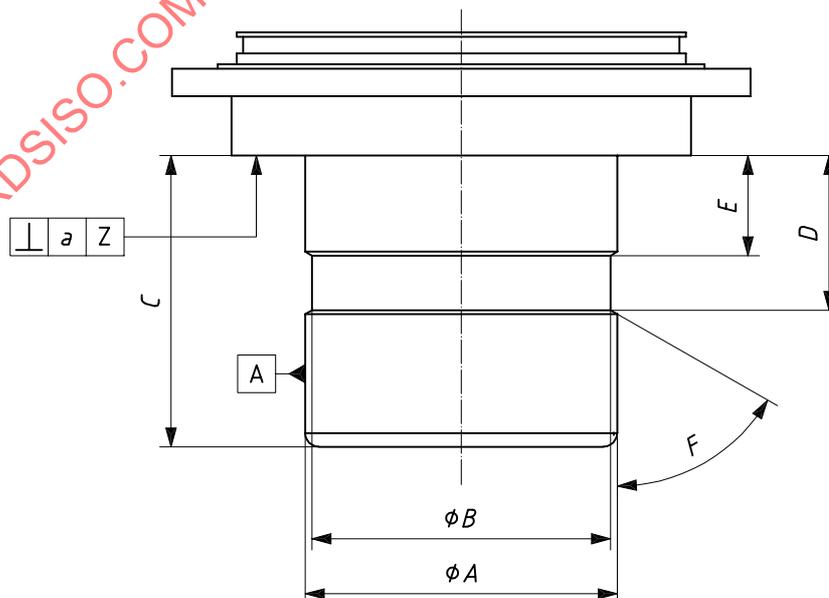


NOTE See Table 2 for explanation of symbols.

Figure 6 — Pivot

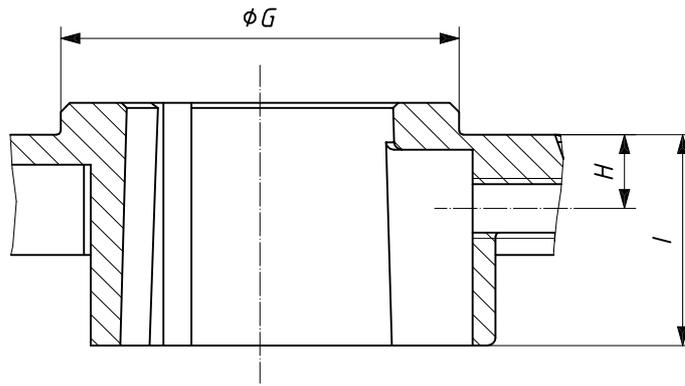

NOTE See Table 2 for explanation of symbols.

Figure 7 — Pivot hole

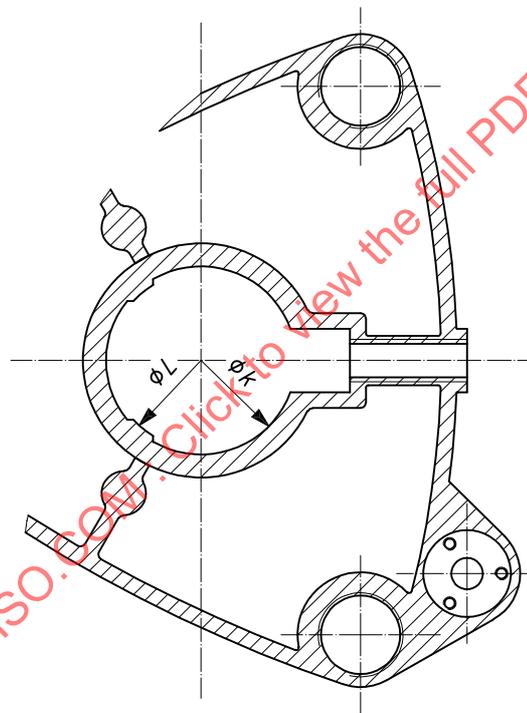

NOTE 1 See Table 2 for explanation of symbols.

NOTE 2 The shown solution is one of different possibilities.

Figure 8 — Pivot hole