

---

---

**Ceramic tiles — Definitions,  
classification, characteristics and  
marking**

*Carreaux et dalles céramiques — Définitions, classification,  
caractéristiques et marquage*

STANDARDSISO.COM : Click to view the full PDF of ISO 13006:2018



STANDARDSISO.COM : Click to view the full PDF of ISO 13006:2018



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2018

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11  
Fax: +41 22 749 09 47  
Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

|                                                                                                                                                  | Page      |
|--------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| Foreword .....                                                                                                                                   | iv        |
| <b>1 Scope</b> .....                                                                                                                             | <b>1</b>  |
| <b>2 Normative references</b> .....                                                                                                              | <b>1</b>  |
| <b>3 Terms and definitions</b> .....                                                                                                             | <b>2</b>  |
| <b>4 Classification</b> .....                                                                                                                    | <b>4</b>  |
| 4.1 Basis of classification .....                                                                                                                | 4         |
| 4.2 Methods of manufacture .....                                                                                                                 | 4         |
| 4.3 Water absorption according to group .....                                                                                                    | 4         |
| 4.3.1 General .....                                                                                                                              | 4         |
| 4.3.2 Subdivision of the three groups .....                                                                                                      | 4         |
| <b>5 Characteristics</b> .....                                                                                                                   | <b>5</b>  |
| <b>6 Sampling and basis for acceptance</b> .....                                                                                                 | <b>5</b>  |
| <b>7 Requirements</b> .....                                                                                                                      | <b>5</b>  |
| <b>8 Marking and specifications</b> .....                                                                                                        | <b>5</b>  |
| 8.1 Marking .....                                                                                                                                | 5         |
| 8.2 Product literature .....                                                                                                                     | 6         |
| 8.3 Specifications .....                                                                                                                         | 6         |
| <b>9 Ordering</b> .....                                                                                                                          | <b>7</b>  |
| <b>Annex A (normative) Extruded ceramic tiles with low water absorption <math>0,5 &lt; E_v \leq 3 \%</math> Group AI<sub>b</sub></b> .....       | <b>10</b> |
| <b>Annex B (normative) Extruded ceramic tiles <math>3 \% &lt; E_v \leq 6 \%</math> Group AII<sub>a</sub> — Subgroup (Part) 1</b> .....           | <b>13</b> |
| <b>Annex C (normative) Extruded ceramic tiles <math>3 \% &lt; E_v \leq 6 \%</math> Group AII<sub>a</sub> — Subgroup (Part) 2</b> .....           | <b>16</b> |
| <b>Annex D (normative) Extruded ceramic tiles <math>6 \% &lt; E_v \leq 10 \%</math> Group AII<sub>b</sub> — Subgroup (Part) 1</b> .....          | <b>19</b> |
| <b>Annex E (normative) Extruded ceramic tiles <math>6 \% &lt; E_v \leq 10 \%</math> Group AII<sub>b</sub> — Subgroup (Part) 2</b> .....          | <b>22</b> |
| <b>Annex F (normative) Extruded ceramic tiles <math>E_v &gt; 10 \%</math> Group AIII</b> .....                                                   | <b>25</b> |
| <b>Annex G (normative) Dry-pressed ceramic tiles with low water absorption <math>E_v \leq 0,5 \%</math> Group BI<sub>a</sub></b> .....           | <b>28</b> |
| <b>Annex H (normative) Dry-pressed ceramic tiles with low water absorption <math>0,5 \% &lt; E_v \leq 3 \%</math> Group BI<sub>b</sub></b> ..... | <b>32</b> |
| <b>Annex I (informative) Intentionally blank</b> .....                                                                                           | <b>35</b> |
| <b>Annex J (normative) Dry-pressed ceramic tiles <math>3 \% &lt; E_v \leq 6 \%</math> Group BII<sub>a</sub></b> .....                            | <b>36</b> |
| <b>Annex K (normative) Dry-pressed ceramic tiles <math>6 \% &lt; E_v \leq 10 \%</math> Group BII<sub>b</sub></b> .....                           | <b>39</b> |
| <b>Annex L (normative) Dry-pressed ceramic tiles <math>E_v &gt; 10 \%</math> Group BIII</b> .....                                                | <b>42</b> |
| <b>Annex M (normative) Extruded ceramic tiles with low water absorption <math>E_v \leq 0,5 \%</math> Group AI<sub>a</sub></b> .....              | <b>45</b> |
| <b>Annex N (informative) Classification of glazed tiles for floors according to their abrasion resistance</b> .....                              | <b>48</b> |
| <b>Annex O (informative) Intentionally blank</b> .....                                                                                           | <b>49</b> |
| <b>Annex P (informative) Test methods</b> .....                                                                                                  | <b>50</b> |
| <b>Annex Q (informative) Intentionally blank</b> .....                                                                                           | <b>51</b> |
| <b>Annex R (informative) Symbols recommended for use</b> .....                                                                                   | <b>52</b> |
| <b>Bibliography</b> .....                                                                                                                        | <b>53</b> |

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see: [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by ISO/TC 189, *Ceramic tile*.

This third edition cancels and replaces the second edition (ISO 13006:2012), which has been technically revised.

This main changes compared to the previous edition are as follows:

- The boiling method in ISO 10545-3 is no longer referenced for the determination of water absorption. The vacuum method is now referenced for the determination of water absorption.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html).

# Ceramic tiles — Definitions, classification, characteristics and marking

## 1 Scope

This document defines terms and establishes classifications, characteristics and marking requirements for ceramic tiles of the best commercial quality (first quality). This document is not applicable to tiles made by other than normal processes of extrusion or dry pressing. It is not applicable to decorative accessories or trim such as edges, corners, skirting, capping, coves, beads, steps, curved tiles and other accessory pieces or mosaics (i.e. any piece that can fit into a square, the side of which is less than 7 cm).

NOTE ISO 10545 (all parts) describes the test procedures required to determine the product characteristics listed in this document. ISO 10545 is a multi-part standard, each part describes a specific test procedure or related matter.

## 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 1006, *Building construction — Modular coordination — Basic module*

ISO 10545-1, *Ceramic tiles — Part 1: Sampling and basis for acceptance*

ISO 10545-2, *Ceramic tiles — Part 2: Determination of dimensions and surface quality*

ISO 10545-3, *Ceramic tiles — Part 3: Determination of water absorption, apparent porosity, apparent relative density and bulk density*

ISO 10545-4, *Ceramic tiles — Part 4: Determination of modulus of rupture and breaking strength*

ISO 10545-5, *Ceramic tiles — Part 5: Determination of impact resistance by measurement of coefficient of restitution*

ISO 10545-6, *Ceramic tiles — Part 6: Determination of resistance to deep abrasion for unglazed tiles*

ISO 10545-7, *Ceramic tiles — Part 7: Determination of resistance to surface abrasion for glazed tiles*

ISO 10545-8, *Ceramic tiles — Part 8: Determination of linear thermal expansion*

ISO 10545-9, *Ceramic tiles — Part 9: Determination of resistance to thermal shock*

ISO 10545-10, *Ceramic tiles — Part 10: Determination of moisture expansion*

ISO 10545-11, *Ceramic tiles — Part 11: Determination of crazing resistance for glazed tiles*

ISO 10545-12, *Ceramic tiles — Part 12: Determination of frost resistance*

ISO 10545-13, *Ceramic tiles — Part 13: Determination of chemical resistance*

ISO 10545-14, *Ceramic tiles — Part 14: Determination of resistance to stains*

ISO 10545-15, *Ceramic tiles — Part 15: Determination of lead and cadmium given off by glazed tiles*

ISO 10545-16, *Ceramic tiles — Part 16: Determination of small colour differences*

### 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 1006 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <https://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

#### 3.1

##### **ceramic tile**

thin slab made from clays and/or other inorganic raw materials, generally used as covering for floors and walls, usually shaped by extruding (A) or pressing (B) at room temperature, but may be formed by other processes (C), then dried and subsequently fired at temperatures sufficient to develop the required properties

Note 1 to entry: Tiles may be glazed (GL) or unglazed (UGL); they are incombustible and are not affected by light.

#### 3.2

##### **porcelain tile**

fully vitrified tile with water absorption coefficient less than or equal to a mass fraction of 0,5 %, belonging to groups AI<sub>a</sub> and BI<sub>a</sub>

#### 3.3

##### **glaze**

vitified covering that is impermeable

#### 3.4

##### **engobed surface**

clay-based covering with a matt finish which may be permeable or impermeable

Note 1 to entry: A tile with an engobed surface is regarded as an unglazed tile.

#### 3.5

##### **polished surface**

surface of glazed and unglazed tile which has been given a glossy finish by mechanical polishing as the last stage of manufacture

#### 3.6

##### **extruded tile**

tile, whose body is shaped in the plastic state in an extruder, the column obtained being cut into tiles of pre-determined dimension, and which is designated as Group A

Note 1 to entry: This document classifies extruded tiles as “precision” or “natural”. The classification is dependent upon the different technical characteristics as listed in the individual product standards.

Note 2 to entry: Traditional terms used for extruded products are “split tiles” and “quarry tiles”. They commonly indicate double-extruded and single-extruded tiles, respectively. The term “quarry tiles” only refers to extruded tiles with a water absorption coefficient of a mass fraction not exceeding 6 %.

#### 3.7

##### **dry-pressed tile**

tile, formed from a finely milled body mixture and shaped (e.g. in dies or moulds) at high pressure, and which is designated as Group B

#### 3.8

##### **water absorption**

$E_v$

percentage of water impregnating a tile

Note 1 to entry: This is measured in accordance with ISO 10545-3.

Note 2 to entry: Water absorption is expressed as a mass fraction of dry mass.

### 3.9 Sizes

Note 1 to entry The sizes are only defined for rectangular tiles. If the sizes of non-rectangular tiles are required, they are defined by the smallest rectangle into which they fit.

#### 3.9.1

##### **nominal size**

size used to describe the product

Note 1 to entry: See [Figures 1](#) and [2](#).

#### 3.9.2

##### **work size**

size of a tile specified for manufacturing to which the actual size shall conform within specified permissible deviations

Note 1 to entry: See [Figures 1](#) and [2](#).

#### 3.9.3

##### **actual size**

size obtained by measuring the face of a tile

Note 1 to entry: This is measured in accordance with ISO 10545-2.

Note 2 to entry: See [Figures 1](#) and [2](#).

#### 3.9.4

##### **coordinating size**

work size plus the joint width

Note 1 to entry: See [Figures 1](#) and [2](#).

#### 3.9.5

##### **modular size**

tile and size based on module M, 2 M, 3 M and 5 M and also their multiples or subdivisions, except for tiles with a surface area of less than 9 000 mm<sup>2</sup>

Note 1 to entry: See ISO 1006, where 1 M = 100 mm.

Note 2 to entry: See [Figures 1](#) and [2](#).

#### 3.9.6

##### **non-modular size**

size not based on module M

Note 1 to entry: See ISO 1006, where 1 M = 100 mm.

Note 2 to entry: Tiles of these sizes are those commonly used in most countries.

Note 3 to entry: See [Figures 1](#) and [2](#).

#### 3.9.7

##### **tolerance**

difference between the permissible limits of size

Note 1 to entry: See [Figures 1](#) and [2](#).

### 3.10

#### **spacer lug**

projection that is located along certain edges of tiles so that where two tiles are placed together, in line, the lugs on adjacent edges separate the tiles by a distance of not less than the specified width of the joint

Note 1 to entry: See [Figure 2](#).

### 3.11

#### **rectified tile**

ceramic tile that, after firing, is subjected to a precise mechanical finishing of the edges

### 3.12

#### **back feet**

parallel ridges running across the back surface of some exterior wall tiles which possess a geometry intended to facilitate an interlocking connection between tile and cement mortar

Note 1 to entry: See [Figure 3](#).

Note 2 to entry: Back feet dimensions shall be measured with vernier calipers, and each specimen in a 10-tile sample is required to satisfy the requirements in [Annexes A to H](#) and [Annexes J to M](#).

## 4 Classification

### 4.1 Basis of classification

Ceramic tiles are divided into groups according to their method of manufacture and their water absorption (see [3.8](#) and [Table 1](#)). The groups do not presuppose the usage of the products.

### 4.2 Methods of manufacture

The following are the two methods of manufacture:

- method A, extruded tiles (see [3.6](#));
- method B, dry-pressed tiles (see [3.7](#)).

### 4.3 Water absorption according to group

#### 4.3.1 General

The following are the three groups according to water absorption,  $E_v$ .

#### 4.3.2 Subdivision of the three groups

The three groups are divided into tiles of low, medium and high water absorption, namely Groups I, II and III, respectively.

- a) Tiles of low water absorption, i.e. absorption coefficient less than or equal to a mass fraction of 3 %,  $E_v \leq 3$  %, belong to Group I. Group I consists of the following:
  - 1) for extruded tiles
    - i)  $E_v \leq 0,5$  % (Group AI<sub>a</sub>), and
    - ii)  $0,5$  % <  $E_v \leq 3$  % (Group AI<sub>b</sub>);
  - 2) for dry-pressed tiles:
    - i)  $E_v \leq 0,5$  % (Group BI<sub>a</sub>);

- ii)  $0,5 \% < E_v \leq 3 \%$  (Group BI<sub>b</sub>).
- b) Tiles of medium water absorption, i.e.  $3 \% < E_v \leq 10 \%$ , belong to Group II. Group II consists of the following:
  - 1) for extruded tiles
    - i)  $3 \% < E_v \leq 6 \%$  [Group AII<sub>a</sub>, Subgroups (Parts) 1 and 2; see [Annex B](#) for Subgroup (Part) 1 or [Annex C](#) for Subgroup (Part) 2], and
    - ii)  $6 \% < E_v \leq 10 \%$  [Group AII<sub>b</sub>, Subgroups (Parts) 1 and 2; see [Annex D](#) for Subgroup (Part) 1 or [Annex E](#) for Subgroup (Part) 2];
  - 2) for dry-pressed tiles
    - i)  $3 \% < E_v \leq 6 \%$  (Group BII<sub>a</sub>), and
    - ii)  $6 \% < E_v \leq 10 \%$  (Group BII<sub>b</sub>).
- c) Tiles of high water absorption, i.e.  $E_v > 10 \%$ , belong to Group III.

## 5 Characteristics

The characteristics for different applications of ceramic tiles are given in [Table 2](#).

## 6 Sampling and basis for acceptance

The sampling and basis for acceptance shall be in accordance with that presented in ISO 10545-1.

## 7 Requirements

Dimensional and surface quality requirements and physical and chemical properties shall be as given in the relevant/specific annex, of [Annexes A to H](#) and [Annexes J to M](#), for each tile class.

NOTE [Annexes I, O](#) and [Q](#) are intentionally left blank. This is as a convenience to producers in order to avoid changes to packaging and related costs. In addition, at the time of publication, the market offers consumers various products identified by the matching annex headings of this document.

## 8 Marking and specifications

### 8.1 Marking

Tiles and/or their packaging are required to bear the following marking:

- a) manufacturer's mark and/or trademark and the country where the tile was manufactured (i.e. country of origin, as determined by the relevant international regulation);
- b) indication of first quality;
- c) type of tile and reference to the appropriate group and/or annex of [Annexes A to H](#) and [Annexes J to M](#) covering the specific group of tile;
- d) nominal and work sizes, and "M" if modular;
- e) nature of the surface, i.e. glazed (GL) or unglazed (UGL);
- f) any surface treatment applied after firing;
- g) total number of tiles in the package;

## ISO 13006:2018(E)

- h) manufacturer's production run or batch number;
- i) an indication of colour consistency, as defined by the manufacturer;
- j) total dry weight which the tiles and their packaging shall not exceed.

### EXAMPLE 1

The ABC Tile Co., Made in China, Ceramic Tile of First Quality  
Extruded tile, ISO 13006:2018, Annex A, Group A<sub>1b</sub>, Precision  
M, 25 cm × 12,5 cm (*S<sub>w</sub>* 240 mm × 115 mm × 12,5 mm), UGL, Protective Sealer Added  
20 pcs/box, batch A50, 0100-Gray, Max dry weight: 20 kg

### EXAMPLE 2

The 123 Tile Co., Made in Spain, Ceramic Tile of First Quality  
Dry-pressed porcelain tile, ISO 13006:2018, Annex G, Group B<sub>1a</sub>, Rectified  
60 cm × 60 cm (*S<sub>w</sub>* 598 mm × 598 mm × 10 mm) UGL  
3 pcs/box, batch B52, 0590-Slate, Max dry weight: 16 kg

### EXAMPLE 3

The XYX Tile Co., Made in Indonesia, Ceramic Tile of First Quality  
Dry-pressed tile, ISO 13006:2018, Annex H, Group B<sub>1b</sub> Non-rectified  
30 cm × 30 cm (*S<sub>w</sub>* 299 mm × 299 mm × 10 mm) GL  
10 pcs/box, batch C60, 0320-Ivory, Max dry weight: 20 kg

Each tile conforming to this document is required to bear on its reverse side or edge, the country where it was manufactured.

## 8.2 Product literature

Product literature for tiles intended for use on floors shall state the abrasion class or the place of use of glazed tiles.

## 8.3 Specifications

Tiles shall be designated by the following:

- a) the method of shaping;
- b) the relevant group and/or annex of [Annexes A](#) to [H](#) and [Annexes J](#) to [M](#) covering the specific group of tile
- c) nominal and work sizes, and "M" if modular;
- d) the nature of the surface, i.e. glazed (GL) or unglazed (UGL);
- e) the addition of back feet, if required.

EXAMPLE 1 Precision extruded tile, ISO 13006:2018, Annex M, A<sub>1a</sub> M 25 cm × 12,5 cm (*S<sub>w</sub>* 240 mm × 115 mm × 10 mm) GL.

EXAMPLE 2 Natural extruded tile, ISO 13006:2018, Annex A, A<sub>1b</sub> 15 cm × 15 cm (*S<sub>w</sub>* 150 mm × 150 mm × 12,5 mm) UGL.

EXAMPLE 3 Dry-pressed tile, ISO 13006:2018, Annex G, B<sub>1a</sub> M 25 cm × 12,5 cm (*S<sub>w</sub>* 240 mm × 115 mm × 10 mm) GL.

EXAMPLE 4 Dry-pressed tile, ISO 13006:2018, Annex L, B<sub>III</sub> 15 cm × 15 cm (*S<sub>w</sub>* 150 mm × 150 mm × 12,5 mm) UGL.

## 9 Ordering

Each time that an order is placed, items, such as size, thickness, type of surface, colour, profile, abrasion class for glazed tiles and other properties, shall be agreed upon by the parties concerned.

**Table 1 — Classification of ceramic tiles with respect to water absorption and shaping**

| Shaping                 | Group I<br>$E_v \leq 3\%$                                                         | Group II <sub>a</sub><br>$3\% < E_v \leq 6\%$                           | Group II <sub>b</sub><br>$6\% < E_v \leq 10\%$                          | Group III<br>$E_v > 10\%$                                 |
|-------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------|-------------------------------------------------------------------------|-----------------------------------------------------------|
| <b>A</b><br>Extruded    | Group AI <sub>a</sub><br>$E_v \leq 0,5\%$<br>(see <a href="#">Annex M</a> )       | Group AII <sub>a-1</sub> <sup>a</sup><br>(see <a href="#">Annex B</a> ) | Group AII <sub>b-1</sub> <sup>a</sup><br>(see <a href="#">Annex D</a> ) | Group AIII<br>(see <a href="#">Annex F</a> )              |
|                         | Group AI <sub>b</sub><br>$0,5\% < E_v \leq 3\%$<br>(see <a href="#">Annex A</a> ) | Group AII <sub>a-2</sub> <sup>a</sup><br>(see <a href="#">Annex C</a> ) | Group AII <sub>b-2</sub> <sup>a</sup><br>(see <a href="#">Annex E</a> ) |                                                           |
| <b>B</b><br>Dry pressed | Group BI <sub>a</sub><br>$E_v \leq 0,5\%$<br>(see <a href="#">Annex G</a> )       | Group BII <sub>a</sub><br>(see <a href="#">Annex J</a> )                | Group BII <sub>b</sub><br>(see <a href="#">Annex K</a> )                | Group BIII <sup>b</sup><br>(see <a href="#">Annex L</a> ) |
|                         | Group BI <sub>b</sub><br>$0,5\% < E_v \leq 3\%$<br>(see <a href="#">Annex H</a> ) |                                                                         |                                                                         |                                                           |

<sup>a</sup> Groups AII<sub>a</sub> and AII<sub>b</sub> are divided into two subgroups (Parts 1 and 2) with different product specifications.

<sup>b</sup> Group BIII covers glazed tiles only. There is a low quantity of dry-pressed unglazed tiles produced with water absorption greater than 10 % mass fraction, which is not covered by this product group.


**Table 2 — Characteristics required for different applications**

| Characteristics                               | Floor    |          | Wall     |          | Test                     |
|-----------------------------------------------|----------|----------|----------|----------|--------------------------|
|                                               | Interior | Exterior | Interior | Exterior | Reference                |
| <b>Dimensions and surface quality</b>         |          |          |          |          |                          |
| Length and width                              | X        | X        | X        | X        | ISO 10545-2              |
| Thickness                                     | X        | X        | X        | X        | ISO 10545-2              |
| Straightness of sides                         | X        | X        | X        | X        | ISO 10545-2              |
| Rectangularity                                | X        | X        | X        | X        | ISO 10545-2              |
| Surface flatness (curvature and warpage)      | X        | X        | X        | X        | ISO 10545-2              |
| Surface quality                               | X        | X        | X        | X        | ISO 10545-2              |
| Back feet (if specified) <sup>a</sup>         |          |          |          | X        | <a href="#">Figure 3</a> |
| <b>Physical property</b>                      |          |          |          |          |                          |
| Water absorption                              | X        | X        | X        | X        | ISO 10545-3              |
| Breaking strength                             | X        | X        | X        | X        | ISO 10545-4              |
| Modulus of rupture                            | X        | X        | X        | X        | ISO 10545-4              |
| Resistance to deep abrasion — unglazed tiles  | X        | X        |          |          | ISO 10545-6              |
| Resistance to surface abrasion — glazed tiles | X        | X        |          |          | ISO 10545-7              |
| Linear thermal expansion <sup>b</sup>         | X        | X        | X        | X        | ISO 10545-8              |
| Resistance to thermal shock <sup>b</sup>      | X        | X        | X        | X        | ISO 10545-9              |
| Resistance to crazing — glazed tiles          | X        | X        | X        | X        | ISO 10545-11             |
| Frost resistance <sup>c</sup>                 |          | X        |          | X        | ISO 10545-12             |
| Moisture expansion <sup>b</sup>               | X        | X        | X        | X        | ISO 10545-10             |
| Small colour differences <sup>b</sup>         | X        | X        | X        | X        | ISO 10545-16             |

Table 2 (continued)


| Characteristics                                                     | Floor           |                 | Wall            |                 | Test             |
|---------------------------------------------------------------------|-----------------|-----------------|-----------------|-----------------|------------------|
|                                                                     | Interior        | Exterior        | Interior        | Exterior        | Reference        |
| Impact resistance <sup>b</sup>                                      | X               | X               |                 |                 | ISO 10545-5      |
| <b>Chemical property</b>                                            | <b>Interior</b> | <b>Exterior</b> | <b>Interior</b> | <b>Exterior</b> | <b>Reference</b> |
| Resistance to staining                                              |                 |                 |                 |                 | ISO 10545-14     |
| — glazed tiles                                                      | X               | X               | X               | X               | ISO 10545-14     |
| — unglazed tiles <sup>b</sup>                                       | X               | X               | X               | X               | ISO 10545-14     |
| Resistance to low concentrations of acids and alkalis               | X               | X               | X               | X               | ISO 10545-13     |
| Resistance to high concentrations of acids and alkalis <sup>b</sup> | X               | X               | X               | X               | ISO 10545-13     |
| Resistance to household cleaners and swimming pool salts            | X               | X               | X               | X               | ISO 10545-13     |
| Lead and cadmium release — glazed tiles <sup>b</sup>                | X               | X               | X               | X               | ISO 10545-15     |

a For application to exterior tiles installed by cement mortar, including tunnels, where back feet are specified.  
 b Test method is available.  
 c For tiles intended to be used in situations where frost conditions apply.

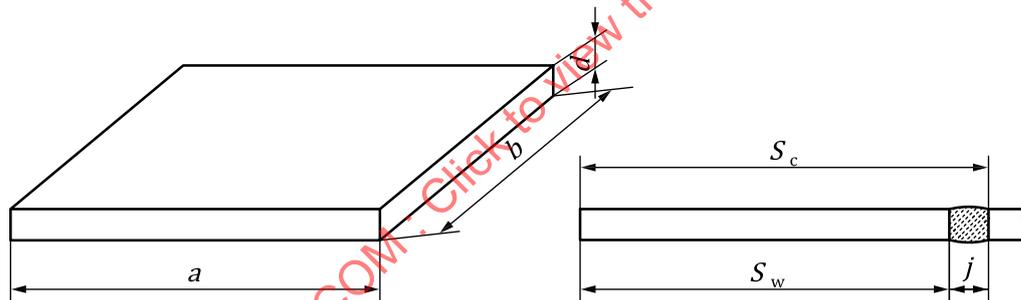

**Key**  
*a, b* dimensions of the tile  
*d* thickness  
*j* joint  
*S<sub>c</sub>* coordinating size  
*S<sub>w</sub>* work size  
 $S_c = S_w + j$   
 $S_w = a, b, d$


Figure 1 — Tile

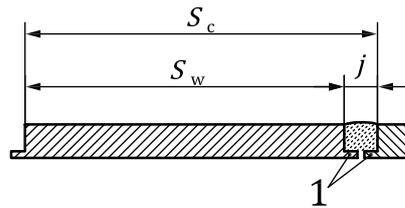

**Key**

- 1 spacer lugs
- $j$  joint
- $S_c$  coordinating size
- $S_w$  work size
- $S_c = S_w + j$
- $S_w = a, b, d$

**Figure 2 — Tile with spacer lug**

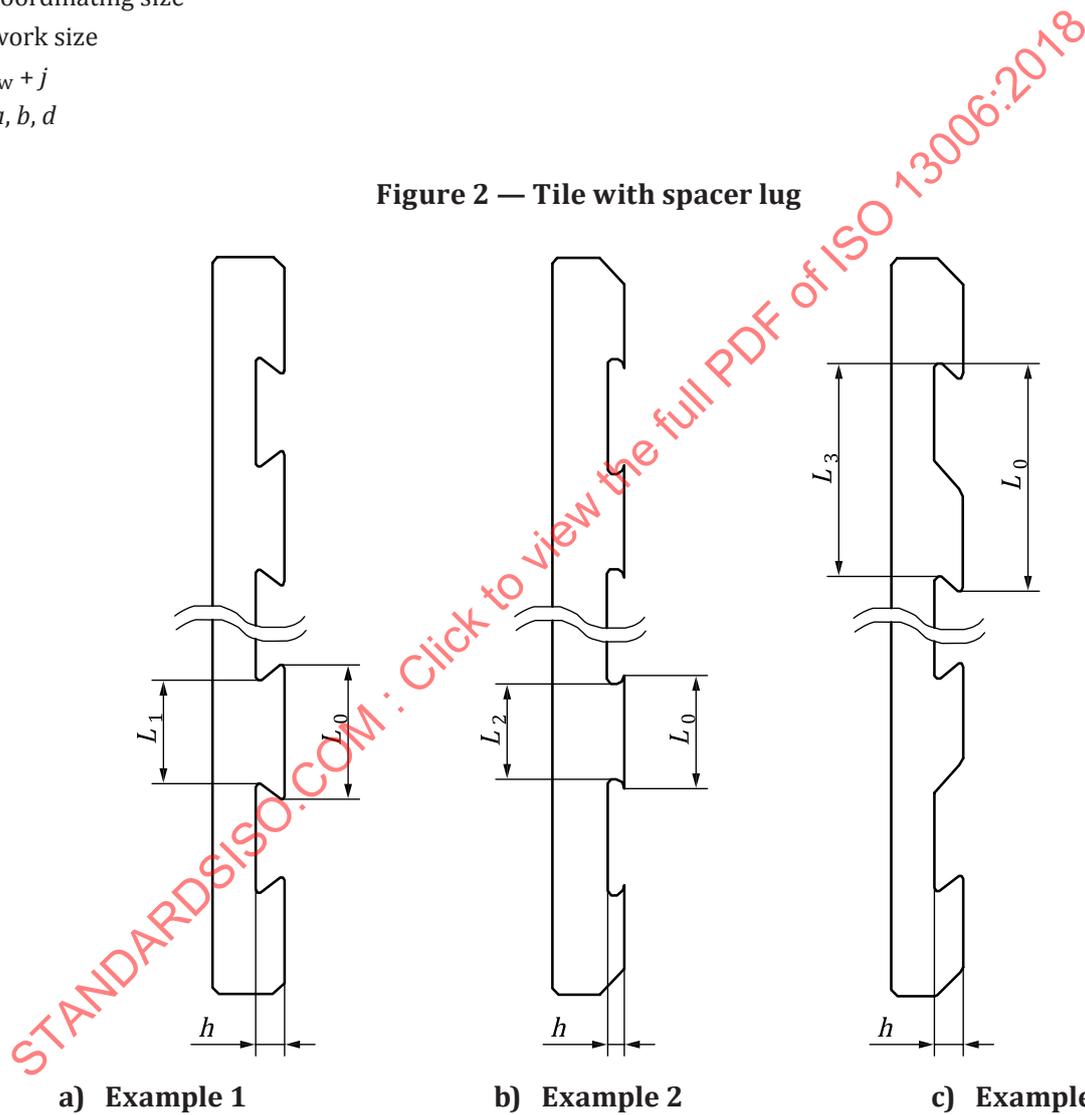

**Key**

- $h$  height
- $L$  length

**Figure 3 — Back feet — Examples**

## Annex A (normative)

### Extruded ceramic tiles with low water absorption $0,5 < E_v \leq 3 \%$ Group AI<sub>b</sub>

Dimensional and surface quality requirements and physical and chemical properties are required to be in accordance with [Table A.1](#).

**Table A.1 — Requirements for extruded ceramic tiles — Group AI<sub>b</sub>,  $0,5 < E_v \leq 3 \%$**

| Dimensions and surface quality                                                                                                                   | Precision                               | Natural                                 | Test        |
|--------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------------|-------------|
| <b>Length and width</b>                                                                                                                          |                                         |                                         |             |
| The manufacturer shall choose the work size as follows:                                                                                          |                                         |                                         |             |
| a) for modular tiles in order to allow a nominal joint width of between 3 mm and 11 mm <sup>a</sup> ;                                            |                                         |                                         |             |
| b) for non-modular tiles so that the difference between the work size and the nominal size is not more than $\pm 3$ mm.                          |                                         |                                         |             |
| The deviation, in percent, of the average size for each tile (two or four sides) from the work size, $S_w$                                       | $\pm 1,0 \%$ to a maximum of $\pm 2$ mm | $\pm 2,0 \%$ to a maximum of $\pm 4$ mm | ISO 10545-2 |
| The deviation, in percent, of the average size for each tile (two or four sides) from the average size of the 10 test specimens (20 or 40 sides) | $\pm 1,0 \%$                            | $\pm 1,5 \%$                            | ISO 10545-2 |
| <b>Thickness</b>                                                                                                                                 |                                         |                                         |             |
| a) The thickness shall be specified by the manufacturer <sup>g</sup>                                                                             |                                         |                                         |             |
| b) The deviation, in percent, of the average thickness of each tile from the work size thickness <sup>g</sup>                                    | $\pm 10 \%$                             | $\pm 10 \%$                             | ISO 10545-2 |
| <b>Straightness of sides<sup>b</sup></b> (facial sides)                                                                                          |                                         |                                         |             |
| The maximum deviation from straightness, in percent, related to the corresponding work sizes                                                     | $\pm 0,5 \%$                            | $\pm 0,6 \%$                            | ISO 10545-2 |
| <b>Rectangularity<sup>b</sup></b>                                                                                                                |                                         |                                         |             |
| The maximum deviation from rectangularity, in percent, related to the corresponding work sizes                                                   | $\pm 1,0 \%$                            | $\pm 1,0 \%$                            | ISO 10545-2 |
| <b>Surface flatness</b>                                                                                                                          |                                         |                                         |             |
| The maximum deviation from flatness, in percent:                                                                                                 |                                         |                                         |             |
| a) centre curvature, related to diagonal calculated from the work sizes;                                                                         | $\pm 0,5 \%$                            | $\pm 1,5 \%$                            | ISO 10545-2 |
| b) edge curvature, related to the corresponding work sizes;                                                                                      | $\pm 0,5 \%$                            | $\pm 1,5 \%$                            | ISO 10545-2 |

Table A.1 (continued)

| Dimensions and surface quality                                                                                          | Precision                                                                                                                   | Natural                                                                                    | Test                     |
|-------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|--------------------------|
| c) warpage, related to the diagonal calculated from the work sizes.                                                     | ±0,8 %                                                                                                                      | ±1,5 %                                                                                     | ISO 10545-2              |
| <b>Back feet</b> (if specified)                                                                                         |                                                                                                                             |                                                                                            |                          |
| a) Height, $h$ , for tiles of surface area, $A$                                                                         |                                                                                                                             |                                                                                            |                          |
| 49 cm <sup>2</sup> ≤ $A$ < 60 cm <sup>2</sup>                                                                           | Minimum $h$ = 0,7 mm; Maximum $h$ = 3,5 mm                                                                                  |                                                                                            | <a href="#">Figure 3</a> |
| $A$ ≥ 60 cm <sup>2</sup>                                                                                                | Minimum $h$ = 1,5 mm; Maximum $h$ = 3,5 mm                                                                                  |                                                                                            | <a href="#">Figure 3</a> |
| b) Shape                                                                                                                | Back feet as specified by the manufacturer and as shown in one of the examples in <a href="#">Figure 3</a>                  |                                                                                            | <a href="#">Figure 3</a> |
| Example 1 (see <a href="#">Figure 3</a> )                                                                               | $L_0 - L_1 > 0$                                                                                                             |                                                                                            | <a href="#">Figure 3</a> |
| Example 2 (see <a href="#">Figure 3</a> )                                                                               | $L_0 - L_2 > 0$                                                                                                             |                                                                                            | <a href="#">Figure 3</a> |
| Example 3 (see <a href="#">Figure 3</a> )                                                                               | $L_0 - L_3 > 0$                                                                                                             |                                                                                            | <a href="#">Figure 3</a> |
| <b>Surface quality<sup>c</sup></b>                                                                                      | A minimum of 95 % of the tiles are to be free from visible defects which can impair the appearance of a major area of tiles |                                                                                            | ISO 10545-2              |
| <b>Physical property</b>                                                                                                | <b>Precision</b>                                                                                                            | <b>Natural</b>                                                                             | <b>Test</b>              |
| <b>Water absorption</b><br>Percent mass fraction                                                                        | 0,5 < $E_v$ ≤ 3,0 %<br>Individual maximum<br>3,3 %                                                                          | 0,5 < $E_v$ ≤ 3,0 %<br>Individual maximum<br>3,3 %                                         | ISO 10545-3              |
| <b>Breaking strength, in Newtons</b>                                                                                    |                                                                                                                             |                                                                                            |                          |
| a) Thickness ≥ 7,5 mm                                                                                                   | Not less than 1 100                                                                                                         | Not less than 1 100                                                                        | ISO 10545-4              |
| b) Thickness < 7,5 mm                                                                                                   | Not less than 600                                                                                                           | Not less than 600                                                                          | ISO 10545-4              |
| <b>Modulus of rupture, in Newtons per square millimetre</b><br>Not applicable to tiles with breaking strength ≥ 3 000 N | Minimum 23<br>Individual minimum<br>18                                                                                      | Minimum 23<br>Individual minimum<br>18                                                     | ISO 10545-4              |
| <b>Abrasion resistance</b>                                                                                              |                                                                                                                             |                                                                                            |                          |
| a) Resistance to deep abrasion of unglazed tiles: removed volume, in cubic millimetres                                  | Maximum 275                                                                                                                 | Maximum 275                                                                                | ISO 10545-6              |
| b) Resistance to surface abrasion of glazed tiles intended for use on floors <sup>d</sup>                               | Report abrasion class and cycles passed                                                                                     | Report abrasion class and cycles passed                                                    | ISO 10545-7              |
| <b>Coefficient of linear thermal expansion<sup>e</sup></b>                                                              |                                                                                                                             |                                                                                            |                          |
| From ambient temperature to 100 °C                                                                                      | Test method available                                                                                                       | Test method available                                                                      | ISO 10545-8              |
| <b>Thermal shock resistance<sup>e</sup></b>                                                                             | Test method available                                                                                                       | Test method available                                                                      | ISO 10545-9              |
| <b>Crazing resistance: glazed tiles<sup>f</sup></b>                                                                     | Required                                                                                                                    | Required                                                                                   | ISO 10545-11             |
| <b>Frost resistance</b>                                                                                                 | Required                                                                                                                    | Required                                                                                   | ISO 10545-12             |
| <b>Moisture expansion, in millimetres per metre<sup>e</sup></b>                                                         | Test method available                                                                                                       | Test method available                                                                      | ISO 10545-10             |
| <b>Small colour differences<sup>e</sup></b>                                                                             | Plain coloured tiles only where required<br>GL: $\Delta E < 0,75$<br>UGL: $\Delta E < 1,0$                                  | Plain coloured tiles only where required<br>GL: $\Delta E < 0,75$<br>UGL: $\Delta E < 1,0$ | ISO 10545-16             |
| <b>Impact resistance<sup>e</sup></b>                                                                                    | Test method available                                                                                                       | Test method available                                                                      | ISO 10545-5              |
| <b>Chemical property</b>                                                                                                | <b>Precision</b>                                                                                                            | <b>Natural</b>                                                                             | <b>Test</b>              |
| <b>Resistance to staining</b>                                                                                           |                                                                                                                             |                                                                                            |                          |
| a) Glazed tiles                                                                                                         | Minimum class 3                                                                                                             | Minimum class 3                                                                            | ISO 10545-14             |
| b) Unglazed tiles <sup>e</sup>                                                                                          | Test method available                                                                                                       | Test method available                                                                      | ISO 10545-14             |

Table A.1 (continued)

| Dimensions and surface quality                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Precision                               | Natural                                 | Test         |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------------|--------------|
| <b>Resistance to chemicals</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                         |                                         |              |
| Resistance to low concentrations of acids and alkalis                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Manufacturer is to state classification | Manufacturer is to state classification | ISO 10545-13 |
| Resistance to high concentrations of acids and alkalis <sup>e</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Test method available                   | Test method available                   | ISO 10545-13 |
| Resistance to household chemicals and swimming pool salts                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Minimum B                               | Minimum B                               | ISO 10545-13 |
| <b>Lead and cadmium release<sup>e</sup></b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Test method available                   | Test method available                   | ISO 10545-15 |
| <p>a Similar joint widths shall be used to apply to traditional systems based on non-metric sizes.</p> <p>b Not applicable to tiles having curved shapes.</p> <p>c As a result of firing, slight variations from this standard colour are unavoidable. This does not apply to intentional irregularities of colour variation of the face of tiles (which can be unglazed, glazed or partly glazed) or to the colour variation over a tile area which is characteristic for this type of tile and desirable. Spots or coloured dots which are introduced for decorative purposes are not considered a defect.</p> <p>d Use <a href="#">Annex N</a> for the abrasion resistance classification for all glazed tiles intended for use on floors.</p> <p>e <a href="#">Annex P</a> gives information regarding requirements which are non-compulsory but which are listed as “test method available”.</p> <p>f Certain decorative effects can have a tendency to craze. These are to be identified by the manufacturer, in which case, the crazing test given in ISO 10545-11 is not applicable.</p> <p>g Where applicable, tile thickness shall include the addition of back feet heights, as measured in accordance with <a href="#">Figure 3</a>.</p> |                                         |                                         |              |

## Annex B (normative)

### Extruded ceramic tiles $3 \% < E_v \leq 6 \%$ Group AII<sub>a</sub> — Subgroup (Part) 1

Dimensional and surface quality requirements and physical and chemical properties are required to be in accordance with [Table B.1](#).

**Table B.1 — Requirements for extruded ceramic tiles — Group AII<sub>a-1</sub>,  $3 \% < E_v \leq 6 \%$**

| Dimensions and surface quality                                                                                                                   | Precision                               | Natural                                | Test        |
|--------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|----------------------------------------|-------------|
| <b>Length and width</b>                                                                                                                          |                                         |                                        |             |
| The manufacturer shall choose the work size as follows:                                                                                          |                                         |                                        |             |
| a) for modular tiles in order to allow a nominal joint width of between 3 mm and 11 mm <sup>a</sup> ;                                            |                                         |                                        |             |
| b) for non-modular tiles so that the difference between the work size and the nominal size is not more than $\pm 3$ mm.                          |                                         |                                        |             |
| The deviation, in percent, of the average size for each tile (two or four sides) from the work size, $S_w$                                       | $\pm 1,25$ % to a maximum of $\pm 2$ mm | $\pm 2,0$ % to a maximum of $\pm 4$ mm | ISO 10545-2 |
| The deviation, in percent, of the average size for each tile (two or four sides) from the average size of the 10 test specimens (20 or 40 sides) | $\pm 1,0$ %                             | $\pm 1,5$ %                            | ISO 10545-2 |
| <b>Thickness</b>                                                                                                                                 |                                         |                                        |             |
| a) The thickness shall be specified by the manufacturer <sup>g</sup>                                                                             |                                         |                                        |             |
| b) The deviation, in percent, of the average thickness of each tile from the work size thickness <sup>g</sup>                                    | $\pm 10$ %                              | $\pm 10$ %                             | ISO 10545-2 |
| <b>Straightness of sides<sup>b</sup> (facial sides)</b>                                                                                          |                                         |                                        |             |
| The maximum deviation from straightness, in percent, related to the corresponding work sizes                                                     | $\pm 0,5$ %                             | $\pm 0,6$ %                            | ISO 10545-2 |
| <b>Rectangularity<sup>b</sup></b>                                                                                                                |                                         |                                        |             |
| The maximum deviation from rectangularity, in percent, related to the corresponding work sizes                                                   | $\pm 1,0$ %                             | $\pm 1,0$ %                            | ISO 10545-2 |
| <b>Surface flatness</b>                                                                                                                          |                                         |                                        |             |
| The maximum deviation from flatness, in percent:                                                                                                 |                                         |                                        |             |
| a) centre curvature, related to diagonal calculated from the work sizes;                                                                         | $\pm 0,5$ %                             | $\pm 1,5$ %                            | ISO 10545-2 |
| b) edge curvature, related to the corresponding work sizes;                                                                                      | $\pm 0,5$ %                             | $\pm 1,5$ %                            | ISO 10545-2 |

Table B.1 (continued)

| Dimensions and surface quality                                                                                          | Precision                                                                                                                    | Natural                                                                                    | Test                     |
|-------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|--------------------------|
| c) warpage, related to diagonal calculated from the work sizes.                                                         | ±0,8 %                                                                                                                       | ±1,5 %                                                                                     | ISO 10545-2              |
| <b>Back feet</b> (if specified)                                                                                         |                                                                                                                              |                                                                                            |                          |
| a) Height, $h$ , for tiles of surface area, $A$                                                                         |                                                                                                                              |                                                                                            |                          |
| 49 cm <sup>2</sup> ≤ $A$ < 60 cm <sup>2</sup>                                                                           | Minimum $h$ = 0,7 mm; Maximum $h$ = 3,5 mm                                                                                   |                                                                                            | <a href="#">Figure 3</a> |
| $A$ ≥ 60 cm <sup>2</sup>                                                                                                | Minimum $h$ = 1,5 mm; Maximum $h$ = 3,5 mm                                                                                   |                                                                                            | <a href="#">Figure 3</a> |
| b) Shape                                                                                                                | Back feet as specified by the manufacturer and as shown in one of the examples in <a href="#">Figure 3</a>                   |                                                                                            | <a href="#">Figure 3</a> |
| Example 1 (see <a href="#">Figure 3</a> )                                                                               | $L_0 - L_1 > 0$                                                                                                              |                                                                                            | <a href="#">Figure 3</a> |
| Example 2 (see <a href="#">Figure 3</a> )                                                                               | $L_0 - L_2 > 0$                                                                                                              |                                                                                            | <a href="#">Figure 3</a> |
| Example 3 (see <a href="#">Figure 3</a> )                                                                               | $L_0 - L_3 > 0$                                                                                                              |                                                                                            | <a href="#">Figure 3</a> |
| <b>Surface quality<sup>c</sup></b>                                                                                      | A minimum of 95 % of the tiles are to be free from visible defects which can impair the appearance of a major area of tiles. |                                                                                            | ISO 10545-2              |
| <b>Physical property</b>                                                                                                | <b>Precision</b>                                                                                                             | <b>Natural</b>                                                                             | <b>Test</b>              |
| <b>Water absorption</b><br>Percent mass fraction                                                                        | 3,0 % < $E_v$ ≤ 6,0 %<br>Individual maximum<br>6,5 %                                                                         | 3,0 % < $E_v$ ≤ 6,0 %<br>Individual maximum<br>6,5 %                                       | ISO 10545-3              |
| <b>Breaking strength, in Newtons</b>                                                                                    |                                                                                                                              |                                                                                            |                          |
| a) Thickness ≥ 7,5 mm                                                                                                   | Not less than 950                                                                                                            | Not less than 950                                                                          | ISO 10545-4              |
| b) Thickness < 7,5 mm                                                                                                   | Not less than 600                                                                                                            | Not less than 600                                                                          | ISO 10545-4              |
| <b>Modulus of rupture, in Newtons per square millimetre</b><br>Not applicable to tiles with breaking strength ≥ 3 000 N | Minimum 20<br>Individual minimum<br>18                                                                                       | Minimum 20<br>Individual minimum<br>18                                                     | ISO 10545-4              |
| <b>Abrasion resistance</b>                                                                                              |                                                                                                                              |                                                                                            |                          |
| a) Resistance to deep abrasion of unglazed tiles: removed volume, in cubic millimetres                                  | Maximum 393                                                                                                                  | Maximum 393                                                                                | ISO 10545-6              |
| b) Resistance to surface abrasion of glazed tiles intended for use on floors <sup>d</sup>                               | Report abrasion class and cycles passed                                                                                      | Report abrasion class and cycles passed                                                    | ISO 10545-7              |
| <b>Coefficient of linear thermal expansion<sup>e</sup></b>                                                              |                                                                                                                              |                                                                                            |                          |
| From ambient temperature to 100 °C                                                                                      | Test method available                                                                                                        | Test method available                                                                      | ISO 10545-8              |
| <b>Thermal shock resistance<sup>e</sup></b>                                                                             | Test method available                                                                                                        | Test method available                                                                      | ISO 10545-9              |
| <b>Crazing resistance: glazed tiles<sup>f</sup></b>                                                                     | Required                                                                                                                     | Required                                                                                   | ISO 10545-11             |
| <b>Frost resistance<sup>e</sup></b>                                                                                     | Test method available                                                                                                        | Test method available                                                                      | ISO 10545-12             |
| <b>Moisture expansion, in millimetres per metre<sup>e</sup></b>                                                         | Test method available                                                                                                        | Test method available                                                                      | ISO 10545-10             |
| <b>Small colour differences<sup>e</sup></b>                                                                             | Plain coloured tiles only where required<br>GL: $\Delta E < 0,75$<br>UGL: $\Delta E < 1,0$                                   | Plain coloured tiles only where required<br>GL: $\Delta E < 0,75$<br>UGL: $\Delta E < 1,0$ | ISO 10545-16             |
| <b>Impact resistance<sup>e</sup></b>                                                                                    | Test method available                                                                                                        | Test method available                                                                      | ISO 10545-5              |
| <b>Chemical property</b>                                                                                                | <b>Precision</b>                                                                                                             | <b>Natural</b>                                                                             | <b>Test</b>              |
| <b>Resistance to staining</b>                                                                                           |                                                                                                                              |                                                                                            |                          |
| a) Glazed tiles                                                                                                         | Minimum class 3                                                                                                              | Minimum class 3                                                                            | ISO 10545-14             |
| b) Unglazed tiles <sup>e</sup>                                                                                          | Test method available                                                                                                        | Test method available                                                                      | ISO 10545-14             |

Table B.1 (continued)

| Dimensions and surface quality                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Precision                               | Natural                                 | Test         |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------------|--------------|
| <b>Resistance to chemicals</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                         |                                         |              |
| Resistance to low concentrations of acids and alkalis                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Manufacturer is to state classification | Manufacturer is to state classification | ISO 10545-13 |
| Resistance to high concentrations of acids and alkalis <sup>e</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Test method available                   | Test method available                   | ISO 10545-13 |
| Resistance to household chemicals and swimming pool salts                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Minimum B                               | Minimum B                               | ISO 10545-13 |
| <b>Lead and cadmium release<sup>e</sup></b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Test method available                   | Test method available                   | ISO 10545-15 |
| <p>a Similar joint widths are to be used to apply to traditional systems based on non-metric sizes.</p> <p>b Not applicable to tiles having curved shapes.</p> <p>c As a result of firing, slight variations from this standard colour are unavoidable. This does not apply to intentional irregularities of colour variation of the face of tiles (which can be unglazed, glazed or partly glazed) or to the colour variation over a tile area which is characteristic for this type of tile and desirable. Spots or coloured dots which are introduced for decorative purposes are not considered a defect.</p> <p>d Use <a href="#">Annex N</a> for the abrasion resistance classification for all glazed tiles intended for use on floors.</p> <p>e <a href="#">Annex P</a> gives information regarding requirements which are non-compulsory but which are listed as “test method available”.</p> <p>f Certain decorative effects can have a tendency to craze. These are to be identified by the manufacturer, in which case the crazing test given in ISO 10545-11 is not applicable.</p> <p>g Where applicable, tile thickness shall include the addition of back feet heights, as measured in accordance with <a href="#">Figure 3</a>.</p> |                                         |                                         |              |

## Annex C (normative)

### Extruded ceramic tiles $3 \% < E_v \leq 6 \%$ Group All<sub>a</sub> — Subgroup (Part) 2

Dimensional and surface quality requirements and physical and chemical properties are required to be in accordance with [Table C.1](#).

**Table C.1 — Requirements for extruded ceramic tiles — Group All<sub>a-2</sub>,  $3 \% < E_v \leq 6 \%$**

| Dimensions and surface quality                                                                                                                                                                                                                                                                      | Precision                               | Natural                                 | Test        |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------------|-------------|
| <b>Length and width</b>                                                                                                                                                                                                                                                                             |                                         |                                         |             |
| The manufacturer shall choose the work size as follows:<br><br>a) for modular tiles in order to allow a nominal joint width of between 3 mm and 11 mm <sup>a</sup> ;<br><br>b) for non-modular tiles so that the difference between the work size and the nominal size is not more than $\pm 3$ mm. |                                         |                                         |             |
| The deviation, in percent, of the average size for each tile (two or four sides) from the work size, $S_w$                                                                                                                                                                                          | $\pm 1,5 \%$ to a maximum of $\pm 2$ mm | $\pm 2,0 \%$ to a maximum of $\pm 4$ mm | ISO 10545-2 |
| The deviation, in percent, of the average size for each tile (two or four sides) from the average size of the 10 test specimens (20 or 40 sides)                                                                                                                                                    | $\pm 1,5 \%$                            | $\pm 1,5 \%$                            | ISO 10545-2 |
| <b>Thickness</b>                                                                                                                                                                                                                                                                                    |                                         |                                         |             |
| a) The thickness shall be specified by the manufacturer <sup>g</sup>                                                                                                                                                                                                                                |                                         |                                         |             |
| b) The deviation, in percent, of the average thickness of each tile from the work size thickness <sup>g</sup>                                                                                                                                                                                       | $\pm 10 \%$                             | $\pm 10 \%$                             | ISO 10545-2 |
| <b>Straightness of sides<sup>b</sup></b> (facial sides)                                                                                                                                                                                                                                             |                                         |                                         |             |
| The maximum deviation from straightness, in percent, related to the corresponding work sizes                                                                                                                                                                                                        | $\pm 1,0 \%$                            | $\pm 1,0 \%$                            | ISO 10545-2 |
| <b>Rectangularity<sup>b</sup></b>                                                                                                                                                                                                                                                                   |                                         |                                         |             |
| The maximum deviation from rectangularity, in percent related to the corresponding work sizes                                                                                                                                                                                                       | $\pm 1,0 \%$                            | $\pm 1,0 \%$                            | ISO 10545-2 |
| <b>Surface flatness</b>                                                                                                                                                                                                                                                                             |                                         |                                         |             |
| The maximum deviation from flatness, in percent:                                                                                                                                                                                                                                                    |                                         |                                         |             |
| a) centre curvature, related to diagonal calculated from the work sizes;                                                                                                                                                                                                                            | $\pm 1,0 \%$                            | $\pm 1,5 \%$                            | ISO 10545-2 |
| b) edge curvature, related to the corresponding work sizes;                                                                                                                                                                                                                                         | $\pm 1,0 \%$                            | $\pm 1,5 \%$                            | ISO 10545-2 |

Table C.1 (continued)

| Dimensions and surface quality                                                                                          | Precision                                                                                                                   | Natural                                                                                    | Test                     |
|-------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|--------------------------|
| c) warpage, related to diagonal calculated from the work sizes.                                                         | ±1,5 %                                                                                                                      | ±1,5 %                                                                                     | ISO 10545-2              |
| <b>Back feet</b> (if specified)                                                                                         |                                                                                                                             |                                                                                            |                          |
| a) Height, $h$ , for tiles of surface area, $A$                                                                         |                                                                                                                             |                                                                                            |                          |
| 49 cm <sup>2</sup> ≤ $A$ < 60 cm <sup>2</sup>                                                                           | Minimum $h = 0,7$ mm; Maximum $h = 3,5$ mm                                                                                  |                                                                                            | <a href="#">Figure 3</a> |
| $A \geq 60$ cm <sup>2</sup>                                                                                             | Minimum $h = 1,5$ mm; Maximum $h = 3,5$ mm                                                                                  |                                                                                            | <a href="#">Figure 3</a> |
| b) Shape                                                                                                                | Back feet as specified by the manufacturer and as shown in one of the examples in <a href="#">Figure 3</a>                  |                                                                                            | <a href="#">Figure 3</a> |
| Example 1 (see <a href="#">Figure 3</a> )                                                                               | $L_0 - L_1 > 0$                                                                                                             |                                                                                            | <a href="#">Figure 3</a> |
| Example 2 (see <a href="#">Figure 3</a> )                                                                               | $L_0 - L_2 > 0$                                                                                                             |                                                                                            | <a href="#">Figure 3</a> |
| Example 3 (see <a href="#">Figure 3</a> )                                                                               | $L_0 - L_3 > 0$                                                                                                             |                                                                                            | <a href="#">Figure 3</a> |
| <b>Surface quality<sup>c</sup></b>                                                                                      | A minimum of 95 % of the tiles are to be free from visible defects which can impair the appearance of a major area of tiles |                                                                                            | ISO 10545-2              |
| <b>Physical property</b>                                                                                                | <b>Precision</b>                                                                                                            | <b>Natural</b>                                                                             | <b>Test</b>              |
| <b>Water absorption</b><br>Percent mass fraction                                                                        | 3,0 % < $E_v \leq 6,0$ %<br>Individual maximum<br>6,5 %                                                                     | 3,0 % < $E_v \leq 6,0$ %<br>Individual maximum<br>6,5 %                                    | ISO 10545-3              |
| <b>Breaking strength, in Newtons</b>                                                                                    |                                                                                                                             |                                                                                            |                          |
| a) Thickness ≥ 7,5 mm                                                                                                   | Not less than 800                                                                                                           | Not less than 800                                                                          | ISO 10545-4              |
| b) Thickness < 7,5 mm                                                                                                   | Not less than 600                                                                                                           | Not less than 600                                                                          | ISO 10545-4              |
| <b>Modulus of rupture, in Newtons per square millimetre</b><br>Not applicable to tiles with breaking strength ≥ 3 000 N | Minimum 13<br>Individual minimum<br>11                                                                                      | Minimum 13<br>Individual minimum<br>11                                                     | ISO 10545-4              |
| <b>Abrasion resistance</b>                                                                                              |                                                                                                                             |                                                                                            |                          |
| a) Resistance to deep abrasion of unglazed tiles: removed volume, in cubic millimetres                                  | Maximum 541                                                                                                                 | Maximum 541                                                                                | ISO 10545-6              |
| b) Resistance to surface abrasion of glazed tiles intended for use on floors <sup>d</sup>                               | Report abrasion class and cycles passed                                                                                     | Report abrasion class and cycles passed                                                    | ISO 10545-7              |
| <b>Coefficient of linear thermal expansion<sup>e</sup></b>                                                              |                                                                                                                             |                                                                                            |                          |
| From ambient temperature to 100 °C                                                                                      | Test method available                                                                                                       | Test method available                                                                      | ISO 10545-8              |
| <b>Thermal shock resistance<sup>e</sup></b>                                                                             |                                                                                                                             |                                                                                            |                          |
|                                                                                                                         | Test method available                                                                                                       | Test method available                                                                      | ISO 10545-9              |
| <b>Crazing resistance: glazed tiles<sup>f</sup></b>                                                                     |                                                                                                                             |                                                                                            |                          |
|                                                                                                                         | Required                                                                                                                    | Required                                                                                   | ISO 10545-11             |
| <b>Frost resistance<sup>e</sup></b>                                                                                     |                                                                                                                             |                                                                                            |                          |
|                                                                                                                         | Test method available                                                                                                       | Test method available                                                                      | ISO 10545-12             |
| <b>Moisture expansion, in millimetres per metre<sup>e</sup></b>                                                         |                                                                                                                             |                                                                                            |                          |
|                                                                                                                         | Test method available                                                                                                       | Test method available                                                                      | ISO 10545-10             |
| <b>Small colour differences<sup>e</sup></b>                                                                             |                                                                                                                             |                                                                                            |                          |
|                                                                                                                         | Plain coloured tiles only where required<br>GL: $\Delta E < 0,75$<br>UGL: $\Delta E < 1,0$                                  | Plain coloured tiles only where required<br>GL: $\Delta E < 0,75$<br>UGL: $\Delta E < 1,0$ | ISO 10545-16             |
| <b>Impact resistance<sup>e</sup></b>                                                                                    |                                                                                                                             |                                                                                            |                          |
|                                                                                                                         | Test method available                                                                                                       | Test method available                                                                      | ISO 10545-5              |
| <b>Chemical property</b>                                                                                                | <b>Precision</b>                                                                                                            | <b>Natural</b>                                                                             | <b>Test</b>              |
| <b>Resistance to staining</b>                                                                                           |                                                                                                                             |                                                                                            |                          |
| a) Glazed tiles                                                                                                         | Minimum class 3                                                                                                             | Minimum class 3                                                                            | ISO 10545-14             |
| b) Unglazed tiles <sup>e</sup>                                                                                          | Test method available                                                                                                       | Test method available                                                                      | ISO 10545-14             |

Table C.1 (continued)

| Dimensions and surface quality                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Precision                               | Natural                                 | Test         |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------------|--------------|
| <b>Resistance to chemicals</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                         |                                         |              |
| Resistance to low concentrations of acids and alkalis                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Manufacturer is to state classification | Manufacturer is to state classification | ISO 10545-13 |
| Resistance to high concentrations of acids and alkalis <sup>e</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Test method available                   | Test method available                   | ISO 10545-13 |
| Resistance to household chemicals and swimming pool salts                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Minimum B                               | Minimum B                               | ISO 10545-13 |
| <b>Lead and cadmium release<sup>e</sup></b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Test method available                   | Test method available                   | ISO 10545-15 |
| <p>a Similar joint widths are to be used to apply to traditional systems based on non-metric sizes.</p> <p>b Not applicable to tiles having curved shapes.</p> <p>c As a result of firing, slight variations from this standard colour are unavoidable. This does not apply to intentional irregularities of colour variation of the face of tiles (which can be unglazed, glazed or partly glazed) or to the colour variation over a tile area which is characteristic for this type of tile and desirable. Spots or coloured dots which are introduced for decorative purposes are not considered a defect.</p> <p>d Use <a href="#">Annex N</a> for the abrasion resistance classification for all glazed tiles intended for use on floors.</p> <p>e <a href="#">Annex P</a> gives information regarding requirements which are non-compulsory but which are listed as “test method available”.</p> <p>f Certain decorative effects can have a tendency to craze. These are to be identified by the manufacturer, in which case the crazing test given in ISO 10545-11 is not applicable.</p> <p>g Where applicable, tile thickness shall include the addition of back feet heights, as measured in accordance with <a href="#">Figure 3</a>.</p> |                                         |                                         |              |

STANDARDSISO.COM : Click to view the full PDF of ISO 13006:2018

## Annex D (normative)

### Extruded ceramic tiles $6\% < E_v \leq 10\%$ Group AII<sub>b</sub> — Subgroup (Part) 1

Dimensional and surface quality requirements and physical and chemical properties are required to be in accordance with [Table D.1](#).

**Table D.1 — Requirements for extruded ceramic tiles — Group AII<sub>b-1</sub>,  $6\% < E_v \leq 10\%$**

| Dimensions and surface quality                                                                                                                   | Precision                              | Natural                                | Test        |
|--------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|----------------------------------------|-------------|
| <b>Length and width</b>                                                                                                                          |                                        |                                        |             |
| The manufacturer shall choose the work size as follows:                                                                                          |                                        |                                        |             |
| a) for modular tiles in order to allow a nominal joint width of between 3 mm and 11 mm <sup>a</sup> ;                                            |                                        |                                        |             |
| b) for non-modular tiles so that the difference between the work size and the nominal size is not more than $\pm 3$ mm.                          |                                        |                                        |             |
| The deviation, in percent, of the average size for each tile (two or four sides) from the work size, $S_w$                                       | $\pm 2,0\%$ to a maximum of $\pm 2$ mm | $\pm 2,0\%$ to a maximum of $\pm 4$ mm | ISO 10545-2 |
| The deviation, in percent, of the average size for each tile (two or four sides) from the average size of the 10 test specimens (20 or 40 sides) | $\pm 1,5\%$                            | $\pm 1,5\%$                            | ISO 10545-2 |
| <b>Thickness</b>                                                                                                                                 |                                        |                                        |             |
| a) The thickness shall be specified by the manufacturer <sup>g</sup>                                                                             |                                        |                                        |             |
| b) The deviation, in percent, of the average thickness of each tile from the work size thickness <sup>g</sup>                                    | $\pm 10\%$                             | $\pm 10\%$                             | ISO 10545-2 |
| <b>Straightness of sides<sup>b</sup> (facial sides)</b>                                                                                          |                                        |                                        |             |
| The maximum deviation from straightness, in percent, related to the corresponding work sizes                                                     | $\pm 1,0\%$                            | $\pm 1,0\%$                            | ISO 10545-2 |
| <b>Rectangularity<sup>b</sup></b>                                                                                                                |                                        |                                        |             |
| The maximum deviation from rectangularity, in percent, related to the corresponding work sizes                                                   | $\pm 1,0\%$                            | $\pm 1,0\%$                            | ISO 10545-2 |
| <b>Surface flatness</b>                                                                                                                          |                                        |                                        |             |
| The maximum deviation from flatness, in percent:                                                                                                 |                                        |                                        |             |
| a) centre curvature, related to diagonal calculated from the work sizes;                                                                         | $\pm 1,0\%$                            | $\pm 1,5\%$                            | ISO 10545-2 |
| b) edge curvature, related to the corresponding work sizes;                                                                                      | $\pm 1,0\%$                            | $\pm 1,5\%$                            | ISO 10545-2 |

Table D.1 (continued)

| Dimensions and surface quality                                                                                          | Precision                                                                                                                    | Natural                                                                                    | Test                     |
|-------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|--------------------------|
| c) warpage, related to diagonal calculated from the work sizes.                                                         | ±1,5 %                                                                                                                       | ±1,5 %                                                                                     | ISO 10545-2              |
| <b>Back feet</b> (if specified)                                                                                         |                                                                                                                              |                                                                                            |                          |
| a) Height, $h$ , for tiles of surface area, $A$                                                                         |                                                                                                                              |                                                                                            |                          |
| 49 cm <sup>2</sup> ≤ $A$ < 60 cm <sup>2</sup>                                                                           | Minimum $h$ = 0,7 mm; Maximum $h$ = 3,5 mm                                                                                   |                                                                                            | <a href="#">Figure 3</a> |
| $A$ ≥ 60 cm <sup>2</sup>                                                                                                | Minimum $h$ = 1,5 mm; Maximum $h$ = 3,5 mm                                                                                   |                                                                                            | <a href="#">Figure 3</a> |
| b) Shape                                                                                                                | Back feet as specified by the manufacturer and as shown in one of the examples in <a href="#">Figure 3</a>                   |                                                                                            | <a href="#">Figure 3</a> |
| Example 1 (see <a href="#">Figure 3</a> )                                                                               | $L_0 - L_1 > 0$                                                                                                              |                                                                                            | <a href="#">Figure 3</a> |
| Example 2 (see <a href="#">Figure 3</a> )                                                                               | $L_0 - L_2 > 0$                                                                                                              |                                                                                            | <a href="#">Figure 3</a> |
| Example 3 (see <a href="#">Figure 3</a> )                                                                               | $L_0 - L_3 > 0$                                                                                                              |                                                                                            | <a href="#">Figure 3</a> |
| <b>Surface quality</b> <sup>c</sup>                                                                                     | A minimum of 95 % of the tiles are to be free from visible defects which can impair the appearance of a major area of tiles. |                                                                                            | ISO 10545-2              |
| <b>Physical property</b>                                                                                                | <b>Precision</b>                                                                                                             | <b>Natural</b>                                                                             | <b>Test</b>              |
| <b>Water absorption</b><br>Percent mass fraction                                                                        | 6 % < $E_v$ ≤ 10 %<br>Individual maximum<br>11 %                                                                             | 6 % < $E_v$ ≤ 10 %<br>Individual maximum<br>11 %                                           | ISO 10545-3              |
| <b>Breaking strength, in Newtons</b>                                                                                    | Not less than 900                                                                                                            | Not less than 900                                                                          | ISO 10545-4              |
| <b>Modulus of rupture, in Newtons per square millimetre</b><br>Not applicable to tiles with breaking strength ≥ 3 000 N | Minimum 17,5<br>Individual minimum<br>15                                                                                     | Minimum 17,5<br>Individual minimum<br>15                                                   | ISO 10545-4              |
| <b>Abrasion resistance</b>                                                                                              |                                                                                                                              |                                                                                            |                          |
| a) Resistance to deep abrasion of unglazed tiles: removed volume, in cubic millimetres                                  | Maximum 649                                                                                                                  | Maximum 649                                                                                | ISO 10545-6              |
| b) Resistance to surface abrasion of glazed tiles intended for use on floors <sup>d</sup>                               | Report abrasion class and cycles passed                                                                                      | Report abrasion class and cycles passed                                                    | ISO 10545-7              |
| <b>Coefficient of linear thermal expansion</b> <sup>e</sup>                                                             |                                                                                                                              |                                                                                            |                          |
| From ambient temperature to 100 °C                                                                                      | Test method available                                                                                                        | Test method available                                                                      | ISO 10545-8              |
| <b>Thermal shock resistance</b> <sup>e</sup>                                                                            | Test method available                                                                                                        | Test method available                                                                      | ISO 10545-9              |
| <b>Crazing resistance:</b> glazed tiles <sup>f</sup>                                                                    | Required                                                                                                                     | Required                                                                                   | ISO 10545-11             |
| <b>Frost resistance</b> <sup>e</sup>                                                                                    | Test method available                                                                                                        | Test method available                                                                      | ISO 10545-12             |
| <b>Moisture expansion, in millimetres per metre</b>                                                                     | Test method available                                                                                                        | Test method available                                                                      | ISO 10545-10             |
| <b>Small colour differences</b> <sup>e</sup>                                                                            | Plain coloured tiles only where required<br>GL: $\Delta E < 0,75$<br>UGL: $\Delta E < 1,0$                                   | Plain coloured tiles only where required<br>GL: $\Delta E < 0,75$<br>UGL: $\Delta E < 1,0$ | ISO 10545-16             |
| Impact resistance <sup>e</sup>                                                                                          | Test method available                                                                                                        | Test method available                                                                      | ISO 10545-5              |
| <b>Chemical property</b>                                                                                                | <b>Precision</b>                                                                                                             | <b>Natural</b>                                                                             | <b>Test</b>              |
| Resistance to staining                                                                                                  |                                                                                                                              |                                                                                            |                          |
| a) Glazed tiles                                                                                                         | Minimum class 3                                                                                                              | Minimum class 3                                                                            | ISO 10545-14             |
| b) Unglazed tiles <sup>e</sup>                                                                                          | Test method available                                                                                                        | Test method available                                                                      | ISO 10545-14             |
| <b>Resistance to chemicals</b>                                                                                          |                                                                                                                              |                                                                                            |                          |

Table D.1 (continued)

| Dimensions and surface quality                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Precision                               | Natural                                 | Test         |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------------|--------------|
| Resistance to low concentrations of acids and alkalis                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Manufacturer is to state classification | Manufacturer is to state classification | ISO 10545-13 |
| Resistance to high concentrations of acids and alkalis <sup>e</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Test method available                   | Test method available                   | ISO 10545-13 |
| Resistance to household chemicals and swimming pool salts                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Minimum B                               | Minimum B                               | ISO 10545-13 |
| <b>Lead and cadmium release<sup>e</sup></b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Test method available                   | Test method available                   | ISO 10545-15 |
| <p><sup>a</sup> Similar joint widths are to be used to apply to traditional systems based on non-metric sizes.</p> <p><sup>b</sup> Not applicable to tiles having curved shapes.</p> <p><sup>c</sup> As a result of firing, slight variations from this standard colour are unavoidable. This does not apply to intentional irregularities of colour variation of the face of tiles (which can be unglazed, glazed or partly glazed) or to the colour variation over a tile area which is characteristic for this type of tile and desirable. Spots or coloured dots which are introduced for decorative purposes are not considered a defect.</p> <p><sup>d</sup> Use <a href="#">Annex N</a> for the abrasion resistance classification for all glazed tiles intended for use on floors.</p> <p><sup>e</sup> <a href="#">Annex P</a> gives information regarding requirements which are non-compulsory but which are listed as “test method available”.</p> <p><sup>f</sup> Certain decorative effects can have a tendency to craze. These are to be identified by the manufacturer, in which case the crazing test given in ISO 10545-11 is not applicable.</p> <p><sup>g</sup> Where applicable, tile thickness shall include the addition of back feet heights, as measured in accordance with <a href="#">Figure 3</a>.</p> |                                         |                                         |              |

## Annex E (normative)

### Extruded ceramic tiles $6 \% < E_V \leq 10 \%$ Group AII<sub>b</sub> — Subgroup (Part) 2

Dimensional and surface quality requirements and physical and chemical properties are required to be in accordance with [Table E.1](#).

**Table E.1 — Requirements for extruded ceramic tiles — Group AII<sub>b-2</sub>,  $6 \% < E_V \leq 10 \%$**

| Dimensions and surface quality                                                                                                                                                                                                                                                                     | Precision                               | Natural                                 | Test        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------------|-------------|
| <b>Length and width</b>                                                                                                                                                                                                                                                                            |                                         |                                         |             |
| The manufacturer shall choose the work size as follows:<br><br>a) for modular tiles in order to allow a nominal joint width of between 3 mm and 11 mm <sup>a</sup> ;<br><br>b) or non-modular tiles so that the difference between the work size and the nominal size is not more than $\pm 3$ mm. |                                         |                                         |             |
| The deviation, in percent, of the average size for each tile (two or four sides) from the work size, $S_w$                                                                                                                                                                                         | $\pm 2,0 \%$ to a maximum of $\pm 2$ mm | $\pm 2,0 \%$ to a maximum of $\pm 4$ mm | ISO 10545-2 |
| The deviation, in percent, of the average size for each tile (two or four sides) from the average size of the 10 test specimens (20 or 40 sides)                                                                                                                                                   | $\pm 1,5 \%$                            | $\pm 1,5 \%$                            | ISO 10545-2 |
| <b>Thickness</b>                                                                                                                                                                                                                                                                                   |                                         |                                         |             |
| a) The thickness shall be specified by the manufacturer <sup>g</sup>                                                                                                                                                                                                                               |                                         |                                         |             |
| b) The deviation, in percent, of the average thickness of each tile from the work size thickness <sup>g</sup>                                                                                                                                                                                      | $\pm 10 \%$                             | $\pm 10 \%$                             | ISO 10545-2 |
| <b>Straightness of sides<sup>b</sup></b> (facial sides)                                                                                                                                                                                                                                            |                                         |                                         |             |
| The maximum deviation from straightness, in percent, related to the corresponding work sizes                                                                                                                                                                                                       | $\pm 1,0 \%$                            | $\pm 1,0 \%$                            | ISO 10545-2 |
| <b>Rectangularity<sup>b</sup></b>                                                                                                                                                                                                                                                                  |                                         |                                         |             |
| The maximum deviation from rectangularity, in percent, related to the corresponding work sizes                                                                                                                                                                                                     | $\pm 1,0 \%$                            | $\pm 1,0 \%$                            | ISO 10545-2 |
| <b>Surface flatness</b>                                                                                                                                                                                                                                                                            |                                         |                                         |             |
| The maximum deviation from flatness, in percent:                                                                                                                                                                                                                                                   |                                         |                                         |             |
| a) centre curvature, related to diagonal calculated from the work sizes;                                                                                                                                                                                                                           | $\pm 1,0 \%$                            | $\pm 1,5 \%$                            | ISO 10545-2 |
| b) edge curvature, related to the corresponding work sizes;                                                                                                                                                                                                                                        | $\pm 1,0 \%$                            | $\pm 1,5 \%$                            | ISO 10545-2 |

Table E.1 (continued)

| Dimensions and surface quality                                                                                           | Precision                                                                                                                   | Natural                                                                                    | Test                     |
|--------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|--------------------------|
| c) warpage, related to diagonal calculated from the work sizes.                                                          | ±1,5 %                                                                                                                      | ±1,5 %                                                                                     | ISO 10545-2              |
| <b>Back feet</b> (if specified)                                                                                          |                                                                                                                             |                                                                                            |                          |
| a) Height, <i>h</i> , for tiles of surface area, <i>A</i>                                                                |                                                                                                                             |                                                                                            |                          |
| 49 cm <sup>2</sup> ≤ <i>A</i> < 60 cm <sup>2</sup>                                                                       | Minimum <i>h</i> = 0,7 mm; Maximum <i>h</i> = 3,5 mm                                                                        |                                                                                            | <a href="#">Figure 3</a> |
| <i>A</i> ≥ 60 cm <sup>2</sup>                                                                                            | Minimum <i>h</i> = 1,5 mm; Maximum <i>h</i> = 3,5 mm                                                                        |                                                                                            | <a href="#">Figure 3</a> |
| b) Shape                                                                                                                 | Back feet as specified by the manufacturer and as shown in one of the examples in <a href="#">Figure 3</a>                  |                                                                                            | <a href="#">Figure 3</a> |
| Example 1 (see <a href="#">Figure 3</a> )                                                                                | $L_0 - L_1 > 0$                                                                                                             |                                                                                            | <a href="#">Figure 3</a> |
| Example 2 (see <a href="#">Figure 3</a> )                                                                                | $L_0 - L_2 > 0$                                                                                                             |                                                                                            | <a href="#">Figure 3</a> |
| Example 3 (see <a href="#">Figure 3</a> )                                                                                | $L_0 - L_3 > 0$                                                                                                             |                                                                                            | <a href="#">Figure 3</a> |
| <b>Surface quality</b> <sup>c</sup>                                                                                      | A minimum of 95 % of the tiles are to be free from visible defects which can impair the appearance of a major area of tiles |                                                                                            | ISO 10545-2              |
| <b>Physical property</b>                                                                                                 | <b>Precision</b>                                                                                                            | <b>Natural</b>                                                                             | <b>Test</b>              |
| <b>Water absorption</b><br>Percent mass fraction                                                                         | 6 % < $E_v$ ≤ 10 %<br>Individual maximum<br>11 %                                                                            | 6 % < $E_v$ ≤ 10 %<br>Individual maximum<br>11 %                                           | ISO 10545-3              |
| <b>Breaking strength, in Newtons</b>                                                                                     | Not less than 750                                                                                                           | Not less than 750                                                                          | ISO 10545-4              |
| <b>Modulus of rupture, in Newtons per square millimetre</b><br>Not applicable to tiles with breaking strength ≥ 3 000 N. | Minimum 9<br>Individual minimum<br>8                                                                                        | Minimum 9<br>Individual minimum<br>8                                                       | ISO 10545-4              |
| <b>Abrasion resistance</b>                                                                                               |                                                                                                                             |                                                                                            |                          |
| a) Resistance to deep abrasion of unglazed tiles: removed volume, in cubic millimetres                                   | Maximum 1 062                                                                                                               | Maximum 1 062                                                                              | ISO 10545-6              |
| b) Resistance to surface abrasion of glazed tiles intended for use on floors <sup>d</sup>                                | Report abrasion class and cycles passed                                                                                     | Report abrasion class and cycles passed                                                    | ISO 10545-7              |
| <b>Coefficient of linear thermal expansion</b> <sup>e</sup>                                                              |                                                                                                                             |                                                                                            |                          |
| From ambient temperature to 100 °C                                                                                       | Test method available                                                                                                       | Test method available                                                                      | ISO 10545-8              |
| <b>Thermal shock resistance</b> <sup>e</sup>                                                                             | Test method available                                                                                                       | Test method available                                                                      | ISO 10545-9              |
| <b>Crazing resistance:</b> glazed tiles <sup>f</sup>                                                                     | Required                                                                                                                    | Required                                                                                   | ISO 10545-11             |
| <b>Frost resistance</b> <sup>e</sup>                                                                                     | Test method available                                                                                                       | Test method available                                                                      | ISO 10545-12             |
| <b>Moisture expansion, in millimetres per metre</b>                                                                      | Test method available                                                                                                       | Test method available                                                                      | ISO 10545-10             |
| <b>Small colour differences</b> <sup>e</sup>                                                                             | Plain coloured tiles only where required<br>GL: $\Delta E < 0,75$<br>UGL: $\Delta E < 1,0$                                  | Plain coloured tiles only where required<br>GL: $\Delta E < 0,75$<br>UGL: $\Delta E < 1,0$ | ISO 10545-16             |

Table E.1 (continued)

| Dimensions and surface quality                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Precision                               | Natural                                 | Test         |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------------|--------------|
| <b>Impact resistance<sup>e</sup></b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Test method available                   | Test method available                   | ISO 10545-5  |
| <b>Chemical property</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <b>Precision</b>                        | <b>Natural</b>                          | <b>Test</b>  |
| <b>Resistance to staining</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                         |                                         |              |
| a) Glazed tiles                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Minimum class 3                         | Minimum class 3                         | ISO 10545-14 |
| b) Unglazed tiles <sup>e</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Test method available                   | Test method available                   | ISO 10545-14 |
| <b>Resistance to chemicals</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                         |                                         |              |
| Resistance to low concentrations of acids and alkalis                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Manufacturer is to state classification | Manufacturer is to state classification | ISO 10545-13 |
| Resistance to high concentrations of acids and alkalis <sup>e</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Test method available                   | Test method available                   | ISO 10545-13 |
| Resistance to household chemicals and swimming pool salts                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Minimum B                               | Minimum B                               | ISO 10545-13 |
| <b>Lead and cadmium release<sup>e</sup></b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Test method available                   | Test method available                   | ISO 10545-15 |
| <p>a Similar joint widths are to be used to apply to traditional systems based on non-metric sizes.</p> <p>b Not applicable to tiles having curved shapes.</p> <p>c As a result of firing, slight variations from this standard colour are unavoidable. This does not apply to intentional irregularities of colour variation of the face of tiles (which can be unglazed, glazed or partly glazed) or to the colour variation over a tile area which is characteristic for this type of tile and desirable. Spots or coloured dots which are introduced for decorative purposes are not considered a defect.</p> <p>d Use <a href="#">Annex N</a> for the abrasion resistance classification for all glazed tiles intended for use on floors.</p> <p>e <a href="#">Annex P</a> gives information regarding requirements which are non-compulsory but which are listed as “test method available”.</p> <p>f Certain decorative effects can have a tendency to craze. These are to be identified by the manufacturer, in which case the crazing test given in ISO 10545-11 is not applicable.</p> <p>g Where applicable, tile thickness shall include the addition of back feet heights, as measured in accordance with <a href="#">Figure 3</a>.</p> |                                         |                                         |              |

## Annex F (normative)

### Extruded ceramic tiles $E_v > 10$ % Group AIII

Dimensional and surface quality requirements and physical and chemical properties are required to be in accordance with [Table F.1](#).

**Table F.1 — Requirements for extruded ceramic tiles — Group AIII,  $E_v > 10$  %**

| Dimensions and surface quality                                                                                                                   | Precision                              | Natural                                | Test        |
|--------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|----------------------------------------|-------------|
| <b>Length and width</b>                                                                                                                          |                                        |                                        |             |
| The manufacturer shall choose the work size as follows:                                                                                          |                                        |                                        |             |
| a) for modular tiles in order to allow a nominal joint width of between 3 mm and 11 mm <sup>a</sup> ;                                            |                                        |                                        |             |
| b) for non-modular tiles so that the difference between the work size and the nominal size is not more than $\pm 3$ mm.                          |                                        |                                        |             |
| The deviation, in percent, of the average size for each tile (two or four sides) from the work size, $S_w$                                       | $\pm 2,0$ % to a maximum of $\pm 2$ mm | $\pm 2,0$ % to a maximum of $\pm 4$ mm | ISO 10545-2 |
| The deviation, in percent, of the average size for each tile (two or four sides) from the average size of the 10 test specimens (20 or 40 sides) | $\pm 1,5$ %                            | $\pm 1,5$ %                            | ISO 10545-2 |
| <b>Thickness</b>                                                                                                                                 |                                        |                                        |             |
| a) The thickness shall be specified by the manufacturer <sup>g</sup>                                                                             |                                        |                                        |             |
| b) The deviation, in percent, of the average thickness of each tile from the work size thickness <sup>g</sup>                                    | $\pm 10$ %                             | $\pm 10$ %                             | ISO 10545-2 |
| <b>Straightness of sides<sup>b</sup></b> (facial sides)                                                                                          |                                        |                                        |             |
| The maximum deviation from straightness, in percent, related to the corresponding work sizes                                                     | $\pm 1,0$ %                            | $\pm 1,0$ %                            | ISO 10545-2 |
| <b>Rectangularity<sup>b</sup></b>                                                                                                                |                                        |                                        |             |
| The maximum deviation from rectangularity, in percent, related to the corresponding work sizes                                                   | $\pm 1,0$ %                            | $\pm 1,0$ %                            | ISO 10545-2 |
| <b>Surface flatness</b>                                                                                                                          |                                        |                                        |             |
| The maximum deviation from flatness, in percent:                                                                                                 |                                        |                                        |             |
| a) centre curvature, related to diagonal calculated from the work sizes;                                                                         | $\pm 1,0$ %                            | $\pm 1,5$ %                            | ISO 10545-2 |
| b) edge curvature, related to the corresponding work sizes;                                                                                      | $\pm 1,0$ %                            | $\pm 1,5$ %                            | ISO 10545-2 |

Table F.1 (continued)

| Dimensions and surface quality                                                                                          | Precision                                                                                                                    | Natural                                                                                    | Test                     |
|-------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|--------------------------|
| c) warpage, related to diagonal calculated from the work sizes.                                                         | ±1,5 %                                                                                                                       | ±1,5 %                                                                                     | ISO 10545-2              |
| <b>Back feet</b> (if specified)                                                                                         |                                                                                                                              |                                                                                            |                          |
| a) Height, <i>h</i> , for tiles of surface area, <i>A</i>                                                               |                                                                                                                              |                                                                                            |                          |
| 49 cm <sup>2</sup> ≤ <i>A</i> < 60 cm <sup>2</sup>                                                                      | Minimum <i>h</i> = 0,7 mm; Maximum <i>h</i> = 3,5 mm                                                                         |                                                                                            | <a href="#">Figure 3</a> |
| <i>A</i> ≥ 60 cm <sup>2</sup>                                                                                           | Minimum <i>h</i> = 1,5 mm; Maximum <i>h</i> = 3,5 mm                                                                         |                                                                                            | <a href="#">Figure 3</a> |
| b) Shape                                                                                                                | Back feet as specified by the manufacturer and as shown in one of the examples in <a href="#">Figure 3</a>                   |                                                                                            | <a href="#">Figure 3</a> |
| Example 1 (see <a href="#">Figure 3</a> )                                                                               | $L_0 - L_1 > 0$                                                                                                              |                                                                                            | <a href="#">Figure 3</a> |
| Example 2 (see <a href="#">Figure 3</a> )                                                                               | $L_0 - L_2 > 0$                                                                                                              |                                                                                            | <a href="#">Figure 3</a> |
| Example 3 (see <a href="#">Figure 3</a> )                                                                               | $L_0 - L_3 > 0$                                                                                                              |                                                                                            | <a href="#">Figure 3</a> |
| <b>Surface quality<sup>c</sup></b>                                                                                      | A minimum of 95 % of the tiles are to be free from visible defects which can impair the appearance of a major area of tiles. |                                                                                            | ISO 10545-2              |
| Physical property                                                                                                       | Precision                                                                                                                    | Natural                                                                                    | Test                     |
| <b>Water absorption</b><br>Percent mass fraction                                                                        | $E_v > 10 \%$                                                                                                                | $E_v > 10 \%$                                                                              | ISO 10545-3              |
| <b>Breaking strength, in Newtons</b>                                                                                    | Not less than 600                                                                                                            | Not less than 600                                                                          | ISO 10545-4              |
| <b>Modulus of rupture, in Newtons per square millimetre</b><br>Not applicable to tiles with breaking strength ≥ 3 000 N | Minimum 8<br>Individual minimum<br>7                                                                                         | Minimum 8<br>Individual minimum<br>7                                                       | ISO 10545-4              |
| <b>Abrasion resistance</b>                                                                                              |                                                                                                                              |                                                                                            |                          |
| a) Resistance to deep abrasion of unglazed tiles: removed volume, in cubic millimetres                                  | Maximum 2 365                                                                                                                | Maximum 2 365                                                                              | ISO 10545-6              |
| b) Resistance to surface abrasion of glazed tiles intended for use on floors <sup>d</sup>                               | Report abrasion class and cycles passed                                                                                      | Report abrasion class and cycles passed                                                    | ISO 10545-7              |
| <b>Coefficient of linear thermal expansion<sup>e</sup></b>                                                              |                                                                                                                              |                                                                                            |                          |
| From ambient temperature to 100 °C                                                                                      | Test method available                                                                                                        | Test method available                                                                      | ISO 10545-8              |
| <b>Thermal shock resistance<sup>e</sup></b>                                                                             | Test method available                                                                                                        | Test method available                                                                      | ISO 10545-9              |
| <b>Crazing resistance: glazed tiles<sup>f</sup></b>                                                                     | Required                                                                                                                     | Required                                                                                   | ISO 10545-11             |
| <b>Frost resistance<sup>e</sup></b>                                                                                     | Test method available                                                                                                        | Test method available                                                                      | ISO 10545-12             |
| <b>Moisture expansion, in millimetres per metre<sup>e</sup></b>                                                         | Test method available                                                                                                        | Test method available                                                                      | ISO 10545-10             |
| <b>Small colour differences<sup>e</sup></b>                                                                             | Plain coloured tiles only where required<br>GL: $\Delta E < 0,75$<br>UGL: $\Delta E < 1,0$                                   | Plain coloured tiles only where required<br>GL: $\Delta E < 0,75$<br>UGL: $\Delta E < 1,0$ | ISO 10545-16             |

Table F.1 (continued)

| Dimensions and surface quality                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Precision                               | Natural                                 | Test         |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------------|--------------|
| <b>Impact resistance<sup>e</sup></b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Test method available                   | Test method available                   | ISO 10545-5  |
| <b>Chemical property</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <b>Precision</b>                        | <b>Natural</b>                          | <b>Test</b>  |
| <b>Resistance to staining</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                         |                                         |              |
| a) Glazed tiles                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Minimum class 3                         | Minimum class 3                         | ISO 10545-14 |
| b) Unglazed tiles <sup>e</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Test method available                   | Test method available                   | ISO 10545-14 |
| <b>Resistance to chemicals</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                         |                                         |              |
| Resistance to low concentrations of acids and alkalis                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Manufacturer is to state classification | Manufacturer is to state classification | ISO 10545-13 |
| Resistance to high concentrations of acids and alkalis <sup>e</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Test method available                   | Test method available                   | ISO 10545-13 |
| Resistance to household chemicals and swimming pool salts                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Minimum B                               | Minimum B                               | ISO 10545-13 |
| <b>Lead and cadmium release<sup>e</sup></b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Test method available                   | Test method available                   | ISO 10545-15 |
| <p>a Similar joint widths are to be used to apply to traditional systems based on non-metric sizes.</p> <p>b Not applicable to tiles having curved shapes.</p> <p>c As a result of firing, slight variations from this standard colour are unavoidable. This does not apply to intentional irregularities of colour variation of the face of tiles (which can be unglazed, glazed or partly glazed) or to the colour variation over a tile area which is characteristic for this type of tile and desirable. Spots or coloured dots which are introduced for decorative purposes are not considered a defect.</p> <p>d Use <a href="#">Annex N</a> for the abrasion resistance classification for all glazed tiles intended for use on floors.</p> <p>e <a href="#">Annex P</a> gives information regarding requirements which are non-compulsory but which are listed as “test method available”.</p> <p>f Certain decorative effects can have a tendency to craze. These are to be identified by the manufacturer, in which case the crazing test given in ISO 10545-11 is not applicable.</p> <p>g Where applicable, tile thickness shall include the addition of back feet heights, as measured in accordance with <a href="#">Figure 3</a>.</p> |                                         |                                         |              |

## Annex G (normative)

### Dry-pressed ceramic tiles with low water absorption $E_v \leq 0,5 \%$ Group BI<sub>a</sub>

Dimensional and surface quality requirements and physical and chemical properties are required to be in accordance with [Table G.1](#).

**Table G.1 — Requirements for dry-pressed ceramic tiles with low water absorption —  
Group BI<sub>a</sub>,  $E_v \leq 0,5 \%$**

| Dimensions and surface quality                                                                                                 | Nominal size N   |                                 |      | Test        |
|--------------------------------------------------------------------------------------------------------------------------------|------------------|---------------------------------|------|-------------|
|                                                                                                                                | 7 cm ≤ N < 15 cm | N ≥ 15 cm                       |      |             |
|                                                                                                                                | mm               | %                               | mm   |             |
| <b>Length and width</b>                                                                                                        |                  | whichever is less is applicable |      |             |
| The manufacturer shall choose the work size as follows:                                                                        |                  |                                 |      |             |
| a) for modular tiles in order to allow a nominal joint width of between 2 mm and 5 mm <sup>a</sup> ;                           |                  |                                 |      |             |
| b) for non-modular tiles so that the difference between the work size and the nominal size is not more than ±2 % (max. ±5 mm). |                  |                                 |      |             |
| For non-rectified, the deviation of the average size for each tile (two or four sides) from the work size, $S_w$               | ±0,9             | ±0,6                            | ±2,0 | ISO 10545-2 |
| For rectified tiles, the deviation of the average size for each tile (two or four sides) from the work size, $S_w$             | ±0,4             | ±0,3                            | ±1,0 | ISO 10545-2 |
| <b>Thickness</b>                                                                                                               |                  |                                 |      |             |
| a) The thickness shall be specified by the manufacturer <sup>h</sup>                                                           |                  |                                 |      |             |
| b) The deviation of the average thickness of each tile from the work size thickness <sup>h</sup>                               | ±0,5             | ±5                              | ±0,5 | ISO 10545-2 |
| <b>Straightness of sides<sup>b</sup></b> (facial sides)                                                                        |                  |                                 |      |             |
| For non-rectified tiles, the maximum deviation from straightness related to the corresponding work sizes                       | ±0,8             | ±0,5                            | ±1,5 | ISO 10545-2 |
| For rectified tiles, the maximum deviation from straightness related to the corresponding work sizes                           | ±0,4             | ±0,3                            | ±0,8 | ISO 10545-2 |
| <b>Rectangularity<sup>b, i</sup></b>                                                                                           |                  |                                 |      |             |
| For non-rectified tiles, the maximum deviation from rectangularity related to the corresponding work sizes                     | ±0,8             | ±0,5                            | ±2,0 | ISO 10545-2 |

Table G.1 (continued)

| Dimensions and surface quality                                                                         | Nominal size N                                                                                                              |           |      | Test                     |
|--------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|-----------|------|--------------------------|
|                                                                                                        | 7 cm ≤ N < 15 cm                                                                                                            | N ≥ 15 cm |      |                          |
|                                                                                                        | mm                                                                                                                          | %         | mm   |                          |
| For rectified tiles, the maximum deviation from rectangularity related to the corresponding work sizes | ±0,4                                                                                                                        | ±0,3      | ±1,5 | ISO 10545-2              |
| <b>Surface flatness</b>                                                                                | whichever is less is applicable                                                                                             |           |      |                          |
| The maximum deviation from flatness:                                                                   |                                                                                                                             |           |      |                          |
| a) for non-rectified tiles, centre curvature, related to diagonal calculated from the work sizes;      | ±0,8                                                                                                                        | ±0,5      | ±2,0 | ISO 10545-2              |
| b) for rectified tiles, centre curvature, related to diagonal calculated from the work sizes;          | ±0,6                                                                                                                        | ±0,4      | ±1,8 | ISO 10545-2              |
| c) for non-rectified tiles, edge curvature, related to the corresponding work sizes;                   | ±0,8                                                                                                                        | ±0,5      | ±2,0 | ISO 10545-2              |
| d) for rectified tiles, edge curvature, related to the corresponding work sizes;                       | ±0,6                                                                                                                        | ±0,4      | ±1,8 | ISO 10545-2              |
| e) for non-rectified tiles, warpage, related to diagonal calculated from the work sizes;               | ±0,8                                                                                                                        | ±0,5      | ±2,0 | ISO 10545-2              |
| f) for rectified tiles, warpage, related to diagonal calculated from the work sizes.                   | ±0,6                                                                                                                        | ±0,4      | ±1,8 | ISO 10545-2              |
| <b>Back feet (if specified)</b>                                                                        |                                                                                                                             |           |      |                          |
| a) Height, <i>h</i> , for tiles of surface area, <i>A</i>                                              |                                                                                                                             |           |      |                          |
| 49 cm <sup>2</sup> ≤ <i>A</i> < 60 cm <sup>2</sup>                                                     | Minimum <i>h</i> = 0,7 mm; Maximum <i>h</i> = 3,5 mm                                                                        |           |      | <a href="#">Figure 3</a> |
| <i>A</i> ≥ 60 cm <sup>2</sup>                                                                          | Minimum <i>h</i> = 1,5 mm; Maximum <i>h</i> = 3,5 mm                                                                        |           |      | <a href="#">Figure 3</a> |
| b) Shape                                                                                               | Back feet as specified by the manufacturer and as shown in one of the examples in <a href="#">Figure 3</a>                  |           |      | <a href="#">Figure 3</a> |
| Example 1 (see <a href="#">Figure 3</a> )                                                              | $L_0 - L_1 > 0$                                                                                                             |           |      | <a href="#">Figure 3</a> |
| Example 2 (see <a href="#">Figure 3</a> )                                                              | $L_0 - L_2 > 0$                                                                                                             |           |      | <a href="#">Figure 3</a> |
| Example 3 (see <a href="#">Figure 3</a> )                                                              | $L_0 - L_3 > 0$                                                                                                             |           |      | <a href="#">Figure 3</a> |
| <b>Surface quality<sup>c</sup></b>                                                                     | A minimum of 95 % of the tiles are to be free from visible defects which can impair the appearance of a major area of tiles |           |      | ISO 10545-2              |
| <b>Physical property</b>                                                                               | <b>Requirements</b>                                                                                                         |           |      | <b>Test</b>              |
| <b>Water absorption</b><br>Percent mass fraction <sup>g</sup>                                          | $E_v \leq 0,5 \%$<br>Individual maximum 0,6 %                                                                               |           |      | ISO 10545-3              |
| <b>Breaking strength, in Newtons</b>                                                                   |                                                                                                                             |           |      |                          |
| a) Thickness ≥ 7,5 mm                                                                                  | Not less than 1 300                                                                                                         |           |      | ISO 10545-4              |
| b) Thickness < 7,5 mm                                                                                  | Not less than 700                                                                                                           |           |      | ISO 10545-4              |

Table G.1 (continued)

| Dimensions and surface quality                                                                                          | Nominal size N                                                                             |           |    | Test         |
|-------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|-----------|----|--------------|
|                                                                                                                         | 7 cm ≤ N < 15 cm                                                                           | N ≥ 15 cm |    |              |
|                                                                                                                         | mm                                                                                         | %         | mm |              |
| <b>Modulus of rupture, in Newtons per square millimetre</b><br>Not applicable to tiles with breaking strength ≥ 3 000 N | Minimum 35<br>Individual minimum 32                                                        |           |    | ISO 10545-4  |
| <b>Abrasion resistance</b>                                                                                              |                                                                                            |           |    |              |
| a) Resistance to deep abrasion of unglazed tiles: removed volume, in cubic millimetres                                  | Maximum 175                                                                                |           |    | ISO 10545-6  |
| b) Resistance to surface abrasion of glazed tiles intended for use on floors <sup>d</sup>                               | Report abrasion class and cycles passed                                                    |           |    | ISO 10545-7  |
| <b>Coefficient of linear thermal expansion<sup>e</sup></b>                                                              |                                                                                            |           |    |              |
| From ambient temperature to 100 °C                                                                                      | Test method available                                                                      |           |    | ISO 10545-8  |
| <b>Thermal shock resistance<sup>e</sup></b>                                                                             | Test method available                                                                      |           |    | ISO 10545-9  |
| <b>Crazing resistance: glazed tiles<sup>f</sup></b>                                                                     | Required                                                                                   |           |    | ISO 10545-11 |
| <b>Frost resistance</b>                                                                                                 | Required                                                                                   |           |    | ISO 10545-12 |
| <b>Moisture expansion, in millimetres per metre<sup>e</sup></b>                                                         | Test method available                                                                      |           |    | ISO 10545-10 |
| <b>Small colour differences<sup>e</sup></b>                                                                             | Plain coloured tiles only where required<br>GL: $\Delta E < 0,75$<br>UGL: $\Delta E < 1,0$ |           |    | ISO 10545-16 |
| <b>Impact resistance<sup>e</sup></b>                                                                                    | Test method available                                                                      |           |    | ISO 10545-5  |
| <b>Chemical property</b>                                                                                                | <b>Requirements</b>                                                                        |           |    | <b>Test</b>  |
| <b>Resistance to staining</b>                                                                                           |                                                                                            |           |    |              |
| a) Glazed tiles                                                                                                         | Minimum class 3                                                                            |           |    | ISO 10545-14 |
| b) Unglazed tiles <sup>e</sup>                                                                                          | Test method available                                                                      |           |    | ISO 10545-14 |
| <b>Resistance to chemicals</b>                                                                                          |                                                                                            |           |    |              |
| Resistance to low concentrations of acids and alkalis                                                                   | Manufacturer is to state classification                                                    |           |    | ISO 10545-13 |
| Resistance to high concentrations of acids and alkalis <sup>e</sup>                                                     | Test method available                                                                      |           |    | ISO 10545-13 |

Table G.1 (continued)

| Dimensions and surface quality                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Nominal size N        |           |    | Test         |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------|----|--------------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 7 cm ≤ N < 15 cm      | N ≥ 15 cm |    |              |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | mm                    | %         | mm |              |
| Resistance to household chemicals and swimming pool salts                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Minimum B             |           |    | ISO 10545-13 |
| Lead and cadmium release <sup>e</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Test method available |           |    | ISO 10545-15 |
| <p>a Similar joint widths are to be used to apply to traditional systems based on non-metric sizes.</p> <p>b Not applicable to tiles having curved shapes.</p> <p>c As a result of firing, slight variations from this standard colour are unavoidable. This does not apply to intentional irregularities of colour variation of the face of tiles (which can be unglazed, glazed or partly glazed) or to the colour variation over a tile area which is characteristic for this type of tile and desirable. Spots or coloured dots which are introduced for decorative purposes are not considered a defect.</p> <p>d Use <a href="#">Annex N</a> for the abrasion resistance classification for all glazed tiles intended for use on floors.</p> <p>e <a href="#">Annex P</a> gives information regarding requirements which are non-compulsory but which are listed as “test method available”.</p> <p>f Certain decorative effects can have a tendency to craze. These are to be identified by the manufacturer, in which case the crazing test given in ISO 10545-11 is not applicable.</p> <p>g A fully vitrified tile is a tile with water absorption of a maximum individual value of 0,5 % (porcelain tile).</p> <p>h Where applicable, tile thickness shall include the addition of back feet heights, as measured in accordance with <a href="#">Figure 3</a>.</p> <p>i For oblong tiles with longer edge ≥60 cm, and ratio between longer edge and shorter edge ≥3, only <math>d_L</math> and percent deviation <math>d_L/S</math> are applicable. See ISO 10545-2.</p> |                       |           |    |              |

## Annex H (normative)

### Dry-pressed ceramic tiles with low water absorption $0,5 \% < E_V \leq 3 \%$ Group BI<sub>b</sub>

Dimensional and surface quality requirements and physical and chemical properties are required to be in accordance with [Table H.1](#).

**Table H.1 — Requirements for dry-pressed ceramic tiles with low water absorption —  
Group BI<sub>b</sub>,  $0,5 \% < E_V \leq 3 \%$**

| Dimensions and surface quality                                                                                                                     | Nominal size N                        |                                 |           | Test        |
|----------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|-----------|-------------|
|                                                                                                                                                    | $7 \text{ cm} \leq N < 15 \text{ cm}$ | $N \geq 15 \text{ cm}$          |           |             |
|                                                                                                                                                    | mm                                    | %                               | mm        |             |
| <b>Length and width</b>                                                                                                                            |                                       | whichever is less is applicable |           |             |
| The manufacturer shall choose the work size as follows:                                                                                            |                                       |                                 |           |             |
| a) for modular tiles in order to allow a nominal joint width of between 2 mm and 5 mm <sup>a</sup> ;                                               |                                       |                                 |           |             |
| b) for non-modular tiles so that the difference between the work size and the nominal size is not more than $\pm 2 \%$ (max. $\pm 5 \text{ mm}$ ). |                                       |                                 |           |             |
| For non-rectified tiles, the deviation of the average size for each tile (two or four sides) from the work size, $S_w$                             | $\pm 0,9$                             | $\pm 0,6$                       | $\pm 2,0$ | ISO 10545-2 |
| For rectified tiles, the deviation of the average size for each tile (two or four sides) from the work size, $S_w$                                 | $\pm 0,4$                             | $\pm 0,3$                       | $\pm 1,0$ | ISO 10545-2 |
| <b>Thickness</b>                                                                                                                                   |                                       |                                 |           |             |
| a) The thickness shall be specified by the manufacturer <sup>g</sup>                                                                               |                                       |                                 |           |             |
| b) The deviation of the average thickness of each tile from the work size thickness <sup>g</sup>                                                   | $\pm 0,5$                             | $\pm 5$                         | $\pm 0,5$ | ISO 10545-2 |
| <b>Straightness of sides<sup>b</sup></b> (facial sides)                                                                                            |                                       |                                 |           |             |
| For non-rectified tiles, the maximum deviation from straightness related to the corresponding work sizes                                           | $\pm 0,8$                             | $\pm 0,5$                       | $\pm 1,5$ | ISO 10545-2 |
| For rectified tiles, the maximum deviation from straightness related to the corresponding work sizes                                               | $\pm 0,4$                             | $\pm 0,3$                       | $\pm 0,8$ | ISO 10545-2 |
| <b>Rectangularity<sup>b, h</sup></b>                                                                                                               |                                       |                                 |           |             |
| For non-rectified tiles, the maximum deviation from rectangularity related to the corresponding work sizes                                         | $\pm 0,8$                             | $\pm 0,5$                       | $\pm 2,0$ | ISO 10545-2 |

Table H.1 (continued)

| Dimensions and surface quality                                                                                          | Nominal size N                                                                                                              |           |      | Test                     |
|-------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|-----------|------|--------------------------|
|                                                                                                                         | 7 cm ≤ N < 15 cm                                                                                                            | N ≥ 15 cm |      |                          |
|                                                                                                                         | mm                                                                                                                          | %         | mm   |                          |
| For rectified tiles, the maximum deviation from rectangularity related to the corresponding work sizes                  | ±0,4                                                                                                                        | ±0,3      | ±1,5 | ISO 10545-2              |
| <b>Surface flatness</b>                                                                                                 | whichever is less is applicable                                                                                             |           |      |                          |
| The maximum deviation from flatness:                                                                                    |                                                                                                                             |           |      |                          |
| a) for non-rectified tiles, centre curvature, related to diagonal calculated from the work sizes;                       | ±0,8                                                                                                                        | ±0,5      | ±2,0 | ISO 10545-2              |
| b) for rectified tiles, centre curvature, related to diagonal calculated from the work sizes;                           | ±0,6                                                                                                                        | ±0,4      | ±1,8 | ISO 10545-2              |
| c) for non-rectified tiles, edge curvature, related to the corresponding work sizes;                                    | ±0,8                                                                                                                        | ±0,5      | ±2,0 | ISO 10545-2              |
| d) for rectified tiles, edge curvature, related to the corresponding work sizes;                                        | ±0,6                                                                                                                        | ±0,4      | ±1,8 | ISO 10545-2              |
| e) for non-rectified tiles, warpage, related to diagonal calculated from the work sizes;                                | ±0,8                                                                                                                        | ±0,5      | ±2,0 | ISO 10545-2              |
| f) for rectified tiles, warpage, related to diagonal calculated from the work sizes.                                    | ±0,6                                                                                                                        | ±0,4      | ±1,8 | ISO 10545-2              |
| <b>Back feet (if specified)</b>                                                                                         |                                                                                                                             |           |      |                          |
| a) Height, <i>h</i> , for tiles of surface area, <i>A</i>                                                               |                                                                                                                             |           |      |                          |
| 49 cm <sup>2</sup> ≤ <i>A</i> < 60 cm <sup>2</sup>                                                                      | Minimum <i>h</i> = 0,7 mm; Maximum <i>h</i> = 3,5 mm                                                                        |           |      | <a href="#">Figure 3</a> |
| <i>A</i> ≥ 60 cm <sup>2</sup>                                                                                           | Minimum <i>h</i> = 1,5 mm; Maximum <i>h</i> = 3,5 mm                                                                        |           |      | <a href="#">Figure 3</a> |
| b) Shape                                                                                                                | Back feet as specified by the manufacturer and as shown in one of the examples in <a href="#">Figure 3</a>                  |           |      | <a href="#">Figure 3</a> |
| Example 1 (see <a href="#">Figure 3</a> )                                                                               | $L_0 - L_1 > 0$                                                                                                             |           |      | <a href="#">Figure 3</a> |
| Example 2 (see <a href="#">Figure 3</a> )                                                                               | $L_0 - L_2 > 0$                                                                                                             |           |      | <a href="#">Figure 3</a> |
| Example 3 (see <a href="#">Figure 3</a> )                                                                               | $L_0 - L_3 > 0$                                                                                                             |           |      | <a href="#">Figure 3</a> |
| <b>Surface quality</b>                                                                                                  | A minimum of 95 % of the tiles are to be free from visible defects which can impair the appearance of a major area of tiles |           |      | ISO 10545-2              |
| <b>Physical property</b>                                                                                                | <b>Requirements</b>                                                                                                         |           |      | <b>Test</b>              |
| <b>Water absorption</b><br>Percent mass fraction                                                                        | 0,5 % < $E_v$ ≤ 3 %<br>Individual maximum 3,3 %                                                                             |           |      | ISO 10545-3              |
| <b>Breaking strength, in Newtons</b>                                                                                    |                                                                                                                             |           |      |                          |
| a) Thickness ≥ 7,5 mm                                                                                                   | Not less than 1 100                                                                                                         |           |      | ISO 10545-4              |
| b) Thickness < 7,5 mm                                                                                                   | Not less than 700                                                                                                           |           |      | ISO 10545-4              |
| <b>Modulus of rupture, in Newtons per square millimetre</b><br>Not applicable to tiles with breaking strength ≥ 3 000 N | Minimum 30<br>Individual minimum 27                                                                                         |           |      | ISO 10545-4              |
| <b>Abrasion resistance</b>                                                                                              |                                                                                                                             |           |      |                          |
| a) Resistance to deep abrasion of unglazed tiles: removed volume, in cubic millimetres                                  | Maximum 175                                                                                                                 |           |      | ISO 10545-6              |

Table H.1 (continued)

| Dimensions and surface quality                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Nominal size N                                                             |           |    | Test         |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|-----------|----|--------------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 7 cm ≤ N < 15 cm                                                           | N ≥ 15 cm |    |              |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | mm                                                                         | %         | mm |              |
| b) Resistance to surface abrasion of glazed tiles intended for use on floors <sup>d</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Report abrasion class and cycles passed                                    |           |    | ISO 10545-7  |
| <b>Coefficient of linear thermal expansion<sup>e</sup></b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                            |           |    |              |
| From ambient temperature to 100 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Test method available                                                      |           |    | ISO 10545-8  |
| <b>Thermal shock resistance<sup>e</sup></b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Test method available                                                      |           |    | ISO 10545-9  |
| <b>Crazing resistance: glazed tiles<sup>f</sup></b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Required                                                                   |           |    | ISO 10545-11 |
| <b>Frost resistance</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Required                                                                   |           |    | ISO 10545-12 |
| <b>Moisture expansion, in millimetres per metre<sup>e</sup></b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Test method available                                                      |           |    | ISO 10545-10 |
| <b>Small colour differences<sup>e</sup></b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Plain coloured tiles only where required<br>GL: ΔE < 0,75<br>UGL: ΔE < 1,0 |           |    | ISO 10545-16 |
| <b>Impact resistance<sup>e</sup></b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Test method available                                                      |           |    | ISO 10545-5  |
| <b>Chemical property</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <b>Requirements</b>                                                        |           |    | <b>Test</b>  |
| <b>Resistance to staining</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                            |           |    |              |
| a) Glazed tiles                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Minimum class 3                                                            |           |    | ISO 10545-14 |
| b) Unglazed tiles <sup>e</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Test method available                                                      |           |    | ISO 10545-14 |
| <b>Resistance to chemicals</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                            |           |    |              |
| Resistance to low concentrations of acids and alkalis                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Manufacturer is to state classification                                    |           |    | ISO 10545-13 |
| Resistance to high concentrations of acids and alkalis <sup>e</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Test method available                                                      |           |    | ISO 10545-13 |
| Resistance to household chemicals and swimming pool salts                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Minimum B                                                                  |           |    | ISO 10545-13 |
| <b>Lead and cadmium release<sup>e</sup></b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Test method available                                                      |           |    | ISO 10545-15 |
| <p>a Similar joint widths are to be used to apply to traditional systems based on non-metric sizes.</p> <p>b Not applicable to tiles having curved shapes.</p> <p>c As a result of firing, slight variations from this standard colour are unavoidable. This does not apply to intentional irregularities of colour variation of the face of tiles (which can be unglazed, glazed or partly glazed) or to the colour variation over a tile area which is characteristic for this type of tile and desirable. Spots or coloured dots which are introduced for decorative purposes are not considered a defect.</p> <p>d Use <a href="#">Annex N</a> for the abrasion resistance classification for all glazed tiles intended for use on floors.</p> <p>e <a href="#">Annex P</a> gives information regarding requirements which are non-compulsory but which are listed as “test method available”.</p> <p>f Certain decorative effects can have a tendency to craze. These are to be identified by the manufacturer, in which case the crazing test given in ISO 10545-11 is not applicable.</p> <p>g Where applicable, tile thickness shall include the addition of back feet heights, as measured in accordance with <a href="#">Figure 3</a>.</p> <p>h For rectangular tiles with longer edge ≥60 cm, and ratio between longer edge and shorter edge ≥3, only d<sub>L</sub> and percent deviation d<sub>L</sub>/S are applicable. See ISO 10545-2</p> |                                                                            |           |    |              |

## **Annex I** (informative)

### **Intentionally blank**

This annex is intentionally left blank. This is as a convenience to producers in order to avoid changes to packaging and related costs. In addition, at the time of publication, the market offers consumers various products identified by the matching annex headings of this document.

STANDARDSISO.COM : Click to view the full PDF of ISO 13006:2018

## Annex J (normative)

### Dry-pressed ceramic tiles $3 \% < E_v \leq 6 \%$ Group BII<sub>a</sub>

Dimensional and surface quality requirements and physical and chemical properties are required to be in accordance with [Table J.1](#).

**Table J.1 — Requirements for dry-pressed ceramic tiles — Group BII<sub>a</sub>,  $3 \% < E_v \leq 6 \%$**

| Dimensions and surface quality                                                                                                 | Nominal size N   |                                 |       | Test        |
|--------------------------------------------------------------------------------------------------------------------------------|------------------|---------------------------------|-------|-------------|
|                                                                                                                                | 7 cm ≤ N < 15 cm | N ≥ 15 cm                       |       |             |
|                                                                                                                                | mm               | %                               | mm    |             |
| <b>Length and width</b>                                                                                                        |                  | whichever is less is applicable |       |             |
| The manufacturer shall choose the work size as follows:                                                                        |                  |                                 |       |             |
| a) for modular tiles in order to allow a nominal joint width of between 2 mm and 5 mm <sup>a</sup> ;                           |                  |                                 |       |             |
| b) for non-modular tiles so that the difference between the work size and the nominal size is not more than ±2 % (max. ±5 mm). |                  |                                 |       |             |
| For non-rectified tiles, the deviation of the average size for each tile (two or four sides) from the work size, $S_w$         | ±0,9             | ±0,6                            | ±2,0  | ISO 10545-2 |
| For rectified tiles, the deviation of the average size for each tile (two or four sides) from the work size, $S_w$             | ±0,4             | ±0,3                            | ±1,0  | ISO 10545-2 |
| <b>Thickness</b>                                                                                                               |                  |                                 |       |             |
| a) The thickness shall be specified by the manufacturer <sup>g</sup>                                                           |                  |                                 |       |             |
| b) The deviation of the average thickness of each tile from the work size thickness <sup>g</sup>                               | ±0,5             | ±5                              | ±0,5  | ISO 10545-2 |
| <b>Straightness of sides<sup>b</sup></b> (facial sides)                                                                        |                  |                                 |       |             |
| For non-rectified tiles, the maximum deviation from straightness related to the corresponding work sizes                       | ±0,8             | ±0,5                            | ±1,5  | ISO 10545-2 |
| For rectified tiles, the maximum deviation from straightness related to the corresponding work sizes                           | ±0,4             | ±0,3                            | ± 0,8 | ISO 10545-2 |
| <b>Rectangularity<sup>b, h</sup></b>                                                                                           |                  |                                 |       |             |
| For non-rectified tiles, the maximum deviation from rectangularity related to the corresponding work sizes                     | ±0,8             | ±0,5                            | ±2,0  | ISO 10545-2 |
| For rectified tiles, the maximum deviation from rectangularity related to the corresponding work sizes                         | ±0,4             | ±0,3                            | ±1,5  | ISO 10545-2 |

Table J.1 (continued)

| Dimensions and surface quality                                                                                          | Nominal size N                                                                                                              |                                 |      | Test                     |
|-------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|---------------------------------|------|--------------------------|
|                                                                                                                         | 7 cm ≤ N < 15 cm                                                                                                            | N ≥ 15 cm                       |      |                          |
|                                                                                                                         | mm                                                                                                                          | %                               | mm   |                          |
| <b>Surface flatness</b>                                                                                                 |                                                                                                                             | whichever is less is applicable |      |                          |
| The maximum deviation from flatness:                                                                                    |                                                                                                                             |                                 |      |                          |
| a) for non-rectified tiles, centre curvature, related to diagonal calculated from the work sizes;                       | ±0,8                                                                                                                        | ±0,5                            | ±2,0 | ISO 10545-2              |
| b) for rectified tiles, centre curvature, related to diagonal calculated from the work sizes;                           | ±0,6                                                                                                                        | ±0,4                            | ±1,8 | ISO 10545-2              |
| c) for non-rectified tiles, edge curvature, related to the corresponding work sizes;                                    | ±0,8                                                                                                                        | ±0,5                            | ±2,0 | ISO 10545-2              |
| d) for rectified tiles, edge curvature, related to the corresponding work sizes;                                        | ±0,6                                                                                                                        | ±0,4                            | ±1,8 | ISO 10545-2              |
| e) for non-rectified tiles, warpage, related to diagonal calculated from the work sizes.                                | ±0,8                                                                                                                        | ±0,5                            | ±2,0 | ISO 10545-2              |
| f) for rectified tiles, warpage, related to diagonal calculated from the work sizes.                                    | ±0,6                                                                                                                        | ±0,4                            | ±1,8 | ISO 10545-2              |
| <b>Back feet (if specified)</b>                                                                                         |                                                                                                                             |                                 |      |                          |
| a) Height, <i>h</i> , for tiles of surface area, <i>A</i>                                                               |                                                                                                                             |                                 |      |                          |
| 49 cm <sup>2</sup> ≤ <i>A</i> < 60 cm <sup>2</sup>                                                                      | Minimum <i>h</i> = 0,7 mm; Maximum <i>h</i> = 3,5 mm                                                                        |                                 |      | <a href="#">Figure 3</a> |
| <i>A</i> ≥ 60 cm <sup>2</sup>                                                                                           | Minimum <i>h</i> = 1,5 mm; Maximum <i>h</i> = 3,5 mm                                                                        |                                 |      | <a href="#">Figure 3</a> |
| b) Shape                                                                                                                | Back feet as specified by the manufacturer and as shown in one of the examples in <a href="#">Figure 3</a>                  |                                 |      | <a href="#">Figure 3</a> |
| Example 1 (see <a href="#">Figure 3</a> )                                                                               | $L_0 - L_1 > 0$                                                                                                             |                                 |      | <a href="#">Figure 3</a> |
| Example 2 (see <a href="#">Figure 3</a> )                                                                               | $L_0 - L_2 > 0$                                                                                                             |                                 |      | <a href="#">Figure 3</a> |
| Example 3 (see <a href="#">Figure 3</a> )                                                                               | $L_0 - L_3 > 0$                                                                                                             |                                 |      | <a href="#">Figure 3</a> |
| <b>Surface quality<sup>c</sup></b>                                                                                      | A minimum of 95 % of the tiles are to be free from visible defects which can impair the appearance of a major area of tiles |                                 |      | ISO 10545-2              |
| <b>Physical property</b>                                                                                                | <b>Requirements</b>                                                                                                         |                                 |      | <b>Test</b>              |
| <b>Water absorption</b><br>Percent mass fraction                                                                        | 3 % < $E_v$ ≤ 6 %<br>Individual maximum 6,5 %                                                                               |                                 |      | ISO 10545-3              |
| <b>Breaking strength, in Newtons</b>                                                                                    |                                                                                                                             |                                 |      |                          |
| a) Thickness ≥ 7,5 mm                                                                                                   | Not less than 1 000                                                                                                         |                                 |      | ISO 10545-4              |
| b) Thickness < 7,5 mm                                                                                                   | Not less than 600                                                                                                           |                                 |      | ISO 10545-4              |
| <b>Modulus of rupture, in Newtons per square millimetre</b><br>Not applicable to tiles with breaking strength ≥ 3 000 N | Minimum 22<br>Individual minimum 20                                                                                         |                                 |      | ISO 10545-4              |
| <b>Abrasion resistance</b>                                                                                              |                                                                                                                             |                                 |      |                          |
| a) Resistance to deep abrasion of unglazed tiles: removed volume, in cubic millimetres                                  | Maximum 345                                                                                                                 |                                 |      | ISO 10545-6              |
| b) Resistance to surface abrasion of glazed tiles intended for use on floors <sup>d</sup>                               | Report abrasion class and cycles passed                                                                                     |                                 |      | ISO 10545-7              |
| <b>Coefficient of linear thermal expansion<sup>e</sup></b>                                                              |                                                                                                                             |                                 |      |                          |

Table J.1 (continued)

| Dimensions and surface quality                                      | Nominal size N                                                             |   |           | Test         |
|---------------------------------------------------------------------|----------------------------------------------------------------------------|---|-----------|--------------|
|                                                                     | 7 cm ≤ N < 15 cm                                                           |   | N ≥ 15 cm |              |
|                                                                     | mm                                                                         | % | mm        |              |
| From ambient temperature to 100 °C                                  | Test method available                                                      |   |           | ISO 10545-8  |
| <b>Thermal shock resistance<sup>e</sup></b>                         | Test method available                                                      |   |           | ISO 10545-9  |
| <b>Crazing resistance: glazed tiles<sup>f</sup></b>                 | Required                                                                   |   |           | ISO 10545-11 |
| <b>Frost resistance<sup>e</sup></b>                                 | Test method available                                                      |   |           | ISO 10545-12 |
| <b>Moisture expansion, in millimetres per metre<sup>e</sup></b>     | Test method available                                                      |   |           | ISO 10545-10 |
| <b>Small colour differences<sup>e</sup></b>                         | Plain coloured tiles only where required<br>GL: ΔE < 0,75<br>UGL: ΔE < 1,0 |   |           | ISO 10545-16 |
| <b>Impact resistance<sup>e</sup></b>                                | Test method available                                                      |   |           | ISO 10545-5  |
| <b>Chemical property</b>                                            | <b>Requirements</b>                                                        |   |           | <b>Test</b>  |
| <b>Resistance to staining</b>                                       |                                                                            |   |           |              |
| a) Glazed tiles                                                     | Minimum class 3                                                            |   |           | ISO 10545-14 |
| b) Unglazed tiles <sup>e</sup>                                      | Test method available                                                      |   |           | ISO 10545-14 |
| <b>Resistance to chemicals</b>                                      |                                                                            |   |           |              |
| Resistance to low concentrations of acids and alkalis               | Manufacturer is to state classification                                    |   |           | ISO 10545-13 |
| Resistance to high concentrations of acids and alkalis <sup>e</sup> | Test method available                                                      |   |           | ISO 10545-13 |
| Resistance to household chemicals and swimming pool salts           | Minimum B                                                                  |   |           | ISO 10545-13 |
| <b>Lead and cadmium release<sup>e</sup></b>                         | Test method available                                                      |   |           | ISO 10545-15 |

a Similar joint widths are to be used to apply to traditional systems based on non-metric sizes.

b Not applicable to tiles having curved shapes.

c As a result of firing, slight variations from this standard colour are unavoidable. This does not apply to intentional irregularities of colour variation of the face of tiles (which can be unglazed, glazed or partly glazed) or to the colour variation over a tile area which is characteristic for this type of tile and desirable. Spots or coloured dots which are introduced for decorative purposes are not considered a defect.

d Use [Annex N](#) for the abrasion resistance classification for all glazed tiles intended for use on floors.

e [Annex P](#) gives information regarding requirements which are non-compulsory but which are listed as “test method available”.

f Certain decorative effects can have a tendency to craze. These are to be identified by the manufacturer, in which case the crazing test given in ISO 10545-11 is not applicable.

g Where applicable, tile thickness shall include the addition of back feet heights, as measured in accordance with [Figure 3](#).

h For rectangular tiles with longer edge ≥60 cm, and ratio between longer edge and shorter edge ≥3, only d<sub>L</sub> and percent deviation d<sub>L</sub>/S are applicable. See ISO 10545-2

## Annex K (normative)

### Dry-pressed ceramic tiles $6 \% < E_v \leq 10 \%$ Group BII<sub>b</sub>

Dimensional and surface quality requirements and physical and chemical properties are required to be in accordance with [Table K.1](#).

**Table K.1 — Requirements for dry-pressed ceramic tiles — Group BII<sub>b</sub>,  $6 \% < E_v \leq 10 \%$**

| Dimensions and surface quality                                                                                                 | Nominal size N   |                                 |      | Test        |
|--------------------------------------------------------------------------------------------------------------------------------|------------------|---------------------------------|------|-------------|
|                                                                                                                                | 7 cm ≤ N < 15 cm | N ≥ 15 cm                       |      |             |
|                                                                                                                                | mm               | %                               | mm   |             |
| <b>Length and width</b>                                                                                                        |                  | whichever is less is applicable |      |             |
| The manufacturer shall choose the work size as follows:                                                                        |                  |                                 |      |             |
| a) for modular tiles in order to allow a nominal joint width of between 2 mm and 5 mm <sup>a</sup> ;                           |                  |                                 |      |             |
| b) for non-modular tiles so that the difference between the work size and the nominal size is not more than ±2 % (max. ±5 mm). |                  |                                 |      |             |
| For non-rectified tiles, the deviation of the average size for each tile (two or four sides) from the work size, $S_w$         | ±0,9             | ±0,6                            | ±2,0 | ISO 10545-2 |
| For rectified tiles, the deviation of the average size for each tile (two or four sides) from the work size, $S_w$             | ±0,4             | ±0,3                            | ±1,0 | ISO 10545-2 |
| <b>Thickness</b>                                                                                                               |                  |                                 |      |             |
| a) The thickness shall be specified by the manufacturer <sup>g</sup>                                                           |                  |                                 |      |             |
| b) The deviation of the average thickness of each tile from the work size thickness <sup>g</sup>                               | ±0,5             | ±5                              | ±0,5 | ISO 10545-2 |
| <b>Straightness of sides<sup>b</sup></b> (facial sides)                                                                        |                  |                                 |      |             |
| For non-rectified tiles, the maximum deviation from straightness related to the corresponding work sizes                       | ±0,8             | ±0,5                            | ±1,5 | ISO 10545-2 |
| For rectified tiles, the maximum deviation from straightness related to the corresponding work sizes                           | ±0,4             | ±0,3                            | ±0,8 | ISO 10545-2 |
| <b>Rectangularity<sup>b, h</sup></b>                                                                                           |                  |                                 |      |             |
| For non-rectified tiles, the maximum deviation from rectangularity related to the corresponding work sizes                     | ±0,8             | ±0,5                            | ±2,0 | ISO 10545-2 |
| For rectified tiles, the maximum deviation from rectangularity related to the corresponding work sizes                         | ±0,4             | ±0,3                            | ±1,5 | ISO 10545-2 |
| <b>Surface flatness</b>                                                                                                        |                  | whichever is less is applicable |      |             |

Table K.1 (continued)

| Dimensions and surface quality                                                                                          | Nominal size N                                                                                                              |           |      | Test                     |
|-------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|-----------|------|--------------------------|
|                                                                                                                         | 7 cm ≤ N < 15 cm                                                                                                            | N ≥ 15 cm |      |                          |
|                                                                                                                         | mm                                                                                                                          | %         | mm   |                          |
| The maximum deviation from flatness:                                                                                    |                                                                                                                             |           |      |                          |
| a) for non-rectified tiles, centre curvature, related to diagonal calculated from the work sizes;                       | ±0,8                                                                                                                        | ±0,5      | ±2,0 | ISO 10545-2              |
| b) for rectified tiles, centre curvature, related to diagonal calculated from the work sizes;                           | ±0,6                                                                                                                        | ±0,4      | ±1,8 | ISO 10545-2              |
| c) for non-rectified tiles, edge curvature, related to the corresponding work sizes;                                    | ±0,8                                                                                                                        | ±0,5      | ±2,0 | ISO 10545-2              |
| d) for rectified tiles, edge curvature, related to the corresponding work sizes;                                        | ±0,6                                                                                                                        | ±0,4      | ±1,8 | ISO 10545-2              |
| e) for non-rectified tiles, warpage, related to diagonal calculated from the work sizes.                                | ±0,8                                                                                                                        | ±0,5      | ±2,0 | ISO 10545-2              |
| f) for rectified tiles, warpage, related to diagonal calculated from the work sizes.                                    | ±0,6                                                                                                                        | ±0,4      | ±1,8 | ISO 10545-2              |
| <b>Back feet (if specified)</b>                                                                                         |                                                                                                                             |           |      |                          |
| a) Height, <i>h</i> , for tiles of surface area, <i>A</i>                                                               |                                                                                                                             |           |      |                          |
| 49 cm <sup>2</sup> ≤ <i>A</i> < 60 cm <sup>2</sup>                                                                      | Minimum <i>h</i> = 0,7 mm; Maximum <i>h</i> = 3,5 mm                                                                        |           |      | <a href="#">Figure 3</a> |
| <i>A</i> ≥ 60 cm <sup>2</sup>                                                                                           | Minimum <i>h</i> = 1,5 mm; Maximum <i>h</i> = 3,5 mm                                                                        |           |      | <a href="#">Figure 3</a> |
| b) Shape                                                                                                                | Back feet as specified by the manufacturer and as shown in one of the examples in <a href="#">Figure 3</a>                  |           |      | <a href="#">Figure 3</a> |
| Example 1 (see <a href="#">Figure 3</a> )                                                                               | $L_0 - L_1 > 0$                                                                                                             |           |      | <a href="#">Figure 3</a> |
| Example 2 (see <a href="#">Figure 3</a> )                                                                               | $L_0 - L_2 > 0$                                                                                                             |           |      | <a href="#">Figure 3</a> |
| Example 3 (see <a href="#">Figure 3</a> )                                                                               | $L_0 - L_3 > 0$                                                                                                             |           |      | <a href="#">Figure 3</a> |
| <b>Surface quality<sup>c</sup></b>                                                                                      | A minimum of 95 % of the tiles are to be free from visible defects which can impair the appearance of a major area of tiles |           |      | ISO 10545-2              |
| <b>Physical property</b>                                                                                                | <b>Requirements</b>                                                                                                         |           |      | <b>Test</b>              |
| <b>Water absorption</b><br>Percent mass fraction                                                                        | 6 % < $E_v$ ≤ 10 %<br>Individual maximum 11 %                                                                               |           |      | ISO 10545-3              |
| <b>Breaking strength, in Newtons</b>                                                                                    |                                                                                                                             |           |      |                          |
| a) Thickness ≥ 7,5 mm                                                                                                   | Not less than 800                                                                                                           |           |      | ISO 10545-4              |
| b) Thickness < 7,5 mm                                                                                                   | Not less than 500                                                                                                           |           |      | ISO 10545-4              |
| <b>Modulus of rupture, in Newtons per square millimetre</b><br>Not applicable to tiles with breaking strength ≥ 3 000 N | Minimum 18<br>Individual minimum 16                                                                                         |           |      | ISO 10545-4              |
| <b>Abrasion resistance</b>                                                                                              |                                                                                                                             |           |      |                          |
| a) Resistance to deep abrasion of unglazed tiles: removed volume, in cubic millimetres                                  | Maximum 540                                                                                                                 |           |      | ISO 10545-6              |
| b) Resistance to surface abrasion of glazed tiles intended for use on floors <sup>d</sup>                               | Report abrasion class and cycles passed                                                                                     |           |      | ISO 10545-7              |
| <b>Coefficient of linear thermal expansion<sup>e</sup></b>                                                              |                                                                                                                             |           |      |                          |
| From ambient temperature to 100 °C                                                                                      | Test method available                                                                                                       |           |      | ISO 10545-8              |
| <b>Thermal shock resistance<sup>e</sup></b>                                                                             | Test method available                                                                                                       |           |      | ISO 10545-9              |
| <b>Crazing resistance: glazed tiles<sup>f</sup></b>                                                                     | Required                                                                                                                    |           |      | ISO 10545-11             |

Table K.1 (continued)

| Dimensions and surface quality                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Nominal size N                                                                             |           |    | Test         |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|-----------|----|--------------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 7 cm ≤ N < 15 cm                                                                           | N ≥ 15 cm |    |              |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | mm                                                                                         | %         | mm |              |
| <b>Frost resistance<sup>e</sup></b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Test method available                                                                      |           |    | ISO 10545-12 |
| <b>Moisture expansion, in millimetres per metre<sup>e</sup></b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Test method available                                                                      |           |    | ISO 10545-10 |
| <b>Small colour differences<sup>e</sup></b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Plain coloured tiles only where required<br>GL: $\Delta E < 0,75$<br>UGL: $\Delta E < 1,0$ |           |    | ISO 10545-16 |
| <b>Impact resistance<sup>e</sup></b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Test method available                                                                      |           |    | ISO 10545-5  |
| <b>Chemical property</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <b>Requirements</b>                                                                        |           |    | <b>Test</b>  |
| <b>Resistance to staining</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                            |           |    |              |
| a) Glazed tiles                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Minimum class 3                                                                            |           |    | ISO 10545-14 |
| b) Unglazed tiles <sup>e</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Test method available                                                                      |           |    | ISO 10545-14 |
| <b>Resistance to chemicals</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                            |           |    |              |
| Resistance to low concentrations of acids and alkalis                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Manufacturer is to state classification                                                    |           |    | ISO 10545-13 |
| Resistance to high concentrations of acids and alkalis <sup>e</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Test method available                                                                      |           |    | ISO 10545-13 |
| Resistance to household chemicals and swimming pool salts                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Minimum B                                                                                  |           |    | ISO 10545-13 |
| <b>Lead and cadmium release<sup>e</sup></b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Test method available                                                                      |           |    | ISO 10545-15 |
| <p>a Similar joint widths are to be used to apply to traditional systems based on non-metric sizes.</p> <p>b Not applicable to tiles having curved shapes.</p> <p>c As a result of firing, slight variations from this standard colour are unavoidable. This does not apply to intentional irregularities of colour variation of the face of tiles (which can be unglazed, glazed or partly glazed) or to the colour variation over a tile area which is characteristic for this type of tile and desirable. Spots or coloured dots which are introduced for decorative purposes are not considered a defect.</p> <p>d Use <a href="#">Annex N</a> for the abrasion resistance classification for all glazed tiles intended for use on floors.</p> <p>e <a href="#">Annex P</a> gives information regarding requirements which are non-compulsory but which are listed as “test method available”.</p> <p>f Certain decorative effects can have a tendency to craze. These are to be identified by the manufacturer, in which case the crazing test given in ISO 10545-11 is not applicable.</p> <p>g Where applicable, tile thickness shall include the addition of back feet heights, as measured in accordance with <a href="#">Figure 3</a>.</p> <p>h For rectangular tiles with longer edge ≥60 cm, and ratio between longer edge and shorter edge ≥3, only <math>d_L</math> and percent deviation <math>d_L/S</math> are applicable. See ISO 10545-2</p> |                                                                                            |           |    |              |

## Annex L (normative)

### Dry-pressed ceramic tiles $E_V > 10\%$ Group BIII

Dimensional and surface quality requirements and physical and chemical properties are required to be in accordance with [Table L.1](#).

**Table L.1 — Requirements for dry-pressed ceramic tiles — Group BIII,  $E_V > 10\%$**

| Dimensions and surface quality                                                                                                 | Nominal size N   |                                 |       | Test        |
|--------------------------------------------------------------------------------------------------------------------------------|------------------|---------------------------------|-------|-------------|
|                                                                                                                                | 7 cm ≤ N < 15 cm | N ≥ 15 cm                       |       |             |
|                                                                                                                                | mm               | %                               | mm    |             |
| <b>Length and width</b>                                                                                                        |                  | whichever is less is applicable |       |             |
| The manufacturer shall choose the work size as follows:                                                                        |                  |                                 |       |             |
| a) for modular tiles in order to allow a nominal joint width of between 1,5 mm and 5 mm <sup>a</sup> ;                         |                  |                                 |       |             |
| b) for non-modular tiles so that the difference between the work size and the nominal size is not more than ±2 % (max. ±5 mm). |                  |                                 |       |             |
| For non-rectified tiles, the deviation of the average size for each tile (two or four sides) from the work size, $S_w$         | ±0,9             | ±0,6                            | ±2,0  | ISO 10545-2 |
| For rectified tiles, the maximum deviation from straightness related to the corresponding work sizes                           | ±0,4             | ±0,3                            | ± 1,0 | ISO 10545-2 |
| <b>Thickness</b>                                                                                                               |                  |                                 |       |             |
| a) The thickness shall be specified by the manufacturer <sup>h</sup>                                                           |                  |                                 |       |             |
| b) The deviation of the average thickness of each tile from the work size thickness <sup>h</sup>                               | ±0,5             | ±10                             | ±0,5  | ISO 10545-2 |
| <b>Straightness of sides<sup>b</sup></b> (facial sides)                                                                        |                  |                                 |       |             |
| For non-rectified tiles, the maximum deviation from straightness related to the corresponding work sizes                       | ±0,8             | ±0,5                            | ±1,5  | ISO 10545-2 |
| For rectified tiles, the maximum deviation from straightness related to the corresponding work sizes                           | ±0,4             | ±0,3                            | ± 0,8 | ISO 10545-2 |
| <b>Rectangularity<sup>b, i</sup></b>                                                                                           |                  |                                 |       |             |
| For non-rectified tiles, the maximum deviation from rectangularity related to the corresponding work sizes                     | ±0,8             | ±0,5                            | ±2,0  | ISO 10545-2 |
| For rectified tiles, the maximum deviation from rectangularity related to the corresponding work sizes                         | ±0,4             | ±0,3                            | ±1,5  | ISO 10545-2 |