

---

---

**Industrial furnaces and associated  
processing equipment — Method of  
measuring energy balance and  
calculating efficiency —**

Part 3:

**Batch-type aluminium melting furnaces**

*Fours industriels et équipements associés — Méthode de mesure du  
bilan énergétique et de calcul de l'efficacité —*

*Partie 3: Fours dormants de fusion pour l'aluminium*



STANDARDSISO.COM : Click to view the full PDF of ISO 13579-3:2013



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2013

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

Page

|   |           |
|---|-----------|
| Foreword .....  | v         |
| Introduction.....   | vi        |
| <b>1</b> <b>Scope</b> .....   | <b>1</b>  |
| <b>2</b> <b>Normative references</b> .....  | <b>1</b>  |
| <b>3</b> <b>Terms and definitions</b> .....   | <b>1</b>  |
| <b>3.1</b> <b>Terms related to type of energy used in this part of ISO 13579</b> .....  | <b>2</b>  |
| <b>4</b> <b>Symbols</b> .....   | <b>5</b>  |
| <b>5</b> <b>Basic principles</b> .....  | <b>7</b>  |
| <b>5.1</b> <b>General</b> .....   | <b>7</b>  |
| <b>5.2</b> <b>Energy flow diagram</b> .....   | <b>9</b>  |
| <b>5.3</b> <b>Process Heating Assessment Survey Tool</b> .....  | <b>9</b>  |
| <b>6</b> <b>Basic conditions of measurement and calculation</b> .....   | <b>9</b>  |
| <b>6.1</b> <b>State of furnace</b> .....  | <b>9</b>  |
| <b>6.2</b> <b>Duration of measurement</b> .....   | <b>9</b>  |
| <b>6.3</b> <b>Unit of specific energy intensity</b> .....   | <b>9</b>  |
| <b>6.4</b> <b>Reference conditions</b> .....  | <b>9</b>  |
| <b>6.5</b> <b>Unit of amount of gas</b> .....   | <b>9</b>  |
| <b>6.6</b> <b>Fuel</b> .....  | <b>9</b>  |
| <b>7</b> <b>Type of energy used in this part of ISO 13579</b> .....   | <b>9</b>  |
| <b>7.1</b> <b>General</b> .....   | <b>9</b>  |
| <b>7.2</b> <b>Energy balance</b> .....  | <b>10</b> |
| <b>7.3</b> <b>Thermal energy balance</b> .....  | <b>11</b> |
| <b>7.4</b> <b>Energy balance of electrical generation</b> .....   | <b>12</b> |
| <b>7.5</b> <b>Recycled energy</b> .....   | <b>13</b> |
| <b>8</b> <b>Measurement method</b> .....  | <b>13</b> |
| <b>8.1</b> <b>General</b> .....   | <b>13</b> |
| <b>8.2</b> <b>Fuel</b> .....  | <b>13</b> |
| <b>8.3</b> <b>Atomization agent</b> .....   | <b>13</b> |
| <b>8.4</b> <b>Combustion air and exhaust gas</b> .....  | <b>14</b> |
| <b>8.5</b> <b>Products</b> .....  | <b>14</b> |
| <b>8.6</b> <b>Temperature of furnace surface</b> .....  | <b>16</b> |
| <b>8.7</b> <b>Furnace inner wall temperature</b> .....  | <b>16</b> |
| <b>8.8</b> <b>Inner furnace pressure</b> .....  | <b>16</b> |
| <b>8.9</b> <b>Cooling water</b> .....   | <b>16</b> |
| <b>8.10</b> <b>Electrical auxiliary equipment</b> .....   | <b>16</b> |
| <b>8.11</b> <b>Generation of utilities</b> .....  | <b>16</b> |
| <b>8.12</b> <b>Recycled energy</b> .....  | <b>16</b> |
| <b>9</b> <b>Calculation</b> .....   | <b>17</b> |
| <b>9.1</b> <b>General provisions</b> .....  | <b>17</b> |
| <b>9.2</b> <b>Total energy input</b> .....  | <b>17</b> |
| <b>9.3</b> <b>Total energy output</b> .....   | <b>18</b> |
| <b>9.4</b> <b>Total energy efficiency</b> .....   | <b>20</b> |
| <b>10</b> <b>Energy balance evaluation report</b> .....   | <b>21</b> |
| <b>Annex A</b> (informative) <b>Reference data</b> .....  | <b>22</b> |
| <b>Annex B</b> (informative) <b>Measurement of energy balance and calculation of efficiency of a batch-type aluminium melting furnace sample report</b> ..... | <b>24</b> |

**Annex C** (informative) **Assessment of uncertainty of the total energy efficiency**.....32  
**Bibliography**.....35

STANDARDSISO.COM : Click to view the full PDF of ISO 13579-3:2013

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 13579-3 was prepared by Technical Committee ISO/TC 244, *Industrial furnaces and associated thermal processing equipment*.

ISO 13579 consists of the following parts, under the general title *Industrial furnaces and associated processing equipment — Method of measuring energy balance and calculating efficiency*:

- *Part 1: General methodology*
- *Part 3: Reheating furnaces for steel*
- *Part 2: Batch-type aluminium melting furnaces*
- *Part 4: Furnaces with protective or reactive atmosphere*

## Introduction

All calculations within this part of ISO 13579 are based on the location of equipment at reference conditions.

NOTE For equipment intended to be installed above or below sea level, it is expected that the impact of the elevation be calculated for that location.

STANDARDSISO.COM : Click to view the full PDF of ISO 13579-3:2013

# Industrial furnaces and associated processing equipment — Method of measuring energy balance and calculating efficiency —

## Part 3: Batch-type aluminium melting furnaces

### 1 Scope

This part of ISO 13579 specifies general methodology for measuring energy balance and calculating the efficiency of the process involving batch-type aluminium melting furnaces as designed by furnace manufacturers. This general methodology includes:

- measurement methods;
- calculations (general calculation);
- energy balance and efficiency calculation evaluation report.

This part of ISO 13579 is not applicable to any efficiencies related to the process itself outside of batch-type aluminium melting furnaces.

### 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 13574, *Industrial furnaces and associated processing equipment — Vocabulary*

ISO 13579-1:2013, *Industrial furnaces and associated processing equipment — Method of measuring energy balance and calculating efficiency — Part 1: General methodology*

### 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 13574 and the following apply.

### 3.1 Terms related to type of energy used in this part of ISO 13579

#### 3.1.1 Total energy input

##### 3.1.1.1

##### total energy input

$E_{input}$

aggregate of measured energy input brought into the area of energy balance, and which is composed of fuel equivalent energy and other energy input

#### 3.1.2 Fuel equivalent energy

##### 3.1.2.1

##### fuel equivalent energy

$E_{fe}$

aggregate of input energy which is composed of calorific value of fuel, calorific value of waste, calorific value of source gas of atmospheric gas and fuel equivalent energy of electricity

##### 3.1.2.2

##### calorific value of fuel

$E_{h,fuel}$

heat of combustion of fuel which is consumed and used for heating products in the area of energy balance

##### 3.1.2.3

##### calorific value of waste

$E_{h,waste}$

calorific value of waste which is brought to the area of energy balance with products

EXAMPLE Waste oil on aluminium scrap.

##### 3.1.2.4

##### fuel equivalent energy of electricity

$E_{fe,el}$

aggregate of fuel equivalent energy of electricity converted from each occurrence of electrical energy consumption in the area of energy balance

#### 3.1.3 Other energy input

##### 3.1.3.1

##### other energy input

$E_{others}$

energy that is composed of sensible heat of fuel, sensible heat of combustion air or other oxidant, sensible heat of atomization agent for liquid fuel, heat of reaction and sensible heat of infiltration air

##### 3.1.3.2

##### heat of reaction

$E_{react}$

heat generated by the oxidation reaction of products in the area of energy balance measurement

EXAMPLE The formation of scale of steel products during the oxidation reaction.

##### 3.1.3.3

##### sensible heat of infiltration air

$E_{s,infiltr}$

sensible heat of air that leaks into the furnace through supply/discharge port or gaps in the operating systems of the furnace

Note 1 to entry This term may be replaced with "sensible heat of false air".

### 3.1.4 Total energy output

#### 3.1.4.1

##### total energy output

$E_{\text{output}}$

aggregate of measured energy output emitted from or consumed in the area of energy balance which is composed of thermal energy output, energy consumed in electrical auxiliary equipment, energy used for generation of utility and electrical generation loss

### 3.1.5 Thermal energy output

#### 3.1.5.1

##### thermal energy output

$E_{\text{therm,out}}$

aggregate of thermal energy which is emitted from the area of energy balance

Note 1 to entry Thermal energy output is composed of energy defined in 3.1.5.2 to 3.1.5.11.

#### 3.1.5.2

##### effective energy

$E_{\text{effect}}$

enthalpy that products gain in the area of energy balance

#### 3.1.5.3

##### sensible heat of oxidized substance

$E_{\text{l,oxid}}$

sensible heat of substances which have reacted with oxygen, formed in the thermal process brought out from the area of energy balance measurement

#### 3.1.5.4

##### sensible heat of exhaust gas

$E_{\text{exhaust}}$

sensible heat of expended gas which is emitted from the area of energy balance measurement

#### 3.1.5.5

##### heat storage loss by batch-type furnace

$E_{\text{l,storage}}$

sensible heat which a furnace refractory gains within a batch-type furnace operation cycle

#### 3.1.5.6

##### wall loss

$E_{\text{l,wall}}$

thermal energy emitted from the surface of industrial furnaces by radiation and convection

#### 3.1.5.7

##### heat loss of discharged blowout from furnace opening

$E_{\text{l,blowout}}$

sensible heat of blowout gas emitted from the furnace opening

#### 3.1.5.8

##### heat loss of radiation from furnace opening

$E_{\text{l,opening}}$

thermal energy emitted from the furnace opening by radiation

#### 3.1.5.9

##### heat loss from furnace parts installed through furnace wall

$E_{\text{l,parts}}$

thermal energy emitted through furnace parts which are installed through furnace wall

EXAMPLE As in the case of a roller hearth furnace.

**3.1.5.10  
cooling water loss**

$E_{l,cw}$   
thermal energy brought out by cooling water from the area of energy balance measurement

**3.1.5.11  
other losses**

$E_{l,other}$   
unmeasured thermal energy losses from the area of energy balance

**3.1.6 Energy consumed in electrical auxiliary equipment**

**3.1.6.1  
energy consumed in electrical auxiliary equipment**

$E_{aux}$   
energy utilized in electrical auxiliary equipment which is composed of energy consumed in installed electrical auxiliary equipment and energy used for fluid transfer

**3.1.6.2  
energy consumed in installed electrical auxiliary equipment**

$E_{aux,installed}$   
aggregate of total energy used in installed electrical auxiliary equipment (e.g. fans, pumps) installed in the area of energy balance

**3.1.6.3  
energy used for fluid transfer**

$E_{aux,fluid}$   
aggregate of energy for fluid transfer calculated from the property of the fluid

EXAMPLE For cooling water, fuel, etc.

**3.1.7 Energy used for generation of utility**

**3.1.7.1  
utility**  
service other than fuel and electricity provided to the area of energy balance

EXAMPLE Oxygen, steam and atmospheric gas as specified in ISO 13579-1:2013, 3.1.7.1.

**3.1.7.2  
energy used for generation of utility**

$E_{utility}$   
aggregate of energy for the generation of utilities used in the area of energy balance

**3.1.8 Electrical generation loss**

**3.1.8.1  
electrical generation loss**

$E_{l,eg}$   
energy loss in electrical generation which is backcalculated from fuel equivalent energy and total consumed electrical energy

**3.1.9 Thermal energy balance**

**3.1.9.1  
thermal energy input from electrical heating source**

heat energy entering the process from an electrical heating source, such as an electrical heater emitted to the area of energy balance

**3.1.9.2****circulating heat**

heat that circulates within equipment or system installed in the area of energy balance

**3.1.10 Energy balance of electrical generation****3.1.10.1****total consumed electrical energy** $E_{e,total}$ 

aggregate of electrical energy which is consumed in the area of energy balance and equal to the sum of thermal energy input from electrical heating source, energy consumed in electrical auxiliary equipment and electrical energy used for generation of utility

**3.1.10.2****electrical energy used for generation of utilities** $E_{e,utility}$ 

aggregate of electrical energy consumed for generation of utilities (e.g. generation of oxygen) used in the area of energy balance

**3.1.11 Recycled energy****3.1.11.1****recycled energy** $E_{re}$ 

energy that is regenerated from the wasted thermal energy from the area of energy balance

EXAMPLE Energy reused in waste gas boiler.

**4 Symbols**

For the purposes of this document, the following symbols apply.

NOTE Tons used are metric tons.

| Symbol              | Meaning  | Unit      |
|---------------------|--|-----------|
| $c_{pm,p1}$         | mean specific heat of products between $T_{p1}$ and 273,15 K                             | kJ/(kg·K) |
| $c_{pm,p2}$         | mean specific heat of products between $T_{p2}$ and 273,15 K                             | kJ/(kg·K) |
| $c_{pm,ps}$         | mean specific heat of products between $T_s$ and 273,15 K                                | kJ/(kg·K) |
| $c_{pm,oxid}$       | mean specific heat of scale  | kJ/(kg·K) |
| $E_{aux}$           | energy consumed in electrical auxiliary equipment per ton of products                    | kJ/t      |
| $E_{aux,fluid}$     | aggregate of energy used for fluid transfer per ton of products                          | kJ/t      |
| $E_{aux,installed}$ | aggregate of energy used in installed electrical auxiliary equipment per ton of products | kJ/t      |
| $E_{effect}$        | effective energy per ton of products   | kJ/t      |
| $E_{exhaust}$       | sensible heat of exhaust gas per ton of products   | kJ/t      |
| $e_{Al}$            | heat by formation of scale per kilogram of scale   | kJ/kg     |
| $e_{latent}$        | latent heat of melting per kilogram of aluminium   | kJ/kg     |
| $E_{fe}$            | fuel equivalent energy per ton of products   | kJ/t      |
| $E_{fe,el}$         | fuel equivalent energy of electricity per ton of products                                | kJ/t      |
| $E_{h,fuel}$        | calorific value of fuel per ton of products  | kJ/t      |
| $E_{h,waste}$       | calorific value of waste per ton of products   | kJ/t      |

| Symbol          | Meaning   | Unit              |
|-----------------|---|-------------------|
| $E_{input}$     | total energy input per ton of products  | kJ/t              |
| $E_{l,blowout}$ | heat loss of discharged blowout from furnace opening per ton of products  | kJ/t              |
| $E_{l,cw}$      | cooling water loss per ton of products  | kJ/t              |
| $E_{l,leg}$     | energy loss in electrical generation  | kJ/t              |
| $E_{l,opening}$ | heat loss of radiation from furnace opening per ton of products   | kJ/t              |
| $E_{l,other}$   | other losses per ton of products  | kJ/t              |
| $E_{l,parts}$   | Heat loss from furnace parts installed through furnace wall   | kJ/t              |
| $E_{l,storage}$ | heat storage loss by batch-type furnace per ton of products   | kJ/t              |
| $e_{l,storage}$ | heat storage loss by batch-type furnace per square metre of furnace wall  | kJ/m <sup>2</sup> |
| $E_{l,wall}$    | wall loss per ton of products   | kJ/t              |
| $E_{others}$    | other energy input per ton of products  | kJ/t              |
| $E_{p1}$        | sensible heat (or enthalpy) of products at the time when products are loaded in the area of energy balance per ton of products      | kJ/t              |
| $E_{p2}$        | sensible heat (or enthalpy) of products at the time when products are extracted from the area of energy balance per ton of products | kJ/t              |
| $E_{react}$     | heat of reaction per ton of products  | kJ/t              |
| $E_{re}$        | energy regenerated from the wasted thermal energy per ton of products   | kJ/t              |
| $E_{s,air}$     | sensible heat of combustion air or other oxydant per ton of products  | kJ/t              |
| $E_{s,atomize}$ | sensible heat of atomization agent per ton of products  | kJ/t              |
| $E_{s,fuel}$    | sensible heat of fuel per ton of products   | kJ/t              |
| $E_{s,infiltr}$ | sensible heat of infiltration air per ton of products   | kJ/t              |
| $E_{s,oxid}$    | sensible heat of oxidized substance per ton of products   | kJ/t              |
| $E_{therm,out}$ | thermal (output) energy per ton of products   | kJ/t              |
| $E_{utility}$   | energy used for generation of utilities per ton of products   | kJ/t              |
| $E_{u,oxy}$     | energy for generation of oxygen per ton of products   | kJ/t              |
| $E_{u,steam}$   | energy for generation of steam per ton of products  | kJ/t              |
| $M_{loss}$      | loss of mass per ton of products  | kg/t              |
| $M_{oxid}$      | mass of oxidized substance per ton of products  | kg/t              |
| $M_p$           | mass of products  | kg or t           |
| $T_{p1}$        | average temperature of products at the time of loading to the area of energy balance  | K                 |
| $T_{p2}$        | average temperature of products at the time of extracting from the area of the energy balance                                       | K                 |
| $T_s$           | melting temperature of aluminium  | K                 |
| $\eta_1$        | total energy efficiency   | —                 |
| $\eta_e$        | regional electrical generation efficiency   | —                 |
| $\sigma_1$      | absolute error of thermocouple  | °C                |
| $\sigma_2$      | absolute error of compensation lead wire  | °C                |
| $\sigma_3$      | absolute error of output device of thermocouple   | °C                |

## 5 Basic principles

### 5.1 General

The area of energy balance measurement shall be determined.

In principle, exclude energy consumed by external product loading vehicles such as forklifts from the area of energy balance.

NOTE An example of determination of the area of energy balance measurement of a batch-type aluminium melting furnace is shown in Figure 1.

The following aspects shall be included in the energy balance measurement:


- a) energy input;
  - fuel equivalent energy,  $E_{fe}$ ;
  - other energy input,  $E_{others}$ ;
- b) energy output;
  - thermal energy output,  $E_{therm,out}$ ;
  - energy consumed in electrical auxiliary equipment,  $E_{aux}$ ;
  - energy used for generation of utilities,  $E_{utilities}$ ;
  - electrical generation loss,  $E_{l,eg}$ .

Determine the energy input and energy output which goes into and comes out of the area of energy balance based on the measurement data.

The total energy input into the area shall balance the total energy output from the area.

The result of energy balance measurement shall be summarized into energy input and energy output in an energy balance sheet with necessary information, such as equipment summary, measurement conditions and measurement data.

Thermal energy balance and electrical generation may be created as subcategories (see 7.3 and 7.4).

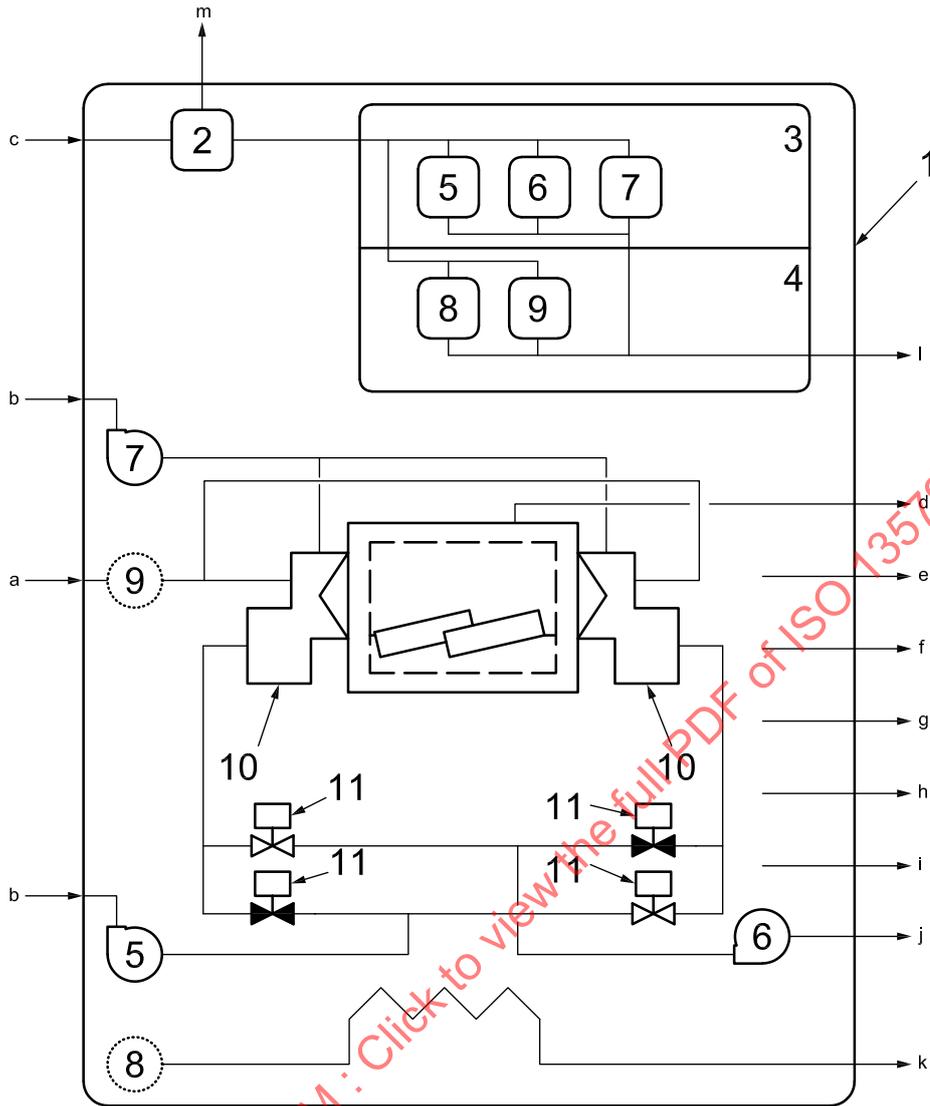

**Key**

- |   |  |    |                          |
|---|--|----|--------------------------|
| 1 | area of energy balance                               | 7  | pilot burner blower      |
| 2 | electrical generation                                | 8  | cooling water pump       |
| 3 | installed electrical auxiliary equipment             | 9  | fuels transfer equipment |
| 4 | equipment for fluid transfer                         | 10 | regenerative burner      |
| 5 | combustion blower                                    | 11 | changeover valve         |
| 6 | induced draft (or draught) fan (IDF)                 |    |                          |
| a | Sensible heat of fuel.                               |    |                          |
| b | Sensible heat of combustion air.                     |    |                          |
| c | Fuel equivalent energy of electricity.               |    |                          |
| d | Sensible heat of exhaust gas (auxiliary flue).       |    |                          |
| e | Effective energy.                                    |    |                          |
| f | Sensible heat of oxidized substance.                 |    |                          |
| g | Heat storage loss by batch-type furnace.             |    |                          |
| h | Wall loss.   |    |                          |
| i | Other losses.  |    |                          |
| j | Sensible heat of exhaust gas (regenerative burners). |    |                          |
| k | Cooling water loss.                                  |    |                          |
| l | Energy consumed in electrical auxiliary equipment.   |    |                          |
| m | Energy loss in electrical generation.                |    |                          |

**Figure 1 — Example of determination of the area of energy balance measurement of batch-type aluminium melting furnaces**

## 5.2 Energy flow diagram

The energy flow diagram (or Sankey diagram) is as specified in ISO 13579-1:2013, 5.2.

## 5.3 Process Heating Assessment Survey Tool

The Process Heating Assessment Survey Tool (PHAST) is as specified in ISO 13579-1:2013, 5.3.

# 6 Basic conditions of measurement and calculation

## 6.1 State of furnace

The furnaces subject to measurement shall be in normal operation, and the temperature cycle and throughput shall be as considered in the design calculation.

Normal operating conditions are generally based on nominal conditions stipulated in the specifications. However, in the case of no specified conditions, it may be at the discretion of the supplier, for example two thirds of design throughput.

Melting rate influences efficiency, but in this part of ISO 13579, melting rate is assumed generally to be 300 kg/m<sup>2</sup>h to 500 kg/m<sup>2</sup>h since furnace temperature is usually around 1 200 °C. As far as the melting rate is in the range, the melting rate does not have a significant effect on energy efficiency. When melting rate is quite different from the range, it should be taken into account and mentioned.

## 6.2 Duration of measurement

Duration of measurement is specified in ISO 13579-1:2013, 6.2.

## 6.3 Unit of specific energy intensity

Unit of specific energy intensity is specified in ISO 13579-1:2013, 6.3.

## 6.4 Reference conditions

Reference conditions are specified in ISO 13579-1:2013, 6.4.

## 6.5 Unit of amount of gas

Unit of amount of gas is specified in ISO 13579-1:2013, 6.5.

## 6.6 Fuel

Fuel is specified in ISO 13579-1:2013, 6.6.

# 7 Type of energy used in this part of ISO 13579

## 7.1 General

The energy evaluated in this part of ISO 13579 and their symbols are defined in Clause 3.

All energy shall be expressed in kilojoule per ton of products (kJ/t), unless otherwise specified.

7.2 Energy balance

Systematization of energy evaluated in this part of ISO 13579 is described in Table 1.

**Table 1 — Systematization of type of energy evaluated in this part of ISO 13579 — Overall energy balance**

| Total energy input/output  | Intermediate category   | Type of energy   |                                |                                |
|--|---|--|--------------------------------|--------------------------------|
|  |   | Detailed item  |                                |                                |
| Total energy input, $E_{input}$  | Fuel equivalent energy, $E_{fe}$  | Calorific value of fuel, $E_{h,fuel}$                              |                                |                                |
|  |   | Calorific value of waste, $E_{h,waste}$                            |                                |                                |
|  |   | Calorific value of source gas of atmospheric gas, $E_{fe,atm,cal}$ |                                |                                |
|  |   | Fuel equivalent energy of electricity, $E_{fe,el}$                 |                                |                                |
|  | Other energy input, $E_{other}$   | Sensible heat of fuel, $E_{s,fuel}$                                |                                |                                |
|  |   | Sensible heat of combustion air, $E_{s,air}$                       |                                |                                |
|  |   | Sensible heat of atomization agent, $E_{s,atomize}$                |                                |                                |
|  |   | Heat of reaction, $E_{react}$                                      |                                |                                |
|  |   | Sensible heat of infiltration air, $E_{s,infiltr}$                 |                                |                                |
|  |   | Total energy output, $E_{output}$                                  | Thermal energy, $E_{ther,out}$ | Effective energy, $E_{effect}$ |
| Jig loss, $E_{l,jig}$  |   |  |                                |                                |
| Sensible heat of oxidized substance, $E_{s,oxid}$                          |   |  |                                |                                |
| Sensible heat of exhaust gas, $E_{s,exhaust}$                              |   |  |                                |                                |
| Heat storage loss by batch-type furnace, $E_{l,storage}$                   |   |  |                                |                                |
| Wall loss, $E_{l,wall}$  |   |  |                                |                                |
| Heat loss of discharged blowout from furnace opening, $E_{l,blowout}$      |   |  |                                |                                |
| Heat loss of radiation from furnace opening, $E_{l,opening}$               |   |  |                                |                                |
| Heat loss from furnace parts installed through furnace wall, $E_{l,parts}$ |   |  |                                |                                |
| Cooling water loss, $E_{l,cw}$   |   |  |                                |                                |
| Other losses, $E_{l,other}$  |   |  |                                |                                |
| Electrical auxiliary equipment, $E_{aux}$                                  | Energy consumed in installed electrical auxiliary equipment, blowers, etc., $E_{aux,installed}$ |  |                                |                                |
|  | Energy used for fluid transfer, cooling water, etc., $E_{aux,fluid}$                            |  |                                |                                |
|  | Generation of utilities, $E_{utility}$  |  |                                |                                |
| Generation of utilities, $E_{utility}$                                     | Oxygen, $E_{u,oxy}$   |  |                                |                                |
|  | Steam, $E_{u,steam}$  |  |                                |                                |
| Electrical generation loss, $E_{l,eg}$                                     |   |  |                                |                                |

7.2.1 Total energy input

See 3.1.1.

7.2.2 Fuel equivalent energy

See 3.1.2.

Regional electrical generation efficiency shall be applied to the convention of fuel equivalent energy of electricity,  $E_{fe,el}$ .

**7.2.3 Other energy input**

See 3.1.3.

**7.2.4 Total energy output**

See 3.1.4.

**7.2.5 Thermal energy output**

See 3.1.5.

**7.2.6 Energy consumed in electrical auxiliary equipment**

See 3.1.6.

If part of the energy consumed in electrical auxiliary equipment,  $E_{aux,installed}$ , is used as thermal energy in the heating process, the thermal energy shall be subtracted from the total energy consumed in the installed electrical auxiliary equipment.

Energy used for fluid transfer,  $E_{aux,fluid}$ , shall be applied when energy consumed in auxiliary electrical equipment for fluid transfer, such as a pump, cannot be determined from the measurement of electrical energy supplied to the equipment (e.g. cooling water supplied from the factory facilities).

**7.2.7 Energy used for generation of utility**

See 3.1.7.

Energy used for the generation of utilities,  $E_{utility}$ , other than oxygen, steam and atmospheric gas for heat treatment may be excluded.

**7.2.8 Electrical generation loss**

See 3.1.8.

**7.3 Thermal energy balance****7.3.1 General**

Thermal energy balance sheet may be created as a subcategory of total energy balance. The thermal energy balance shall be a part of the total energy balance.

The area of thermal energy balance should be basically equivalent to the melting furnace chambers (see Figure 1).

The systematization of thermal energy is described in Table 2.

Table 2 — Type of energy used in this part of ISO 13579 — Thermal energy balance

| Type of energy                                     |  |   |
|--|--|---|
| Thermal energy input/output                        | Intermediate category/detailed item  |   |
| Thermal energy input                               | Calorific value of fuel, $E_{h,fuel}$                                      |   |
|  | Thermal energy input from electrical heating source                        |   |
|  | Other energy input, $E_{others}$   | Sensible heat of fuel, $E_{s,fuel}$                 |
|  |  | Sensible heat of combustion air, $E_{s,air}$        |
|  |  | Sensible heat of atomization agent, $E_{s,atomize}$ |
|  |  | Heat of reaction, $E_{react}$                       |
| Sensible heat of infiltration air, $E_{s,infiltr}$ |  |   |
| Thermal energy output<br>$E_{therm,out}$           | Effective energy, $E_{effect}$   |   |
|  | Jig loss, $E_{l,jig}$  |   |
|  | Sensible heat of oxidized substance, $E_{s,oxid}$                          |   |
|  | Sensible heat of exhaust gas, $E_{exhaust}$                                |   |
|  | Heat storage loss by batch-type furnace, $E_{l,storage}$                   |   |
|  | Wall loss, $E_{l,wall}$  |   |
|  | Heat loss of discharged blowout from furnace opening, $E_{l,blowout}$      |   |
|  | Heat loss of radiation from furnace opening, $E_{l,opening}$               |   |
|  | Heat loss from furnace parts installed through furnace wall, $E_{l,parts}$ |   |
|  | Cooling water loss, $E_{l,cw}$   |   |
|  | Other losses, $E_{l,other}$  |   |
| The use of thermal energy balance is optional.     |  |   |

**7.3.2 Thermal energy input from electrical heating source**

See 3.1.9.1.

Thermal energy input from electrical heating source shall not be the fuel equivalent energy of electricity. Efficiency of heat transfer shall be taken into account if necessary.

**7.3.3 Circulating heat**

See 3.1.9.2

When circulating heat is determined, it shall be summarized separately from the thermal energy balance sheet.

**7.4 Energy balance of electrical generation**

**7.4.1 General**

Energy balance of electrical generation may be used as a subcategory of total energy balance. This electrical energy balance shall be a part of the total energy balance.

NOTE This category is useful when fuel equivalent energy of electricity,  $E_{fe,el}$ , is calculated.

The systematization of energy related to electrical generation is described in Table 3.

Table 3 — Type of energy used in this part of ISO 13579 — Energy balance of electrical generation

| Energy input/output  | Type of energy  |  |
|--|---|--|
|  | Intermediate category/detailed item                                 |  |
| Input  | Fuel equivalent energy of electricity, $E_{fe,el}$                  |  |
| Output   | Total consumed electrical energy, $E_{e,total}$                     | Thermal energy output from electrical heating source   |
|  |   | Electrical auxiliary equipment, $E_{aux}$  |
|  |   | Energy consumed in installed electrical auxiliary equipment, $E_{aux,installed}$ , blowers, etc. |
|  |   | Energy used for fluid transfer, $E_{aux,fluid}$ , cooling water, etc.                            |
|  | Electrical energy used for generation of utilities, $E_{e,utility}$ | Oxygen, $E_{u,oxy}$  |
|  |   | Atmospheric gas energy for generation, $E_{u,atm,gen}$   |
|  | Electrical generation loss, $E_{l,eg}$                              |  |
| The use of an energy balance sheet of electrical generation is optional. |   |  |

## 7.5 Recycled energy

See 3.1.11.

The value of this type of energy can be deducted from the total energy input in the total energy efficiency calculation specified in 9.4.1.

## 8 Measurement method

### 8.1 General

The measurement method is specified in ISO 13579-1:2013, 8.1.

### 8.2 Fuel

#### 8.2.1 Volume

Volume is specified in ISO 13579-1:2013, 8.2.1.

#### 8.2.2 Sampling, test, analysis and measurement of calorific value

Sampling, test, analysis and measurement of calorific value are specified in ISO 13579-1:2013, 8.2.2.

#### 8.2.3 Pressure and temperature

Pressure and temperature are specified in ISO 13579-1:2013, 8.2.3.

### 8.3 Atomization agent

#### 8.3.1 Volume

Volume is specified in ISO 13579-1:2013, 8.3.1.

**8.3.2 Pressure and temperature**

Pressure and temperature are specified in ISO 13579-1:2013, 8.3.2.

**8.4 Combustion air and exhaust gas**

**8.4.1 Combustion air**

**8.4.1.1 Combustion air volume**

Combustion air volume are specified in ISO 13579-1:2013, 8.4.1.1.

**8.4.1.2 Combustion air pressure and temperature**

Combustion air pressure and temperature are specified in ISO 13579-1:2013, 8.4.1.2.

**8.4.2 Exhaust gas**

**8.4.2.1 Temperature**

Temperature is specified in ISO 13579-1:2013, 8.4.2.1.

**8.4.2.2 Method of exhaust gas analysis**

Method of exhaust gas analysis is specified in ISO 13579-1:2013, 8.4.2.2.

**8.4.3 Measurement method for burners with recuperative functions**

**8.4.3.1 Regenerative burners**

**8.4.3.1.1 Measurement positions**

Measurement positions are specified in ISO 13579-1:2013, 8.4.3.1.1.

**8.4.3.1.2 Measurement of exhaust gas temperature**

Measurement of exhaust gas temperature is specified in ISO 13579-1:2013, 8.4.3.1.2.

**8.4.3.2 Recuperative radiant tube burners**

Recuperative radiant tube burners are specified in ISO 13579-1:2013, 8.4.3.2.

**8.5 Products**

**8.5.1 General**

The aluminium products and related by-products are generally described as shown in Table 4.

Table 4 — Aluminium and related by-products generated by aluminium melting furnaces

| Material |  | Description   |
|----------|--|---|
| Input    | Load (aluminium scrap)                 | Aluminium loaded into the furnace for the thermal process                     |
|          | Residual aluminium left in the furnace | Residual aluminium remaining in the furnace from the previous batch           |
| Output   | Molten aluminium                       | Effective amount of aluminium from the furnace                                |
|          | Scale, dross                           | Oxidized aluminium which is produced during the thermal process               |
|          | Residual aluminium in the furnace      | Residual aluminium remaining in the furnace after the batch under measurement |

## 8.5.2 Mass

### 8.5.2.1 Load (aluminium scrap)

The measurement of the mass of the load aluminium shall be determined using weighing equipment.

The measurement of mass shall be carried out per batch.

### 8.5.2.2 Molten aluminium

The measurement of the mass of the molten aluminium shall be determined using weighing equipment.

The measurement of mass shall be carried out per batch.

### 8.5.2.3 Scale and dross

Mass loss due to the formation of scales or dross shall be determined from the measurement of its mass per batch.

NOTE Dross describes impurities separated from molten aluminium by melting.

When the batch-by-batch measurement is difficult, other practical methods may also be taken [e.g. adoption of average data determined from the accumulated mass loss for a certain period of time (daily, weekly, etc.)].

## 8.5.3 Temperature

### 8.5.3.1 Load (aluminium scrap)

Assume the average temperature of aluminium at the time of loading as it is equal to the ambient temperature.

In the case of aluminium products of which temperature may exceed ambient temperature, it is allowed to estimate the average temperature from the surface temperature.

### 8.5.3.2 Molten aluminium

Measure the internal temperature of molten aluminium in the furnace at the end of melting cycle.

K thermocouples attached inside the furnace at the tip of the protecting tube, which is submerged in the molten aluminium, are generally used for this measurement.

Molten aluminium shall be properly agitated so as to perform an accurate temperature measurement.

#### 8.5.4 Scale and dross

Assign the temperature data of molten aluminium to the temperature value of scale (dross).

#### 8.5.5 Residual aluminium in the furnace

The furnace should be empty at the beginning of the measurement; otherwise, residual aluminium is considered negligible in most cases. When the residual aluminium in the furnace is not negligible, its mass and temperature shall be determined.

### 8.6 Temperature of furnace surface

#### 8.6.1 Furnace wall

Furnace wall is specified in ISO 13579-1:2013, 8.7.1.

#### 8.6.2 Cross-sectional area of furnace parts installed through furnace wall

Cross-sectional area of furnace parts installed through furnace wall is specified in ISO 13579-1:2013, 8.7.2.

#### 8.7 Furnace inner wall temperature

Furnace inner wall temperature is specified in ISO 13579-1:2013, 8.8.

#### 8.8 Inner furnace pressure

Inner furnace pressure is specified in ISO 13579-1:2013, 8.9.

#### 8.9 Cooling water

##### 8.9.1 Temperature

Temperature is specified in ISO 13579-1:2013, 8.10.1.

##### 8.9.2 Volume

Volume is specified in ISO 13579-1:2013, 8.10.2.

#### 8.10 Electrical auxiliary equipment

##### 8.10.1 Installed electrical auxiliary equipment

Installed electrical auxiliary equipment is specified in ISO 13579-1:2013, 8.11.1.

##### 8.10.2 Energy for fluid transfer

Energy for fluid transfer is specified in ISO 13579-1:2013, 8.11.2.

#### 8.11 Generation of utilities

Generation of utilities is specified in ISO 13579-1:2013, 8.12.

#### 8.12 Recycled energy

Recycled energy is specified in ISO 13579-1:2013, 8.13.

## 9 Calculation

### 9.1 General provisions

General provisions for calculations are specified in ISO 13579-1:2013, 9.1.

### 9.2 Total energy input

#### 9.2.1 Calorific value of fuel

##### 9.2.1.1 General

Calorific value of fuel is specified in ISO 13579-1:2013, 9.2.1.1.

##### 9.2.1.2 Gaseous fuel

Gaseous fuel is specified in ISO 13579-1:2013, 9.2.1.2.

##### 9.2.1.3 Liquid fuel

Liquid fuel is specified in ISO 13579-1:2013, 9.2.1.3.

#### 9.2.2 Calorific value of waste

Calorific value of waste is specified in ISO 13579-1:2013, 9.2.2.

#### 9.2.3 Calorific value of source gas of atmospheric gas

Calorific value of source gas of atmospheric gas is specified in ISO 13579-1:2013, 9.2.3.

#### 9.2.4 Fuel equivalent energy of electricity

Fuel equivalent energy of electricity is specified in ISO 13579-1:2013, 9.2.4.

##### 9.2.4.1 Sensible heat of fuel

Sensible heat of fuel is specified in ISO 13579-1:2013, 9.2.4.1.

##### 9.2.5 Sensible heat of combustion air

###### 9.2.5.1 General

Sensible heat of combustion air is specified in ISO 13579-1:2013, 9.2.5.1.

###### 9.2.5.2 Gaseous fuel

Gaseous fuel is specified in ISO 13579-1:2013, 9.2.5.2.

###### 9.2.5.3 Liquid fuel

Liquid fuel is specified in ISO 13579-1:2013, 9.2.5.3.

###### 9.2.5.4 Simplified calculation of excess air ratio

Simplified calculation of excess air ratio is specified in ISO 13579-1:2013, 9.2.5.4.

### 9.2.6 Sensible heat of atomization agent

Sensible heat of atomization agent is specified in ISO 13579-1:2013, 9.2.6.

### 9.2.7 Heat of reaction

The heat of formation of scale (aluminium oxide) per ton of product is calculated using Formula (1):

$$E_{\text{react}} = M_{\text{loss}} \times e_{\text{Al}} \quad (1)$$

15,484 kJ/kg may be applied to the heat by the formation of scale per kilogram of scale.

### 9.2.8 Sensible heat of infiltration air

Sensible heat of infiltration air is specified in ISO 13579-1:2013, 8.2.8.

## 9.3 Total energy output

### 9.3.1 Thermal energy output

#### 9.3.1.1 Effective energy

##### 9.3.1.1.1 General

Calculate the effective energy,  $E_{\text{effective}}$ , using Formula (2):

$$E_{\text{effective}} = E_{\text{p2}} - E_{\text{p1}} \quad (2)$$

##### 9.3.1.1.2 Sensible heat of products

###### 9.3.1.1.2.1 At the time of loading

Calculate the sensible heat of products at the time when products are loaded in the area of energy balance per ton of products,  $E_{\text{p1}}$ , using Formula (3):

$$E_{\text{p1}} = 1000 \times c_{\text{pm,p1}} \times (T_{\text{p1}} - 273,15) \quad (3)$$

The physical properties of purity aluminium are given in Table A.1.

Table A.2 may be used for the specific heat of aluminium alloy.

###### 9.3.1.1.2.2 At the time of extracting

The enthalpy of products at the time when products are extracted from the area of energy balance per ton of aluminium product,  $E_{\text{p2}}$ , is calculated as,

$$E_{\text{p2}} = (1000 - M_{\text{loss}}) \times [\{c_{\text{pm,p1}} \times (T_{\text{s}} - 273,15)\} + e_{\text{latent}} + \{c_{\text{pm,p2}} \times (T_{\text{p2}} - T_{\text{s}})\}] \quad (4)$$

where

$$e_{\text{latent}} = 396$$

The mean specific heat before melting,  $c_{pm,ps}$ , is calculated as Formula (5):

$$c_{pm,ps} = 0,000\,334 \times \frac{(T_s + 273,15)}{2} + 0,92 \quad (5)$$

The mean specific heat after melting,  $c_{pm,p2}$ , is calculated as Formula (6):

$$c_{pm,p2} = 0,000\,2014 \times \frac{(T_s + T_{p2})}{2} + 0,915 \quad (6)$$

The mean specific heat, melting point and latent heat of melting are shown in Tables A.1 and A.2.

### 9.3.1.2 Sensible heat of oxidized substance

The sensible heat of scale (aluminium oxide) per ton of product,  $E_{s,oxid}$ , is calculated as,

$$E_{s,oxid} = M_{oxid} \times c_{pm,oxid} \times (T_{p2} - 273,15) \quad (7)$$

1,085 (kJ/kg·K) may be applied to the mean specific heat of scale.

NOTE Properties of typical aluminium oxides are shown in Table A.3.

### 9.3.1.3 Sensible heat of exhaust gas

#### 9.3.1.3.1 General

Sensible heat of exhaust gas is specified in ISO 13579-1:2013, 9.3.1.4.1.

#### 9.3.1.3.2 Gaseous fuel

Gaseous fuel is specified in ISO 13579-1:2013, 9.3.1.4.2.

#### 9.3.1.3.3 Liquid fuel

Liquid fuel is specified in ISO 13579-1:2013, 9.3.1.4.3.

### 9.3.1.4 Heat storage loss by batch-type furnace

Heat storage loss by batch-type furnace is specified in ISO 13579-1:2013, 9.3.1.5.

### 9.3.1.5 Sensible heat loss of atmospheric gas

Sensible heat loss of atmospheric gas is specified in ISO 13579-1:2013, 9.3.1.6.

### 9.3.1.6 Wall loss

Wall loss is specified in ISO 13579-1:2013, 9.3.1.7.

### 9.3.1.7 Heat loss of discharged blowout from furnace opening

Heat loss of discharged blowout from furnace opening is specified in ISO 13579-1:2013, 9.3.1.8.

### 9.3.1.8 Heat loss of radiation from furnace opening

Heat loss of radiation from furnace opening is specified in ISO 13579-1:2013, 9.3.1.9.

**9.3.1.9 Heat loss from furnace parts installed through furnace wall**

Heat loss from furnace parts installed through furnace wall is specified in ISO 13579-1:2013, 9.3.1.10.

**9.3.1.10 Cooling water loss**

Cooling water loss is specified in ISO 13579-1:2013, 9.3.1.11.

**9.3.2 Energy consumed in electrical auxiliary equipment**

**9.3.2.1 Energy consumed in electrical auxiliary equipment**

Energy consumed in electrical auxiliary equipment is specified in ISO 13579-1:2013, 9.3.2.1.

**9.3.2.2 Energy consumed in installed electrical auxiliary equipment**

Energy consumed in installed electrical auxiliary equipment is specified in ISO 13579-1:2013, 9.3.2.2.

**9.3.2.3 Energy used for fluid transfer**

Energy used for fluid transfer is specified in ISO 13579-1:2013, 9.3.2.3.

**9.3.3 Energy used for generation of utilities**

**9.3.3.1 General**

Energy used for the generation of utilities is specified in ISO 13579-1:2013, 9.3.3.1.

**9.3.3.2 Oxygen**

Oxygen is specified in ISO 13579-1:2013, 9.3.3.2.

**9.3.3.3 Steam**

Steam is specified in ISO 13579-1:2013, 9.3.3.3.

**9.3.4 Electrical generation loss**

Electrical generation loss is specified in ISO 13579-1:2013, 9.3.4.

**9.4 Total energy efficiency**

**9.4.1 General**

Total energy efficiency is specified in ISO 13579-1:2013, 9.4.1.

**9.4.2 Total energy efficiency limited to the heating-up process**

The total energy efficiency limited to the heating-up process, which is specified in ISO 13579-1:2013, 8.4.2, may not be applied to this part of ISO 13579.

## 10 Energy balance evaluation report

The energy balance report for batch-type aluminium melting furnaces shall be as specified in ISO 13579-1:2013, Clause 10.

NOTE An example of an energy balance report is given in Annex B.

STANDARDSISO.COM : Click to view the full PDF of ISO 13579-3:2013

## Annex A (informative)

### Reference data

Table A.1 — Physical properties of purity aluminium

| Property  |        | High-purity aluminium <sup>a</sup> | Purity aluminium <sup>b</sup> |
|---|--------|------------------------------------|-------------------------------|
| Atomic number   |        | 13                                 | -                             |
| Atomic mass   |        | 26,981 5                           | -                             |
| Grating constant<br>(face-centred cubic lattice) 20 °C (nm) |        | 0,404 96                           | 0,404                         |
| Density (mg/m <sup>3</sup> )                                | 20 °C  | 2,698 4                            | 2,1                           |
|   | 700 °C | -                                  | 2,373                         |
| Melting point (°C)  |        | 660,1                              | ~650                          |
| Boiling point (°C)  |        | 2 520                              | -                             |
| Latent heat of melting (kJ/mol)                             |        | 10,47                              | 10,3                          |
| Combustion heat (kJ/mol)                                    |        | 834                                | 835                           |
| Solidification contraction (% mass fraction)                |        | -                                  | 6,6                           |
| Specific heat 0 °C – 100 °C(J/kg·°C)                        |        | 917                                | -                             |
| Thermal conductivity 25 °C(W/m·°C)                          |        | 238                                | 225 (soft)                    |
| NOTE Source: Reference [4].                                 |        |                                    |                               |
| a 99,996 mass%.   |        |                                    |                               |
| b 99,5 mass%.   |        |                                    |                               |

Table A.2 — Specific heat of aluminium alloy

| Temperature<br>°C                  | Solid state<br>kJ/kg°C | Liquid state<br>kJ/kg°C |
|------------------------------------|------------------------|-------------------------|
| 0                                  | 0,920 92               | -                       |
| 100                                | 0,961 524              | -                       |
| 200                                | 0,993 756              | -                       |
| 300                                | 1,025 989              | -                       |
| 400                                | 1,058 639              | -                       |
| 500                                | 1,090 872              | -                       |
| 600                                | 1,123 104              | -                       |
| 660                                | 1,141 522              | 1,047 337               |
| 700                                | -                      | 1,056 128               |
| 800                                | -                      | 1,076 221               |
| 900                                | -                      | 1,095 476               |
| 1 000                              | -                      | 1,116 406               |
| NOTE Extracted from Reference [4]. |                        |                         |

Table A.3 — Properties of aluminium oxide<sup>a</sup>

| Material                                   | Temperature<br>K | Density<br>kg/m <sup>3</sup> | Specific<br>heat<br>kJ/(kg·K) | Thermal<br>conductivity<br>W/(m·K) | Thermal<br>dispersion<br>mm <sup>2</sup> /s |
|--|------------------|------------------------------|-------------------------------|------------------------------------|---|
| Alumina,<br>Al <sub>2</sub> O <sub>3</sub> | 300              | 3890                         | 0,779                         | 36,0                               | 11,89                                       |
|  | 500              | 3870                         | 1,040                         | 20,2                               | 5,02  |
|  | 800              | 3850                         | 1,181                         | 10,4                               | 2,29  |
|  | 1 300            | 3790                         | 1,271                         | 6,13                               | 1,27  |
|  | 1 800            | 3740                         | 1,323                         | 5,59                               | 1,13  |
| NOTE Source: Reference [5].                |                  |                              |                               |                                    |   |
| <sup>a</sup> Based on 2 % porosity.        |                  |                              |                               |                                    |   |

STANDARDSISO.COM : Click to view the full PDF of ISO 13579-3:2013

## Annex B (informative)

### Measurement of energy balance and calculation of efficiency of a batch-type aluminium melting furnace sample report


#### B.1 Equipment specification summary

The equipment specification summary for the furnace is shown in Table B.1. The outline drawings are shown in Figure B.1.


**Table B.1 — Equipment specification summary**

|  |                                       |
|--|---------------------------------------|
| Company/Plant name                         | --                                    |
| Location                                   | --                                    |
| Manufacturer of the furnace                | --                                    |
| Serial number                              | --                                    |
| Type                                       | Aluminium melting furnace: batch-type |
| Nominal capacity                           | 29,5 per ton per charge               |
| Type of fuel                               | LNG 13A                               |
| Type, capacity and quantity of burners     | Regenerative burner: one pair         |
| Material of products                       | Aluminium                             |
| Nominal loading temperature of products    | 20 °C                                 |
| Nominal extracting temperature of products | 750 °C                                |
| Melting temperature                        | 660 °C                                |

Dimensions in millimetres

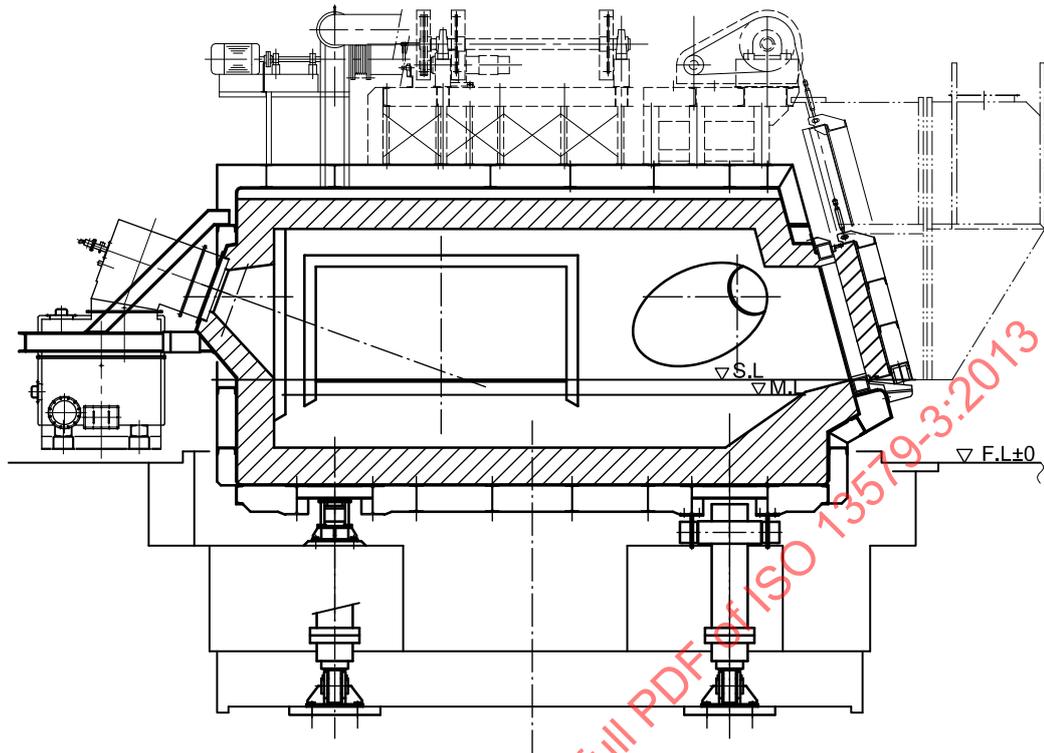

a) Longitudinal section

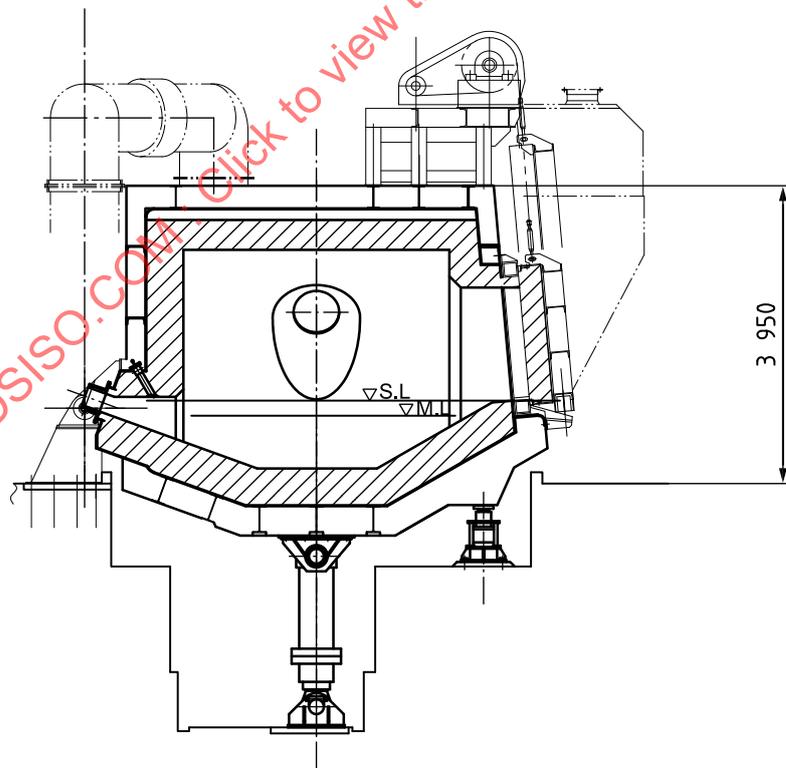

b) Cross-section


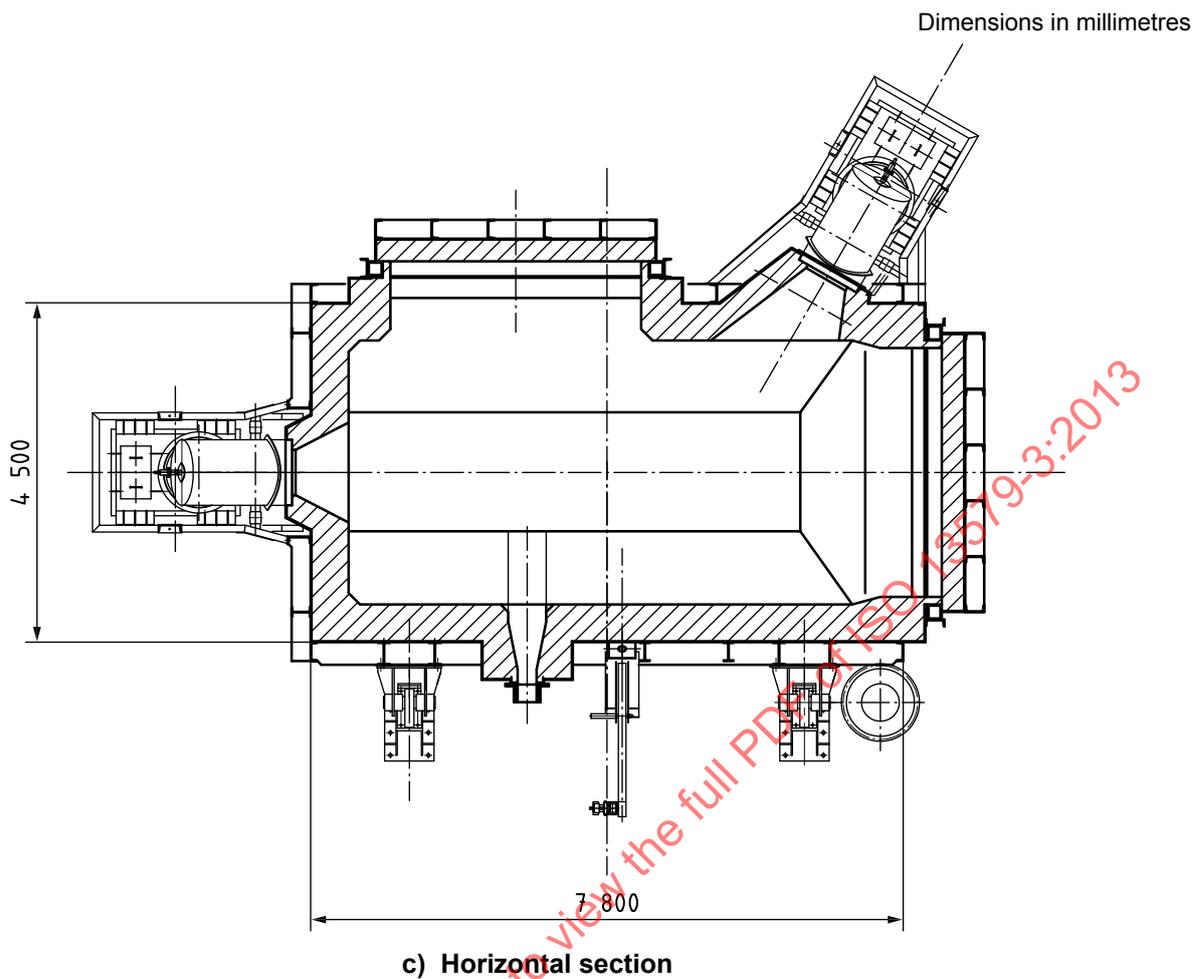


Figure B.1 — Outline drawing of the intended furnace

## B.2 Area of energy balance

The area of energy balance is defined as described in Figure B.2 (see key item 1).

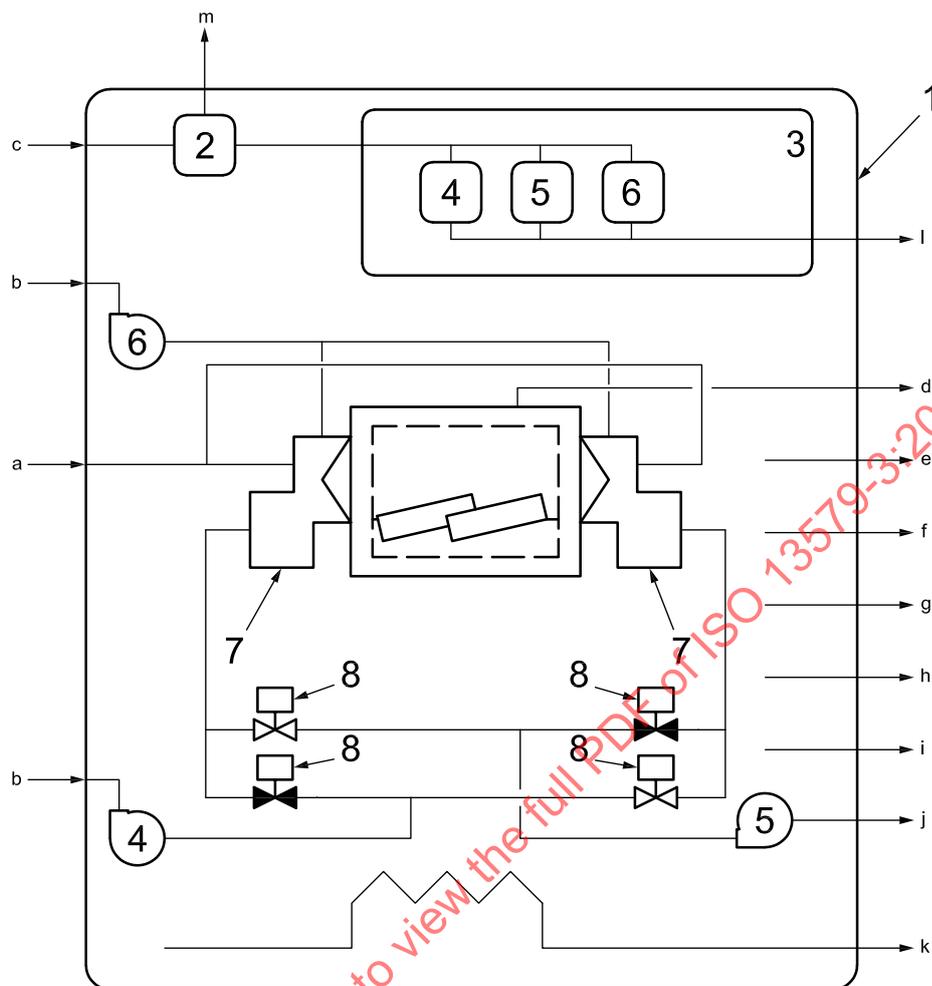

**Key**

- |   |  |   |                     |
|---|--|---|---------------------|
| 1 | area of energy balance                   | 5 | IDF                 |
| 2 | electrical generation                    | 6 | pilot burner blower |
| 3 | installed electrical auxiliary equipment | 7 | regenerative burner |
| 4 | combustion blower                        | 8 | changeover valve    |

- a Sensible heat of fuel.  
 b Sensible heat of combustion air.  
 c Fuel equivalent energy of electricity.  
 d Sensible heat of exhaust gas (auxiliary flue).  
 e Effective energy.  
 f Sensible heat of oxidized substance.  
 g Heat storage loss by batch-type furnace.  
 h Wall loss.  
 i Other losses.  
 j Sensible heat of exhaust gas (regenerative burners).  
 k Cooling water loss.  
 l Energy consumed in electrical auxiliary equipment.  
 m Energy loss in electrical generation.

NOTE The energy used for fluid transfer is neglected.

**Figure B.2 — The area of energy balance**