

---

---

**Welding — General tolerances for  
welded constructions — Dimensions  
for lengths and angles, shape and  
position**

*Soudage — Tolérances générales relatives aux constructions soudées  
— Dimensions des longueurs et angles, formes et positions*

STANDARDSISO.COM : Click to view the full PDF of ISO 13920:2023



STANDARDSISO.COM : Click to view the full PDF of ISO 13920:2023



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2023

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11  
Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

	Page
Foreword.....	iv
<b>1 Scope</b> .....	<b>1</b>
<b>2 Normative references</b> .....	<b>1</b>
<b>3 Terms and definitions</b> .....	<b>1</b>
<b>4 General tolerances</b> .....	<b>2</b>
4.1 Tolerances for linear dimensions.....	2
4.2 Tolerances for angular dimensions.....	2
4.3 Straightness, flatness and parallelism tolerances.....	4
<b>5 Indications on drawings</b> .....	<b>5</b>
<b>6 Testing</b> .....	<b>5</b>
6.1 General.....	5
6.2 Straightness.....	5
6.3 Flatness.....	6
6.4 Parallelism.....	6
<b>7 Non-conformities</b> .....	<b>7</b>
<b>Bibliography</b> .....	<b>8</b>

STANDARDSISO.COM : Click to view the full PDF of ISO 13920:2023

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had/had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at [www.iso.org/patents](http://www.iso.org/patents). ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by Technical Committee ISO/TC 44, *Welding and allied processes*, Subcommittee SC 10, *Quality management in the field of welding*, in collaboration with the European Committee for Standardization (CEN) Technical Committee CEN/TC 121, *Welding and allied processes*, in accordance with the Agreement on technical cooperation between ISO and CEN (Vienna Agreement).

This second edition cancels and replaces the first edition (ISO 13920:1996), of which it constitutes a minor revision. The main changes are as follows:

- references have been updated;
- presentation has been updated to the latest ISO styles.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html). Official interpretations of ISO/TC 44 documents, where they exist, are available from this page: <https://committee.iso.org/sites/tc44/home/interpretation.html>.

# Welding — General tolerances for welded constructions — Dimensions for lengths and angles, shape and position

## 1 Scope

This document specifies general tolerances for linear and angular dimensions and for shape and position of welded structures in four tolerance classes, based on customary workshop accuracy. The main criterion for selection of a particular tolerance class is based on the functional requirements which are to be met.

The applicable tolerances are always those which are stated in the drawing. Instead of specifying individual tolerances the tolerance classes according to this document can be used.

General tolerances for linear and angular dimensions and for shape and position as specified in this document apply for weldments, welding assemblies, welded structures, etc.

Special provisions can be necessary for complex structures.

The specifications given in this document are based on the independency principle of ISO 8015, according to which the dimensional and geometrical tolerances apply independently of each other.

Manufacturing documentation in which linear and angular dimensions or indications for shape and position are presented without individually indicated tolerances shall be deemed incomplete if there is no, or inadequate, reference to general tolerances. This does not apply to temporary dimensions.

## 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 463, *Geometrical Product Specifications (GPS) — Dimensional measuring equipment — Design and metrological characteristics of mechanical dial gauges*

ISO 1101, *Geometrical product specifications (GPS) — Geometrical tolerancing — Tolerances of form, orientation, location and run-out*

ISO 13385-1, *Geometrical product specifications (GPS) — Dimensional measuring equipment — Part 1: Design and metrological characteristics of callipers*

ISO 13385-2, *Geometrical product specifications (GPS) — Dimensional measuring equipment — Part 2: Design and metrological characteristics of calliper depth gauges*

## 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 1101 apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

## 4 General tolerances

### 4.1 Tolerances for linear dimensions

See [Table 1](#).

**Table 1 — Tolerances for linear dimensions**

Tolerance class	Range of nominal sizes										
	$l$										
	mm										
	2 < $l$ ≤ 30	30 < $l$ ≤ 120	120 < $l$ ≤ 400	400 < $l$ ≤ 1 000	1 000 < $l$ ≤ 2 000	2 000 < $l$ ≤ 4 000	4 000 < $l$ ≤ 8 000	8 000 < $l$ ≤ 12 000	12 000 < $l$ ≤ 16 000	16 000 < $l$ ≤ 20 000	$l$ > 20 000
Tolerances											
$t$											
mm											
A	±1	±1	±1	±2	±3	±4	±5	±6	±7	±8	±9
B		±2	±2	±3	±4	±6	±8	±10	±12	±14	±16
C		±3	±4	±6	±8	±11	±14	±18	±21	±24	±27
D		±4	±7	±9	±12	±16	±21	±27	±32	±36	±40

### 4.2 Tolerances for angular dimensions

The length of the shorter angle leg shall be used, in accordance with [Table 2](#), to determine which tolerances apply. The length of the leg can also be assumed to extend to a specified reference point. In this case, the reference point concerned shall be indicated on the drawing.


See [Table 2](#) for the relevant tolerances.

[Figure 1](#) shows examples of how the shorter angle leg,  $l$ , is represented.

Table 2 — Tolerances for angular dimensions

Tolerance class	Range of nominal sizes $l$ mm (length of shorter leg)		
	$l \leq 400$	$400 < l \leq 1\,000$	$l > 1\,000$
	Tolerances $\Delta\alpha$ (degrees and minutes)		
A	$\pm 20'$	$\pm 15'$	$\pm 10'$
B	$\pm 45'$	$\pm 30'$	$\pm 20'$
C	$\pm 1^\circ$	$\pm 45'$	$\pm 30'$
D	$\pm 1^\circ 30'$	$\pm 1^\circ 15'$	$\pm 1^\circ$
	Calculated and rounded tolerances, $t$ , in mm/m <sup>a</sup>		
A	$\pm 6$	$\pm 4,5$	$\pm 3$
B	$\pm 13$	$\pm 9$	$\pm 6$
C	$\pm 18$	$\pm 13$	$\pm 9$
D	$\pm 26$	$\pm 22$	$\pm 18$

<sup>a</sup> The value indicated in mm/m corresponds to the tangent value of the general tolerance. It is to be multiplied by the length, in m, of the shorter leg.

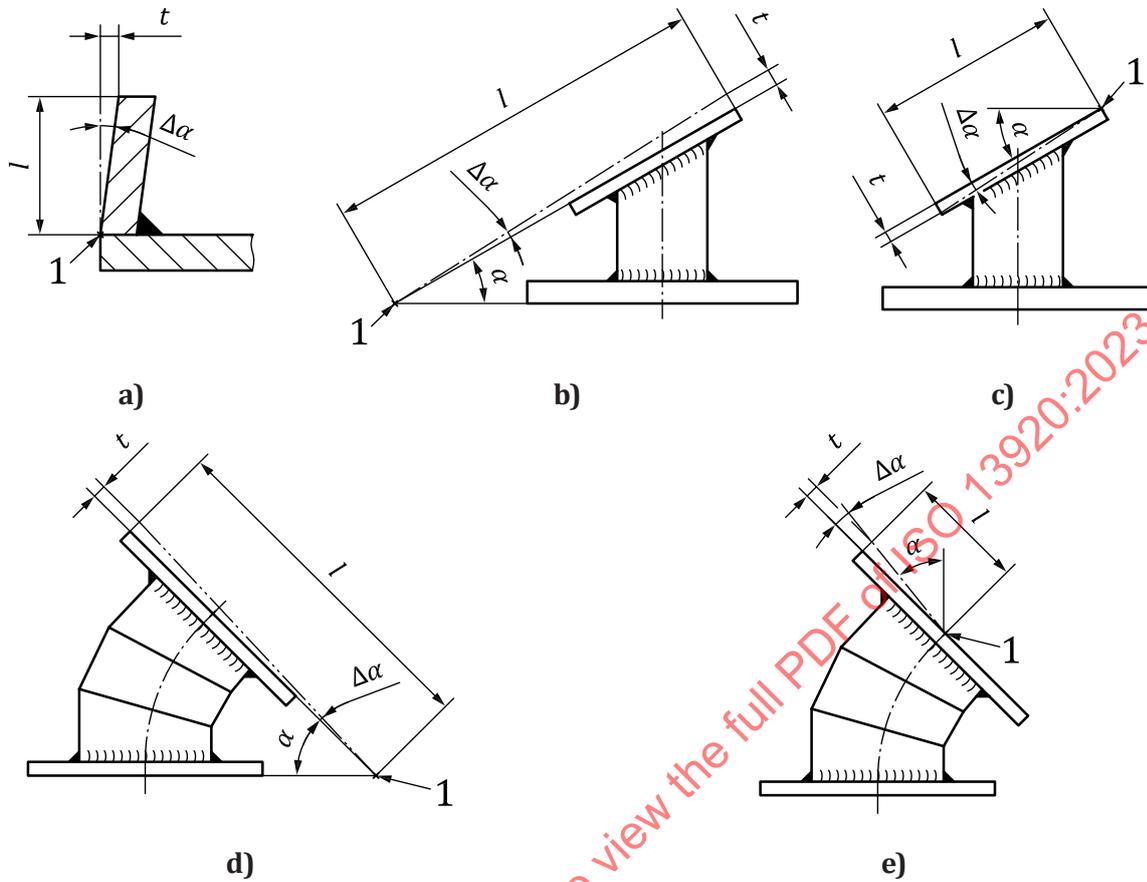

**Key**

1 reference point

**Figure 1 — Examples showing how the shorter angle leg,  $l$ , is represented**

**4.3 Straightness, flatness and parallelism tolerances**

The straightness, flatness and parallelism tolerances specified in [Table 3](#) apply for

- the overall dimensions of a weldment,
- a welding assembly, or
- a welded structure, and
- for sections for which the dimensions are indicated.

Other tolerances of form and position, e.g. coaxiality and symmetry tolerances, have not been specified. If such tolerances are required for reasons of function, they shall be indicated on the drawings as specified in ISO 1101.

**Table 3 — Straightness, flatness and parallelism tolerances**

Tolerance class	Range of nominal sizes									
	$l$									
	mm (relates to longer side of the surface)									
	30 $<l \leq$ 120	120 $<l \leq$ 400	400 $<l \leq$ 1 000	1 000 $<l \leq$ 2 000	2 000 $<l \leq$ 4 000	4 000 $<l \leq$ 8 000	8 000 $<l \leq$ 12 000	12 000 $<l \leq$ 16 000	16 000 $<l \leq$ 20 000	$l >$ 20 000
	Tolerances									
	$t$									
	mm									
E	0,5	1	1,5	2	3	4	5	6	7	8
F	1	1,5	3	4,5	6	8	10	12	14	16
G	1,5	3	5,5	9	11	16	20	22	25	25
H	2,5	5	9	14	18	26	32	36	40	40

## 5 Indications on drawings

The designation of the selected tolerance class as specified in [Table 1](#) and [Table 2](#) (e.g. ISO 13920-B) or its combination with a tolerance class as specified in [Table 3](#) (e.g. ISO 13920-BE), shall be entered in the appropriate area on the drawing.

## 6 Testing

### 6.1 General

Testing and measuring devices used shall be suitable and accurate for their intended purpose:

- graduated steel straightedges;
- tape measures;
- straightedges;
- squares;
- vernier callipers (in accordance with ISO 13385-1 or ISO 13385-2);
- dial gauges (in accordance with ISO 463).


Other testing and measuring devices may be used by agreement.

The results of measurement can be influenced if they are obtained under unusual temperature or atmospheric conditions, e.g. large constructions in strong sunlight.

The actual size of an angle shall be determined by applying suitable measuring devices tangentially to the weldment, but away from the zone immediately influenced by the weld. The deviation shall be derived from the difference between the nominal size and the actual size. The angular deviation may be measured in degrees and minutes, or in millimetres.

### 6.2 Straightness

The edge of the weldment and the straightedge shall be aligned in such a way that the greatest distance between the straightedge and the actual surface is at its minimum. The distance between the edge and the straightedge shall be measured (e.g. see [Figure 2](#)).

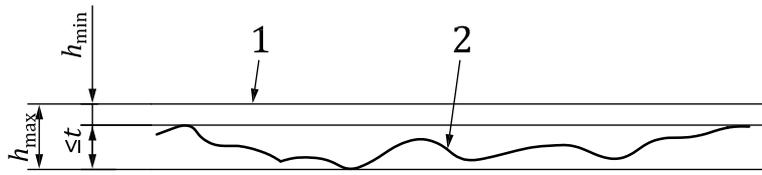

**Key**

- 1 straightedge
- 2 edge of weldment


NOTE  $h_{max} - h_{min} \leq t$

**Figure 2 — Straightness test**

**6.3 Flatness**

The actual surface of the weldment and the measuring plane shall be aligned to each other in such a way that the greatest distance between the measuring plane and the actual surface is at its minimum. This may be achieved, for example, with the aid of optical devices, tubular water levels, span wires, floor plates, surface plates, and machine beds.

The distances between the actual surface and the measuring plane shall be measured (example see [Figure 3](#)).

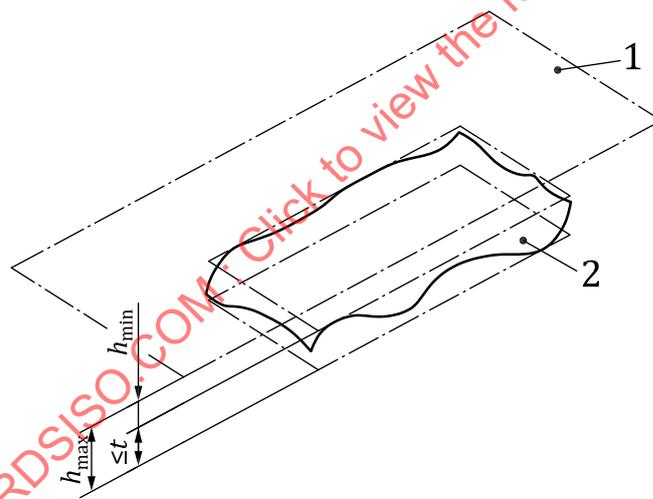

**Key**

- 1 measuring plane
- 2 actual surface

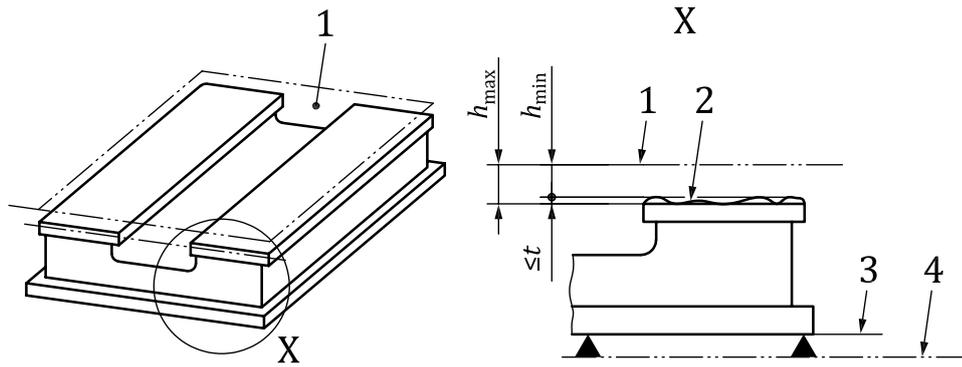
NOTE  $h_{max} - h_{min} \leq t$

**Figure 3 — Flatness test**

**6.4 Parallelism**

The reference surface shall be aligned parallel to the reference plane.

A measuring plane shall be established parallel to the reference plane and apart from the weldment, using the measuring devices referred to in [6.3](#). The distances between the actual surface and the measuring plane shall be measured (e.g. see [Figure 4](#)).

**Key**

- 1 measuring plane  
2 actual surface

- 3 reference surface  
4 reference plane

NOTE  $h_{\max} - h_{\min} \leq t$

**Figure 4 — Parallelism test**

## 7 Non-conformities

A decision on the acceptance of components not complying with this document may be made on the basis of the suitability for their intended purpose.

STANDARDSISO.COM : Click to view the full PDF of ISO 13920:2023