

INTERNATIONAL
STANDARD

ISO
14229-1

Third edition
2020-02

AMENDMENT 1
2022-10

**Road vehicles — Unified diagnostic
services (UDS) —**

Part 1:
Application layer

AMENDMENT 1

Véhicules routiers — Services de diagnostic unifiés (SDU) —

Partie 1: Couche application

AMENDEMENT 1

STANDARDSISO.COM : Click to view the full PDF of ISO 14229-1:2020/Amd 1:2022



Reference number
ISO 14229-1:2020/Amd.1:2022(E)

© ISO 2022

STANDARDSISO.COM : Click to view the full PDF of ISO 14229-1:2020/Amd 1:2022



COPYRIGHT PROTECTED DOCUMENT

© ISO 2022

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 31, *Data communication*.

A list of all parts in the ISO 14229 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

STANDARDSISO.COM : Click to view the full PDF of ISO 14229-1:2020/Amd 1:2022

Road vehicles — Unified diagnostic services (UDS) —

Part 1: Application layer

AMENDMENT 1

8.4, Table 2

Replace “80₁₆ to 82₁₆” with “80₁₆ to 83₁₆”.

Replace “83₁₆ to 88₁₆” with “84₁₆ to 88₁₆”.

11.6.2.3, Table 240, entry “memorySize”

Replace

“The memorySize shall be greater than 1.”

with

“The memorySize shall be greater than 0000₁₆.”

12.2.2.1, Table 296, entry “#5”

Replace “Memory Selection” with “MemorySelection”.

12.2.4, Table 299, entry “31₁₆”

Replace

“This NRC shall be returned if the specified groupOfDTC parameter is not supported.”

with

“This NRC shall be returned if the specified groupOfDTC or MemorySelection parameter is not supported.”.

12.3.1.1, last paragraph

Replace

“When using paged-buffer-handling to read DTCs (especially for SubFunction = reportDTCByStatusMask), it is possible that the number of DTCs can decrease while creating the response. In such a case the response shall be filled up with DTC 000000₁₆ and DTC status 00₁₆. The client shall treat these DTCs as not present in the response message.”

with

“The service ReadDTCInformation can result in responses that contain information from many DTCs (such as reportDTCByStatusMask, reportDTCSnapshotIdentification, reportDTCExtDataRecordByRecordNumber, ...). With paged-buffer-handling to read DTCs it is possible that:

- the DTC status is changing and thus the number of DTCs matching the filter is decreased; or
- the DTC is removed due to fault memory overflow and thus no more data to read is available.

In this case the response shall be filled up with DTC 000000₁₆ and statusOfDTC 00₁₆. In case of SubFunction reportDTCExtDataRecordByRecordNumber the DTCExtDataRecord data bytes shall be also filled up with 00₁₆.

12.3.1.19

Replace all occurrences of “DTCExtDataRecordNumber” with “UserDefDTCExtDataRecordNumber” in 12.3.1.19.

12.3.2.1, Table 312, entry #6

12.3.2.2, Table 317

12.3.2.3, Table 318

12.3.3.2, Table 335

12.3.5.17, heading

12.3.5.17.1

12.3.5.17.3, Table 388 (2 occurrences)

12.3.5.17.3, Table 389 (2 occurrences)

Replace

“reportDTCExtendedDataRecordIdentification”

with

“reportDTCExtDataRecordByRecordNumber”.

12.3.2.3, Table 318

Replace the table cell “UserDefDTCSnapshotRecordNumber” with the following two table cells:

<p>DTCSnapshotRecordNumber</p> <p>DTCSnapshotRecordNumber is a 1-Byte value indicating the number of the specific DTCSnapshot data record requested for a client defined DTCMaskRecord via the reportDTCSnapshotByDTCNumber Sub-Function.</p> <p>DTCSnapshot data record number 00₁₆ and F0₁₆ shall be reserved for legislated purposes (e.g. VOBD). DTCSnapshot records in the range of 01₁₆ through EF₁₆ and F1₁₆ through FE₁₆ shall be available for vehicle manufacturer specific usage. A value of FF₁₆ requests the server to report all stored DTCSnapshot data records at once.</p>

UserDefDTCSnapshotRecordNumber

UserDefDTCSnapshotRecordNumber is a 1-Byte value indicating the number of the specific DTCSnapshot data record requested for a client defined DTCMaskRecord via the reportUserDefMemoryDTCSnapshotRecordByDTCNumber SubFunction.

UserDefDTCSnapshot records in the range of 00₁₆ through FE₁₆ shall be available for vehicle manufacturer specific usage. A value of FF₁₆ requests the server to report all stored UserDefDTCSnapshot data records at once.

12.3.2.3, Table 318, entry for DTCReadinessGroupIdentifier

Replace

“specifies the reference to the the DTC readiness group and associated”

with

“specifies the reference to the DTC readiness group and associated”.

12.3.2.3, Table 318

Add an additional row to the table:

UserDefDTCExtDataRecordNumber

UserDefDTCExtDataRecordNumber is a 1-Byte value indicating the number of the specific DTCExtendedData record requested for a client defined DTCMaskRecord on a user defined fault memory via the reportUserDefMemoryDTCExtDataRecordByDTCNumber subfunction. The UserDefDTCExtendedDataRecordNumber ranges are defined in D.8.

12.3.2.3, Table 318

Replace “SAE_J2012-DA_VOBD_DTCFormat” with “SAE_J2012-DA_DTCFormat_04”.

12.3.3.1, Table 329

Replace “DTCSnapshotRecord” with “UserDefDTCSnapshotRecord”.

12.3.3.1, Table 330

Replace Table 330 with the following:

A_Data byte	Parameter Name	Cvt	Byte value	Mnemonic
#1	ReadDTCInformation Response SID	M	59 ₁₆	RDTICIPR
#2	reportType = [reportUserDefMemoryDTCExtDataRecordByDTCNumber]	M	19 ₁₆	LEV_RUDMDTCEDRBDN
#3	MemorySelection	M	00 ₁₆ -FF ₁₆	MEMYS

C₁: The UserDefDTCExtDataRecordNumber and the extendedData in the DTCExtDataRecord parameter are only present if at least one DTCExtDataRecord is available to be reported.

C₂: The UserDefDTCExtDataRecordNumber and the extendedData in the DTCExtDataRecord parameter are only present if all records are requested to be reported (UserDefDTCExtDataRecordNumber set to FE₁₆ or FF₁₆ in the request) and more than one record is available to be reported.

A_Data byte	Parameter Name	Cvt	Byte value	Mnemonic
#4 #5 #6 #7	DTCAndStatusRecord[] = [DTCHighByte DTCMiddleByte DTCLowByte statusOfDTC]	M M M M	00 ₁₆ to FF ₁₆ 00 ₁₆ to FF ₁₆ 00 ₁₆ to FF ₁₆ 00 ₁₆ to FF ₁₆	DTCASR_ DTCHB DTCMB DTCLB SODTC
#8	DTCExtDataRecordNumber#1	C ₁	00 ₁₆ -FE ₁₆	DTCEDRN
#9 : #9+(p-1)	DTCExtDataRecord[]#1 = [extendedData#1 byte#1 : extendedData#1 byte#p]	C ₁ : C ₁	00 ₁₆ to FF ₁₆ : 00 ₁₆ to FF ₁₆	DTCSSR_ EDD11 : EDD1p
:	:	:	:	:
t	DTCExtDataRecordNumber#x	C ₂	00 ₁₆ to FD ₁₆	DTCEDRN
#t+1 : #t+1+(q-1)	DTCExtDataRecord[]#x = [extendedData#x byte#1 : extendedData#x byte#q]	C ₂ : C ₂	00 ₁₆ to FE ₁₆ : 00 ₁₆ to FF ₁₆	DTCSSR_ EDDx1 : EDDxq

C₁: The UserDefDTCExtDataRecordNumber and the extendedData in the DTCExtDataRecord parameter are only present if at least one DTCExtDataRecord is available to be reported.

C₂: The UserDefDTCExtDataRecordNumber and the extendedData in the DTCExtDataRecord parameter are only present if all records are requested to be reported (UserDefDTCExtDataRecordNumber set to FE₁₆ or FF₁₆ in the request) and more than one record is available to be reported.

12.3.3.2, Table 335

Add an additional row to the table:

DTCSnapshotRecordNumber

Either the echo of the DTCSnapshotRecordNumber parameter specified by the client in the reportDTCSnapshotRecordByDTCNumber request, or the actual DTCSnapshotRecordNumber of a stored DTCSnapshot record.

12.3.3.2, Table 335

Add a new row at the end of the table:

UserDefDTCExtDataRecordNumber

Either the echo of the UserDefDTCExtDataRecordNumber parameter specified by the client in the reportUserDefMemoryDTCSnapshotRecordByDTCNumber request, or the actual DTCExtDataRecordNumber of a stored DTCExtendedData record.

15.6.5.2, Table 486

Replace “server → client” with “client → server”.

Replace “Response” with “Request”.

Annex A, Table A.1, entry “3A₁₆”

Replace “SDTF” with “SDVF”.

Annex A, Table A.1, entry “56₁₆”

Replace “CVFIS” with “CVFISD”.

Annex A, Table A.1, entry “57₁₆”

Replace “CVFIC” with “CVFICR”.

Annex C, Table C.1, entry “FF01₁₆”

Replace “ReservedForISO15765-5” with “TransportLayerSegmentationSupport”.

D.2.1,

Replace the list item:


- **Confirmation Threshold:** The confirmed status of a failure is defined as a test having reported 'Failed' for this test for a given number of operation cycles where the test has run to completion. Typically for non-OBD use cases the threshold for operation cycles is defined as one. For OBD use cases this threshold is typically greater than one. Implementations may use a Trip Counter (see Figure D.9) as a trigger for changing the confirmed status from 0 to 1. The Trip Counter counts the number of operation cycles (driving cycles) where a malfunction occurred. If the counter reaches the threshold (e.g. 2 driving cycles) the confirmed bit changes from 0 to 1.

with the following:

- **Confirmation Threshold:** The confirmed status of a failure is defined as a test having reported 'Failed' for a given number of operation cycles where the test has run to completion. Typically for non-OBD use cases the confirmation threshold for operation cycles is defined as zero. For OBD use cases this confirmation threshold is typically greater or equal than one. Implementations may use a trip counter (see Figure D.9) as a trigger for changing the confirmed status from 0 to 1. The trip counter is incremented at the end of an operation cycle if testFailedThisOperationCycle is 1 and counts the number of completed operation cycles where a malfunction occurred. If test result reported a value of "failed" and the trip counter has reached the confirmation threshold, then the confirmed bit changes from 0 to 1.


D.2.3, Figure D.3

Replace Figure D.3 with the following:

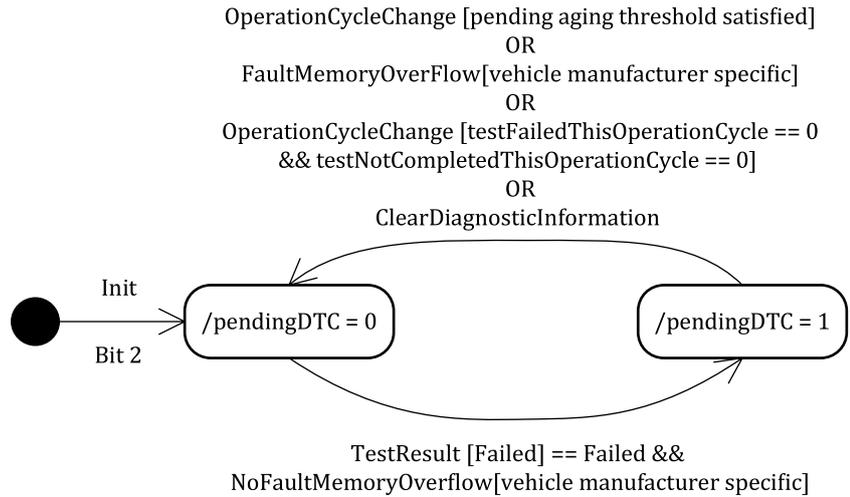

D.2.3, Figure D.4


Replace Figure D.4 with the following:

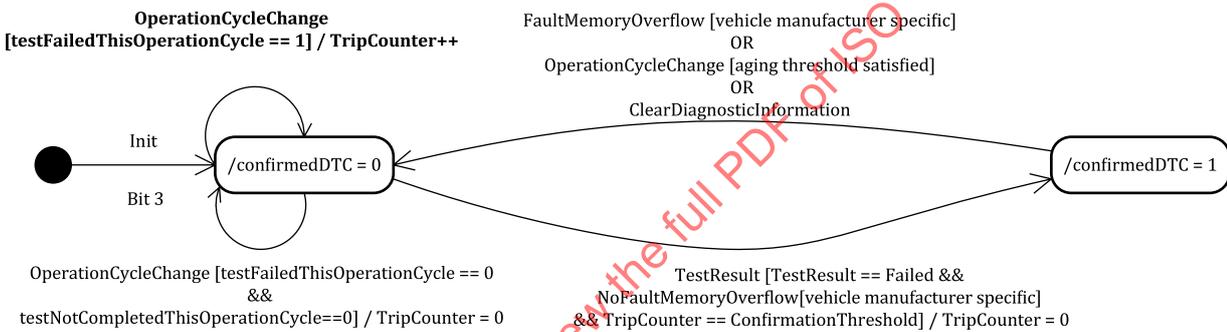

D.2.4, Figure D.9

Replace Figure D.9 with the following:

STANDARDSISO.COM : Click to view the full PDF of ISO 14229-1:2020/Amd 1:2022

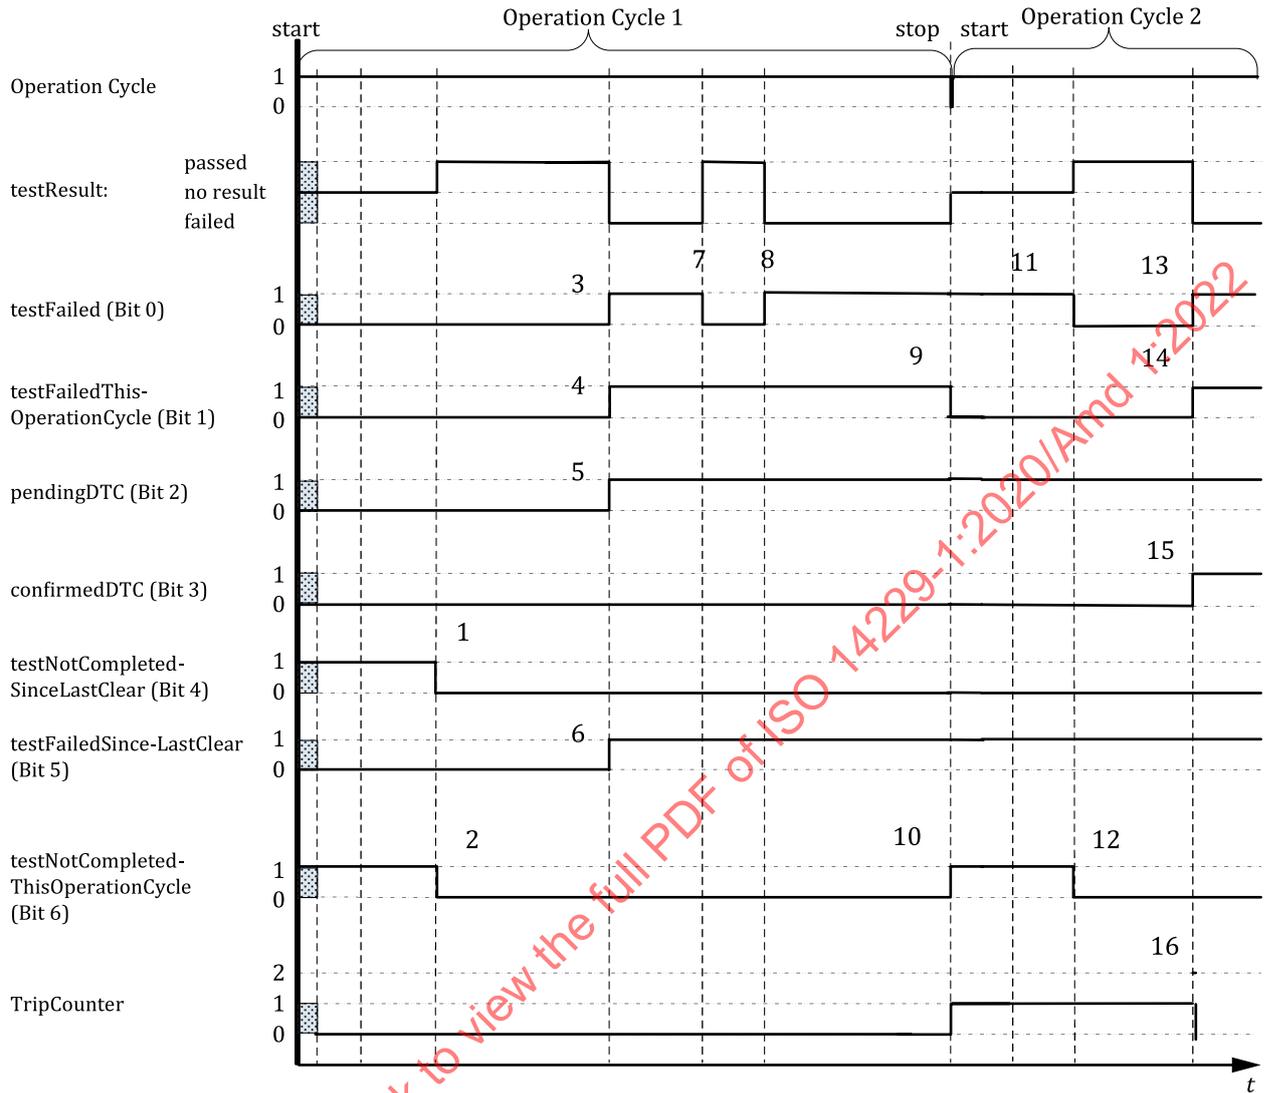


D.2.4, Figure D.9

Replace description of key 16 with "TripCounter is reset to '0' when the DTC status changes to confirmedDTC according to Figure D.4."

D.6, Figure D.10

Replace Figure D.10 with the following:

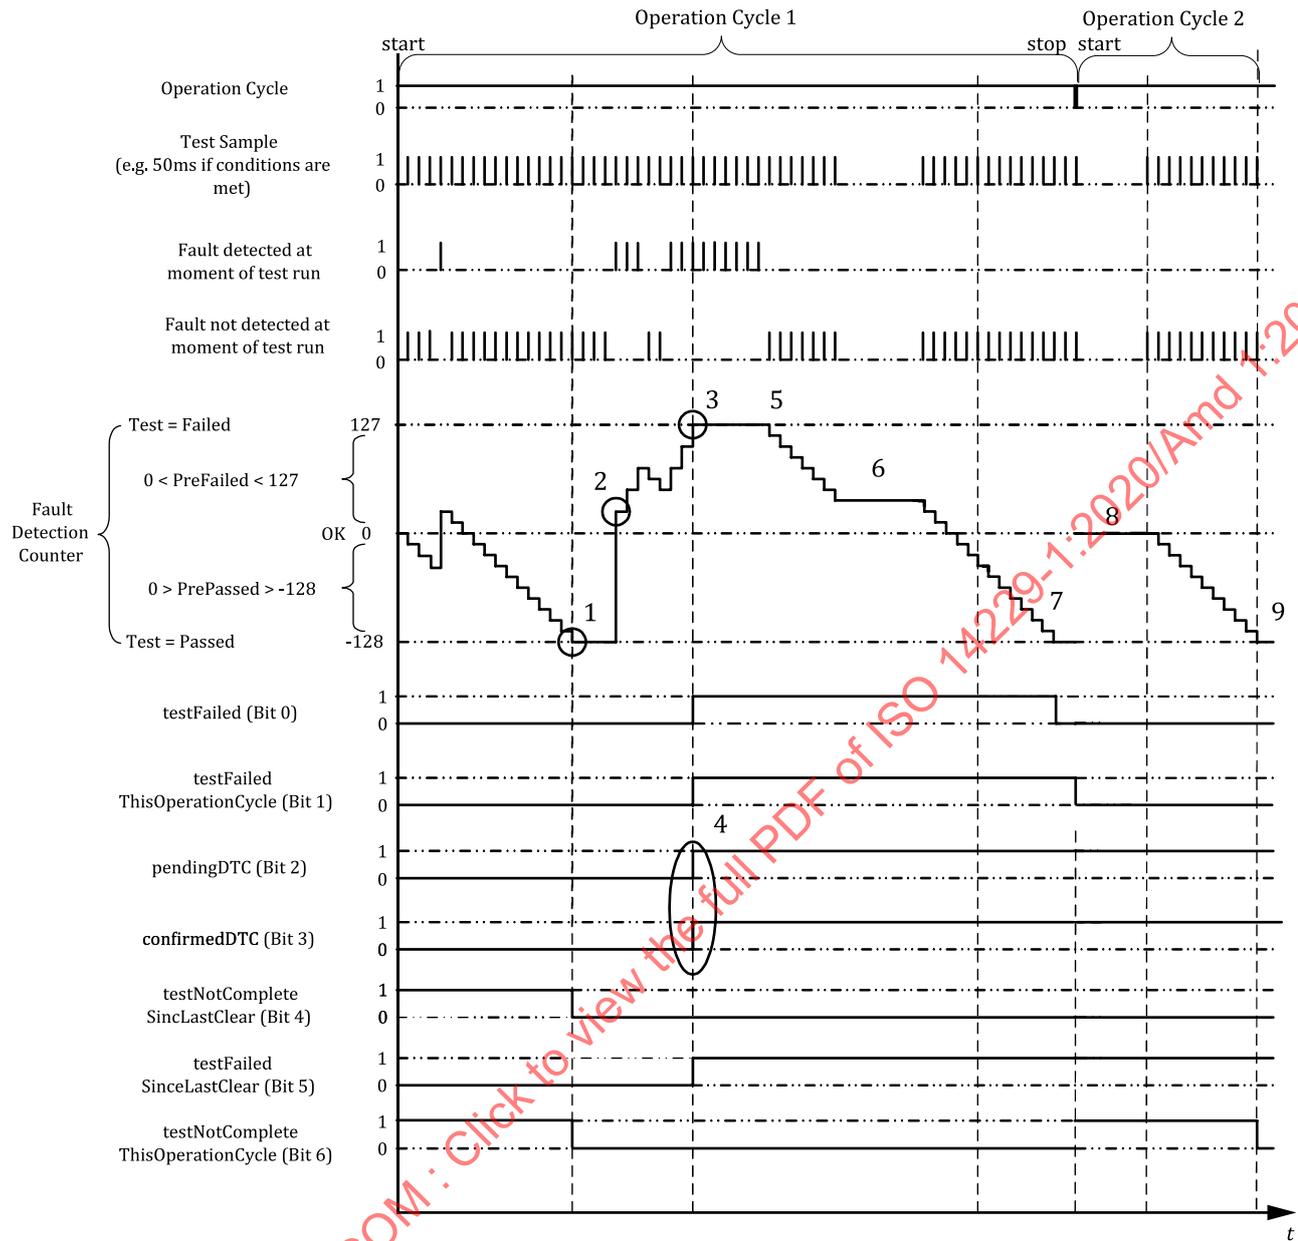

D.7, Figure D.11

Replace Figure D.11 with the following: