
**Optics and optical instruments — Test
methods for telescopic systems —**

Part 3:

Test methods for telescopic sights

*Optique et instruments d'optique — Méthodes d'essai pour systèmes
télescopiques —*

Partie 3: Méthodes d'essai pour viseurs de tir

STANDARDSISO.COM : Click to view the full PDF of ISO 14490-3:2004



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 14490-3:2004

© ISO 2004

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 14490-3 was prepared by Technical Committee ISO/TC 172, *Optics and photonics*, Subcommittee SC 4, *Telescopic systems*.

ISO 14490 consists of the following parts, under the general title *Optics and optical instruments — Test methods for telescopic systems*:

- *Part 1: Test methods for basic characteristics*
- *Part 2: Test methods for binocular systems*
- *Part 3: Test methods for telescopic sights*
- *Part 4: Test methods for astronomical telescopes*
- *Part 5: Test methods for transmittance*
- *Part 6: Test methods for veiling glare index*
- *Part 7: Test methods for limit of resolution*

STANDARDSISO.COM : Click to view the full PDF of ISO 14490-3:2004

Optics and optical instruments — Test methods for telescopic systems —

Part 3: Test methods for telescopic sights

1 Scope

This part of ISO 14490 specifies test equipment and test procedures for the determination of the following optical characteristics of telescopic sights:

- axial parallax;
- parallax;
- eye relief range;
- reticle tracking.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 14132-1:2002, *Optics and optical instruments — Vocabulary for telescopic systems — Part 1: General terms and alphabetical indexes of terms in ISO 14132*

ISO 14132-3:2002, *Optics and optical instruments — Vocabulary for telescopic systems — Part 3: Terms for telescopic sights*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 14132-1 and ISO 14132-3 shall apply.

4 Test methods

4.1 Axial parallax

4.1.1 General

This test method describes the measurement of the axial distance between the reticle of a telescopic sight and an image, formed by the objective lens of this telescopic sight. The distance p'_{ax} is expressed in dioptres (m^{-1}).

4.1.2 Requirements for measuring equipment (See Figure 1)

4.1.2.1 Collimator

The collimator shall have a useful diameter larger than the objective lens diameter of the telescopic sight under test and a focal length of at least 10 times the diameter of the collimator lens.

The reticle of the collimator shall be a cross-hair. The axial position of this reticle shall be correctly adjusted to form a virtual image at the specified parallax-free distance of the telescopic sight under test.

The illumination unit shall create a uniform brightness over the aperture of the collimator.

To avoid chromatic aberrations, a green filter (approximately 0,55 μm) shall be used.


4.1.2.2 Telescopic sight

The telescopic sight shall be adjusted parallel to the optical axis of the collimator in such a position that the objective lens of the telescopic sight is completely illuminated.

The reticle of the telescopic sight shall be in the centre of the total adjustment range.

4.1.2.3 Dioptic tester

The dioptic tester shall have an aperture larger than the exit pupil of the telescopic sight and a magnification sufficient to ensure precise measurement (i.e., ×3 to ×6).

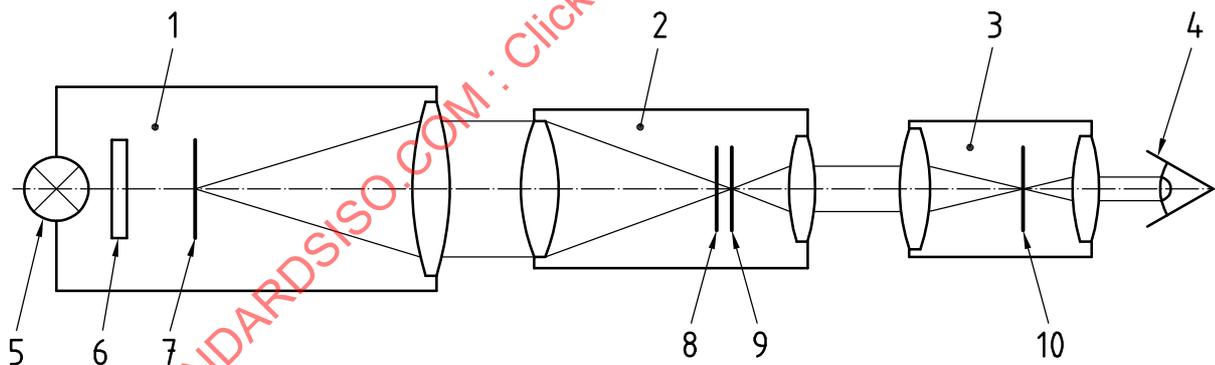

- Key**
- 1 collimator
 - 2 telescopic sight
 - 3 dioptic tester
 - 4 observer's eye
 - 5 illumination unit
 - 6 filter
 - 7 reticle of collimator
 - 8 reticle of telescopic sight
 - 9 image of collimator reticle
 - 10 reticle of dioptic tester

Figure 1 — Schematic test set up: axial parallax

4.1.3 Measurement procedure

Set the dioptric tester to zero with its eyepiece adjusted to obtain a sharp image of its own reticle.

The eyepiece of the telescopic sight shall be focused on the reticle of the telescopic sight to obtain a sharp image while viewing through the dioptric tester.

For telescopic sights with fixed eyepiece, use the dioptric tester to focus on the reticle of the telescopic sight.

The dioptric setting of the dioptric tester shall be adjusted to obtain a sharp image of the collimator reticle.

The axial parallax in the image space p'_{ax} shall be determined by the difference of the two readings on the dioptric tester.

The measurement error for p'_{ax} shall not exceed

$$\frac{2,7 \text{ mm}}{D'^2}$$

where D' is the exit pupil diameter, expressed in millimetres.

For exit pupil diameters larger than 7 mm, the value in the formula shall be $D' = 7 \text{ mm}$.

The axial parallax in the object space p_{ax} is calculated by

$$p_{ax} = \frac{p'_{ax}}{\Gamma^2}$$

NOTE The image quality of the telescopic sight influences the measurement error.

4.2 Parallax

4.2.1 General

This method describes the determination of the angular deviation between the aiming lines for on-axis and off-axis observation.

NOTE For exit pupil diameters of approximately 2 mm or less, only the test method for axial parallax is appropriate.

4.2.2 Requirements for measuring equipment (See Figure 2)

4.2.2.1 Collimator

The collimator shall have a useful diameter larger than the objective lens diameter of the telescopic sight under test and a focal length of at least 10 times the diameter of the collimator lens.

The reticle of the collimator shall be a cross-hair. The axial position of this reticle shall be correctly adjusted to form a virtual image at the specified parallax-free distance of the telescopic sight under test.

The illumination unit shall create a uniform brightness over the aperture of the collimator. To avoid chromatic aberrations, a green filter (approximately 0,55 μm) shall be used.

4.2.2.2 Telescopic sight

The telescopic sight shall be adjusted parallel to the optical axis of the collimator in such a position that the objective lens of the telescopic sight is completely illuminated.


The reticle of the telescopic sight shall be in the centre of the total adjustment range.

4.2.2.3 Light stop

The light stop shall have a diameter d , in millimetres, (see Figure 2) of $d = (1,2 \pm 0,1) \times \Gamma$

where Γ is the magnification of the telescopic sight under test.

The light stop shall be adjustable in a horizontal direction over the whole diameter of the entrance pupil of the telescopic sight.

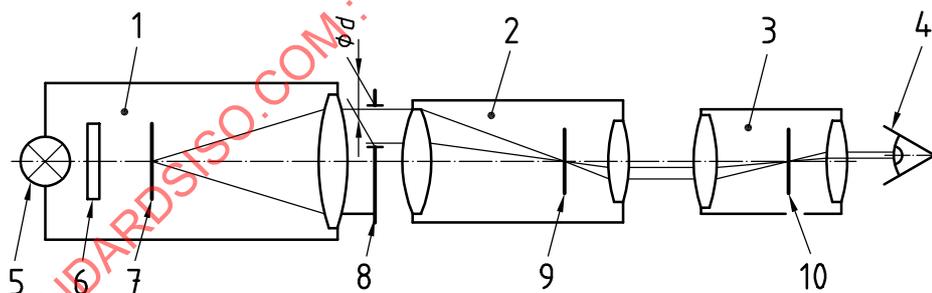

Key

- 1 collimator
- 2 telescopic sight
- 3 auxiliary telescope
- 4 observer's eye
- 5 illumination unit
- 6 filter
- 7 reticle of collimator
- 8 light stop, off-axis
- 9 reticle of telescopic sight
- 10 reticle of auxiliary telescope

Figure 2 — Schematic test set up: parallax

4.2.2.4 Auxiliary telescope

The auxiliary telescope shall have an aperture larger than the exit pupil of the telescopic sight and a magnification sufficient to ensure a precise measurement.

The auxiliary telescope reticle shall have a scale in minutes of arc on its horizontal axis, with subdivisions of 2 minutes of angle (moa).

The auxiliary telescope shall be focused to infinity.

4.2.2.5 Measurement procedure

The eyepiece of the telescopic sight shall be focused on its own reticle to obtain a sharp image while viewing through the auxiliary telescope.

Adjust the light stop to two opposite positions, so that in each of them its outer edge corresponds to the edge of the entrance pupil of the telescopic sight.

Use the auxiliary telescope to determine the change a , in moa, of the angular deviation between the images of the collimator reticle and the telescopic sight reticle in the two light stop positions.

The parallax p' in the image space is calculated by

$$p' = \frac{a}{2}$$

The maximum parallax in the object space p is calculated by

$$p = \frac{p'}{\Gamma}$$

The measurement error for p' shall not exceed 1,0 moa.

NOTE For practical purposes, the relations between parallax and axial parallax are given by

$$p' = p'_{ax} \frac{D'}{2} \text{ expressed in milliradians}$$

$$p' = p'_{ax} \frac{D'}{2} \times 3,438 \text{ expressed in minutes of angle}$$

where D' is the exit pupil diameter, expressed in millimetres.

4.3 Eye relief range

4.3.1 General

This method describes the determination of that eye position range along the optical axis of a telescopic sight, which still allows observation of the full field of view.

For this method, a mean daylight eye pupil of 3 mm in diameter is assumed.

For an illustration of eye relief range, see Figure 3 where "a" to "c" is the eye relief range.


4.3.2 Requirements for measuring equipment (See Figure 3)

4.3.2.1 Collimator

The collimator shall have a useful diameter larger than that of the objective lens of the telescopic sight under test and a focal length of at least 10 times the diameter of the collimator lens.

The collimator shall have two point-shaped light sources positioned in a plane that corresponds to the parallax-free distance of the telescopic sight under test. These light sources shall be adjustable symmetrically about the optical axis in correspondence to the field of view of the telescopic sight.

To avoid chromatic aberration, a green filter (approximately 0,55 μm) shall be used.

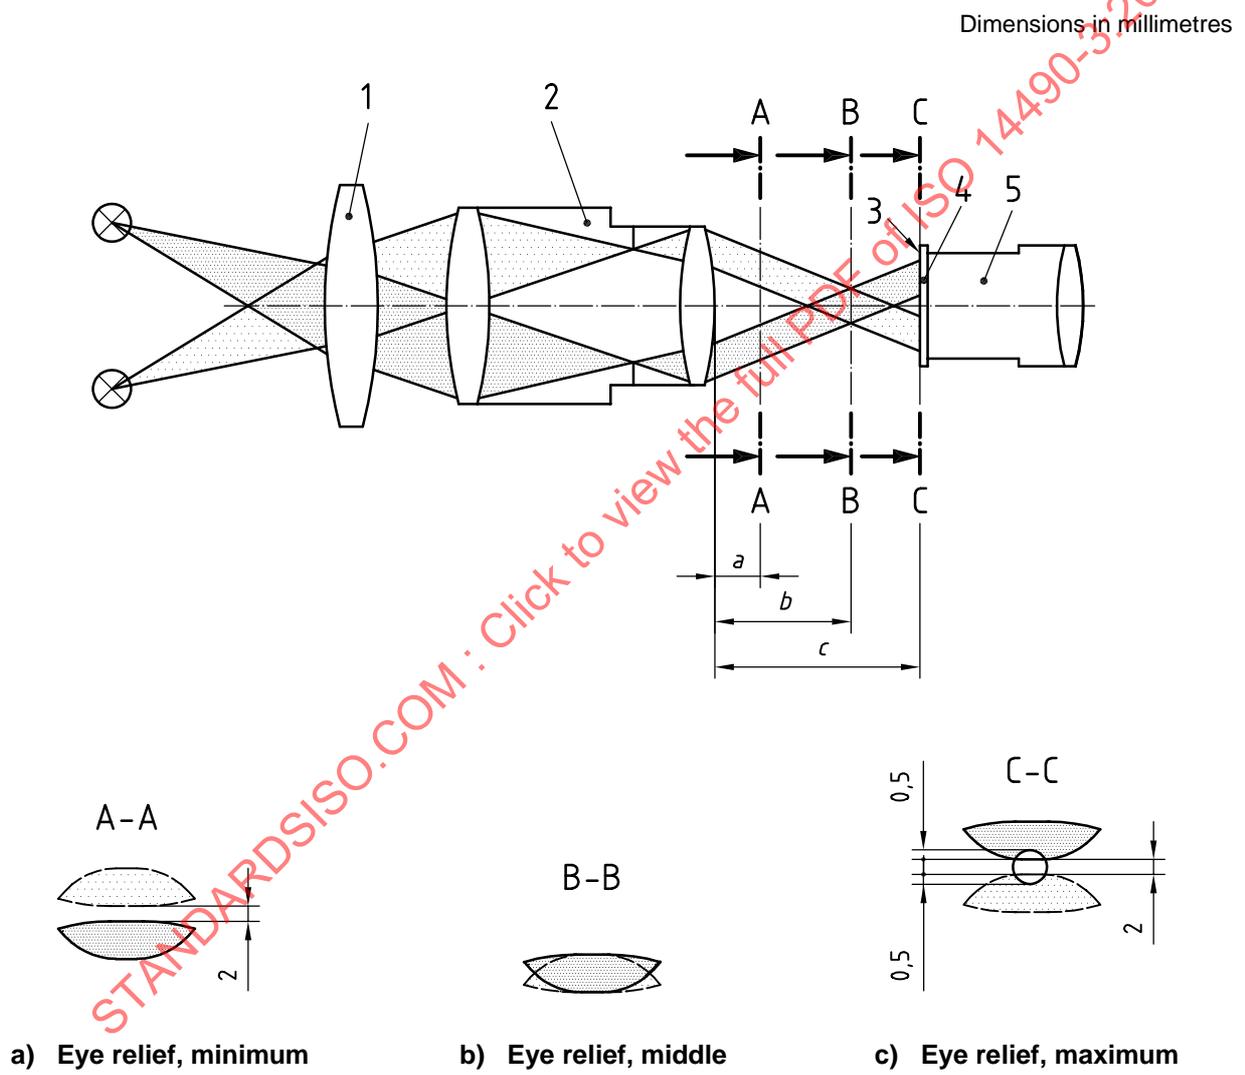

Key

- 1 collimator
- 2 telescopic sight
- 3 diffusion screen
- 4 glass with scale
- 5 measuring magnifier

Figure 3 — Schematic test set up: eye relief range

4.3.2.2 Telescopic sight

The reticle of the telescopic sight shall be in the centre of the adjustment range. The telescopic sight is held in a mount, which is adjustable in two axes perpendicular to the optical axis.

4.3.2.3 Measuring magnifier

The measuring magnifier shall have a magnification of approximately seven times and a reticle with a graduation of 0,1 mm. The graduated side of the reticle is orientated towards the eyepiece of the telescopic sight.

The measuring magnifier is positioned parallel to the optical axis of the telescopic sight and adjustable in the axial direction.

4.3.3 Measurement procedure

Adjust the distance between the two light sources of the collimator corresponding to the field of view of the telescopic sight under test.

Align the telescopic sight so that the edge line of the field of view corresponds with the images of the two light sources.

Move the measuring magnifier — starting from a position close to the telescopic sight — along the optical axis until the inner edges of the two exit pupils are at a distance of 2 mm (see Figure 3, section A-A).

In this position, 0,5 mm of the meridional extension of each of the two exit pupils are covered by a mean daylight eye pupil of 3 mm in diameter.

This position represents the lower limit of the eye relief range.

Continue moving the measuring magnifier along the optical axis until the inner edges of the two exit pupils again are at a distance of 2 mm (see Figure 3, section C-C).

This position represents the upper limit of the eye relief range.

The values for the upper and lower limits of the eye relief range are given by the distances in millimetres from the vertex of the last optical surface of the telescopic sight to the graduated surface of the measuring magnifier in both of the above defined positions.

The uncertainty of measurement shall be less than 0,4 mm for each distance and less than 0,8 mm for the eye relief range.

4.4 Reticle tracking

4.4.1 General

This method describes how to check the movement of the aiming mark over the total adjustment range in relation to the reticle axes.

4.4.2 Requirements for test equipment

4.4.2.1 General

The test equipment consists of a collimator and a fixture for the telescopic sight under test in front of the collimator. The fixture has its main axis parallel to the optical axis of the collimator and is adjustable in two axes perpendicular to the optical axis.