
**Ergonomics of the thermal
environment — Evaluation of thermal
environments in vehicles —**

Part 2:

Determination of equivalent temperature

*Ergonomie des ambiances thermiques — Évaluation des ambiances
thermiques dans les véhicules —*

Partie 2: Détermination de la température équivalente



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 14505-2:2006

© ISO 2006

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword.....	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions.....	1
4 Assessment principles.....	2
4.1 General description of equivalent temperature	2
4.2 General determination principle of equivalent temperature	3
5 Specific equivalent temperatures	4
5.1 General.....	4
5.2 Whole body equivalent temperature.....	4
5.3 Segmental equivalent temperature	5
5.4 Directional equivalent temperature.....	5
5.5 Omnidirectional equivalent temperature.....	6
6 Measuring instruments	7
7 Assessment.....	7
7.1 Determination of whole body equivalent temperature.....	8
7.2 Determination of local equivalent temperature	8
Annex A (informative) Examples of measuring instruments	9
Annex B (informative) Characteristics and specifications of measuring instruments	12
Annex C (informative) Calibration and other determinations	18
Annex D (informative) Interpretation of equivalent temperature.....	20
Annex E (informative) Examples.....	23
Bibliography	25

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 14505-2 was prepared by Technical Committee ISO/TC 159, *Ergonomics*, Subcommittee SC 5, *Ergonomics of the physical environment*.

ISO 14505 consists of the following parts, under the general title *Ergonomics of the thermal environment — Evaluation of thermal environments in vehicles*:

- *Part 1: Principles and methods for assessment of thermal stress* [Technical Specification]
- *Part 2: Determination of equivalent temperature*
- *Part 3: Evaluation of thermal comfort using human subjects*

Introduction

The interaction of convective, radiative and conductive heat exchange in a vehicle compartment is very complex. External thermal loads in combination with the internal heating and ventilation system of the vehicle create a local climate that can vary considerably in space and time. Asymmetric thermal conditions arise and these are often the main cause of complaints of thermal discomfort. In vehicles without or having a poor heating, ventilating and air-conditioning system (HVAC-system), thermal stress is determined largely by the impact of the ambient climatic conditions on the vehicle compartment. Subjective evaluation is integrative, as the individual combines into one reaction the combined effect of several thermal stimuli. However, it is not sufficiently detailed or accurate for repeated use. Technical measurements provide detailed and accurate information, but require integration in order to predict the thermal effects on humans. Since several climatic factors play a role for the final heat exchange of a person, an integrated measure of these factors, representing their relative importance, is required.

STANDARDSISO.COM : Click to view the full PDF of ISO 14505-2:2006

Ergonomics of the thermal environment — Evaluation of thermal environments in vehicles —

Part 2: Determination of equivalent temperature

1 Scope

This part of ISO 14505 provides guidelines for the assessment of the thermal conditions inside a vehicle compartment. It can also be applied to other confined spaces with asymmetric climatic conditions. It is primarily intended for assessment of thermal conditions, when deviations from thermal neutrality are relatively small. Appropriate methodology as given in this part of ISO 14505 can be chosen for inclusion in specific performance standards for testing of HVAC-systems for vehicles and similar confined spaces.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies

ISO 13731, *Ergonomics of the thermal environment — Vocabulary and symbols*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 13731 and the following apply.

3.1 equivalent temperature

t_{eq}
temperature of a homogenous space, with mean radiant temperature equal to air temperature and zero air velocity, in which a person exchanges the same heat loss by convection and radiation as in the actual conditions under assessment

3.2 whole body equivalent temperature

$t_{eq,whole}$
temperature of an imaginary enclosure with the same temperature in air and on surrounding surfaces and with air velocity equal to zero in which a full-scale, human shaped, heated sensor will exchange the same dry heat by radiation and convection as in the actual non-uniform environment

3.3 segmental equivalent temperature

$t_{eq,segment}$
uniform temperature of an imaginary enclosure with the same temperature in air and on surrounding surfaces and with air velocity equal to zero in which one or more selected zones of a thermal manikin will exchange the same dry heat by radiation and convection as in the actual non-uniform environment

3.4
directional equivalent temperature

$t_{eq, direct}$
uniform temperature of an imaginary enclosure with the same temperature in air and on surrounding surfaces and with air velocity equal to zero in which a small flat heated surface will exchange the same dry heat by radiation and convection as in the actual non-uniform environment

3.5
omnidirectional equivalent temperature

$t_{eq, omni}$
uniform temperature of an imaginary enclosure with the same temperature in air and on surrounding surfaces and with air velocity equal to zero in which a heated ellipsoid will exchange the same dry heat by radiation and convection as in the actual non-uniform environment

3.6
segment

part of a human-shaped sensor, normally corresponding to a real body-part, consisting of one or several whole zones, for which a segmental equivalent temperature, $t_{eq, segment}$, is presented

3.7
zone

physical partition of a manikin, which is independently regulated and within which the surface temperature and heat exchange is measured

3.8
HVAC-system

heating, ventilating and air-conditioning system of the vehicle and/or cabin

4 Assessment principles

The assessment principle is based on the measurement of the equivalent temperature. The equivalent temperature provides a unified, physical measure of the climatic effects on the human dry heat exchange. On the basis of the actual value for, and the variation in, equivalent temperature, it is possible to predict the conditions for heat balance under conditions in or close to the thermoneutral zone. People's thermal sensation is primarily influenced by general and local levels and variations in skin surface heat flux. Values for the equivalent temperature of a defined environment have been found to be closely related to how people perceive thermal conditions when exposed to the same environment. This can be used for the interpretation of the t_{eq} value and assessment of the quality of the environment.

The climate is assessed in terms of a *total equivalent temperature*, which describes the level of *thermal neutrality*.

The climate is also assessed for local effects on defined parts of the human body surface. The *local equivalent temperatures* determine to what extent the actual body parts fall within the range of acceptable levels of heat loss (*local discomfort*).

4.1 General description of equivalent temperature

The equivalent temperature is a pure physical quantity, that in a physically sound way integrates the independent effects of convection and radiation on human body heat exchange. This relationship is best described for the overall (whole body) heat exchange. There is limited experience with relations between local dry heat exchange and local equivalent temperature. The standardized definition of t_{eq} applies only for the whole body. Therefore, the definition has to be modified for the purposes of this part of ISO 14505. t_{eq} does not take into account human perception and sensation or other the subjective aspects. However, empirical studies show that t_{eq} values are well related to the subjective perception of the thermal effect.

4.2 General determination principle of equivalent temperature

Determination of t_{eq} is based on equations for convective and radiative heat transfer for clothed persons. Heat exchange by conduction is assumed to be small and accounted for by radiation and convection.

$$R = h_r (t_{\text{sk}} - \bar{t}_r) \quad (1)$$

$$C = h_c (t_{\text{sk}} - t_a) \quad (2)$$

where

R is heat exchange by radiation, in watts per square metre (W/m^2);

C is heat exchange by convection, in watts per square metre (W/m^2);

h_r is the radiation heat transfer coefficient, in watts per square metre (W/m^2);

h_c is the convection heat transfer coefficient, in watts per square metre (W/m^2);

t_{sk} is the skin temperature, in degrees Celsius ($^{\circ}\text{C}$);

\bar{t}_r is the mean radiant temperature, in degrees Celsius ($^{\circ}\text{C}$);

t_a is the ambient air temperature, in degrees Celsius ($^{\circ}\text{C}$).

In practice the equivalent temperature is determined and defined by

$$t_{\text{eq}} = t_s - \frac{Q}{h_{\text{cal}}} \quad (3)$$

where

t_s is the surface temperature;

t_{eq} is the temperature of the standard environment;

Q is the measured convective and radiative heat loss during the actual conditions,

$$Q = R + C \quad (4)$$

h_{cal} is the combined heat transfer coefficient, determined during calibration in a standard environment.

The standard environment comprises homogenous, uniform thermal conditions with $t_a = \bar{t}_r$ and air velocity, v_a , $< 0,1$ m/s. A suitable calibration procedure is described in Annex C.

5 Specific equivalent temperatures

5.1 General

As there is no method available for measurement of the true total or local t_{eq} , four specific equivalent temperatures are calculated according to different principles, according to 5.2 to 5.5. Depending on different measuring principles, they are defined as

- whole body equivalent temperature,
- segmental equivalent temperature,
- directional equivalent temperature,
- omnidirectional equivalent temperature.

5.2 Whole body equivalent temperature

5.2.1 Determination principle

The principle of determination is to measure the total heat flow from a human-sized test manikin consisting of several zones, each with a specific measured surface temperature similar to that of a human being. Theoretically whole body equivalent temperature can be measured with thermal manikins or a large number of flat heated sensors attached to an unheated manikin. The accuracy of the result is depending on surface temperature, size of body, number and division of zones, posture etc. An appropriate method to use is a thermal manikin divided into separate, individually heated zones covering the whole body, with surface temperatures close to that of a real human being. A human sized manikin with only one zone will not determine a realistic whole body t_{eq} because the thermal conditions vary too much over the surface. The more zones the manikin has, the more correct value it will measure.

5.2.2 Calculation

$$t_{eq,whole} = t_{sk,whole} - \frac{Q_{whole}}{h_{cal,whole}} \quad (5)$$

$$t_{sk,whole} = \frac{\sum (t_{sk,n} \times A_n)}{\sum A_n} \quad (6)$$

$$Q_{whole} = \frac{\sum (Q_n \times A_n)}{\sum A_n} \quad (7)$$

where

$h_{cal, whole}$ is determined by calibration in a standard environment (see Annex C);

n is the number of zones of the body ($0 < n \leq N$).

In order to be able to compare results from other manikins, the measured t_{eq} should be presented together with specifications of the manikin used, such as regulation principle, skin temperature, number of zones etc. (see Annexes A and B).

5.3 Segmental equivalent temperature

5.3.1 Determination principle

The principle of determination is to measure the total heat flow from a *segment* consisting of one or more *zones*, each with a specific measured surface temperature similar to that of a human being.

The segmental t_{eq} is based on the heat flow from a certain part of the body, i.e. a segment, such as hand, head or chest. The segmental t_{eq} can only be measured with a full-sized, human-shaped heated sensor, e.g. a thermal manikin. The number of zones and the partition between them must at least be such that it corresponds to the actual segment that the segmental t_{eq} should be measured for. Some segments, e.g. thigh, need to be divided into at least two zones within the segment, because the thermal conditions are different on the front and the rear (seat contact) side in the case of the thigh.

5.3.2 Calculation

$$t_{\text{eq, segment}} = t_{\text{sk, segment}} - \frac{Q_{\text{segment}}}{h_{\text{cal, segment}}} \quad (8)$$

$$t_{\text{sk, segment}} = \frac{\sum (t_{\text{sk},n} \times A_n)}{\sum A_n} \quad (9)$$

$$Q_{\text{segment}} = \frac{\sum (Q_n \times A_n)}{\sum A_n} \quad (10)$$

where

$h_{\text{cal, segment}}$ is determined by calibration in a standard environment (see Annex C);

n is the number of zones of the body ($0 < n \leq N$).

The segment can be freely chosen, but it must consist of one or more whole zones. Normally body parts like head, hands, arms, feet, legs, chest, back and seat are chosen. To be able to compare results from other measurements, the measured t_{eq} should be presented with specifications about the segment used, such as regulation principle, surface temperature, which body part, number, size and partition of zones of the segment (see Annexes A and B).

5.4 Directional equivalent temperature

5.4.1 Determination principle

The principle of determination is to measure the total heat flow from a small flat surface with a measured surface temperature. The *directional* t_{eq} can be described as a normal vector to the measuring plane in every point, defined by magnitude and direction. It refers to the heat exchange within the half-sphere in front of the infinitesimal plane. The directional t_{eq} can only be measured with a flat sensor, which might or might not be attached to an unheated manikin or other positioning device. Several sensors can be used simultaneously to determine directional t_{eq} at other locations or in other directions, provided that they are positioned so that they do not influence each other.

5.4.2 Calculation

$$t_{\text{eq, direct}} = t_{\text{sk, direct}} - \frac{Q_{\text{direct}}}{h_{\text{cal, direct}}} \quad (11)$$

where

$t_{sk,direct}$ is the surface temperature of the sensor;

Q_{direct} is the heat flow from the sensor;

$h_{cal,direct}$ is determined by calibration of the sensor in a standard environment (see Annex C).

A local equivalent temperature, $t_{eq, local}$, can be calculated as an average value from several measurements at the same location but in different directions. It can be calculated as an arithmetic mean value without weighing factors or with weighing to simulate a certain body posture.

$$t_{eq, local} = \frac{\sum t_{eq, direct, n}}{n} \quad (12)$$

where n is the number of directions.

$$t_{eq, local} = \sum (t_{eq, direct, n} \times A_n) \quad (13)$$

where n is the number of locations, with $\Sigma(A_n) = 1$.

A total equivalent temperature can be calculated as a weighted mean value of local equivalent temperatures.

$$t_{eq, local} = \sum (t_{eq, local, n} \times A_n) \quad (14)$$

where n is the number of measurements, with $\Sigma(A_n) = 1$, and A represents body postures.

In order to be able to compare results from other measurements, the measured t_{eq} should be presented with specifications about the sensor used, such as regulation principle, surface temperature, size and also location and direction of the sensor (see Annexes A and B). Whole body t_{eq} and total t_{eq} is not the same. In an asymmetric climate and with seat contact the difference between them will be considerable.

5.5 Omnidirectional equivalent temperature

5.5.1 Determination principle

The principle of determination is to measure the total heat flow from the surface of an ellipsoid with a measured surface temperature. The *omnidirectional* t_{eq} can be described as the weighted mean value of the directional t_{eq} in all directions. The weighing factors for the different directions are dependent of the form of the ellipsoid. It refers to the heat exchange in all directions. The omnidirectional t_{eq} can only be measured with an ellipsoid sensor with uniform heat flow over the surface. One or more sensors can be used simultaneously. If more than one sensor is used, it must be pointed out that the sensors will influence each other as hot surfaces in the sphere that is measured.

5.5.2 Calculation

$$t_{eq, omni} = t_{sk, omni} - \frac{Q_{omni}}{h_{cal, omni}} \quad (15)$$

where

$t_{sk, omni}$ is the surface temperature of the sensor;

Q_{omni} is the heat flow from the sensor;

$h_{cal, omni}$ is determined by calibration of the sensor in a standard environment (see Annex C).

Omnidirectional t_{eq} determined with one ellipsoid sensor in an asymmetric climate is a local t_{eq} . A total t_{eq} can be calculated as an arithmetic mean value from sensors at different locations with weighing factors for different body parts according to SAE J 2234.

$$t_{\text{eq, total}} = \sum (t_{\text{eq, local, } n} \times A_n) \quad (16)$$

where n is the number of locations, with $\Sigma(A_n) = 1$.

In order to be able to compare results from other measurements, the measured t_{eq} should be presented with specifications about the sensor used, such as regulation principle, surface temperature, size and also location and direction of the sensor (see Annexes A and B).

6 Measuring instruments

Several measurement methods and instruments, representing different measuring principles, are given in Annexes A and B. Depending on needs, a method as given in Annex A should be selected.

Measurement values obtained with principally different methods are not comparable with each other. They represent different levels in terms of

- reliability,
- relevance,
- validity,
- repeatability,
- accuracy,
- integration,
- complexity
- cost, and
- availability

Performance and requirements of the specific methods are given in Annex B. Requirements for calibration procedures are given in Annex C.

7 Assessment

The equivalent temperature represents a quantitative assessment of the conditions for physical heat exchange. The numeric value of t_{eq} is a temperature level that can come close to “normal” expected room temperatures. Higher t_{eq} values indicate lower heat losses (“warmer”), while lower t_{eq} values indicate higher heat losses (“colder”).

The interpretation of equivalent temperature in terms of anticipated perceived thermal sensation is based on series of experiments with subjects in which the different types of equivalent temperature have been measured. Examples of interpretation are given in Annex C. For some types of equivalent temperature, data are not available for comparison with human responses. Nevertheless, these kinds of measurement can be used for differential measurements of thermal conditions.

7.1 Determination of whole body equivalent temperature

Determination of whole body equivalent temperature should preferably be done with measurements using a thermal manikin or by integration of discrete measurements using omnidirectional sensors placed at defined positions in the vehicle cabin.

7.1.1 Determination with omnidirectional sensors

Omnidirectional sensors are described in Annexes A and B. Sensors are placed on a stand simulating a person and placed in a seat of the vehicle. At least six sensors are placed in relevant positions and measurements are made when steady state is achieved. Whole body equivalent temperature is determined as the area-weighted average of the individual sensors. Interpretation of values should be made according to Annex D.

7.1.2 Determination with a thermal manikin

Requirements for the manikin and procedures are described in Annexes A and B. The manikin is placed in a seat in the vehicle and whole body heat loss is measured when steady state conditions are achieved. Whole body heat loss is the area-weighted average of the independent segments of the manikin. Interpretation of values should be made according Annex D.

7.2 Determination of local equivalent temperature

Determination of whole body equivalent temperature should preferably be done with measurements using a thermal manikin or by the integration of discrete measurements using omnidirectional sensors.

7.2.1 Determination with omnidirectional sensors or flat, heated sensors

Omnidirectional sensors are described in Annex A. Sensors are placed on a stand simulating a person and placed in a seat of the vehicle or at defined spots on the surface of the clothing of a person or a manikin. Measurements are made when steady state is achieved. Local equivalent temperature is determined as the value of the individual sensor. The more sensors located in the space, the better resolution of the variation in the thermal field around the human body.

7.2.2 Determination with a thermal manikin

Requirements for the manikin and procedures are described in Annexes A and B. The manikin is placed in a seat in the vehicle and heat loss is measured from a local segment of the manikin when steady state conditions are achieved. Local equivalent temperature is determined by the measured value of the individual segment and represent that particular segment only. Interpretation of values should be made according to Annex D.

Annex A (informative)

Examples of measuring instruments

A.1 Thermal manikins

A thermal manikin comprises a human-sized and -shaped sensor with its surface covered with numerous, individually controlled, heated zones. It is suitable for measurement of whole body as well as local t_{eq} . The independent zones of the manikin are heated to a controlled and measured temperature. Low-voltage power is pulsed to each zone at a rate that allows the maintenance of a chosen constant or variable surface temperature. It is also possible to maintain a constant power supply to the surface.

The power consumption under steady-state conditions is a measure of the convective, radiative and conductive heat losses (dry heat loss). Measurements and regulation are made with a computer system. Typically, the quantity measured for each zone is the power consumption or heat loss, Q (W/m^2), and the surface temperature, t_s ($^{\circ}C$). The direct measurement of Q and t_s eliminates the need for determining the other components. By normalization to a climate according the definition of equivalent temperature, the heat loss can be converted to an equivalent temperature. The technical data of two manikins are presented in Figure A.1 and Table A.1. More details of the measurement and regulation system can be found in the Bibliography.

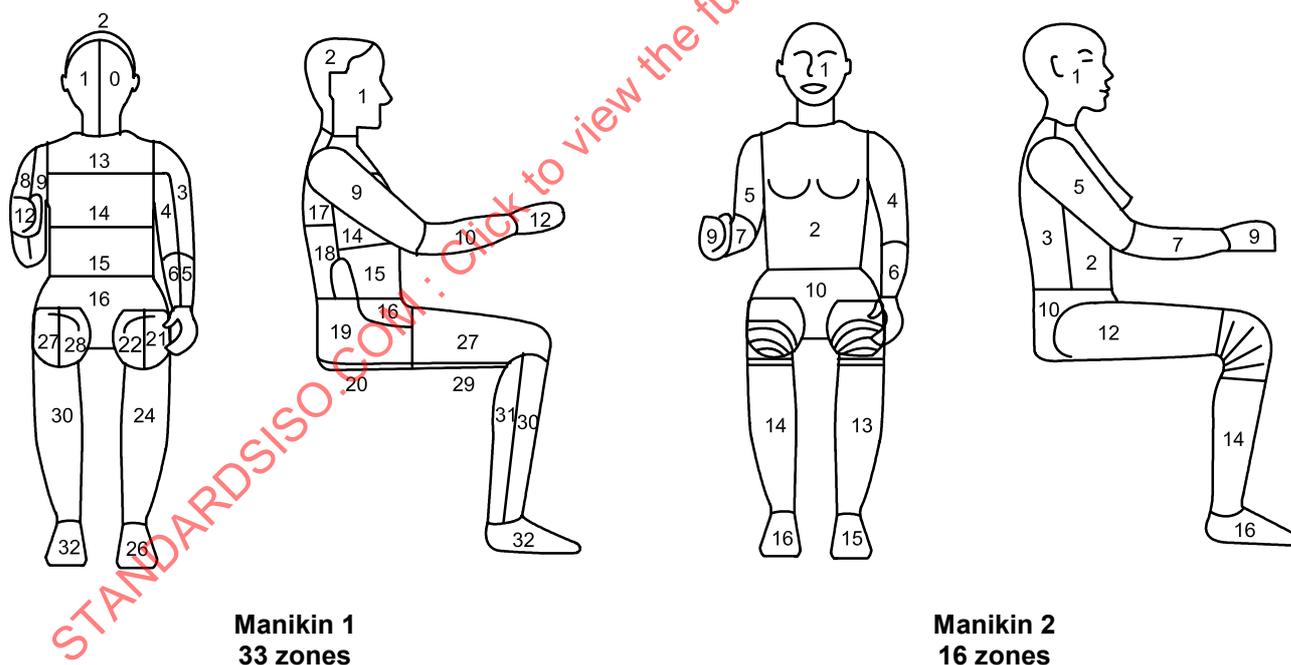


Figure A.1 — Schematic pictures of two heated manikins and their division into different zones


Table A.1 — Technical data for the two examples of thermal manikins

Manikin	Male	Female
Clothing size	C50	
Length	Sitting (fixed position)	166 cm
Weight	16 kg	31 kg
Number of zones	33 + 3 t_a	16
Regulation principle (see Annex B)	Constant t_{sk} Constant Q Comfort equation	Constant t_{sk} Constant Q Comfort equation
Clothing	0,6 clo	Nude + 0,51 clo

A.2 Discrete, heat integrating sensors

A.2.1 Flat, heated sensors

Flat, heated sensor elements of various design and shape can be used for determination of directional t_{eq} . One type of sensor is made of a heated, single element. It consists of a small flat platinum surface, which is electrically heated to different settings, according to the activity level of the person (in most at a constant rate of 85 W/m²). The artificial skin measures directional t_{eq} . To avoid unintended heat flows, eight counter heaters and nine back counter heaters are installed. The value measured is the Resultant Surface Temperature (RST), which can be calculated from the measured electrical resistance and a calibration curve. The t_{eq} can be calculated from the RST by a linear function. Several sensors can be attached to the surface of a body shaped dummy or incorporated in standard dress worn by the dummy or by a real person, as shown in Figure A.2.

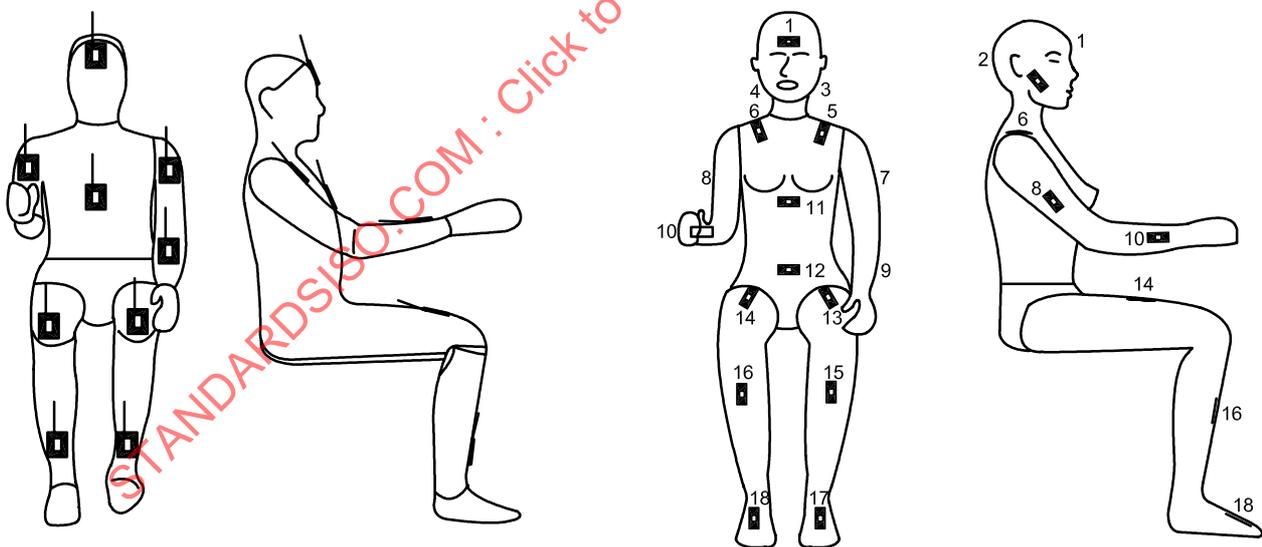

Example 1
Flat, heated sensors on human-shaped dummy

Example 2
Flat, hot film sensors on human-shaped dummy

Figure A.2 — Examples of set-up for measurement of t_{eq} using several, discrete heated sensors mounted on a human-shaped dummy or a real person

Another type of sensor is based on two hot-film elements heated via the Joule effect at two power levels. The sensors are small and have a flat surface, which implies that they measure directional t_{eq} . A linear model is used to calculate the equivalent temperature. Several sensors are installed on the body surface of a seated manikin with a female body shape. The manikin is made of polyurethane on a metal core. The electronic control unit is integrated in the body of the manikin (Figure A.2, Example 2).


With both types of sensors, whole body t_{eq} as well as local t_{eq} values can be determined.

A.2.2 Discrete, spherical, heated sensors

Spherical sensors that are heated all over the surface can be used for measurement of omni-directional t_{eq}

One type of sensor forms an ellipsoid of the size 200 mm × 50 mm in size. The sensor is heated and temperature controlled by a separate unit. The size and the shape of the transducer have been chosen so that the ratio between the heat loss by radiation and by convection is similar to that of a person. By changing the position of the transducer between vertical and horizontal, the transducer can simulate a person in different situations. To simulate a seated person, the sensor should be directed 30° from vertical. The sensor consists of only one zone. It cannot distinguish different climate in different directions, e.g. radiant heat load on one side and draft on another can take out each other. When several sensors are used, they will influence each other. The sensor is not designed to measure with seat contact. The measured data are used to calculate the omni-directional t_{eq} .

Several sensors can be mounted on a separate man-shaped rig to simulate a seated person. In this way both local and whole body t_{eq} values can be determined (see Figure A.3).

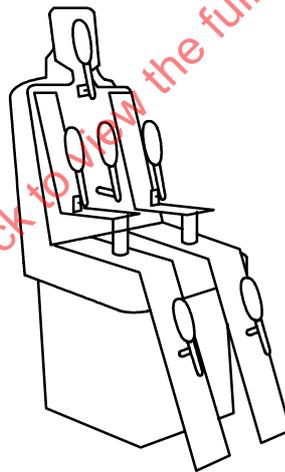

Ellipsoid sensors mounted on a rig

Figure A.3 — Example of measuring set-up with several ellipsoid sensors mounted on rig simulating a seated person

Annex B
(informative)

Characteristics and specifications of measuring instruments

B.1 Introduction

In Tables B.1 to B.3, factors that have an impact on the results when measuring the different types of t_{eq} are listed. Typical values or variations for the factors are proposed. A value for the factor to get reasonable accuracy are recommended.

B.2 Instruments for determining whole body and segmental t_{eq}

Table B.1 — Specification of factors related to whole body and segmental t_{eq}

Factor	Typical values/variations	Specification
Size and posture	The definition of both whole body and segmental t_{eq} relates to a human being in two different conditions. Therefore, the posture should be the same in both cases, normal driving position. Also, the size should be "normal", which can vary.	Size: C50 Posture: driving position
Number of zones and partition for regulation	The number of zones can vary. With too few zones the result will lack resolution. The zones should be partitioned where the thermal condition changes (e.g. seat contact or shadow). This will require a minimum number of zones or the result will be less representative because of temperature variations over the surface. There should be more zones on the manikin than segments for which the results are presented.	Minimum: 16 zones (see Note 1) Goal: 41 zones (see Note 1) or more Partition: where the heat exchange change abruptly (see Notes 1 and 2)
Number of segments and partition for presentation	The number of segments for presentation of results is not necessary the same as the number of zones for regulation. Normally segments like foot, chest, etc. are used. If the manikin has many zones, and a segment consists of more than one zone, it is possible to study thermal impact on smaller parts, e.g. part of the chest or seat.	Normally 16 segments (see Table 1) In some cases more (if possible)

Table B.1 (continued)

Factor	Typical values/variations	Specification																				
Regulating principle	<p>There are basically three different regulating principles:</p> <p>Constant temperature mode: t_{sk} constant and uniform or non-uniform over the body. It is fast, but can be unstable. Reasonably realistic surface temperature. Smallest range with actively heated surface.</p> <p>Constant heat flux mode: Q constant and uniform or non-uniform over the body. It is stable but slower than constant t_{sk}. The surface temperatures can differ considerably from realistic levels.</p> <p>Comfort equation mode: t_{sk} depends on Q and is controlled by an equation. It is stable but slower than constant t_{sk}. The surface temperatures are more realistic than for the other modes.</p> <p style="text-align: center;">Realistic range</p> <table border="1"> <thead> <tr> <th>Mode</th> <th>Stability</th> <th>Speed</th> <th>Surf. temp.</th> <th>$Q > 0 \text{ W/m}^2$</th> </tr> </thead> <tbody> <tr> <td>Constant t_{sk}</td> <td>-</td> <td>+</td> <td>+</td> <td>-</td> </tr> <tr> <td>Constant Q</td> <td>+</td> <td>-</td> <td>-</td> <td>+</td> </tr> <tr> <td>Comfort equation</td> <td>+</td> <td>-</td> <td>++</td> <td>-</td> </tr> </tbody> </table>	Mode	Stability	Speed	Surf. temp.	$Q > 0 \text{ W/m}^2$	Constant t_{sk}	-	+	+	-	Constant Q	+	-	-	+	Comfort equation	+	-	++	-	<p>Constant temperature mode with 34 °C uniform surface temperature</p> <p>Comfort equation mode if the response time could be shortened</p>
Mode	Stability	Speed	Surf. temp.	$Q > 0 \text{ W/m}^2$																		
Constant t_{sk}	-	+	+	-																		
Constant Q	+	-	-	+																		
Comfort equation	+	-	++	-																		
Clothing	<p>A manikin can be used nude or with clothing.</p> <p>A nude manikin does not determine the same t_{eq} as a clothed one. A driver normally wears clothes that are covering the body except hands and head. Therefore, the heat flow and the temperature of the exposed surface will be more representative with a dressed manikin. The repeatability will be better with a nude manikin.</p> <p>Clothing can vary both regarding fit and Clo value (insulation). The Clo value should be realistic for the situation. Since the purpose of the HVAC is comfort, normal indoor wear can be used. To minimize errors, the clothing should be "tight fit".</p>	<p>Clothes with "tight fit": short underwear, light socks, long-sleeved shirt, long trousers and light shoes (0,6 to 0,8 clo or 1,3 clo total)</p>																				
Recovery time	<p>The recovery time depends on several factors: regulating principle, the thermal capacity of the thermal manikin, the insulation etc.</p> <p>Acceptable recovery time depends on the situation. Short recovery time can have a negative impact on the stability.</p>	<p>Recovery time < 20 min</p>																				
Accuracy	<p>Accuracy refers to the ability to determine the t_{eq} in a known uniform environment.</p> <p>Accuracy depends on several factors: e.g. surface temperature, clothing, size, posture, number of zones.</p>	<p>Acceptable accuracy: < $\pm 1 \text{ }^\circ\text{C } t_{eq}$</p>																				
Repeatability	<p>Repeatability refers to the largest difference between two determinations carried out in exactly the same uniform or non-uniform environment with the same instrument and the same operator.</p>	<p>Acceptable repeatability: < $\pm 0,5 \text{ }^\circ\text{C}$</p>																				
Reproducibility	<p>Reproducibility refers to the largest difference between determinations when the measurement is reproduced.</p>	<p>Acceptable reproducibility: < $\pm 1,0 \text{ }^\circ\text{C}$</p>																				
Resolution	<p>The resolution depends on the specifications of the components in the regulation and measurement system of the instrument. The accuracy is not directly dependent of the resolution.</p>	<p>Acceptable resolution: < $0,1 \text{ }^\circ\text{C}$</p>																				

Table B.1 (continued)

Factor	Typical values/variatiions	Specification																																										
Ranges	<p>The primary purpose of thermal manikins is to assess the thermal climate within or close to thermal comfort. However, conditions in a vehicle cabin can be well outside the comfort range and still be of interest to measure.</p> <p>Two types of ranges can be distinguished:</p> <p>measuring range within which the results have correlation with human thermal perception;</p> <p>safety range within which the instrument can be used without disturbing the calibration or risk of damage.</p>	<p>Measuring range at least 0 °C < t_{eq} < 40 °C</p> <p>Safety or storage range at least 0 °C < t_{eq} < 50 °C</p>																																										
<p>NOTE 1 Proposed minimum number and partition of zones.</p> <p>Minimum (16 zones + total)</p> <table border="0"> <tr> <td>0 Total</td> <td>6 Left hand</td> <td>12 Right thigh</td> </tr> <tr> <td>1 Face</td> <td>7 Right hand</td> <td>13 Left leg</td> </tr> <tr> <td>2 Scalp</td> <td>8 Chest</td> <td>14 Right leg</td> </tr> <tr> <td>3 Shoulders</td> <td>9 Back</td> <td>15 Left foot</td> </tr> <tr> <td>4 Left arm</td> <td>10 Seat (+ rear thighs)</td> <td>16 Right foot</td> </tr> <tr> <td>5 Right arm</td> <td>11 Left thigh</td> <td></td> </tr> </table>			0 Total	6 Left hand	12 Right thigh	1 Face	7 Right hand	13 Left leg	2 Scalp	8 Chest	14 Right leg	3 Shoulders	9 Back	15 Left foot	4 Left arm	10 Seat (+ rear thighs)	16 Right foot	5 Right arm	11 Left thigh																									
0 Total	6 Left hand	12 Right thigh																																										
1 Face	7 Right hand	13 Left leg																																										
2 Scalp	8 Chest	14 Right leg																																										
3 Shoulders	9 Back	15 Left foot																																										
4 Left arm	10 Seat (+ rear thighs)	16 Right foot																																										
5 Right arm	11 Left thigh																																											
<p>NOTE 2 Proposed number and partition of zones for good regulation.</p> <p>Goal (> 41 zones + total)</p> <table border="0"> <tr> <td>0 Total</td> <td>14 Right upper arm inside</td> <td>28 Left thigh inner</td> </tr> <tr> <td>1 Face left</td> <td>15 Right upper arm outside</td> <td>29 Left thigh outer</td> </tr> <tr> <td>2 Face right</td> <td>16 Right lower arm upside</td> <td>30 Left thigh rear</td> </tr> <tr> <td>3 Eyes</td> <td>17 Right lower arm downside</td> <td>31 Right thigh inner</td> </tr> <tr> <td>4 Scalp</td> <td>18 Right hand outside</td> <td>32 Right thigh outer</td> </tr> <tr> <td>5 Neck</td> <td>19 Right hand inside</td> <td>33 Right thigh rear</td> </tr> <tr> <td>6 Shoulders front</td> <td>20 Chest front</td> <td>34 Left leg front</td> </tr> <tr> <td>7 Shoulders back</td> <td>21 Chest left</td> <td>35 Left leg back</td> </tr> <tr> <td>8 Left upper arm inside</td> <td>22 Chest right</td> <td>36 Right leg front</td> </tr> <tr> <td>9 Left upper arm outside</td> <td>23 Stomach</td> <td>37 Right leg back</td> </tr> <tr> <td>10 Left lower arm upside</td> <td>24 Crutch</td> <td>38 Left foot upside</td> </tr> <tr> <td>11 Left lower arm downside</td> <td>25 Upper back</td> <td>39 Left foot downside</td> </tr> <tr> <td>12 Left hand outside</td> <td>26 Lower back</td> <td>40 Right foot upside</td> </tr> <tr> <td>13 Left hand inside</td> <td>27 Seat</td> <td>41 Right foot downside</td> </tr> </table>			0 Total	14 Right upper arm inside	28 Left thigh inner	1 Face left	15 Right upper arm outside	29 Left thigh outer	2 Face right	16 Right lower arm upside	30 Left thigh rear	3 Eyes	17 Right lower arm downside	31 Right thigh inner	4 Scalp	18 Right hand outside	32 Right thigh outer	5 Neck	19 Right hand inside	33 Right thigh rear	6 Shoulders front	20 Chest front	34 Left leg front	7 Shoulders back	21 Chest left	35 Left leg back	8 Left upper arm inside	22 Chest right	36 Right leg front	9 Left upper arm outside	23 Stomach	37 Right leg back	10 Left lower arm upside	24 Crutch	38 Left foot upside	11 Left lower arm downside	25 Upper back	39 Left foot downside	12 Left hand outside	26 Lower back	40 Right foot upside	13 Left hand inside	27 Seat	41 Right foot downside
0 Total	14 Right upper arm inside	28 Left thigh inner																																										
1 Face left	15 Right upper arm outside	29 Left thigh outer																																										
2 Face right	16 Right lower arm upside	30 Left thigh rear																																										
3 Eyes	17 Right lower arm downside	31 Right thigh inner																																										
4 Scalp	18 Right hand outside	32 Right thigh outer																																										
5 Neck	19 Right hand inside	33 Right thigh rear																																										
6 Shoulders front	20 Chest front	34 Left leg front																																										
7 Shoulders back	21 Chest left	35 Left leg back																																										
8 Left upper arm inside	22 Chest right	36 Right leg front																																										
9 Left upper arm outside	23 Stomach	37 Right leg back																																										
10 Left lower arm upside	24 Crutch	38 Left foot upside																																										
11 Left lower arm downside	25 Upper back	39 Left foot downside																																										
12 Left hand outside	26 Lower back	40 Right foot upside																																										
13 Left hand inside	27 Seat	41 Right foot downside																																										

B.3 Instruments for determining directional t_{eq}

Table B.2 — Specification factors related to directional t_{eq}

Factor	Typical values/variatiions	Specification
Size of surface	<p>The heated surface of an instrument used to determine directional t_{eq} is normally small: a few square centimetres. The measured t_{eq} is influenced by the size of the surface because the heat transfer coefficient for convection is dependent on it while the radiant heat transfer coefficient is not.</p>	<p>Less than 5 × 5 cm</p>
Number of sensors and position	<p>The sensor can be attached to a human shaped unheated manikin or other positioning device. The use of the manikin ensures a more realistic airflow field around the sensor surfaces.</p> <p>The number of sensors can vary. The more sensors the better the resolution in the assessment of the overall climate will be. To compare results from different methods with directional sensors, a minimum number of 16 is suggested.</p>	<p>Size of the manikin: C50</p> <p>Posture: driving or passenger position</p> <p>Minimum number of sensors: 16 (see Table 1)</p>

Table B.2 (continued)

Factor	Typical values/variations	Specification																				
Regulating principle	<p>Constant temperature mode: t_{sk} constant and uniform or non-uniform over the body. It is fast, but can be unstable. Reasonably realistic surface temperature. Smallest range with actively heated surface.</p> <p>Constant heat flux mode: Q constant and uniform or non-uniform over the body. It is stable but slower than constant t_{sk}. The surface temperatures can differ considerably from realistic levels.</p> <p>Comfort equation mode: t_{sk} depends on Q and controlled by an equation. It is stable but slower than constant t_{sk}. The surface temperatures are more realistic than for the other modes.</p> <p style="text-align: center;">Realistic range</p> <table border="1"> <thead> <tr> <th>Mode</th> <th>Stability</th> <th>Speed</th> <th>Surf. temp.</th> <th>$Q > 0 \text{ W/m}^2$</th> </tr> </thead> <tbody> <tr> <td>Constant t_{sk}</td> <td>–</td> <td>+</td> <td>+</td> <td>--</td> </tr> <tr> <td>Constant Q</td> <td>+</td> <td>–</td> <td>–</td> <td>+</td> </tr> <tr> <td>Comfort equation</td> <td>+</td> <td>–</td> <td>++</td> <td>–</td> </tr> </tbody> </table>	Mode	Stability	Speed	Surf. temp.	$Q > 0 \text{ W/m}^2$	Constant t_{sk}	–	+	+	--	Constant Q	+	–	–	+	Comfort equation	+	–	++	–	<p>Constant temperature mode with 34 °C uniform surface temperature</p> <p>Comfort equation mode if the response time could be shortened</p>
Mode	Stability	Speed	Surf. temp.	$Q > 0 \text{ W/m}^2$																		
Constant t_{sk}	–	+	+	--																		
Constant Q	+	–	–	+																		
Comfort equation	+	–	++	–																		
Recovery time	<p>The recovery time depends on several factors: regulating principle, thermal capacity of the sensor, etc.</p> <p>Acceptable recovery time depends on the situation. Short recovery time can have a negative impact on the stability.</p>	Recovery time < 10 min																				
Accuracy	<p>Accuracy refers to the ability to determine the t_{eq} in a known uniform environment.</p> <p>Accuracy depends on several factors: surface temperature, size, posture, number of zones, etc.</p>	Acceptable accuracy: < ± 1 °C t_{eq}																				
Repeatability	Repeatability refers to the largest difference between two determinations carried out in exactly the same uniform or non-uniform environment with the same instrument and the same operator.	Acceptable repeatability: < ± 0,5 °C																				
Reproducibility	Reproducibility refers to the largest difference between determinations when the measurement is reproduced.	Acceptable reproducibility: < ± 1,0 °C																				
Resolution	The resolution depends on the specifications of the components in the regulation and measurement system of the instrument. The accuracy is not directly dependent of the resolution.	Acceptable resolution: < 0,1 °C																				
Ranges	<p>The primary purpose of sensor is to assess the thermal climate within or close to thermal comfort. However, conditions in a vehicle cabin can be well outside the comfort range and still be of interest to measure.</p> <p>Two types of ranges can be distinguished:</p> <ul style="list-style-type: none"> — measuring range within which the results have correlation with human thermal perception. — safety range within which the instrument can be used without disturbing the calibration or risk of damage. 	<p>Measuring range at least 0 °C < t_{eq} < 40 °C</p> <p>Safety or storage range at least –20 °C < t_{eq} < 70 °C</p>																				

B.4 Instruments for determining omnidirectional t_{eq}

Table B.3 — Specification of factors related to omnidirectional t_{eq}

Factor	Typical values/variations	Specification																				
Geometry of sensor	<p>Normally a sensor for determining omnidirectional t_{eq} is an ellipsoid, but it can also be a sphere. With a sphere, the weighing of different directions is uniform. With different ellipsoidal form, the weighing factors for different directions can be changed to mimic a sitting or standing person.</p> <p>The t_{eq} is influenced by both form and angle.</p> <p>Normally the sensor consists of only one zone.</p>	Ellipsoid with one zone (Comfort meter) slightly inclined (30°) towards the back of the seat																				
Size of surface	The heated surface of an instrument used to determine omnidirectional t_{eq} is normally an ellipsoid with the smallest diameter about 50 mm and about 200 mm long.	Comfort meter																				
Number of sensors and position	<p>The number of sensors can be freely chosen to suit the situation. The more sensors the better the resolution in the assessment of the overall climate will be. It is important to note that sensors will affect each other increasingly with higher number of sensors used.</p> <p>To be able to compare results from different measurements with individual sensors, they must have the same position in relation to the operator's position.</p>	<p>Minimum of 6 sensors located at head, trunk, lower arms and lower legs</p> <p>If required, the number of sensors can be increased at (or moved to) new positions</p>																				
Regulating principle	<p>Constant temperature mode: t_{sk} constant and uniform or non-uniform over the body. It is fast, but can be unstable. Reasonably realistic surface temperature. Smallest range with actively heated surface.</p> <p>Constant heat flux mode: Q constant and uniform or non-uniform over the body. It is stable but slower than constant t_{sk}. The surface temperatures can differ considerably from realistic levels.</p> <p>Comfort equation mode: t_{sk} depends on Q and controlled by an equation. It is stable but slower than constant t_{sk}. The surface temperatures are more realistic than for the other modes.</p> <p style="text-align: center;">Realistic range</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Mode</th> <th>Stability</th> <th>Speed</th> <th>Surf. temp.</th> <th>$Q > 0 \text{ W/m}^2$</th> </tr> </thead> <tbody> <tr> <td>Consant t_{sk}</td> <td style="text-align: center;">-</td> <td style="text-align: center;">+</td> <td style="text-align: center;">+</td> <td style="text-align: center;">--</td> </tr> <tr> <td>Consant Q</td> <td style="text-align: center;">+</td> <td style="text-align: center;">-</td> <td style="text-align: center;">-</td> <td style="text-align: center;">+</td> </tr> <tr> <td>Comfort equation</td> <td style="text-align: center;">+</td> <td style="text-align: center;">-</td> <td style="text-align: center;">++</td> <td style="text-align: center;">-</td> </tr> </tbody> </table>	Mode	Stability	Speed	Surf. temp.	$Q > 0 \text{ W/m}^2$	Consant t_{sk}	-	+	+	--	Consant Q	+	-	-	+	Comfort equation	+	-	++	-	<p>Constant temperature mode with 34 °C uniform surface temperature</p> <p>Comfort equation mode if the response time could be shortened</p>
Mode	Stability	Speed	Surf. temp.	$Q > 0 \text{ W/m}^2$																		
Consant t_{sk}	-	+	+	--																		
Consant Q	+	-	-	+																		
Comfort equation	+	-	++	-																		
Recovery time	<p>The recovery time depends on several factors: regulating principle, thermal capacity of the sensor, etc.</p> <p>Acceptable recovery time depends on the situation. Short recovery time can have a negative impact on the stability.</p>	Recovery time < 10 min																				
Accuracy	<p>Accuracy refers to ability to determine the t_{eq} in a known uniform environment.</p> <p>Accuracy is depending on several factors: surface temperature, size, posture, number of zones, etc.</p>	Acceptable accuracy: < ± 1 °C t_{eq}																				
Repeatability	Repeatability refers to largest difference between two determinations carried out in exactly the same uniform or non-uniform environment with the same instrument and the same operator.	Acceptable repeatability: < ± 0,5 °C																				
Reproducibility	Reproducibility refers to largest difference between determinations when the measurement is reproduced.	Acceptable reproducibility: < ± 1,0 °C																				

Table B.3 (continued)

Factor	Typical values/variations	Specification
Resolution	The resolution depends on the specifications of the components in the regulation and measurement system of the instrument. The accuracy is not directly dependent of the resolution.	Acceptable resolution: < 0,1 °C
Ranges	<p>The primary purpose of sensor is to assess the thermal climate within or close to thermal comfort. However, conditions in a vehicle cabin can be well outside the comfort range and still be of interest to measure.</p> <p>Two types of ranges can be distinguished:</p> <ul style="list-style-type: none"> measuring range within which the results have correlation with human thermal perception; Safety range within which the instrument can be used without disturbing the calibration or risk of damage. 	<p>Measuring range at least 0 °C < t_{eq} < 40 °C</p> <p>Safety or storage range at least -20 °C < t_{eq} < 70 °C</p>

STANDARDSISO.COM : Click to view the full PDF of ISO 14505-2:2006

Annex C (informative)

Calibration and other determinations

C.1 Surface temperature calibration

Calibration should be carried out in a box or a chamber with homogenous climatic conditions ($t_s: t_a = t_r = 34 \text{ °C} \pm 0,2 \text{ °C}$, $\Delta t_{0,1-1,1 \text{ m}} < 0,4 \text{ °C}$).

Calibration should be made at least before and after measurement series. With long series, a control should be made every week.

No specified position of manikin or sensors is needed.

The sensors need to be calibrated for the whole range of use. For manikins with comfort equation regulation and for constant Q regulation, calibration in the whole measurement range is needed. The mean value from the area-weighted, temperature-compensated, surface temperature measurement (Δt_{temps}) should differ less than $\pm 0,3 \text{ °C}$ between consecutive measurements, measured with a reference instrument with better accuracy in the calibration environment.

C.2 Determination of heat transfer coefficients

Determination should be made with measurements in a box or in a chamber with homogenous climatic conditions ($h_{\text{cal}}: t_a = t_r = 24 \text{ °C} \pm 0,2 \text{ °C}$, $v_a = 0,05 \text{ m/s}$, $\Delta t_{0,1-1,1 \text{ m}} < 0,4 \text{ °C}$).

The heat transfer coefficient in calibration conditions h_{cal} is not a constant, it is dependent on the difference between the temperature in the chamber, t_{eq} , and the surface temperature, t_{sk} . Therefore, the determination should be done at three equivalent temperatures: the highest, the lowest and at 24 °C . For a dressed manikin or when the comfort equation is used as regulation mode, h_{cal} can be considered to be a constant within the measuring interval, and the determination can be done at only 24 °C .

Determination is recommended before and after measurement series.

Position of sensors must be the same as in the actual situation, when vehicle climate is evaluated.

The manikin must be positioned in the same way as during measurement or the heat transfer coefficient will be changed. The manikin should be seated in a net chair or similar to avoid adding insulation. Temperature variations over the zone surface (Δt_{area}) should not be larger than 3 °C .

C.3 Determination of recovery time

Recovery time is defined as the time needed for an instrument to recover, from a 3 min power shut down, to the same steady-state equivalent temperature mean value $\pm 0,5 \text{ °C}$ as before the shut down.

Tests of recovery time are performed by switching off the power of the measuring instrument and then switching it on again. The temperature is kept constant during the test.

C.4 Determination of accuracy, repeatability and reproducibility

Accuracy is the difference between the t_{eq} determined by the instrument and the known t_{eq} of a uniform environment.

Repeatability, is the variation between measurements when *one person* measures the same characteristic several times with the same method. The repeatability for a method implies that maximum variation should equal to a mean equivalent temperature $\pm 0,5$ °C.

Reproducibility, is the variation between measurements when *different individuals* measure the same characteristic with the same method. The conditions should be recreated after a period of time and the manikin should have been moved between measurements. The reproducibility for a method implies that maximum variation should equal to a mean equivalent temperature $\pm 1,0$ °C.

C.5 Surface properties

The absorptivity and emissivity, with reference to solar radiation for the measuring surfaces, should be similar to that of the human being in the actual situation. If a body part is normally dressed or nude, the surface of the measuring sensor should mimic this.

STANDARDSISO.COM : Click to view the full PDF of ISO 14505-2:2006