
**Small craft — Airborne sound emitted by
powered recreational craft —**

Part 3:

**Sound assessment using calculation and
measurement procedures**

*Petits navires — Bruit aérien émis par les bateaux de plaisance
motorisés —*

*Partie 3: Évaluation du bruit à l'aide de procédures de calcul et de
mesure*

STANDARDSISO.COM : Click to view the full PDF of ISO 14509-3:2009



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 14509-3:2009



COPYRIGHT PROTECTED DOCUMENT

© ISO 2009

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	2
4 Symbols	2
5 Sound assessment method	3
6 Test report	3
Annex A (normative) Hull-form sound pressure level calculation	4
Annex B (normative) On-board sound pressure level measurement method	5
Annex C (informative) Example of test report form	10

STANDARDSISO.COM : Click to view the full PDF of ISO 14509-3:2009

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 14509-3 was prepared by Technical Committee ISO/TC 188, *Small craft*.

ISO 14509 consists of the following parts, under the general title *Small craft — Airborne sound emitted by powered recreational craft*:

- *Part 1: Pass-by measurement procedures*
- *Part 2: Sound assessment using reference craft*
- *Part 3: Sound assessment using calculation and measurement procedures*

Introduction

The European Union Directive 2003/44/EC (Amendment to Directive 94/25/EC) introduces limits for sound emission from recreational craft and requires conformity for certain types of craft to be shown by using the ISO 14509 series. ISO 14509-1 provides a practical measurement method, ISO 14509-2 provides an assessment method using reference craft and this part of ISO 14509 provides a predictive measurement method based on the work of the SoundBoat project. SoundBoat was funded by the European Commission and various European Marine Industry Associations and industrial partners to develop alternative methods of testing sound emission from recreational craft. Over the two years of the project, more than 65 craft have been tested according to the ISO 14509-1 pass-by test. From this an algorithm has been developed that uses a combination of hull-water sound, derived from hull parameters, and exhaust outlet sound, derived by direct measurement on board the craft under test, to predict the sound pressure level that would be observed at 25 m had the craft undergone pass-by testing according to ISO 14509-1. The method specified in this part of ISO 14509 does not require a measurement platform to be established and testing can be carried out independently of location and weather restrictions. This method does not require a list of reference craft to be established and provides a reproducible assessment procedure comparable to ISO 14509-1 pass-by testing to within 2 dB.

The SoundBoat project has concentrated on specific craft types and has only tested craft with the following characteristics:

- bottom type configuration of not more than two chines;
- square transom configuration;
- length of hull 11 m or greater.

The SoundBoat project was successfully completed in early 2005, but industry continues to gather data from on-water testing and, as the data model is refined with further validation of the concept, the parameters above will be revised appropriately. The SoundBoat project team do not believe that craft outside the above characteristics are unsuitable for assessment using this part of ISO 14509; however, where a significantly different craft is to be assessed, it might be beneficial to test according to ISO 14509-1.

STANDARDSISO.COM : Click to view the full PDF of ISO 14509-3:2009

Small craft — Airborne sound emitted by powered recreational craft —

Part 3: Sound assessment using calculation and measurement procedures

1 Scope

This part of ISO 14509 specifies the procedures for assessing sound emission of powered monohull recreational craft of length up to 24 m with a Froude number greater than 1,1. It is not applicable for personal watercraft (PWC).

This part of ISO 14509 specifies the determination of the A-weighted sound pressure level by combining a calculation method and a measurement method.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 8665, *Small craft — Marine propulsion reciprocating internal combustion engines — Power measurements and declarations*

ISO 8666, *Small craft — Principal data*

ISO 10087, *Small craft — Craft identification — Coding system*

ISO 14509-1, *Small craft — Airborne sound emitted by powered recreational craft — Part 1: Pass-by measurement procedures*

IEC 60942, *Electroacoustics — Sound calibrators*

IEC 61672-1, *Electroacoustics — Sound level meters — Part 1: Specifications*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 8666 and the following apply.

3.1 recreational craft
craft of any type, regardless of the means of propulsion, intended to be used for sports and leisure purposes

3.2 maximum A-frequency weighted sound pressure level for recreational craft
maximum A-weighted sound pressure level

L_{pAmax}
maximum sound pressure level achieved from measurement at the passage of the craft under specified operating conditions, measured with frequency weighting A according to IEC 61672-1

NOTE It is expressed in decibels (dB).

3.3 Froude number
 F_n

$$F_n = \frac{v_{max}}{\sqrt{(g \cdot L_{wl})}} \quad (1)$$

where

v_{max} is the maximum boat speed, expressed in metres per second (m/s);

g is the given gravitational constant $g = 9,8 \text{ m/s}^2$;

L_{wl} is the length of the water line, expressed in metres (m).

NOTE Adapted from EU Directive 2003/44/EC.

4 Symbols

L_H length of hull, as defined in ISO 8666, expressed in metres (m)

L_{pAmax} maximum A-frequency weighted sound pressure level of the craft, expressed in decibels (dB)

L_{pASmax} maximum A-frequency weighted, S-time weighted sound pressure level of the craft as measured in ISO 14509-1, expressed in decibels (dB)

L_{pHF} A-weighted hull-form sound pressure level calculated according to Equation (A.1), expressed in decibels (dB)

L_{pOB} average A-weighted on-board sound pressure level measured according to Equation (B.1), expressed in decibels (dB)

T_{25} propagation attenuation from on-board measurements to 25 m as given in Equation (B.3), expressed in decibels (dB)

5 Sound assessment method

The hull-form sound pressure level shall be calculated according to Annex A. The on-board sound pressure level shall be measured according to Annex B. The estimated L_{pAmax} for the craft under assessment is the sum of the predicted L_{pHF} and the propagation-corrected L_{pOB} , and shall be calculated as follows:

$$L_{pAmax} = 10 \lg \left[10^{\left(\frac{L_{pHF}}{10} \right)} + 10^{\left(\frac{L_{pOB} - T_{25}}{10} \right)} \right] \quad (2)$$

The result of this calculation will be within ± 2 dB of L_{pASmax} , measured for the same craft according to ISO 14509-1, taking into account the stated measurement uncertainties of ISO 14509-1 and ISO 14509-3.

6 Test report

The assessment report shall include the following:

- a) a reference to this part of ISO 14509;
- b) a declaration that all of its requirements are met;
- c) the name and signature of the assessor and the date of the assessment;
- d) details of the measurement devices used, together with their serial numbers;
- e) L_{pHF} , calculated according to Equation (A.1);
- f) the individual A-weighted on-board sound pressure levels measured according to B.2 and the resulting L_{pOB} calculated according to Equation (B.1);
- g) L_{pAmax} , calculated according to Clause 5;
- h) details of the manufacturer and boat model (if available), according to ISO 10087;
- i) details of the engine manufacturer, engine and drive type.

Annex A (normative)

Hull-form sound pressure level calculation

L_{pHF} shall be calculated using Equation (A.1) or Equation (A.2).

NOTE The calculated result is the predicted sound pressure level generated by the hull–water interaction of a passing craft at a distance of 25 m perpendicular to the side of the craft.

$$L_{pHF} = 30 \lg\left(\frac{v}{1 \text{ m/s}}\right) + 5 \lg\left(\frac{L_H}{1 \text{ m}}\right) + 28,7 \quad (\text{A.1})$$

where

v is the speed of the craft, expressed in metres per second (m/s);

or

$$L_{pHF} = 30 \lg(v_{kn}) + 5 \lg(L_H) + 20 \quad (\text{A.2})$$

where

v_{kn} is the speed of the craft, expressed in knots (kn).

STANDARDSISO.COM : Click to view the full PDF of ISO 14509-3:2009

Annex B (normative)

On-board sound pressure level measurement method

B.1 General

B.1.1 Equipment specifications

The sound measurement equipment including the sound level meter, associated low-pass filter and windshield recommended by the manufacturer shall meet the requirements for a class 2 instrument according to IEC 61672-1. A sound calibrator that meets the requirements for a class 1 instrument according to IEC 60942 shall be used.

The overall acoustic performance of the measurement equipment shall be checked with the sound calibrator according to the instructions of its manufacturer at the beginning and end of each individual craft test (which comprises seven nominal measurements), and at least at the beginning and end of each measurement day.

The sound calibrator used for calibration of the sound level meter shall undergo laboratory verification every year with traceability to a primary standards laboratory.

B.1.2 Microphone positions

Measurements shall be made at the seven microphone positions given in Figure B.1.


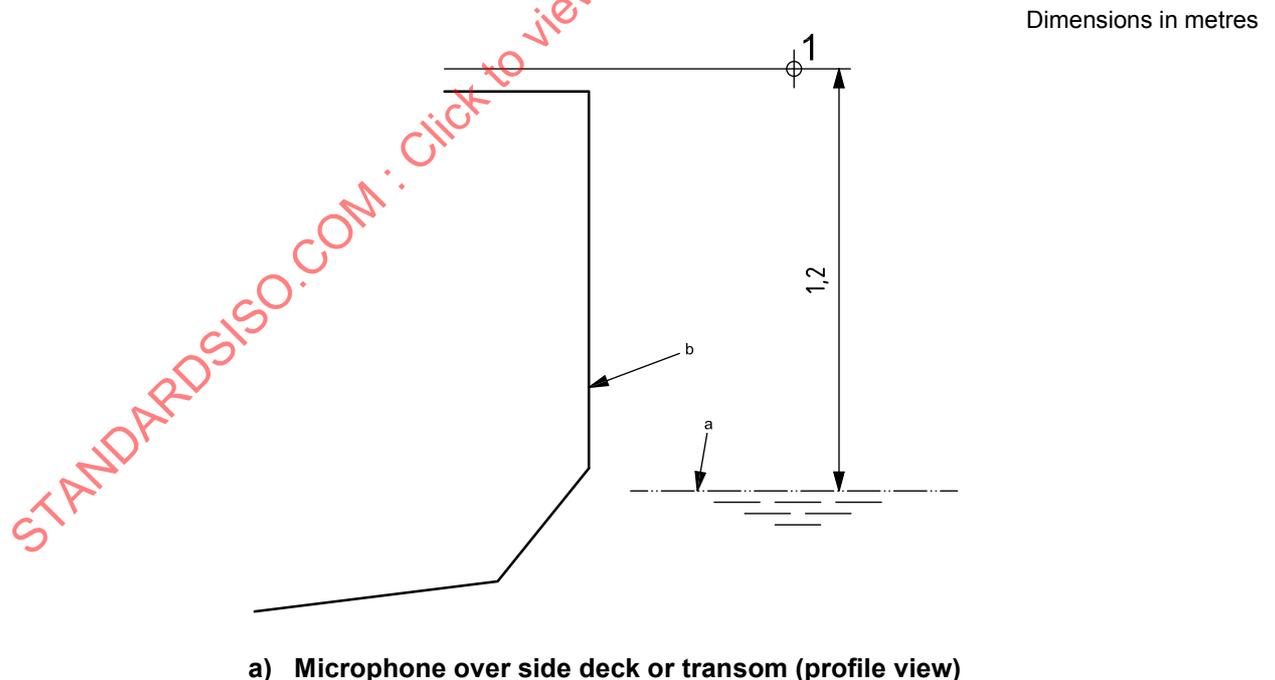



Figure B.1 (continued)

Dimensions in metres

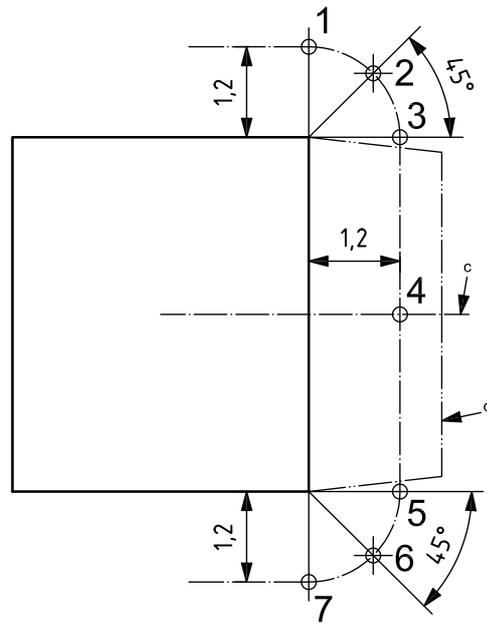

b) Square transom (top view)

Dimensions in metres

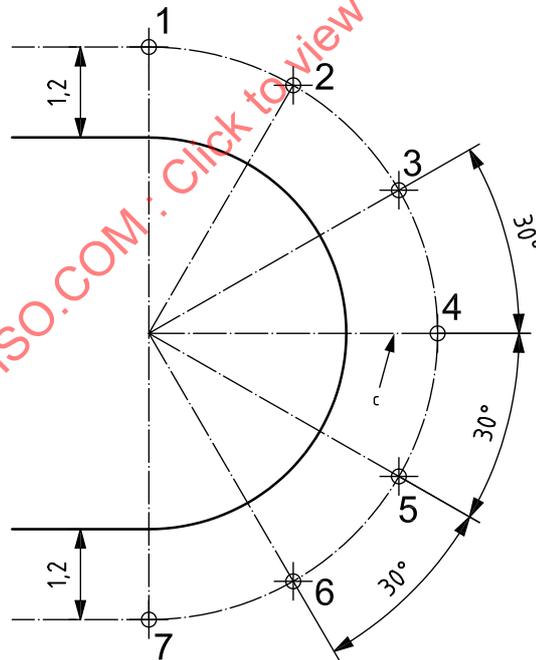

c) Round transom (top view)

Key

1 to 7 microphone positions

a Water line.

b Hull.

c Centre line of craft.

d Swim platform.

Figure B.1— Microphone positions

Microphones shall be located as close as practically possible to the dimensions indicated in Figure B.1.

The microphone shall have omnidirectional directivity characteristics and shall be generally oriented horizontally away from the craft.

B.1.3 Operating conditions

IMPORTANT — These measurements may be carried out without regard to wind velocity, rain or other precipitation, or wave height. However, the measurements should not be carried out in conditions beyond the design category of the boat.

B.1.3.1 Craft shall be operated with an equivalent two-person load except for craft intended for one person which shall have an equivalent one-person load. An equivalent one-person load is defined as $75 \text{ kg} \pm 20 \text{ kg}$.

B.1.3.2 The engine of the craft shall be raised to operating temperature before the measurement starts. All the other operating conditions (fuel used, run-up time, etc.) shall comply with the manufacturer's instructions.

B.1.3.3 The engine shall be operated at full throttle for all tests. If the craft speed exceeds 70 km/h ($37,8 \text{ kn}$), the engine throttle shall be adjusted to maintain a maximum speed of $70 \text{ km/h} \pm 2 \text{ km/h}$ ($37,8 \text{ kn} \pm 1,08 \text{ kn}$).

B.1.3.4 For propulsion systems equipped with adjustable trim, the trim angle shall be adjusted so that the propeller/impeller thrust is parallel to the bottom/keel-line of the craft to within $\pm 2^\circ$, hereafter referred to as level trim for all test conditions.

B.1.3.5 The craft shall be trimmed for zero heel for all tests.


B.1.3.6 The propeller/impeller shall be selected such that, at full throttle, the engine speed falls within $\pm 4 \%$ of the declared engine speed at level trim, in accordance with ISO 8665. In the case of spark-ignition engines without speed governor, the declared engine speed shall be the mid-point of the full throttle speed range recommended by the manufacturer for propeller selection. In the case of engines with speed governors, the declared engine speed shall be the governed speed specified by the manufacturer. For controllable pitch propellers, the pitch shall be fixed in the position required to obtain the declared engine speed at full throttle, or as near to full throttle as possible, to achieve the maximum boat speed or 70 km/h , whichever is the lesser.

B.2 Measurement of on-board sound

The A-weighted equivalent continuous sound pressure level below and including the 500 Hz third octave band (i.e. below 562 Hz) shall be measured over a 10 s period at each of the seven microphone positions in Figure B.1.


During the measurement, the recorded sound spectra shall be dominated by clear orders of exhaust sound. In this regard, acceptable and unacceptable measurements are shown in Figures B.2 and B.3, respectively.

NOTE In order to provide frequency spectra as shown in Figures B.2 and B.3, a frequency analysis might have to be performed.

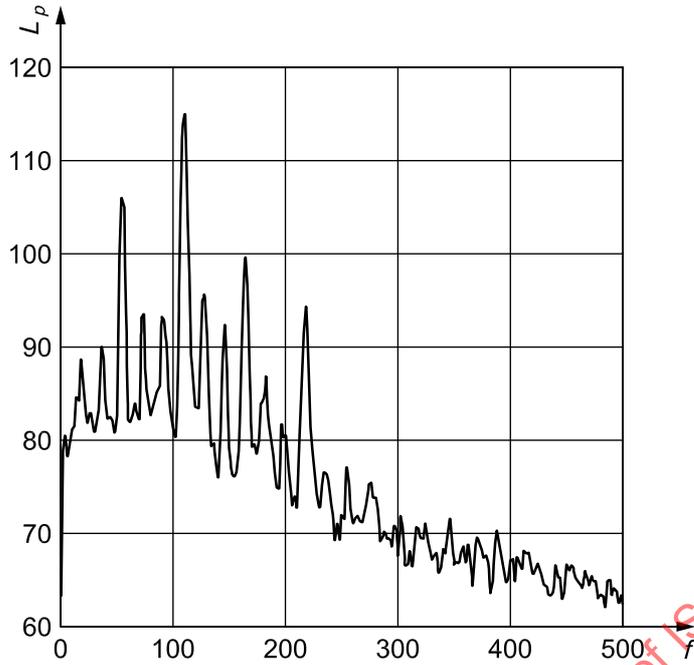

Key
 f frequency (Hz)
 L_p sound pressure level (dB)

Figure B.2 — Example of a sound spectrum showing clear orders of exhaust sound

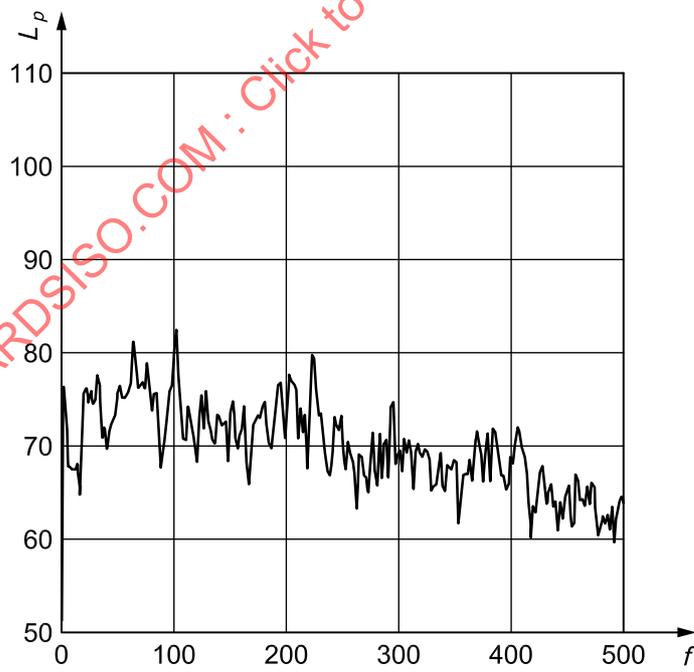

Key
 f frequency (Hz)
 L_p sound pressure level (dB)

Figure B.3 — Example of a more random sound spectrum without dominating exhaust sound showing no clear harmonics