
**Road vehicles — Pedestrian protection —
Head impact test method**

*Véhicules routiers — Protection des piétons — Méthode d'essai de
choc de la tête du piéton*

STANDARDSISO.COM : Click to view the full PDF of ISO 14513:2006



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 14513:2006

© ISO 2006

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword.....	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions.....	1
4 Test equipment	3
4.1 Impact test site.....	3
4.2 Head form impactor	3
5 Requirements	4
5.1 Head form impactor	4
5.2 Impact area	4
5.3 Impact angle	4
5.4 Head form impactor calibration.....	5
5.5 Propulsion of head form impactor	5
5.6 Rear face of head impactor.....	5
6 Preparation of test vehicle	5
6.1 Components	5
6.2 Parking brake	5
6.3 Time.....	5
7 Test conditions	5
7.1 Impact angle and impact velocity.....	5
7.2 Impact points.....	6
8 Recording of test results	6
8.1 Data acquisition	6
8.2 Head form impactor data	6
Annex A (normative) Calibration method for head form impactor	7
Annex B (normative) Velocity and angle	9
Bibliography	11

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 14513 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 10, *Impact test procedures*.

STANDARDSISO.COM : Click to view the full PDF of ISO 14513:2006

Introduction

The intent of this International Standard is to help reduce pedestrian head injuries by providing a standardized test method which will allow different test organizations to use the results from pedestrian impact tests conducted by other organizations. The test method specified applies to adults, but it is anticipated that biomechanical data for children will later be studied in order to determine the potential for child pedestrian protection.

STANDARDSISO.COM : Click to view the full PDF of ISO 14513:2006

Road vehicles — Pedestrian protection — Head impact test method

1 Scope

This International Standard specifies a test method to simulate the head impact of an adult pedestrian to the bonnet top of passenger vehicles or light truck vehicles of up to 3,5 t (GVM), as defined in ISO 3833. The impact device to be used in this test method will be robust for a vehicle impact velocity of up to 11 m/s. The test method specified addresses the reduction of an adult pedestrian head injury risk; it does not test for injuries to other regions of the pedestrian. The evaluation of injury risk to other pedestrian body regions should be determined using other test methods. This test method does not consider downward pitching of the vehicle due to pre-impact braking. This test method and the corresponding HIC measurement utilizes a free flight head form impactor and does not consider the kinematics of the pedestrian body as a whole, nor does it consider the subsequent post-impact kinematics and potential injury risk.

NOTE The test method covers an adult pedestrian head in a simulated impact with a motorized road vehicle. Research suggests vehicle safety improvements in vehicle derived from such pedestrian impact tests may be beneficial also to bicyclists in vehicle front impact.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3784, *Road vehicles — Measurement of impact velocity in collision tests*

ISO 3833, *Road vehicles — Types — Terms and definitions*

ISO 6487, *Road vehicles — Measurement techniques in impact tests — Instrumentation*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1


normal ride attitude

the vehicle attitude in driving order positioned on the ground, with the tires inflated to recommended pressures, the front wheels in the straight-ahead position, with maximum capacity of all fluids necessary for operation of the vehicle (with all standard as provided by the vehicle manufacturer), with one adult male 50th percentile dummy or an equivalent mass placed on the driver's seat and with one adult male 50th percentile dummy or an equivalent mass placed on the passenger's seat, and the suspension set in normal running conditions specified by the manufacturer (especially for vehicles with an active suspension or a device for automatic leveling)

3.2
ground reference plane

a horizontal plane, either real or imaginary, that passes through all tire contact points of a vehicle while the vehicle is in its normal ride attitude (see Figure 1)

NOTE If the vehicle is resting on the ground, then the ground plane and the ground reference plane are one and the same. If the vehicle is raised off the ground such as to allow extra clearance below the bumper, then the ground reference plane is above the ground plane.

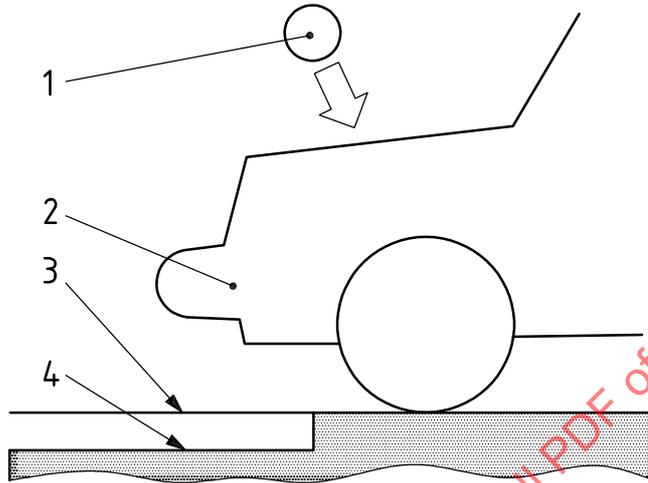

Key

- 1 impactor
- 2 vehicle
- 3 ground reference plane
- 4 ground

Figure 1 — Configuration of ISO head impact test method

3.3
bonnet top

the outer structure that includes the upper surfaces of the bonnet (hood) and of the wings (outer fenders), the scuttle (cowl top) and the lower edge of the windscreen


3.4
wrap around distance

the geometric trace described on the top of the bonnet by one end of a long flexible tape, the other end held in contact with the ground reference plane when it is held in a vertical fore and aft plane of the vehicle and traversed across the front of the bonnet and bumper of the vehicle, when it is in the normal ride attitude (see Figure 2)

NOTE The tape is held taut throughout the operation with one end held in contact with the ground reference plane, vertically below the front face of the bumper and the other end held in contact with the bonnet top. The length of the tape is the same as values of wrap around distance required in 5.2.


3.5
bonnet side reference line

the geometric trace of the highest points of contact between a straight edge and the side of a bonnet, when the straight edge, held parallel to the lateral vertical plane of the vehicle and inclined inwards at 45° is traversed down the side of the bonnet, while maintaining contact with the surface of the body shell (see Figure 3)

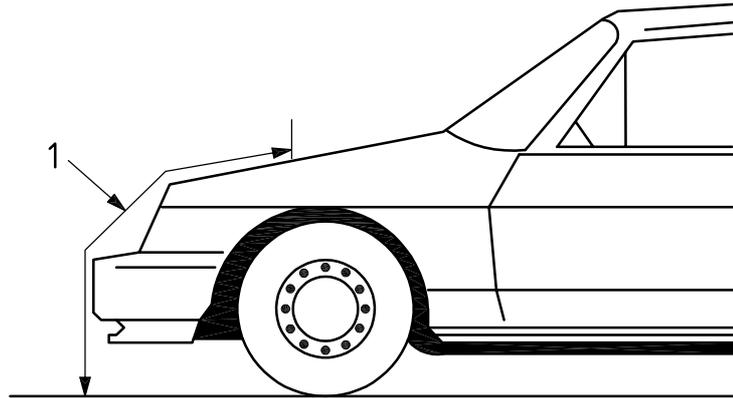**Key**

- 1 wrap around distance

Figure 2 — Determination of wrap around distance

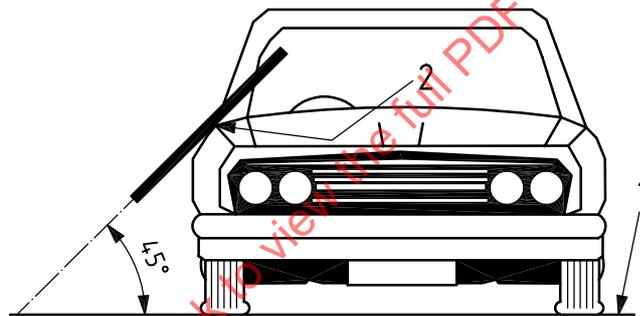**Key**

- 1 straight line reference
2 bonnet side reference line

Figure 3 — Determination of bonnet side reference line

3.6**head injury criterion***HIC*

a calculated value describing the injury risk to pedestrian head colliding with a vehicle, and calculated from the head resultant acceleration time history

4 Test equipment**4.1 Impact test site**

The test shall be conducted on a flat, smooth and hard surface with a slope not exceeding 1 %.

4.2 Head form impactor

Head form impactor described in Clause 5 shall be used in this test method.

5 Requirements

5.1 Head form impactor

5.1.1 Size and mass

The contact surface of the head form impactor shall be spherical. The diameter is 165 mm as shown in Figure 4. The mass shall be $(4,5 \pm 0,1)$ kg. The centre of gravity of the head form impactor shall be located in the geometric centre of the sphere with a tolerance of ± 5 mm.

5.1.2 Instrumentation

One triaxial (or three uniaxial) accelerometers for head form impactor shall be attached in the recess at the centre of the head form impactor. Tolerances of the accelerometers from the geometric centre of the spherical surface shall be ± 10 mm in the direction of impact, and ± 1 mm in the direction perpendicular to the impact. The instrumentation response values CFC and CAC for the accelerometers shall be 1 000 Hz and 500 g respectively, as defined in ISO 6487.


5.2 Impact area

Bonnet top shall be bounded by the geometric trace of the 1 500 mm wrap around distance in the front, as defined in 3.4, and the bonnet side reference lines, as defined in 3.5, in which the angle of the straight edge inclined inwards shall be 45° and rear boundary shall be the forward most of either the 2 100 mm wrap around distance or the rear most line created when the head form makes contact with the bonnet without first contacting the windscreen.

5.3 Impact angle

The head form impactor shall be propelled at a given angle into the bonnet top so as to ensure that the impact angle at the impact moment is as specified in 7.1.

Dimensions in millimetres

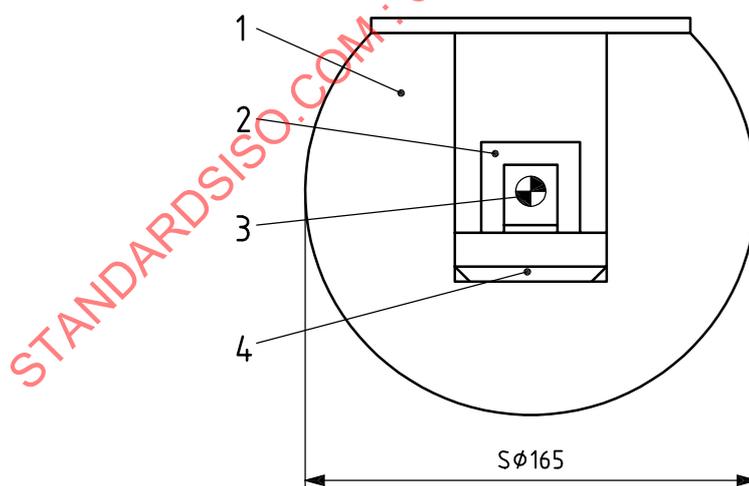

Key

- 1 spherical
- 2 accelerometer
- 3 impactor center of gravity
- 4 accelerometer mount

Figure 4 — Head form impactor

5.4 Head form impactor calibration

The head form impactor shall meet the calibration requirements specified in Annex A.

5.5 Propulsion of head form impactor

The head form impactor shall be propelled into a stationary vehicle. The method of head form impactor propulsion is at the discretion of the test office; however, the head form impactor should be launched to free flight at a required velocity.

5.6 Rear face of head impactor

This is a plane at the outer surface of the head form impactor which is perpendicular to the direction of travel, and typically perpendicular to the axis of one of the accelerometers, as well as being a flat plate used for access to the accelerometers and an attachment point for the propulsion system.

6 Preparation of test vehicle

6.1 Components

Either a complete vehicle or a cut-body, adjusted to the following conditions, shall be used for the test. All the parts of the vehicle structure and components that may be involved in a pedestrian head impact shall be in place in the test vehicle.

6.2 Parking brake

The parking brake shall be applied, or the cut-body shall be securely mounted.

6.3 Time

Sufficient time shall be allowed before testing for the temperature of all vehicle components to stabilize (see 7.1).

7 Test conditions

7.1 Impact angle and impact velocity

7.1.1 Direction of impact

The direction of impact shall be in the fore and aft vertical plane of the section of the vehicle to be tested. The tolerance is $\pm 2^\circ$. The direction of impact of tests to the bonnet top shall be downward and rearward, as if the vehicle were on the ground.

7.1.2 Angle of velocity vector

The angle of the velocity vector of the head form impactor at impact with respect to Ground Reference Level shall be $(65 \pm 2)^\circ$, as explained in Annex B. The velocity of the head impactor at the time of impact shall be selected based on the objectives of the test and the relationship between head impact velocity and vehicle impact velocity as presented in Annex B.

7.2 Impact points

7.2.1 Bonnet top

Tests shall be made to the bonnet top within the boundaries as defined in 5.2. During all tests the centre of the head form impactor shall, at the time of first contact, be a minimum of 82,5 mm inside the defined bonnet side reference line (see 3.5).

7.2.2 Testing points

The points selected for testing shall be indicated in the test report.

8 Recording of test results

8.1 Data acquisition

Data shall be acquired in accordance with ISO 6487.

8.2 Head form impactor data

8.2.1 The velocity of the head form impactor shall be measured during the free flight immediately before impact, in accordance with the method specified in ISO 3784. The accuracy of velocity measurement shall be $\pm 0,1$ m/s. The measured velocity shall be adjusted considering all factors which may affect the impactor between the point of measurement and the point of impact to give the velocity of the impactor at the time of impact. The angle of the velocity vector at the time of impact shall be measured.

8.2.2 The acceleration time histories shall be recorded, and *HIC* shall be calculated as follows:

$$HIC = \left[\frac{1}{t_2 - t_1} \int_{t_1}^{t_2} a \, dt \right]^{2,5} (t_2 - t_1)$$

$t_2 - t_1 \leq 15 \text{ ms}$

where

a is the resultant acceleration as a multiple of g ;

t_1 and t_2 are the two time instants (expressed in seconds) during the impact, defining the beginning and the end of the recording for which the value of *HIC* is a maximum.

8.2.3 The location of the first point of contact on the bonnet top of the vehicle shall be recorded.

Annex A (normative)

Calibration method for head form impactor

A.1 Performance criteria

The head form impactor shall meet the requirements specified in A.2 when tested as specified in A.3.

A.2 Requirements

A.2.1 Range for acceleration

When the head form impactor is dropped from a height of 376 mm in accordance with A.3, the peak resultant acceleration, measured by one triaxial (or three uniaxial) accelerometer (accelerometers) in the head form impactor, shall be not less than 225 *g* and not more than 275 *g*. The acceleration time curve shall be unimodal.

A.2.2 CFC and CAC

The instrumentation response values CFC and CAC for the accelerometer shall be 1000 Hz and 500 *g* respectively, as defined in ISO 6487.

A.2.3 Temperature conditions

The head form impactor shall have a temperature of (20 ± 5) °C at the time of impact.

A.3 Test method


A.3.1 The head form impactor shall be suspended from a drop rig, as shown in Figure A.1.

A.3.2 The head form impactor shall be dropped from the specified height by means that ensure instant release onto a rigidly supported flat horizontal steel plate, 50 mm thick and 600 mm², which has a clean dry surface and a surface finish of between 0,2 µm and 2,0 µm.

A.3.3 The head form impactor shall be dropped with the rear face of the impactor at the test angle chosen in 7.1.2 with respect to the vertical, as specified in Figure A.1. The suspension of the head form impactor shall be such that the head form impactor does not rotate during the fall.

A.3.4 The drop test shall be performed three times, with the head form impactor rotated 120° around its symmetrical axis after each test.

Dimensions in millimetres

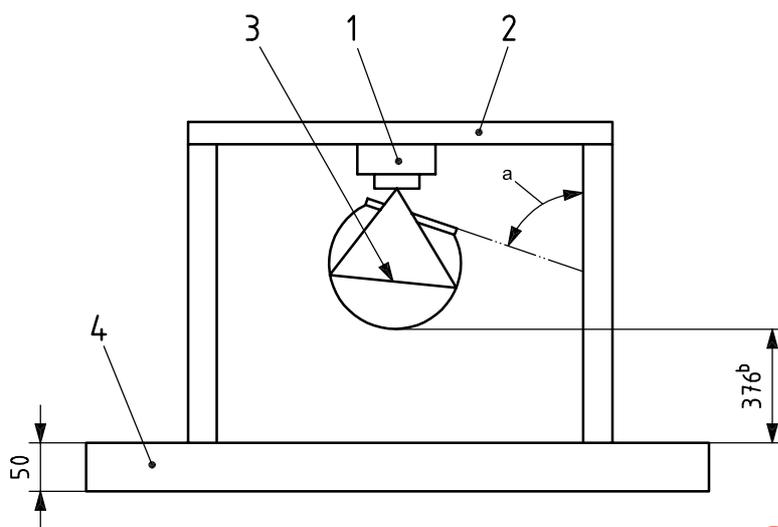

Key

- 1 release mechanism
- 2 drop rig
- 3 support system
- 4 rigid steel plate

- a drop angle
- b drop height

Figure A.1 — Test set-up for dynamic head form impactor calibration test

STANDARDSISO.COM : Click to view the full PDF of ISO 14513:2006