

---

---

**Water quality — Evaluation of ultimate aerobic biodegradability of organic compounds in aqueous medium — Method by analysis of inorganic carbon in sealed vessels (CO<sub>2</sub> headspace test)**

*Qualité de l'eau — Évaluation en milieu aqueux de la biodégradabilité aérobie ultime des composés organiques — Méthode par analyse du carbone inorganique dans des récipients hermétiquement clos (Essai au CO<sub>2</sub> dans l'espace de tête)*



**Contents**

**1 Scope** ..... 1

**2 Normative reference** ..... 1

**3 Terms and definitions** ..... 2

**4 Principle** ..... 3

**5 Test environment** ..... 4

**6 Reagents** ..... 4

**7 Apparatus** ..... 5

**8 Procedure** ..... 5

**9 Calculation and expression of results** ..... 9

**10 Expression of results** ..... 10

**11 Validity of results** ..... 10

**12 Precision of the method** ..... 11

**13 Test report** ..... 11

**Annex A (informative) Example of a biodegradation curve** ..... 12

**Annex B (informative) Statistical treatment of results** ..... 13

**Annex C (informative) Interlaboratory ring test** ..... 14

**Bibliography** ..... 15

STANDARDSISO.COM: Click to view the full PDF of ISO 14593:1999

© ISO 1999

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization  
Case postale 56 • CH-1211 Genève 20 • Switzerland  
Internet iso@iso.ch

Printed in Switzerland

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 14593 was prepared by Technical Committee ISO/TC 147, *Water quality*, Subcommittee SC 5, *Biological methods*.

Annexes A, B and C of this International Standard are for information only.

STANDARDSISO.COM : Click to view the full PDF of ISO 14593:1999

STANDARDSISO.COM : Click to view the full PDF of ISO 14593:1999

# Water quality — Evaluation of ultimate aerobic biodegradability of organic compounds in aqueous medium — Method by analysis of inorganic carbon in sealed vessels (CO<sub>2</sub> headspace test)

**WARNING** — Activated sludge and sewage may contain potentially pathogenic organisms and should be handled with appropriate precautions. Hazardous test compounds and those whose properties are unknown should be handled with care.

## 1 Scope

This International Standard specifies a method, by analysis of inorganic carbon, for the evaluation in an aqueous medium of the ultimate aerobic biodegradability of organic substances at a given concentration of microorganisms.

This International Standard is applicable to organic compounds which are:

- a) water-soluble under the test conditions;
- b) poorly water-soluble under the test conditions, in which case special measures may be necessary to achieve a good dispersion of the compound (see ISO 10634);
- c) volatile;
- d) not inhibitory to the test microorganisms at the concentration chosen for the test.

In this test, biogenically produced inorganic carbon is measured *in situ* in the test vessels in such a manner that the rate measured nearly equals the rate of microbial production.

NOTE 1 The conditions described in this International Standard do not always correspond to the optimal conditions for allowing the maximum degree of biodegradation to occur. For alternative biodegradation methods see ISO 15462.

NOTE 2 With highly volatile substances, losses to the gaseous phase can be minimized by reducing the volume of the headspace. However, there should be sufficient oxygen in the test system to prevent biodegradation being oxygen-limited.

NOTE 3 The presence of an inhibitory effect can be determined as specified in 8.3, or by using any other method for determining the inhibitory effect of a substance on bacteria (see, for example, ISO 8192).

## 2 Normative reference

The following normative document contains provisions which, through reference in this text, constitute provisions of this International Standard. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent edition of the normative document indicated below. For undated reference, the latest edition of the normative document referred to applies. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 10634:1995, *Water quality — Guidance for the preparation and treatment of poorly water-soluble organic compounds for the subsequent evaluation of their biodegradability in aqueous medium.*

### 3 Terms and definitions

For the purposes of this International Standard, the following terms and definitions apply.

#### 3.1

##### **ultimate aerobic biodegradation**

breakdown of a chemical compound or organic matter by microorganisms in the presence of oxygen to carbon dioxide, water and mineral salts of any other elements present (mineralization) and the production of new biomass

#### 3.2

##### **primary biodegradation**

structural change (transformation) of a chemical compound by microorganisms resulting in the loss of a specific property

#### 3.3

##### **activated sludge**

biomass produced in the aerobic treatment of wastewater by the growth of bacteria and other microorganisms in the presence of dissolved oxygen

#### 3.4

##### **concentration of suspended solids**

<activated sludge> amount of solids obtained by filtration or centrifugation of a known volume of activated sludge and drying at about 105 °C to constant mass

#### 3.5

##### **total organic carbon**

##### **TOC**

all that carbon present in organic matter which is dissolved and suspended in the water sample

#### 3.6

##### **dissolved organic carbon**

##### **DOC**

that part of the organic carbon in the water sample which cannot be removed by specified phase separation

NOTE For example, by centrifugation at 40 000 m · s<sup>-2</sup> for 15 min or by membrane-filtration using membranes with pores of diameter 0,2 µm to 0,45 µm.

#### 3.7

##### **total inorganic carbon**

##### **TIC**

all that inorganic carbon in the water deriving from carbon dioxide and carbonate

#### 3.8

##### **dissolved inorganic carbon**

##### **DIC**

that part of the inorganic carbon in water which cannot be removed by specified phase separation

NOTE For example, by centrifugation at 40 000 m · s<sup>-2</sup> for 15 min or by membrane-filtration using membranes with pores of diameter 0,2 µm to 0,45 µm.

#### 3.9

##### **theoretical amount of inorganic carbon**

##### **ThIC**

theoretical maximum amount of inorganic carbon formed after oxidizing a chemical compound completely

NOTE It is calculated from the molecular formula and expressed in this case as milligrams carbon per milligram (or gram) test compound.

### 3.10 lag phase

time from the start of a test until adaptation and/or selection of the degrading microorganisms are achieved and the biodegradation degree of a chemical compound or organic matter has increased to about 10 % of the maximum level of biodegradation

NOTE It is normally recorded in days.

### 3.11 maximum level of biodegradation

maximum biodegradation degree of a chemical compound or organic matter in a test, above which no further biodegradation takes place during the test

NOTE It is normally recorded in percent.

### 3.12 biodegradation phase

time from the end of the lag phase of a test until about 90 % of the maximum level of biodegradation has been reached

NOTE It is normally recorded in days.

### 3.13 plateau phase

time from the end of the biodegradation phase until the end of the test

NOTE It is normally recorded in days.

### 3.14 pre-exposure

pre-incubation of an inoculum in the presence of the test chemical compound or organic matter, with the aim of enhancing the ability of this inoculum to biodegrade the test material by adaptation and/or selection of the microorganisms

### 3.15 preconditioning

pre-incubation of an inoculum under the conditions of the subsequent test in the absence of the test chemical compound or organic matter, with the aim of improving the performance of the test by acclimatization of the microorganisms to the test conditions

## 4 Principle

The test compound, as the sole source of carbon and energy, is added to a mineral salts medium inoculated with a mixed population of microorganisms and incubated in sealed vessels with a headspace of air. The concentration of the compound used normally yields an initial organic carbon concentration in the medium of 2 mg/l to 40 mg/l, usually 20 mg/l. Biodegradation (mineralization to carbon dioxide) is determined by measuring the net increase in total inorganic carbon (TIC) levels over time compared with unamended blanks. The test generally runs for 28 d. The extent of biodegradation is expressed as a percentage of the theoretical amount of inorganic carbon (ThIC) based on the amount of test compound added initially.

For sufficiently water-soluble substances, dissolved organic carbon (DOC) removal during the test may also be determined (see for example ISO 7827).

If a suitable analytical method is available, the primary biodegradation of the test compound during the test may also be determined.

## 5 Test environment

Incubation shall take place in the dark or in diffused light, at a temperature within the range 20 °C to 25 °C which shall not vary by more than  $\pm 2$  °C during the test.

## 6 Reagents

Use only reagents of recognized analytical grade.

**6.1 Distilled or deionized water**, containing less than 1 mg/l total organic carbon.

**6.2 Test medium.**

### 6.2.1 Composition

#### a) Solution a)

Dissolve:

Anhydrous potassium dihydrogenphosphate ( $\text{KH}_2\text{PO}_4$ )	8,50 g
Anhydrous dipotassium hydrogenphosphate ( $\text{K}_2\text{HPO}_4$ )	21,75 g
Disodium hydrogenphosphate dihydrate ( $\text{Na}_2\text{HPO}_4 \cdot 2\text{H}_2\text{O}$ )	33,40 g
Ammonium chloride ( $\text{NH}_4\text{Cl}$ )	0,50 g
in water (6.1), quantity necessary to make up to	1 000 ml

In order to check this buffer solution, it is recommended to measure the pH, which should be at about 7,4. If this is not the case, prepare a new solution.

#### b) Solution b)

Dissolve 36,40 g of calcium chloride dihydrate ( $\text{CaCl}_2 \cdot 2\text{H}_2\text{O}$ ) in water (6.1), quantity necessary to make up to 1 000 ml.

#### c) Solution c)

Dissolve 22,50 g of magnesium sulfate heptahydrate ( $\text{MgSO}_4 \cdot 7\text{H}_2\text{O}$ ) in water (6.1), quantity necessary to make up to 1 000 ml.

#### d) Solution d)

Dissolve 0,25 g iron(III) chloride hexahydrate ( $\text{FeCl}_3 \cdot 6\text{H}_2\text{O}$ ) in water (6.1), quantity necessary to make up to 1 000 ml. To avoid precipitation, prepare this solution freshly before use or add a drop of concentrated hydrochloric acid (HCl).

### 6.2.2 Preparation of the test medium

For 1 l of test medium, mix 10 ml of solution a) with 800 ml water (6.1) and then add 1 ml each of solutions b), c) and d) and make up to 1 000 ml with water (6.1).

**6.3 Concentrated orthophosphoric acid ( $\text{H}_3\text{PO}_4$ )** ( $\geq 85$  % mass per volume).

#### 6.4 Sodium hydroxide solution.

Dissolve 280 g of sodium hydroxide (NaOH) in 1 l of water (6.1) to obtain a solution of concentration  $c = 7$  mol/l. Use either a freshly prepared solution or determine the concentration of dissolved inorganic carbon (DIC) of this solution and consider this value when calculating the test result (see clause 9).

### 7 Apparatus

Ensure that all glassware is thoroughly cleaned and, in particular, free from both organic and toxic matter. Use usual laboratory equipment, and the following apparatus.

**7.1 Carbon analyzer**, instrument for measuring inorganic and (optionally) organic carbon, such as the appropriate parts of a total organic carbon (TOC) analyser or a gas chromatograph.

**7.2 Gas-tight glass vessels of known volume**, for example, serum bottles of 160 ml capacity sealed with butyl rubber septa and aluminium crimp seals or any other gas-tight system.

**7.3 Orbital shaker.**

**7.4 Syringes** of high precision for aqueous and gaseous samples.

**7.5 Glass bottles** to take, for example, 5 l medium.

**7.6 Centrifuge.**

**7.7 pH-meter.**

**7.8 Device for filtration**, with membrane filters of suitable porosity (nominal aperture diameter between 0,20  $\mu\text{m}$  and 0,45  $\mu\text{m}$ ) which adsorb organic substances or release organic carbon to a minimum degree.

**7.9 CO<sub>2</sub>-free air production system.**

Prepared by passing air through soda lime granules or a solution of sodium hydroxide (see, for example, ISO 9439). Alternatively, a mixture of 80 % N<sub>2</sub>/20 % O<sub>2</sub> may be used. The absence of CO<sub>2</sub> in the air can be confirmed by passage through barium hydroxide solution (a white precipitate indicates the presence of CO<sub>2</sub>).

### 8 Procedure

#### 8.1 Preparation of the test solutions

##### 8.1.1 Test compound

Prepare a stock solution of a sufficiently water-soluble test compound in water (6.1) or the test medium (6.2.2) at a concentration preferably 100-fold greater than the final concentration to be used in the test. Add the stock solution to the test medium (6.2.2) to give a final TOC concentration of between 2 mg/l and 40 mg/l (see 8.3), preferably 20 mg/l TOC.

Add substances of low water-solubility directly, in solid or liquid form, to the inoculated medium in the appropriate test vessels. Liquid test compounds, including those which are volatile, may be injected directly into sealed vessels using a high-precision microsyringe. Determine the added amount exactly.

Poorly soluble substances can often be dispensed as a dispersion produced using a non-biodegradable emulsifying agent and/or ultrasonication. Refer to ISO 10634 for guidance on the preparation and treatment of poorly water-soluble substances.

### 8.1.2 Reference substance

Prepare a stock solution of the reference substance (an organic substance of known biodegradability such as aniline or sodium benzoate) in water (6.1) in the same way as in 8.1.1, and then dilute in the test medium (6.2.2) to give a final TOC concentration of 20 mg/l.

### 8.1.3 Solution to check inhibition

If required (when e.g. no information on the toxicity of test compound is available), prepare a solution containing, in the test medium (6.2.2), both the test compound (8.1.1) and the reference compound (8.1.2) preferably at concentrations of organic carbon of 20 mg/l for each.

## 8.2 Preparation of the inoculum

### 8.2.1 General

Prepare the inoculum using the sources described in 8.2.2, 8.2.3 and 8.2.4, or using a mixture of these sources, to obtain a microbial population that offers sufficient biodegradative activity. Check this activity by means of the reference substance (8.1.2). Based on experience (clause 12 and annex C), the usual inoculum is activated sludge at a dry solids concentration of 4 mg/l. The carbon dioxide production of the blanks should be as low as possible (see clause 11). To reduce the influence of the blanks, it may be helpful to precondition the inoculum by aeration for up to one week before it is used. Use a suitable volume for inoculation (see note 2 below).

Normally the inoculum should not be pre-exposed to the test compound, to allow a general prediction of the degradation behaviour in the environment. In certain circumstances, depending on the purpose of the test, pre-exposed inocula may be used, provided that this is clearly stated in the test results (e.g. *biodegradation = x %*, *using pre-exposed inocula*) and the method of the pre-exposure is detailed in the test report.

NOTE 1 Pre-exposed inocula can be obtained from laboratory biodegradation tests conducted under a variety of conditions (e.g. ISO 9888 Zahn-Wellens test; ISO 9887 SCAS test) or from samples collected from locations where relevant environmental conditions exist (for example treatment plants dealing with similar substances or contaminated areas).

NOTE 2 Based on experience, suitable volume means:

- sufficient to give a population which offers enough biodegradation activity;
- degrades the reference compound by the stipulated percentage (see clause 11);
- gives between  $10^2$  to  $10^5$  colony forming units per millilitre in the final mixture;
- gives normally a concentration of 4 mg/l suspended solids of activated sludge in the final mixture (higher concentrations up to 30 mg/l are generally possible but may influence significantly the  $\text{CO}_2$  production of the blanks and are therefore not recommended);
- the quantity of dissolved organic carbon provided by the inoculum should be less than 10 % of the initial concentration of organic carbon introduced by the test compound;
- generally 1 ml to 10 ml of inoculum are sufficient for 1 000 ml of test solution.

### 8.2.2 Inoculum from an activated sludge plant

Collect activated sludge from the aeration tank of a full-scale or a laboratory wastewater treatment plant which treats predominantly domestic sewage. If necessary, remove coarse particles by filtration through a sieve (for example, 1 mm<sup>2</sup> mesh size) and keep the sludge aerobic thereafter. Since it is necessary for the inoculum blank to have as low an evolution of  $\text{CO}_2$  as possible, the sludge may need further treatment. For example, settle or centrifuge (e.g. at  $10\,800\text{ m}\cdot\text{s}^{-2}$  for 10 min) the sludge, discard the supernatant and resuspend the settled or centrifuged solids in test medium (6.2.2) to give a suspended solids concentration of about 3 g/l (see, for example, ISO 11923). Alternatively or additionally, aerate the sludge overnight before use. To reduce the blank value still further, the sludge can be preconditioned to the test conditions prior to use by diluting in test medium (6.2.2) to give the final concentration and aerating with moist air for up to one week at the test temperature. Use 4 mg/l dry solids as the concentration of the inoculum in a test (see note 2 in 8.2.1).

### 8.2.3 Inoculum from wastewater

Take a sample of the influent or the effluent from a full-scale or laboratory wastewater treatment plant dealing with predominantly domestic sewage. Keep this sample under aerobic conditions and use on the day of collection (or precondition if necessary). Coarse-filter the effluent to remove gross particulate matter and measure its pH. Before use, sparge the filtrate with CO<sub>2</sub>-free air (7.9) for about 1 h while maintaining the pH at 6,5 using orthophosphoric acid (6.3), restore the pH to its original value and finally let the sample settle for 1 h and take a suitable volume of the supernatant for inoculation.

NOTE This sparging procedure reduces the TIC content of the inoculum. For example, when the maximum of 100 ml filtered effluent per litre test volume is used as the inoculum, the amount of TIC produced in blank vessels in 28 d should be in the range 0,4 mg/l to 1,3 mg/l (see annex D in [9]). The TIC values in the blanks may be different for the various inocula used.

### 8.2.4 Inoculum from a surface water

Take a sample of an appropriate surface water. Keep under aerobic conditions and use on the day of collection. If necessary, concentrate the surface water by filtration or centrifugation. Use a suitable volume as inoculum.

## 8.3 Test procedure

8.3.1 Provide a number of test vessels (7.2) sufficient for requirements in order to have:

- a) test vessels (denoted F<sub>T</sub>) for the test compound;
- b) blank vessels (denoted F<sub>B</sub>) containing test medium and inoculum;
- c) vessels for checking the procedure (denoted F<sub>C</sub>) containing the reference compound;
- d) if needed, vessels for checking a possible inhibitory effect of the test compound (denoted F<sub>I</sub>);
- e) if needed, vessels for checking a possible abiotic elimination (denoted F<sub>S</sub>) containing the test compound but no inoculum, sterilized by autoclaving or by the addition of a suitable inorganic toxic compound to prevent microbial activity. Use, for example, 5 ml/l of a solution containing 10 g/l of mercury(II) chloride (HgCl<sub>2</sub>). Add the same amount of the toxic substance two weeks after the test was begun.

To separate large glass bottles (7.5), make the additions as indicated in Table 1.

The number of vessels needed will depend on the frequency of analysis and the confidence limits required for the final extent of biodegradation (see annex B). Usually at least five vessels from sets F<sub>T</sub>, F<sub>B</sub> and F<sub>C</sub> are analysed at the end of the test.

8.3.2 Thoroughly mix the contents of each of the large bottles (7.5) in turn and dispense suitable aliquots (for example, 100 ml) into labelled test vessels (7.2). Add water-soluble test compounds from stock solutions and poorly water-soluble test compounds directly to the test vessels (see 8.1.1) and add water to give the same volume in each vessel. Ensure that the liquid to headspace ratio and the test compound concentration are such that sufficient oxygen is available in the headspace to allow for complete biodegradation (for example, avoid using a high substrate concentration and a small headspace). A headspace to liquid ratio of 1:2 is usual.

Seal the vessels when all additions have been made, for example, with butyl rubber septa and aluminium caps, place on an orbital shaker in the dark or diffuse light at the test temperature (see clause 5) and start the shaker at a speed sufficient to ensure good mixing of the vessel contents (for example, 150 r/min to 200 r/min).

Calibrate the carbon analyser (7.1) as required (8.4) on the days when analysis is to be made. Sacrifice vessels for analysis on the day of sampling but at least weekly or more frequently if a complete degradation curve is required. Remove the requisite number of replicate vessels from the shaker, representing F<sub>T</sub>, F<sub>B</sub> and F<sub>C</sub>, and, if used, F<sub>I</sub> and F<sub>S</sub>. The test shall normally run for 28 d but can be prolonged if degradation has started. The test may be finished before 28 d have elapsed if biodegradation has reached a plateau.

Table 1 — Final distribution of test and reference compounds in the test vessels

Vessel	Test medium (6.2.2)	Test compound (8.1.1)	Reference compound (8.1.2)	Inoculum (8.2)
F <sub>T</sub> Test compound	+	+	–	+
		2 mg/l to 40 mg/l TOC		
F <sub>B</sub> Blank	+	–	–	+
F <sub>C</sub> Inoculum check	+	–	+	+
			20 mg/l TOC	
F <sub>S</sub> Abiotic elimination check (optional)	+	+	–	–
	sterilized	2 mg/l to 40 mg/l TOC		
F <sub>I</sub> Inhibition control (optional)	+	+	+	+
		2 mg/l to 40 mg/l TOC	20 mg/l TOC	

## 8.4 Determination of total inorganic carbon (TIC)

### 8.4.1 General

There are two methods available for measuring the amount of TIC produced in the test. The methods can give slightly different results and therefore only one method should be used in a test run.

### 8.4.2 Acidification to pH < 3

Calibrate the carbon analyser (7.1) using appropriate standards (for example, 1 % mass fraction CO<sub>2</sub> in N<sub>2</sub>). Inject concentrated orthophosphoric acid (6.3) through the septum of each test vessel taken, to lower the pH of the medium to < 3 (for example, add 1 ml to 100 ml test medium). Replace the vessels on the shaker. After shaking for 1 h, remove the vessels from the shaker, withdraw 1-ml aliquots of gas from the headspace in each vessel and inject into the carbon analyser. Read and record the concentration of TIC (milligrams carbon per litre gas).

The principle of this method is that after acidification to pH < 3 and equilibration, the equilibrium constant for the distribution of CO<sub>2</sub> between the liquid and gaseous phases in the test vessels is approximately equal to one (for example, 0,95 at 20 °C). This should be checked for the test system as follows: Set up test vessels containing between 0,5 mg/l and 10 mg/l TIC, using a solution of anhydrous sodium carbonate (Na<sub>2</sub>CO<sub>3</sub>) in CO<sub>2</sub>-free water [prepared by acidifying water (6.1) with concentrated orthophosphoric acid (6.3), sparging overnight with CO<sub>2</sub>-free air (7.9) and raising the pH to neutrality with alkali]. Ensure that the ratio of the headspace volume to the liquid volume is the same as for the test (for example, 1:2). Acidify the vessels by injecting in an appropriate volume (for example, 1 ml) of concentrated orthophosphoric acid (6.3), shake for 1 h, withdraw samples from the headspace and the liquid, and analyse for TIC. Check that the two concentrations are the same, within experimental error.

**NOTE** If DOC removal is also to be measured (soluble test compounds only), use the test mixture of the test vessels if no significant change is to be expected by the acidification (e.g. influence on the solubility of the test compound or disintegration of the inoculum), or use separate vessels for this purpose. Take samples of the liquid phase at least at the start and end of the test, membrane-filter or centrifuge and inject into the DOC analyser (see e.g. ISO 8245). If primary biodegradation is to be measured, use the sample for substance-specific analyses as well.

### 8.4.3 Conversion of CO<sub>2</sub> to carbonate

Calibrate the carbon analyser (7.1) using appropriate standards. For example, inject solutions of sodium bicarbonate (NaHCO<sub>3</sub>) in CO<sub>2</sub>-free water (see 8.4.2) in the range 0 mg/l to 20 mg/l TIC. Inject 1 ml sodium hydroxide (6.4) through the septum of each test vessel sampled and shake for 1 h. Remove vessels from the shaker, allow to settle and withdraw, by syringe, suitable volumes (for example, 50 µl to 200 µl) from the liquid phase in each vessel. Alternatively, when using a carbon analyser connected to an automatic sampler, the small beakers of the sampler are carefully filled to the brim, covered with a suitable cap to prevent CO<sub>2</sub> exchange with the air, use e.g. sealed vessels and analysed within 6 h. Inject the samples into the carbon analyser directly by syringe or with the help of an automatic sampler and read off the concentration of TIC from the calibration curve.

The principle of this method is that after the addition of alkali and shaking, the concentration of TIC in the headspace is negligible. This should be checked for the test system.

NOTE If DOC removal is also to be measured (soluble test compounds only), use the test mixture of the test vessels if no significant change is to be expected by bringing to alkaline conditions (e.g. influence on the solubility of the test compound or disintegration of the inoculum) or use separate vessels for this purpose. Take samples of the liquid phase at least at the start and end of the test, acidify to remove TIC, membrane-filter or centrifuge and inject into the DOC analyser (see e.g. ISO 8245). If primary biodegradation is also to be measured, use the sample for substance-specific analyses as well.

## 9 Calculation and expression of results

### 9.1 Calculation

Assuming 100 % mineralization of the test compound, the theoretical amount of inorganic carbon (ThIC) in excess of that produced in the blank controls (i.e. endogenous respiration) equals the amount of total organic carbon (TOC) added as the test compound to each test vessel at the start of the test, that is:

$$\text{ThIC} = \text{TOC}$$

The total inorganic carbon (TIC) in the test vessel is:

$$\text{TIC} = (\text{mg C in the liquid phase} + \text{mg C in the gas phase})$$

that is:

$$\text{TIC} = (V_L \cdot c_L) + (V_H \cdot c_H) \quad (1)$$

where

$V_L$  is the volume, in litres, of liquid in the test vessel;

$c_L$  is the concentration of TIC in the liquid phase (mg carbon per litre liquid);

$V_H$  is the volume, in litres, of the headspace;

$c_H$  is the concentration of TIC in the headspace (mg carbon per litre gas).

The calculation of TIC for the two analytical methods is described below in 9.2 and 9.3. Percentage biodegradation  $D_t$  in each case is given by:

$$D_t = \frac{(\text{TIC}_t - \text{TIC}_b)}{\text{TOC}_i} \times 100 \quad (2)$$

where

$\text{TIC}_t$  is the TIC, in milligrams, in test vessel at time  $t$ ;

$\text{TIC}_b$  is the mean TIC, in milligrams, in blank control vessels at time  $t$ ;

$\text{TOC}_i$  is the TOC, in milligrams, initially added to the test vessel.

Calculate in the same way the biodegradation degree of the reference compound in the inoculum check vessels ( $F_C$ ) and the inhibition check vessels ( $F_I$ ) and without subtracting the blanks, of the test compound in the abiotic elimination control  $F_S$  if they were included, from the amounts of TIC produced up to each sampling time.

NOTE 1 If there has been a significant increase in the TIC content of the sterile controls ( $F_S$ ) over the test period, then abiotic degradation of the test compound has occurred.

NOTE 2 The determination of DOC at the start and end of the test and in between can be used to determine the final percentage biodegradation for water-soluble test compounds based on DOC removal (see for example ISO 7827 and ISO 8245).

NOTE 3 If specific analysis was performed at the start and end of the test, then the primary biodegradation of parent test compound during the test may also be determined.

## 9.2 Acidification to pH < 3

Acidification to pH < 3 and equilibration results in the equalization of the concentration of TIC in the liquid and gaseous phases. Hence only the concentration of TIC in the gas phase needs to be measured as  $c_L = c_H$  [see equation (1)].

## 9.3 Conversion of CO<sub>2</sub> to carbonate

In this method calculations are performed as described in equation (1), but the negligible amount of TIC in the gaseous phase is ignored [that is,  $(V_H \cdot c_H) \approx 0$  in equation (1)].

## 10 Expression of results

Compile a table of inorganic carbon measured (TIC) and percentage biodegradation ( $D_t$ ) for each determination interval and each test vessel. Plot a biodegradation curve in percent as a function of time, and indicate lag phase and degradation phase if possible. If comparable results are obtained for the parallel test vessels  $F_T$  (< 20 % difference) plot a mean curve, otherwise plot curves for each vessel (see example in annex A).

Determine the mean value of percent biodegradation in the plateau phase or use the highest value, e.g. when the curve decreases in the plateau phase, and indicate this maximum level of biodegradation as "degree of biodegradation of the test compound" in the test report. If the number of test vessels was not sufficient to indicate a plateau phase, use the measured data of the last day of the test and calculate a mean value.

Plot in the same way a curve of the reference compound  $F_C$  and, if included, of the abiotic elimination check  $F_S$  and the inhibition control  $F_I$ .

Record the amount of TIC formed in the blank controls ( $F_B$ ), and in the vessels for checking abiotic elimination ( $F_S$ ) and for checking any inhibitory effect of the test compound ( $F_I$ ), if these vessels were included in the test.

Information on the toxicity of the test compound may be useful in the interpretation of test results showing a low biodegradation. If in vessels  $F_I$  the degradation percentage is < 25 % at the end of the test and insufficient degradation of the test compound is observed, it can be assumed that the test compound is inhibitory. In this case the test should be repeated using a lower test concentration, however, it should be noted that this will reduce the precision of the method. Alternatively another inoculum may be used. If in flask  $F_S$  (abiotic elimination check if included) a significant increase in TIC amount (> 10 %) is observed, abiotic degradation processes may have taken place.

## 11 Validity of results

The test is considered as valid if:

- the mean percentage degradation in the vessels  $F_C$  containing the reference compound is  $\geq 60$  % on the 14th day of incubation;
- the mean amount of TIC produced from the blank controls at the end of the test is  $\leq 15$  % of the organic carbon added initially as the test compound.

## 12 Precision of the method

The interlaboratory variability (reproducibility) was determined in a ring test (see annex D in [9]) of the method. The results recorded, determined after 28 d of test duration, are given in annex C of this International Standard, Table C.1.

## 13 Test report

The test report shall provide all pertinent information, particularly the following:

- a) a reference to this International Standard;
- b) any information necessary to identify the substance subjected to the test;
- c) the name and concentration of the reference substance used;
- d) all the results obtained (in tabular form) and the degradation curve, including the results obtained for the inoculum activity check tests (vessel F<sub>C</sub>) and for the inhibition check tests (vessel F<sub>I</sub>) and abiotic degradation check tests (vessel F<sub>S</sub>) if they were included;
- e) the main characteristics of the carbon analyser employed and, if used, the method of specific analysis for the test compound;
- f) the method of TIC analysis employed;
- g) a brief description of the test system used;
- h) the reasons for any rejection of the test results (see clause 11);
- i) any preconditioning or pre-exposure of the inoculum;
- j) the concentration of the test compound used and the organic carbon content of this concentration;
- k) the source, characteristics and amount of inoculum used;
- l) any other facts that are relevant to the procedure followed.

## Annex A (informative)

### Example of a biodegradation curve

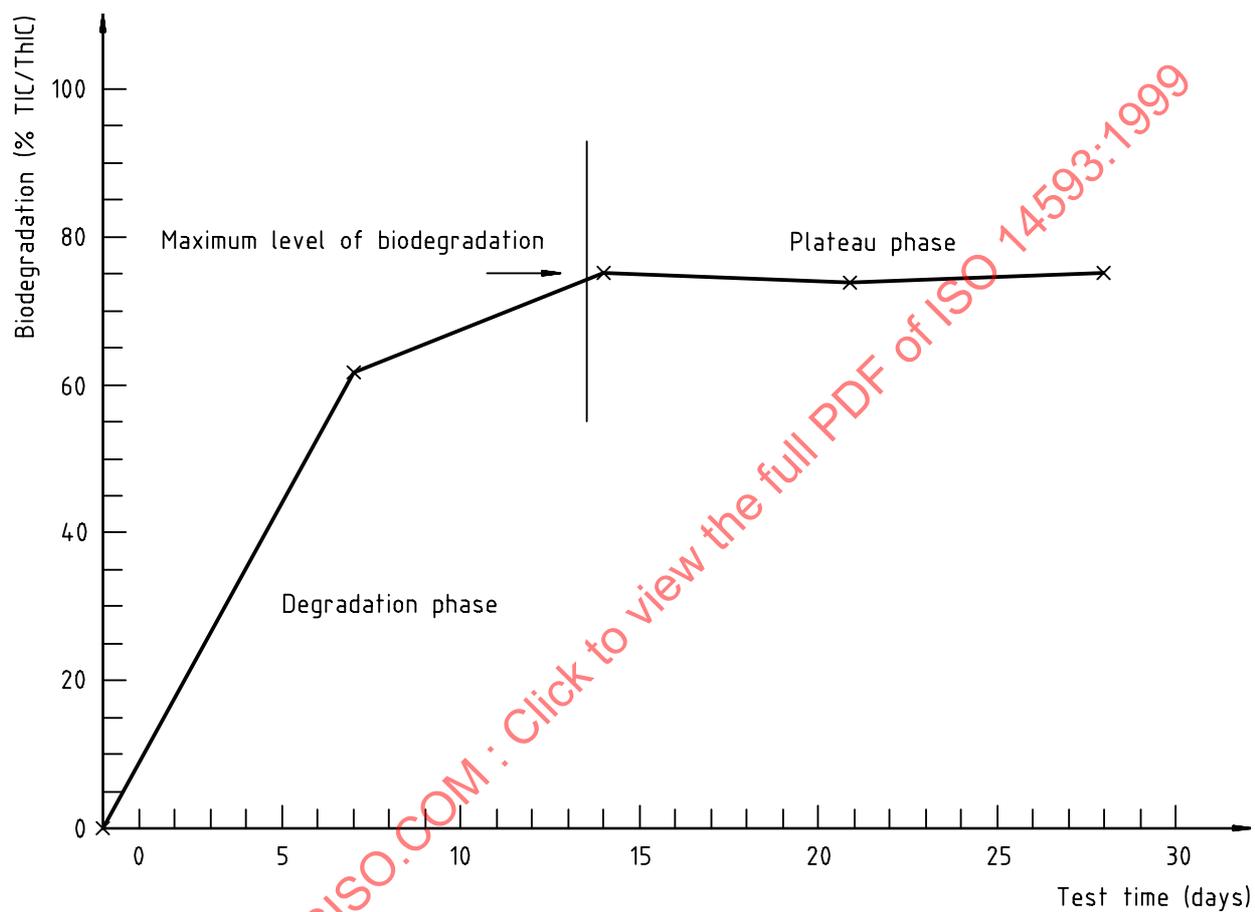


Figure A.1 — Biodegradation of octan-1-ol in the CO<sub>2</sub> headspace test