
Graphical symbols for diagrams —

Part 3:

Connections and related devices

Symboles graphiques pour schémas —

Partie 3: Connexions et dispositifs associés

STANDARDSISO.COM : Click to view the full PDF of ISO 14617-3:2002



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 14617-3:2002

© ISO 2002

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.ch
Web www.iso.ch

Printed in Switzerland

Contents

	Page
Foreword	iv
Introduction.....	v
1 Scope.....	1
2 Normative references.....	1
3 Terms and definitions	1
4 Connections.....	4
5 Connection joints and pipeline ends	7
6 Connection joints, junctions, and related devices of specified design	9
7 Fittings.....	10
8 Ports ^{ISO} , quick-release couplings, and connectors.....	11
9 Additional simplifications.....	12
Bibliography.....	15

STANDARDSISO.COM : Click to view the full PDF of ISO 14617-3:2002

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this part of ISO 14617 may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 14617-3 was prepared by Technical Committee ISO/TC 10, *Technical product documentation*, Subcommittee SC 10, *Process plant documentation and tpd-symbols*.

ISO 14617 consists of the following parts, under the general title *Graphical symbols for diagrams*:

- *Part 1: General information and indexes*
- *Part 2: Symbols having general application*
- *Part 3: Connections and related devices*
- *Part 4: Actuators and related devices*
- *Part 5: Measurement and control devices*
- *Part 6: Measurement and control functions*
- *Part 7: Basic mechanical components*
- *Part 8: Valves and dampers*
- *Part 9: Pumps, compressors and fans*
- *Part 10: Fluid power converters*
- *Part 11: Devices for heat transfer and heat engines*
- *Part 12: Devices for separating, purification and mixing*
- *Part 15: Installation diagrams and network maps*

Other parts are under preparation.

Introduction

The purpose of ISO 14617 in its final form is the creation of a library of harmonized graphical symbols for diagrams used in technical applications. This work has been, and will be, performed in close cooperation between ISO and IEC. The ultimate result is intended to be published as a standard common to ISO and IEC, which their technical committees responsible for specific application fields can use in preparing International Standards and manuals.

STANDARDSISO.COM : Click to view the full PDF of ISO 14617-3:2002

Graphical symbols for diagrams —

Part 3: Connections and related devices

1 Scope

This part of ISO 14617 specifies graphical symbols for functional connections, mechanical links, pipelines and related devices such as connection joints, ISO ports, terminals, quick-release couplings and connectors, in diagrams.

For the fundamental rules of creation and application of graphical symbols in diagrams, see ISO 81714-1.

For an overview of ISO 14617, information on the creation and use of registration numbers for identifying graphical symbols used in diagrams, rules for the presentation and application of these symbols, and examples of their use and application, see ISO 14617-1.

2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this part of ISO 14617. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this part of ISO 14617 are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 2553, *Welded, brazed and soldered joints — Symbolic representation on drawings*

ISO 4063, *Welding and allied processes — Nomenclature of processes and reference numbers*

ISO 14617-1:2002, *Graphical symbols for diagrams — Part 1: General information and indexes*

ISO 81714-1:1999, *Design of graphical symbols for use in the technical documentation of products — Part 1: Basic rules*

3 Terms and definitions

For the purposes of this part of ISO 14617, the following terms and definitions apply.

NOTE 1 The list has been restricted to terms whose meaning is not obvious and which have not been defined elsewhere in an International Standard, or which have been defined in various ways in different standards. In preparing these definitions, ISO and IEC standards on terminology have been consulted; see the references in parentheses. However, most of the definitions in those standards were prepared by different technical committees within a restricted scope. This means that many terms so defined have to be given more general or neutral definitions when applied in the context of graphical symbols.

NOTE 2 In those cases where the same term has substantially different meanings in ISO and IEC, this is indicated beside the term by [ISO] or [IEC] and elsewhere in this part of ISO 14617 by a superscript, for example “port^{ISO}”.

**3.1
connection**

general term for functional connection, mechanical link, pipeline, electric conductor, etc.

**3.2
functional connection**

connection between functions

NOTE A functional connection is used to represent the interrelations between functions represented, for example, by symbols according to ISO 14617-6.

**3.3
electric connection**

conductor or circuit for joining terminals or other conductors

[IEC 60050-151, IEC 60050-531, IEC 60050-581]

**3.4
connection [ISO]**

threaded port, flange, or similar means for connecting a pipeline to a component

[ISO 5598]

c.f. port (3.13) and terminal.

**3.5
internal connection**

connection in the form of one or more pipelines or conductors that is an integral part of a component

NOTE An internal connection need not be located inside a component.

**3.6
line [ISO]**

abbreviation of the term "pipeline"

**3.7
line [IEC]**

multi-pole or multi-phase electric connection

EXAMPLE Power line, telecommunication line, transmission line.

**3.8
cable**

insulated conductor or several insulated conductors with a common covering

**3.9
pipe unit**

pipeline or, more often, several pipelines in a common covering pipe with insulation

**3.10
information bus**

bus with conductors conveying information

**3.11
unidirectional**

having the property to move, transmit, etc. in one direction only

3.12**bidirectional**

having the property to move, transmit, etc. in two alternative, opposite directions

[ISO 5598]

3.13**port** [ISO]

terminus of a fluid passage in a component to which can be connected pipelines for the transmission of fluid to or from the component

[ISO 5598]

cf. connection (3.4) and terminal.

3.14**connector**

component which terminates conductors, flexible pipes, or hoses in order to provide connection and disconnection to a mating component

[IEC 60050-441, IEC 60050-581]

cf. connector pair (3.16).

3.15**quick-release coupling**

connection (3.4) which may be joined or separated without the use of tools

[ISO 5598]

3.16**connector pair**

combination of mating connectors

[IEC 60050-581]

3.17**bundle**

group of conductors or pipelines that mainly follow the same path

NOTE The bundle may be a real (product) bundle or a line on a diagram representing a number of conductors or pipelines (single-line representation) even if these do not form a real bundle.

3.18**single-line representation**

representation where two or more connections or components are represented by a single symbol

[IEC 61082-1]

4 Connections

4.1 Symbols of a basic nature






NOTE For the application of the symbols, see R401 (4.2.1) and R402 (4.2.2).







4.1.1	401		Functional connection
4.1.2	402	Form 1 	Mechanical link, shaft
4.1.3	403	Form 2 	Mechanical link, shaft, wire
4.1.4	404		Electrically insulating mechanical link, shaft, wire See R403 (4.2.3).
4.1.5	405		Pipeline, duct
4.1.6	406		Group of pipelines, ducts in single-line representation
4.1.7	411		Non-guided electromagnetic beam
4.1.8	412		Planned pipeline, duct
4.1.9	413		Group of planned pipelines, ducts in single-line representation
4.1.10	422		Pilot (control), drain, purge, or bleed line in fluid power systems

4.2 Application rules for the symbols in 4.1

4.2.1	R401	Symbols for connections may cross each other. For an example, see X401 (4.5.1).
4.2.2	R402	When confusion between symbols 401 (4.1.1) and 405 (4.1.5) or 406 (4.1.6) is likely, symbols giving supplementary information according to clause 4.3 shall be used. For an example, see X401 (4.5.1).
4.2.3	R403	In simplified representation, the symbol may also represent any type of linkage system between an actuator and the affected item, for example, a combination of mechanical links and hydraulic pipelines. For an example, see X405 (4.5.5).

4.3 Symbols giving supplementary information



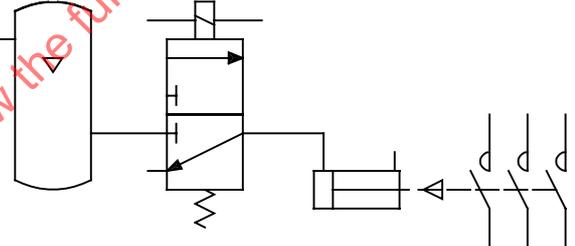




4.3.1	431		Pure functional type
4.3.2	432		Capillary type
4.3.3	433		Pneumatic type
4.3.4	434		Hydraulic type
4.3.5	435		Electric type







4.3.6	442		Unidirectional information bus type
4.3.7	443		Bidirectional information bus type
4.3.8	444	Form 1 	Flexible type For form 1, see R412 (4.4.1).
4.3.9	452	Form 2 	
4.3.10	445		Circular shape
4.3.11	446		Rectangular shape
4.3.12	447		Ridged shape
4.3.13	448		Twisted pipeline or duct
4.3.14	449		Cable, pipe unit See R412 (4.4.1).
4.3.15	450		Twisting of pipelines See R412 (4.4.1).
4.3.16	451	INT INT 	Internal connection See R413 (4.4.2).

4.4 Application rules for the symbols in 4.3

4.4.1	R412	The symbol may instead be located beside the line or lines, provided with a leader line terminated by an arrowhead. For examples, see X411 (4.5.11) to X413 (4.5.13), X421 (4.5.14) and X422 (4.5.15).
4.4.2	R413	<p>The symbol shall be used when it is necessary to indicate that a certain connection is internal, i.e. an integral part of the component or device represented. The symbol shall be placed at both ends of the internal connection or, with a short connecting line, between the two ends.</p> <p>If the internal connection is also connected to a terminal or port^{ISO}, the symbol may be omitted, provided that the terminal or port^{ISO} is represented by symbol 561 (8.1.1) or indicated by a terminal designation.</p> <p>In diagrams for fluid power systems, an internal connection may instead be indicated by bending at least one of the ends of the connecting line by 45° to 60°. For an example, see X435 (4.5.18).</p>


4.5 Application examples


4.5.1	X401	 <p>401, 402, 405, 431</p>	<p>Crossing of symbols for connections</p> <p>A functional connection, a mechanical link and a pipeline is shown.</p>
4.5.2	X402	 <p>402, 444</p>	<p>Flexible mechanical link</p>
4.5.3	X403	 <p>403, 444</p>	
4.5.4	X404	 <p>404, 444</p>	<p>Flexible, electrically insulating mechanical link, shaft</p>
4.5.5	X405	 <p>404, IEC, IEC</p>	<p>Electropneumatically operated contactor, simplified representation</p> <p>Explanation:</p> 
4.5.6	X406	 <p>405, 446, 448</p>	<p>Twisted rectangular pipeline</p>
4.5.7	X322	 <p>325, 405</p>	<p>Pipeline or duct with thermal insulation</p>
4.5.8	X408	 <p>325, 405</p>	<p>Pipeline with thermal insulation, heated or cooled by a separate circuit</p>
4.5.9	X409	 <p>301, 405</p>	<p>Jacketed (sleeved) pipeline</p>
4.5.10	X410	 <p>301, 325, 405</p>	<p>Jacketed (sleeved) pipeline with thermal insulation</p>

4.5.11	X411	 405, 444	Flexible pipeline, hose Two methods are shown.
4.5.12	X412	 405, 444	
4.5.13	X413	 405, 444	Four pipelines, two of flexible type
4.5.14	X421	 405, 449	Four pipelines forming a unit
4.5.15	X422	 405, 449	Four pipelines, two forming a unit
4.5.16	X431	 343, 406	Three pipelines in single-line representation Two methods are shown.
4.5.17	X432	 344, 406	
4.5.18	X435	 201, 242, 422, 2002, 2161, 2171	Internal pilot (control) connection in a pressure relief valve

5 Connection joints and pipeline ends

5.1 Symbols of a basic nature

5.1.1	501	 200 %	Joint of connections (functional connections, mechanical links, pipelines, ducts, etc.) See R501 (5.2.1).
5.1.2	2005		Joint of two mechanical parts permitting motion of the parts in two or more dimensions, for example, a cardan joint

5.1.3	503		Closed end of pipeline or duct
-------	-----	---	--------------------------------

5.2 Application rules for the symbols in 5.1

5.2.1	R501	<p>The diameter of the dot should be five times the width of the widest line, except when symbol 402 (4.1.2) is used.</p> <p>The symbol may be omitted in a T-joint. For examples, see X502 (5.5.2), X505 (5.5.5), and X508 (5.5.8).</p>
-------	------	--






5.3 Symbol giving supplementary information



None.

5.4 Application rule for the symbol in 5.3

None.

5.5 Application examples




5.5.1	X501	 <p>402, 501</p>	<p>T-joint of mechanical links</p> <p>Two methods are shown.</p>
5.5.2	X502	 <p>402</p>	
5.5.3	X503	 <p>402, 501</p>	<p>Joint of multiple mechanical links</p>
5.5.4	X504	 <p>401, 403/405, 501</p>	<p>T-joint of functional connections, mechanical links, or pipelines</p> <p>Two methods are shown.</p>
5.5.5	X505	 <p>401, 403/405</p>	



<p>5.5.6</p>	<p>X506</p>	 <p>401, 403/405, 501</p>	<p>Joint of multiple functional connections, mechanical links, or pipelines</p>
<p>5.5.7</p>	<p>X507</p>	 <p>404, 501</p>	<p>T-joint of electrically insulating mechanical links Two methods are shown.</p>
<p>5.5.8</p>	<p>X508</p>	 <p>404</p>	
<p>5.5.9</p>	<p>X509</p>	 <p>404, 501</p>	<p>Joint of multiple electrically insulating mechanical links</p>

6 Connection joints, junctions, and related devices of specified design

6.1 Symbols of a basic nature

NOTE For the application, see R521 (6.2.1).

<p>6.1.1</p>	<p>511</p>	 <p>200 %</p>	<p>Flange coupling, flange pair</p>
<p>6.1.2</p>	<p>512</p>	 <p>200 %</p>	<p>Flexible coupling</p>
<p>6.1.3</p>	<p>513</p>	 <p>200 %</p>	<p>Clamped flange coupling</p>
<p>6.1.4</p>	<p>514</p>	 <p>200 %</p>	<p>Screwed joint</p>
<p>6.1.5</p>	<p>515</p>	 	<p>Welded, brazed, or soldered joint For further details, see ISO 2553 and ISO 4063.</p>

6.1.6	516		Change of pipe dimension, pipe reducer
6.1.7	517		Blind flange pair
6.1.8	518		End cap

6.2 Application rule for the symbols in 6.1

6.2.1	R521	The symbols shall be used only when it is necessary to indicate the design.	
-------	------	---	--

6.3 Symbol giving supplementary information

None.

6.4 Application rule for the symbol in 6.3



None.

6.5 Application example

None.

7 Fittings

7.1 Symbols of a basic nature

7.1.1	531		Expansion loop
7.1.2	532		Expansion sleeve
7.1.3	533		Expansion bellows

7.2 Application rule for the symbols in 7.1

None.

7.3 Symbol giving supplementary information

None.

7.4 Application rule for the symbol in 7.3

None.

7.5 Application example

None.

8 Ports^{ISO}, quick-release couplings, and connectors

8.1 Symbols of a basic nature

8.1.1	561	 200 %	Port ^{ISO} See R561 (8.2.1).
8.1.2	563	 200 %	Quick-release coupling element of male type
8.1.3	564	 200 %	Quick-release coupling element of female type
8.1.4	565	 200 %	Quick-release coupling element which fits into another coupling element of the same type
8.1.5	566	 200 %	Quick-release coupling element of male type with automatic closing when decoupled
8.1.6	567	 200 %	Quick-release coupling element of female type with automatic closing when decoupled
8.1.7	568	 200 %	Quick-release coupling element which fits into another coupling element of the same type, with automatic closing when decoupled
8.1.8	576		Fixed portion of a connector pair; socket
8.1.9	577		Movable portion of a connector pair; plug

8.2 Application rule for the symbols in 8.1

8.2.1	R561	If no confusion is likely, the symbol may be omitted.
-------	------	---

8.3 Symbol giving supplementary information

None.

8.4 Application rule for the symbol in 8.3

None.