

# INTERNATIONAL STANDARD

**ISO**  
**1496-5**

Second edition  
1991-12-15

---

---

## **Series 1 freight containers — Specification and testing —**

### **Part 5:** Platform and platform-based containers

*Conteneurs de la série 1 — Spécifications et essais —  
Partie 5: Conteneurs plates-formes et type plate-forme*



Reference number  
ISO 1496-5:1991(E)

## Contents

	Page
1 Scope .....	1
2 Normative references .....	1
3 Definitions .....	1
4 Dimensions and ratings .....	2
4.1 External dimensions .....	2
4.2 Internal dimensions .....	2
4.3 Ratings .....	2
5 Design requirements .....	2
5.1 General .....	2
5.2 Interlocked pile of folded containers .....	3
5.3 Corner fittings .....	3
5.4 Base structure .....	3
5.5 End structure (platform-based containers only) .....	4
5.6 Side structure (platform-based containers only) .....	4
5.7 Walls and securing devices .....	4
5.8 Door openings .....	4
5.9 Requirements — Optional features .....	4
6 Testing .....	5
6.1 General .....	5
6.2 Test No. 1 — Stacking .....	5
6.3 Test No. 2 — Lifting from the four top corner fittings .....	6
6.4 Test No. 3 — Lifting from the four bottom corner fittings .....	7
6.5 Test No. 4 — External restraint (longitudinal) .....	7
6.6 Test No. 5 — Strength of end walls (where provided) .....	7
6.7 Test No. 7 — Strength of the roof (where provided) .....	8

© ISO 1991

All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization  
Case Postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

6.8	Test No. 8 — Floor strength .....	8
6.9	Test No. 9 — Rigidity (transverse) (not applicable to platform containers) .....	8
6.10	Test No. 10 — Rigidity (longitudinal) (not applicable to platform containers) .....	9
6.11	Test No. 11 — Lifting from fork-lift pockets (where provided) .....	9
6.12	Test No. 12 — Lifting from the base at grapple-arm positions (where provided) .....	10
6.13	Test No. 13 — Weatherproofness (where appropriate) .....	10
7	Testing of platform-based containers with incomplete superstructure in the folded condition (type codes 63 and 64 only) and of an interlocked pile of such containers .....	10
7.1	General .....	10
7.2	Test No. 14 — Stacking (type codes 63 and 64 only) .....	10
7.3	Test No. 15 — Lifting of an interlocked pile by the top .....	11

#### Annexes

A	Diagrammatic representation of capabilities of platform and platform-based containers .....	12
B	Details of requirements for load-transfer areas in base structures of containers .....	22
C	Dimensions of fork-lift pockets (where provided) .....	28
D	Dimensions of grapple-arm lifting areas (where provided) .....	29
E	Dimensions of gooseneck tunnels (where provided) .....	31
F	Cargo-securing systems for platform and platform-based containers .....	32
F.1	General .....	32
F.2	Design requirements .....	32
F.3	Testing .....	33
G	Dimensions of existing 1CC, 1C and 1CX platform-based containers (type codes 61 to 64) for the carriage of small intermodal containers .....	34
H	Bibliography .....	35

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 1496-5 was prepared by Technical Committee ISO/TC 104, *Freight containers*, Sub-Committee SC 1, *General purpose containers*.

This second edition cancels and replaces the first edition (ISO 1496-5:1977), as well as ISO 1496-6C:1977, of which it constitutes a technical revision.

ISO 1496 consists of the following parts, under the general title *Series 1 freight containers — Specification and testing*:

- *Part 1: General cargo containers for general purposes*
- *Part 2: Thermal containers*
- *Part 3: Tank containers for liquids, gases and pressurized dry bulk*
- *Part 4: Non-pressurized containers for dry bulk*
- *Part 5: Platform and platform-based containers*
- *Part 6: International cargo-security devices*

Annexes A, B, C, D, E and F form an integral part of this part of ISO 1496. Annexes G and H are for information only.

## Introduction

The following grouping of container types is used for specification purposes in ISO 1496:

Part 1		
General purpose		00 to 09
Specific purpose		
closed, vented/ventilated		10 to 19
open top		50 to 59
Part 2		
Thermal		30 to 49
Part 3		
Tank		70 to 79
Dry bulk, pressurized		85 to 89
Part 4		
Bulk, non-pressurized (box type)		20 to 24
Bulk, non-pressurized (hopper type)		80 to 84
Part 5		
Platform (container)		60
Platform-based with incomplete superstructure and fixed ends		61 and 62
Platform-based with incomplete superstructure and folding ends		63 and 64
Platform-based with complete superstructure		65 to 69

NOTE 1 Containers types 90 to 99 are reserved for air/surface containers (see ISO 8323).

This page intentionally left blank

STANDARDSISO.COM : Click to view the full PDF of ISO 1496-5:1997

## Series 1 freight containers — Specification and testing —

### Part 5:

### Platform and platform-based containers

#### 1 Scope

**1.1** This part of ISO 1496 specifies the basic specifications and testing requirements for ISO series 1 freight containers of the platform and platform-based types designated 1AA, 1A, 1AX, 1BB, 1B, 1BX, 1CC, 1C and 1CX which are suitable for international exchange and for conveyance by road, rail and sea, including interchange between these forms of transport, with certain limitations (for example, when loaded, platforms cannot be stacked or top lifted by means of conventional spreaders).

**1.2** The container types covered by this part of ISO 1496 are given in table 1.

**Table 1 — Container types**

Type	Type code designation <sup>1)</sup>
Platform	60
Platform-based container	
<b>With incomplete superstructure</b>	
with fixed complete end structure	61
with fixed free-standing posts	62
with folding complete end structure	63
with folding free-standing posts	64
<b>With complete superstructure</b>	
with roof	65
with open top	66
with open top, open ends (skeletal)	67
1) In accordance with ISO 6346.	

**1.3** The marking requirements for these containers shall be in accordance with the principles embodied in ISO 6346.

#### 2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this part of ISO 1496. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this part of ISO 1496 are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 668:1988, *Series 1 freight containers — Classification, dimensions and ratings*.

ISO 830:1981, *Freight containers — Terminology*, and its amendments: ISO 830:1981/Amd.1:1984 and ISO 830:1981/Amd.2:1988.

ISO 1161:1984, *Series 1 freight containers — Corner fittings — Specification*.

ISO 6346:1984, *Freight containers — Coding, identification and marking*, and its amendment: ISO 6346:1984/Amd.1:1988.

#### 3 Definitions

For the purposes of this part of ISO 1496, the definitions given in ISO 830, together with the following, apply. However, for practical reasons, certain definitions taken and adapted from ISO 830 are given below.

**3.1 platform:** Flat structure having no superstructure whatever. The equipment covered by this part of ISO 1496 is defined as a loadable platform having no superstructure whatever but having the same length and width as the base of series 1 containers, and equipped with top and bottom corner fittings, located in plan view as on other series 1 containers,

so that some securing and lifting devices used on other series 1 containers of the same length can also be used on platforms.

**3.2 platform-based container:** Container having no side walls but which has a base similar to that of a platform container.

**3.3 incomplete superstructure:** Lack of any permanently fixed longitudinal load-carrying structure between the ends other than at the base.

**3.4 fixed complete end structure:** Fixed end frame with a complete load-bearing end wall between corner posts.

**3.5 folding complete end structure:** Folding end frame with a transverse structural connection between corner posts.

**3.6 interlocked pile:** A number of platform containers or folding platform-based containers, with ends folded down, which are interlocked to form a unit (module) (see 4.1.3).

## 4 Dimensions and ratings

### 4.1 External dimensions

**4.1.1** The overall external dimensions and tolerances of the freight containers covered by this part of ISO 1496 shall be those established in ISO 668, except that the requirements for the overall top lengths ( $L$ ) of platform-based containers with incomplete superstructure may be relaxed to the extreme limits specified in table 2.

**Table 2 — Overall top dimension,  $L$**

Dimensions in millimetres

Container designation	Overall top dimension in tare condition $T$	Overall top dimension when loaded to $R$
	$L_{max}$	$L_{min}$
<b>1AA, 1A and 1AX</b>	12 202	12 172
<b>1BB, 1B and 1BX</b>	9 135	9 105
<b>1CC, 1C and 1CX</b>	6 068	6 042

Any movement of the corner posts resulting from the change from the empty to the fully loaded condition of the container should, as far as practicable, be equally disposed about the mean of the values of  $L_{max}$  and  $L_{min}$ .

1) 2 591 mm = 102 in

Taking into account the fact that the mechanism of the folding end structures may introduce natural play, the values of  $L_{max}$  and  $L_{min}$  specified in table 2 shall be met. Failure to comply with this requirement is liable to lead to handling difficulties.

**4.1.2** No part of the platform or platform-based container shall project beyond the envelope defined by the overall external dimensions specified in

- ISO 668 for the plan dimensions of the base structure of all containers, the plan dimensions of the top part of container with complete superstructure, or the overall maximum height of all containers which may also be of reduced dimensions, or

- table 2 for the plan dimensions of the top part of containers with incomplete superstructure.

**4.1.3** An interlocked pile of either platform or folded platform-based containers shall have the plan dimensions specified in ISO 668 and a pile height not exceeding 2 591 mm<sup>1)</sup>.

### 4.2 Internal dimensions

Internal dimensions are not specified; however, minimum internal dimensions of existing 1CC, 1C and 1CX platform-based containers for the carriage of small containers are given in annex G. The values are given as a guide to the design of small intermodal containers.

### 4.3 Ratings

The values of the rating  $R$ , the maximum gross mass of these containers, shall be those specified in ISO 668.

## 5 Design requirements

### 5.1 General

All containers shall be capable of fulfilling the requirements given in 5.1.1 to 5.1.4.

**5.1.1** The strength requirements for containers are given in diagrammatic form in annex A (these requirements are applicable to all containers except where otherwise stated). They apply to containers as complete units, i.e. those removable components in position as required for the intended operating conditions.

**5.1.2** The strength requirements for corner fittings (see also 5.3) are specified in ISO 1161.

**5.1.3** All containers, except containers with folding ends (codes 63 and 64) in the folded condition, shall be capable of withstanding the loads and loadings specified in clause 6.

Containers with folding ends in the folded condition shall be capable of withstanding the loads and loadings specified in clause 7.

As the effects of loads encountered under any dynamic operating condition should only approach, but not exceed, the effects of the corresponding test loads, it is implicit that the capabilities of containers indicated in annex A and demonstrated by the tests described in clauses 6 and 7 shall not be exceeded in any mode of operation.

Containers need not be weatherproof but if designed to be weatherproof they shall satisfy test No. 13 (see 6.13).

**5.1.4** Any movable part which, if unsecured, could lead to a hazardous situation, shall be provided with an adequate securing system having external indication of the positive securement of that part in the appropriate operating position.

## 5.2 Interlocked pile of folded containers

Horizontal free play shall be limited between individual folded containers forming an interlocked pile so that the pile is capable of complying with the dimensional requirements of 4.1.3.

## 5.3 Corner fittings

**5.3.1** All containers shall be equipped with top and bottom corner fittings (see notes 2 and 3). The requirements and positioning of the corner fittings are given in ISO 1161, except for the case mentioned in 4.1.1.

### NOTES

2 For 1CX platforms, the top and bottom corner fittings may be combined providing they comply with ISO 1161.

3 Due to the greater inherent longitudinal flexibility of 1CX containers, the top corner fittings may have their top aperture increased by 10 mm towards the end wall. In such a case, the end aperture should be omitted in order to retain corner fitting strength.

**5.3.2** Containers with folding ends shall be equipped with features such that in the folded condition they may be stacked and secured, lifted from the top by means of a spreader equipped with corner fitting locking devices (e.g. twistlocks), and interlocked with other containers having similar folding end structures.

The features shall have at least an equivalent to the upper face and internal cavity of the top corner fitting.

The positioning of the features in the folded condition shall meet the requirements of ISO 1161.

**5.3.3** For all containers, including containers with folding ends folded down, the upper faces of the top corner fittings or equivalent features (performing some of the functions of top corner fittings — see 5.3.2) shall protrude above the top of the container by a minimum of 6 mm<sup>2)</sup> (see 5.4.3). By “top of the container” is understood the highest level of any part of the container, for example the level of the top of a soft cover.

However, if reinforced zones or doubler plates are provided to afford protection in the vicinity of the top corner fittings, such plates and their securements shall not protrude above the upper faces of the top corner fittings.

These plates shall not extend more than 750 mm<sup>2)</sup> from either end of the container but may cover the full width.

## 5.4 Base structure

**5.4.1** All containers shall be capable of being supported by their bottom corner fittings only.

**5.4.2** All containers shall be capable of being supported only by load-transfer areas in their base structure.

**5.4.2.1** Consequently, these containers shall have end transverse members and sufficient intermediate load-transfer areas (or a flat underside) of sufficient strength to permit vertical load transfer to or from the longitudinal members of a carrying vehicle. Such longitudinal members are assumed to lie within the two 250 mm<sup>2)</sup> wide zones defined by the broken lines in figure B.1.

**5.4.2.2** The lower faces of the load-transfer areas in the container base structure, including those of the end transverse members, shall be in one plane located

$$12,5 \text{ mm } \begin{matrix} +5 \\ -1,5 \end{matrix} \text{ mm}^2)$$

above the plane of the lower faces of the bottom corner fittings of the container (base plane), except where camber is provided (see 5.4.5).

Apart from the bottom corner fittings and bottom side rail, no part of the container shall project below this plane. However, doubler plates may be provided

2) 6 mm = 1/4 in; 12,5 mm  $\begin{matrix} +5 \\ -1,5 \end{matrix}$  mm = 1/2 in  $\begin{matrix} +3/16 \\ -1/16 \end{matrix}$  in; 250 mm = 10 in; 750 mm = 29 1/2 in

in the vicinity of the bottom corner fittings to afford protection to the understructure.

Such plates shall not extend more than 550 mm<sup>3)</sup> from the outer end and not more than 470 mm<sup>3)</sup> from the side faces of the bottom corner fittings and their lower faces shall be at least 5 mm<sup>3)</sup> above the base plane of the container.

**5.4.2.3** The transfer of load between the underside of the bottom side rails and carrying vehicles is not envisaged.

The transfer of load between bottom side rails and handling equipment should only occur when provision has been made in accordance with 5.9.1 and 5.9.2.

**5.4.2.4** Containers having all their intermediate transverse members spaced 1 000 mm<sup>3)</sup> apart or less (or having a flat underside) shall be deemed to comply with the requirements of 5.4.2.1.

**5.4.2.5** Requirements for containers not having transverse members spaced 1 000 mm<sup>3)</sup> apart or less (and not having a flat underside) are given in annex B.

**5.4.3** For all containers under dynamic conditions, or the static equivalent of a container having a load uniformly distributed over the floor in such a way that the combined mass of the container and test load is equal to 1,8R, no part of the base of the container shall deflect more than 6 mm<sup>3)</sup> below the base plane of the container.

**5.4.4** The base structure shall be designed to withstand all forces, particularly lateral forces, induced by the cargo in service (see also 5.7.3, 5.7.4 and figures A.7 and A.8). This is particularly important where provisions are made for securement of cargo to the base structure of the container.

**5.4.5** Camber may be provided with respect to the end transverse members, which shall be located at the height specified in 5.4.2.2.

When determining camber of a platform-based container, note should be taken of the relationship between the base deflections which occur under load and the longitudinal movement which is permitted at the top of the corner posts (for which the limit is specified in 4.1.1).

When a container with camber is loaded to its rating R, the base should be approximately horizontal to facilitate the transport of the container when it is supported by its base structure only.

3) 5 mm = 3/16 in; 6 mm = 1/4 in; 42 mm = 1 3/4 in; 60 mm = 2 3/8 in; 470 mm = 18 1/2 in; 550 mm = 22 in; 1 000 mm = 39 3/8 in

## 5.5 End structure (platform-based containers only)

For all platform-based containers, the sideways deflection of the top of the container with respect to the bottom of the container at the time it is under full transverse rigidity test conditions, shall not cause the sum of the changes in length of the two diagonals to exceed 60 mm<sup>3)</sup>.

## 5.6 Side structure (platform-based containers only)

For all platform-based containers, the longitudinal deflection of the top of the container with respect to the bottom of the container at the time it is under full longitudinal rigidity test conditions shall not exceed 42 mm<sup>3)</sup>.

## 5.7 Walls and securing devices

**5.7.1** Where containers are provided with end walls, these shall be able to withstand the effects of test No. 5 except insofar as is implied in 5.7.3.

**5.7.2** Where openings are provided in end walls, the ability of these walls to withstand test No. 5 shall not be impaired.

**5.7.3** Where containers are provided with ends which are not able to withstand test No. 5, means shall be provided for securing the cargo to the base structure in such a manner that the cargo does not transmit longitudinal forces to the ends.

**5.7.4** Since the containers do not have side walls, adequate means shall be provided to permit the securing of the cargo against lateral movement.

**5.7.5** The design requirements for cargo-securing devices presented in 5.7.3 and 5.7.4 are specified in annex F.

## 5.8 Door openings

Door openings need not be provided.

## 5.9 Requirements — Optional features

### 5.9.1 Fork-lift pockets

**5.9.1.1** Fork-lift pockets for handling 1CC, 1C and 1CX containers in the loaded or unloaded condition may be provided as optional features.

Fork-lift pockets shall not be provided on 1AA, 1A, 1AX, 1BB, 1B and 1BX containers.

**5.9.1.2** Where a set of fork-lift pockets has been fitted as in 5.9.1.1, a second set of fork-lift pockets may, in addition, be provided on 1CC, 1C and 1CX containers for empty handling only.

**5.9.1.3** The fork-lift pockets, where provided, shall meet the dimensional requirements specified in annex C and shall pass completely through the base structure of the container so that lifting devices may be inserted from either side. The base of the fork-lift pockets need not be the full width of the container but shall be provided near each end of the fork-lift pockets.

### 5.9.2 Grappler arms or similar devices

Fixtures for handling all containers by means of grappler arms or similar devices may be provided as optional features. The dimensional requirements for such provisions are specified in annex D.

### 5.9.3 Gooseneck tunnels

Gooseneck tunnels may be provided as optional features in 1AA, 1A and 1AX containers. The dimensional requirements are specified in annex E and, in addition, all other parts of the base structure shall be as specified in 5.4.

## 6 Testing

### 6.1 General

Unless otherwise stated, containers complying with the design requirements specified in clause 5 shall, in addition, be capable of withstanding the tests specified in 6.2 to 6.13 and 7.1 to 7.3, as applicable. Containers shall be tested in the condition for which they are designed to be operated. Containers equipped with removable structural items shall be tested with these items in position.

It is recommended that the test for weatherproofness (test No. 13), where appropriate, be made last.

**6.1.1** The symbol  $P$  denotes the maximum payload of the container to be tested, that is:

$$P = R - T$$

where

$R$  is the rating;

$T$  is the tare.

**NOTE 4**  $R$ ,  $P$  and  $T$ , by definition, are in units of mass. Where test requirements are based on the gravitational forces derived from these values, these forces, which are inertial forces, are indicated thus:

$$Rg, Pg, Tg$$

the units of which are in newtons or multiples thereof.

The word "load", when used to describe a physical quantity to which units may be ascribed, implies mass.

The word "loading", for example as in "internal loading", implies force.

**6.1.2** The test load or loading on the platform or platform-based container shall be uniformly distributed.

**6.1.3** The test loads and loadings specified in all of the following tests are minimum requirements.

**6.1.4** The dimensional requirements to which reference is made after each test are those specified in

- the dimensional and design requirement clauses of this part of ISO 1496;
- ISO 668;
- ISO 11641.

## 6.2 Test No. 1 — Stacking

### 6.2.1 General

This test shall be carried out to prove the ability of a fully loaded container to support a superimposed mass of containers, taking into account conditions aboard ships at sea and the relative eccentricities between superimposed containers.

Table 3 specifies the force to be applied as a test to each pair of corner fittings and the superimposed mass that the test force represents.

### 6.2.2 Procedure

#### 6.2.2.1 Platform container

The container in the tare condition shall be placed on four level pads, one under each bottom corner fitting or equivalent corner structure. The pads shall be centralized under the fittings, and shall be substantially of the same plan dimensions as the fittings.

The container shall be subjected to vertical forces applied either to all four corner fittings simultaneously or to each pair of end fittings, at the appropriate level specified in table 3.

#### 6.2.2.2 Platform-based container

The container shall be placed on four level pads, one under each bottom corner fitting. The pads shall be centralized under the fittings, and shall be substantially of the same plan dimensions as the fittings.

The container shall have a load uniformly distributed over the floor in such a way that the combined mass of the container and test load is equal to  $1,8R$ .

The container shall be subjected to vertical forces applied either to all four corner fittings simultaneously or to each pair of end fittings, at the appropriate level specified in table 3.

### 6.2.2.3 Application of force

For platform or platform-based containers, the forces shall be applied through a test fixture equipped with corner fittings as specified in ISO 1161, or equivalent fittings which have imprints of the same geometry (i.e. with the same external dimensions, chamfered aperture and rounded edges) as the lower face of the bottom corner fitting specified in ISO 1161. If equivalent fittings are used they shall be designed to produce the same effect on the container under the test loads as when corner fittings are used.

In all cases, the forces shall be applied in such a manner that rotation of the planes through which the forces are applied and on which the container is supported is minimized.

Each corner fitting or equivalent fitting shall be offset in the same direction by 25,4 mm<sup>4)</sup> laterally and 38 mm<sup>4)</sup> longitudinally.

### 6.2.3 Requirements

On completion of the test, the container shall show neither permanent deformation nor abnormality which will render it unsuitable for use, and the dimensional requirements affecting handling, securing and interchange shall be satisfied.

## 6.3 Test No. 2 — Lifting from the four top corner fittings

### 6.3.1 General

This test shall be carried out to prove the ability of a container to withstand being lifted from the four top corner fittings with the lifting forces applied vertically. These are the only recognized ways of lifting these platform containers by the four top corner fittings.

NOTE 5 Loaded platforms should be lifted by means of spreaders with extensions.

This test shall also be regarded as proving the ability of the floor and base structure to withstand the forces arising from acceleration of the payload in lifting operations.

### 6.3.2 Procedure

The container shall have a load uniformly distributed over the floor in such a way that the combined mass of the container and test load is equal to  $2R$ , and it shall be carefully lifted from all four top corners in such a way that no significant acceleration or deceleration forces are applied.

For all platform containers, the lifting forces shall be applied vertically.

After lifting, the container shall be suspended for 5 min and then lowered to the ground.

### 6.3.3 Requirements

On completion of the test, the container shall show neither permanent deformation nor abnormality which will render it unsuitable for use, and the dimensional requirements affecting handling, securing and interchange shall be satisfied.

Table 3 — Forces to be applied in stacking test

Container designation	Test force per container (all four corners simultaneously)		Test force per pair of end fittings		Superimposed mass represented by test force	
	kN	lbf	kN	lbf	kg	lb
<b>1AA, 1A and 1AX</b>	3 392	763 200	1 696	381 600	192 000	423 320
<b>1BB, 1B and 1BX</b>	3 392	763 200	1 696	381 600	192 000	423 320
<b>1CC, 1C and 1CX</b>	3 392	763 200	1 696	381 600	192 000	423 320

NOTE — The test force of 3392 kN per container is derived from the superimposed mass of nine-high stacking, i.e. eight containers stacked on top of one container, all being rated to 24 000 kg, and an acceleration of 1,8g. [The corner posts of such containers are known to have been tested to 86 400 kg (190 480 lb).]

4) 25,4 mm = 1 in; 38 mm = 1 1/2 in

## 6.4 Test No. 3 — Lifting from the four bottom corner fittings

### 6.4.1 General

This test shall be carried out to prove the ability of a container to withstand being lifted from its four bottom corner fittings by means of lifting devices bearing on the bottom corner fittings only and attached to a single transverse central spreader beam above the container.

### 6.4.2 Procedure

The container shall have a load uniformly distributed over the floor in such a way that the combined mass of container and test load is equal to  $2R$ , and shall be carefully lifted from the side apertures of all four bottom corner fittings in such a way that no significant acceleration or deceleration forces are applied.

Lifting forces shall be applied at an angle of

30° to the horizontal for 1AA, 1A and 1AX containers;

37° to the horizontal for 1BB, 1B and 1BX containers;

45° to the horizontal for 1CC, 1C and 1CX.

In each case, the line of action of the lifting force and the outer face of the corner fitting shall be no further apart than 38 mm<sup>5)</sup>. The lifting shall be carried out in such a manner that the lifting devices bear on the four bottom corner fittings only.

After lifting, the container shall be suspended for 5 min and then lowered to the ground.

### 6.4.3 Requirements

On completion of the test, the container shall show neither permanent deformation nor abnormality which will render it unsuitable for use, and the dimensional requirements affecting handling, securing and interchange shall be satisfied.

5) 38 mm = 1 1/2 in

6) Tests No. 5 and No. 7 are applicable to only some types of platform-based containers. Test No. 6 of ISO 1496-1:1990 (strength of side walls) is not applicable.

## 6.5 Test No. 4 — External restraint (longitudinal)

### 6.5.1 General

This test shall be carried out to prove the ability of a container to withstand longitudinal external restraint under dynamic conditions of railway operations, which implies acceleration of  $2g$ .

### 6.5.2 Procedure

The container shall have a load uniformly distributed over the floor in such a way that the combined mass of the container and the uniformly distributed test load is equal to  $R$ , and it shall be secured longitudinally to rigid anchor points through the bottom aperture of the bottom corner fittings at one end of the container.

A force of  $2Rg$  shall be applied horizontally to the container through the bottom apertures of the other bottom corner fittings, first towards and then away from the anchor points.

### 6.5.3 Requirements

On completion of the test, the container shall show neither permanent deformation nor abnormality which will render it unsuitable for use, and the dimensional requirements affecting handling, securing and interchange shall be satisfied.

## 6.6 Test No. 5 — Strength of end walls (where provided)<sup>6)</sup>

### 6.6.1 General

This test shall be carried out to prove the ability of a container to withstand forces under the dynamic conditions referred to in 6.5.1.

### 6.6.2 Procedure

The container shall have each end tested when one end is blind and the other equipped with special features. In the case of symmetrical construction, one end only need be tested. The container shall be subjected to an internal loading of  $0.4Pg$ . The internal loading shall be uniformly distributed over the wall under test and arranged to allow free deflection of the wall.

### 6.6.3 Requirements

On completion of the test, the container shall show neither permanent deformation nor abnormality which will render it unsuitable for use, and the dimensional requirements affecting handling, securing and interchange shall be satisfied.

## 6.7 Test No. 7 — Strength of the roof (where provided)<sup>7)</sup>

### 6.7.1 General

This test shall be carried out to prove the ability of the rigid roof of a container, where fitted, to withstand the loads imposed by persons working on the roof.

### 6.7.2 Procedure

A load of 300 kg<sup>8)</sup> shall be uniformly distributed over an area of 600 mm × 300 mm<sup>8)</sup> located at the weakest area of the rigid roof of the container.

### 6.7.3 Requirements

On completion of the test, the container shall show neither permanent deformation nor abnormality which will render it unsuitable for use, and the dimensional requirements affecting handling, securing and interchange shall be satisfied.

## 6.8 Test No. 8 — Floor strength

### 6.8.1 General

This test shall be carried out to prove the ability of a container floor to withstand the concentrated dynamic loading during cargo operations involving trucks or similar devices.

### 6.8.2 Procedure

The test shall be performed using a test vehicle equipped with tyres, with an axle load of 5 460 kg<sup>8)</sup> [i.e. 2 730 kg<sup>8)</sup> on each of two wheels]. It shall be so arranged that all points of contact between each wheel and a flat continuous surface lie within a rectangular envelope measuring 185 mm<sup>8)</sup> (in a direction parallel to the axle of the wheel) by 100 mm<sup>8)</sup> and that each wheel makes physical contact over an area within this envelope of not more than 142 cm<sup>2</sup><sup>8)</sup>. The wheel width shall be nominally 180 mm<sup>8)</sup> and the wheel centres shall be nominally 760 mm<sup>8)</sup>. The test vehicle shall be manoeuvred over

the entire floor area of the container both longitudinally and transversally. The test shall be made with the container resting on four level supports under its four bottom corner fittings, with its base structure free to deflect.

### 6.8.3 Requirements

On completion of the test, the container shall show neither permanent deformation nor abnormality which will render it unsuitable for use, and the dimensional requirements affecting handling, securing and interchange shall be satisfied.

## 6.9 Test No. 9 — Rigidity (transverse) (not applicable to platform containers)

### 6.9.1 General

This test shall be carried out to prove the ability of a container, other than a platform container, to withstand the transversal racking forces resulting from ship movement.

### 6.9.2 Procedure

**6.9.2.1** The container in tare condition (*T*) shall be placed on four level supports, one under each corner fitting, and shall be restrained against lateral and vertical movement by means of anchor devices acting through the bottom apertures of the bottom corner fittings. Lateral restraint shall be provided only at a bottom corner fitting diagonally opposite and in the same end frame as the top corner fitting to which forces are applied. When testing the two end frames separately, vertical restraint shall be applied only at the end frame under test.

**6.9.2.2** In the case of containers of type code 62 or 64, in order to represent typical service conditions as closely as practicable, the top corner fittings at the end or ends of the container under test should be connected transversally by means of a member or members representing the lower transverse member(s) in the end frame(s) of a superimposed container. The representative member shall be securely attached to the corner fittings so that the loads will be equally applied to the two posts.

**6.9.2.3** Forces of 150 kN<sup>8)</sup> shall be applied either separately or simultaneously to each of the top corner fittings on one side of the container in lines parallel both to the base and to the planes of the ends of the container. The forces shall be applied first towards and then away from the top corner fittings.

7) Tests No. 5 and No. 7 are applicable to only some types of platform-based containers. Test No. 6 of ISO 1496-1:1990 (strength of side walls) is not applicable.

8) 142 cm<sup>2</sup> = 22 in<sup>2</sup>; 300 kg = 660 lb; 2 730 kg = 6 000 lb; 5 460 kg = 12 000 lb; 150 kN = 33 700 lbf; 100 mm = 4 in; 180 mm = 7 in; 185 mm = 7 1/4 in; 600 mm × 300 mm = 24 in × 12 in; 760 mm = 30 in

In the case of a container with identical ends, only one end need be tested. Where an end is not essentially symmetrical about its own vertical centreline, both sides of that end shall be tested.

For allowable deflections under full test loading, see 5.5.

### 6.9.3 Requirements

On completion of the test, the container shall show neither permanent deformation nor abnormality which will render it unsuitable for use, and the dimensional requirements affecting handling, securing and interchange shall be satisfied.

NOTE 6 The satisfactory completion of this test by a container of type code 62 or 64 implies that each post may be subjected to a maximum transverse racking loading of 75 kN<sup>9)</sup> in service.

## 6.10 Test No. 10 — Rigidity (longitudinal) (not applicable to platform containers)

### 6.10.1 General

This test shall be carried out to prove the ability of a container, other than a platform container, to withstand the longitudinal racking forces resulting from ship movement.

For a container which has incomplete superstructures, a total racking loading of 150 kN<sup>9)</sup> is assumed to be shared between the two ends of the container in the ratio of 2 to 1, although there is uncertainty surrounding the precise division of loading. The test shall be applied in accordance with the procedure given in 6.10.2.

### 6.10.2 Procedure

**6.10.2.1** The container in tare condition (*T*) shall be placed on four level supports, one under each corner fitting, and shall be restrained against longitudinal and vertical movement by means of anchor devices acting through the bottom apertures of the bottom corner fittings. Longitudinal restraint shall be provided only at a bottom corner fitting diagonally opposite and in the same side frame as the top corner fitting to which the force is applied.

**6.10.2.2** For containers with incomplete superstructure (types 61, 62, 63 and 64), forces of 50 kN<sup>9)</sup> shall be applied either separately or simultaneously to each of the top corner fittings on one end of the container in lines parallel both to the base of the container and to the planes of the sides of the container. The forces shall be applied first towards and then away from the top corner fitting.

**6.10.2.3** For containers with complete superstructure (types 65, 66 and 67), forces of 75 kN<sup>9)</sup> shall be applied either separately or simultaneously to each of the top corner fittings on one end of the container in lines parallel both to the base of the container and to the planes of the sides of the container. The forces shall be applied first towards and then away from the top corner fitting.

**6.10.2.4** In the case of a container with identical sides, only one side need be tested. Where a side is not essentially symmetrical about its own vertical centreline, both ends of that side shall be tested.

For allowable deflections under full test loading, see 5.6.

NOTE 7 The deflection is that produced by the test loading and does not include any natural play existing in the mechanism (see 4.1.1).

### 6.10.3 Requirements

On completion of the test, the container shall show neither permanent deformation nor abnormality which will render it unsuitable for use, and the dimensional requirements affecting handling, securing and interchange shall be satisfied.

## 6.11 Test No. 11 — Lifting from fork-lift pockets (where provided)

### 6.11.1 General

This test shall be carried out on any 1CC, 1C or 1CX container which is fitted with fork-lift pockets.

### 6.11.2 Procedure

#### 6.11.2.1 Containers fitted with one set of fork-lift pockets

The container shall have a load uniformly distributed over the floor in such a way that the combined mass of container and test load is equal to 1,6*R*. It shall be supported on two horizontal bars, each 200 mm<sup>9)</sup> wide, projecting 1 828 mm ± 3 mm<sup>9)</sup> into the fork pocket, measured from the outside face of the side of the container. The bars shall be centred within the pockets.

After lifting, the container shall be supported for 5 min and then lowered to the ground.

#### 6.11.2.2 Containers fitted with two sets of fork-lift pockets

The test specified in 6.11.2.1 shall be applied to the outer pockets.

9) 50 kN = 11 200 lbf; 75 kN = 16 850 lbf; 150 kN = 33 700 lbf; 200 mm = 8 in; 1 828 mm ± 3 mm = 72 in ± 1/8 in

A second test shall be applied to the (additional) inner pockets. The procedure for this second test shall be as required in 6.11.2.1 except that, in this case, the combined mass of the container and test load shall be equal to  $0,625R$ , and the bars shall be placed in the inner pockets.

### 6.11.3 Requirements

On completion of the test, the container shall show neither permanent deformation nor abnormality which will render it unsuitable for use, and the dimensional requirements affecting handling, securing and interchange shall be satisfied.

## 6.12 Test No. 12 — Lifting from the base at grappler-arm positions (where provided)

### 6.12.1 General

This test shall be carried out on any container which is fitted with fixtures for being lifted by grappler arms or similar devices with lifting positions as detailed in annex D.

### 6.12.2 Procedure

The container shall have a load uniformly distributed over the floor in such a way that the combined mass of the container and the uniformly distributed test load is equal to  $1,25R$ , and it shall be supported at the four positions where provision has been made for the equipment envisaged in 6.12.1, over an area of  $32 \text{ mm} \times 254 \text{ mm}^{10)}$  centrally located at each of the four positions, clear of the safety lips.

After lifting, the container shall be supported for 5 min and then lowered to the ground.

### 6.12.3 Requirements

On completion of the test, the container shall show neither permanent deformation nor abnormality which will render it unsuitable for use, and the dimensional requirements affecting handling, securing and interchange shall be satisfied.

## 6.13 Test No. 13 — Weatherproofness (where appropriate)<sup>11)</sup>

### 6.13.1 Procedure

A stream of water shall be applied on all exterior joints and seams of the container from a nozzle of  $12,5 \text{ mm}^{10)}$  inside diameter, at a pressure of about  $100 \text{ kPa}^{10)}$  [corresponding to a head of about  $10 \text{ m}^{10)}$

of water] on the upstream side of the nozzle. The nozzle shall be held  $1,5 \text{ m}^{10)}$  from the container under test, and the stream shall be traversed at a velocity of  $0,1 \text{ m/s}^{10)}$ .

Procedures involving the use of several nozzles are acceptable provided that each joint or seam is subjected to a water loading not less than that which would be given by a single nozzle.

### 6.13.2 Requirements

On completion of the test, the container shall be free from penetration of water.

## 7 Testing of platform-based containers with incomplete superstructure in the folded condition (type codes 63 and 64 only) and of an interlocked pile of such containers

### 7.1 General

The containers complying with the design requirements specified in 5.1.3 shall be capable of withstanding the tests specified in 7.2 and 7.3 as appropriate to their intended operation in the folded condition.

**7.1.1** The definitions of terms given in 6.1.1 are equally applicable to this clause.

**7.1.2** The symbol  $n$  denotes the maximum number of containers which form an interlocked pile as defined in 3.6 and 4.1.3.

**7.1.3** The test loads specified in all the following tests are the minimum requirements.

## 7.2 Test No. 14 — Stacking (type codes 63 and 64 only)

### 7.2.1 General

This test shall be carried out to prove the ability of a folding container, in the folded condition, to support a superimposed mass of fully loaded containers, taking into account conditions aboard ships at sea and the relative eccentricities between superimposed containers.

Table 3 specifies the force to be applied as a test to each pair of corner fittings and the superimposed mass that the test force represents.

10)  $100 \text{ kPa} = 14,5 \text{ psi}$ ;  $12,5 \text{ mm} = 1/2 \text{ in}$ ;  $1,5 \text{ m} = 5 \text{ ft}$ ;  $10 \text{ m} = 33 \text{ ft}$ ;  $32 \text{ mm} \times 254 \text{ mm} = 1 \frac{1}{4} \text{ in} \times 10 \text{ in}$ ;  $0,1 \text{ m/s} = 4 \text{ in/s}$

11) For example, type 65 containers equipped with side curtains.

### 7.2.2 Procedure

The container in the tare and folded condition shall be placed on four level pads, one under each bottom corner fitting. The pads shall be centralized under the fittings and shall be substantially of the same plan dimensions as the fittings.

The container shall be subjected to vertical forces applied either to all four features provided for stacking (as in 5.3.2) simultaneously or to each pair of same features at the appropriate level specified in table 3.

The forces shall be applied through a test fixture equipped with corner fittings as specified in ISO 1161 or equivalent fittings which have imprints of the same geometry (i.e. with the same external dimensions, chamfered aperture and rounded edges) as the bottom face of the bottom corner fitting specified in ISO 1161. If equivalent fittings are used they shall be designed to produce the same effect on the container under the test loads as when corner fittings are used.

In all cases, the forces shall be applied in such a manner that rotation of the planes through which the forces are applied and on which the container is supported is minimized.

Each corner fitting or equivalent fitting shall be offset in the same direction by 25,4 mm<sup>12)</sup> laterally and 38 mm<sup>12)</sup> longitudinally.

### 7.2.3 Requirements

On completion of the test, the container shall show neither permanent deformation nor abnormality which will render it unsuitable for use, and the di-

mensional requirements affecting handling, securing and interchange shall be satisfied.

## 7.3 Test No. 15 — Lifting of an interlocked pile by the top

### 7.3.1 General

This test shall be carried out to prove the resistance of either a platform or a folded container connected to a interlocked pile when lifted from above using the features (see 5.3.2) provided, and with the lifting forces applied vertically.

### 7.3.2 Procedure

The container shall be connected by means of interlocking devices or by its integral interlocking devices (where fitted) to another container or to a test fixture which simulates a second container, so that the gross mass lifted by the container under test is  $(2n - 1)T$ , the mass being equally shared among the interlocking devices, where  $n$  is the largest number of interlocked units having a combined height of less than 2 591 mm<sup>12)</sup>.

The combined units shall be carefully lifted from all four top corners in such a way that no significant acceleration or deceleration forces are applied.

### 7.3.3 Requirements

On completion of the test, the container shall show neither permanent deformation nor abnormality which will render it unsuitable for use, and the dimensional requirements affecting handling, securing and interchange shall be satisfied.

12) 25,4 mm = 1 in; 38 mm = 1 1/2 in; 2 591 mm = 102 in

**Annex A**  
(normative)

**Diagrammatic representation of capabilities of platform and platform-based containers**

NOTES

8 The externally applied forces shown below are for one end or one side only. The loads shown within the containers represent uniformly distributed internal loads only, and such loads are for the whole container.

9 The figures in this annex correspond to the tests described in 6.2 to 6.13, and 7.2 and 7.3, only where marked.

10 For definitions of  $R$ ,  $P$  and  $T$ , see 6.1.1.

11 When end and side elevations are represented by a complete square or rectangle, such figures apply to platform-based containers either with complete superstructure or with incomplete superstructure of type codes 61 and 63.

When end and side elevations are represented by an incomplete square or rectangle, such figures apply to platform-based containers of type codes 62 and 64 (having no transverse and longitudinal top members).

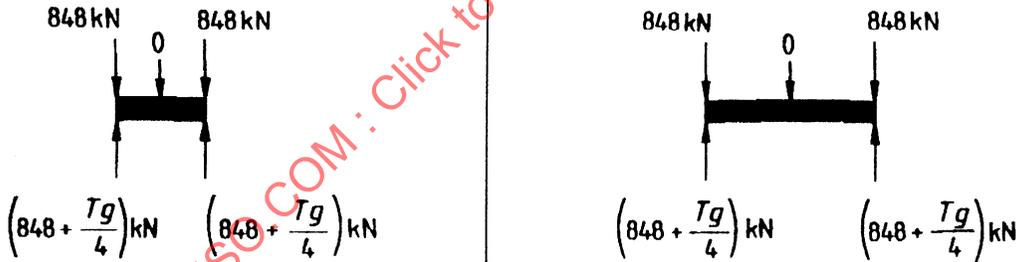
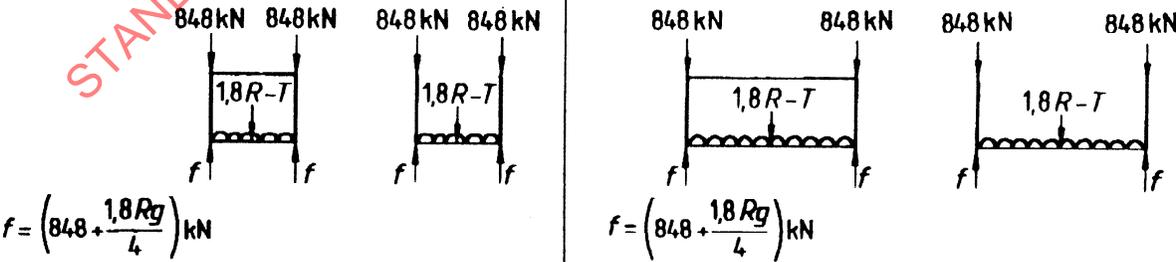
Figure No.	End elevations	Side elevations
A.1	<b>Platform container</b>	
	<p data-bbox="178 1111 306 1167">Stacking Test No. 1</p> 	
	<b>Platform-based container</b>	
	<p data-bbox="178 1507 306 1563">Stacking Test No. 1</p>  <p data-bbox="199 1758 411 1825"><math>f = \left(848 + \frac{1,8Rg}{4}\right) \text{ kN}</math></p> <p data-bbox="805 1758 1018 1825"><math>f = \left(848 + \frac{1,8Rg}{4}\right) \text{ kN}</math></p>	

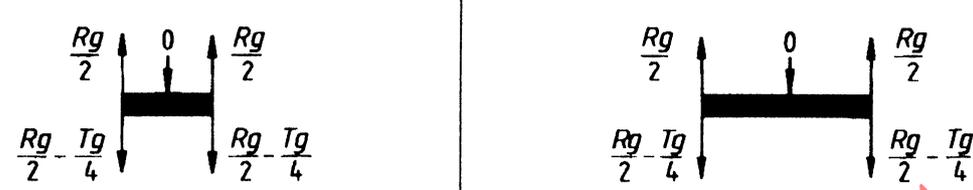
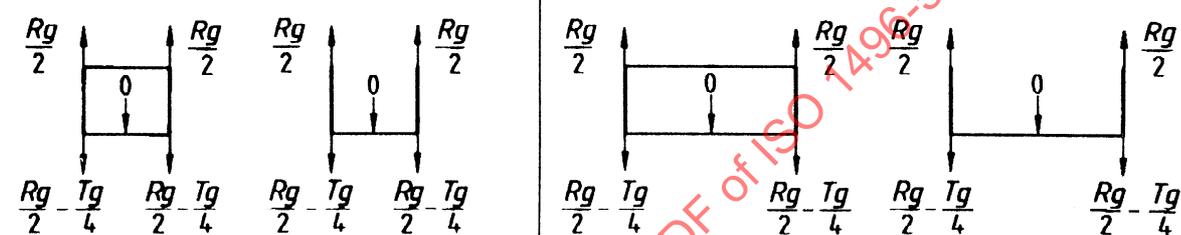
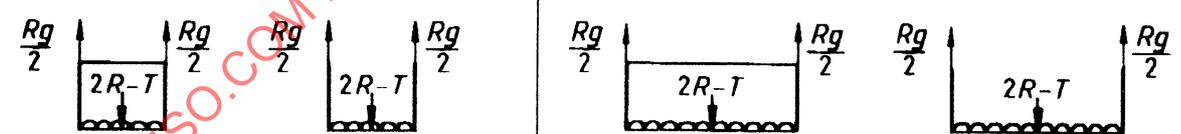
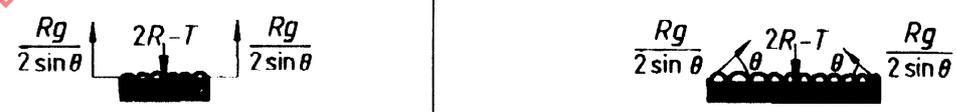
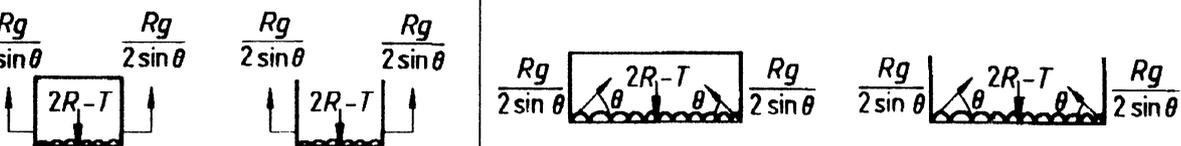
Figure No.	End elevations	Side elevations
A.2	<b>Platform container</b>	
	Top lift 	
	<b>Platform-based container</b>	
	Top lift 	
A.3	<b>Platform container</b>	
	Top lift Test No. 2 	
	<b>Platform-based container</b>	
	Top lift Test No. 2 	
A.4	<b>Platform container</b>	
	Bottom lift Test No. 3 	
	<b>Platform-based container</b>	
	Bottom lift Test No. 3 	

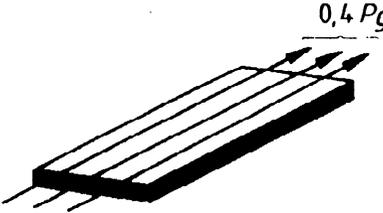
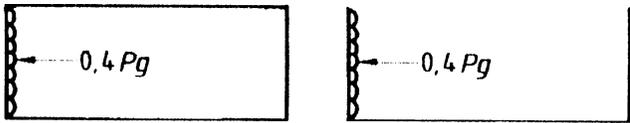
Figure No.	End elevations	Side elevations
A.5	<p>Platform container</p> <p>Restraint (longitudinal) Test No. 4 at bottom</p>	
	<p>Platform-based container</p> <p>Restraint (longitudinal) Test No. 4</p>	
A.6	<p>Platform container</p> <p>Restraint (longitudinal) Test No. 4 at bottom</p>	
	<p>Platform-based container</p> <p>Restraint (longitudinal) Test No. 4</p>	
A.7	<p>Platform container</p> <p>Effect of cargo loading</p>	
	<p>Platform-based container</p> <p>Effect of cargo loading End loading (where provided) Test No. 5</p> <p>Not applicable to types 62 and 64</p>	

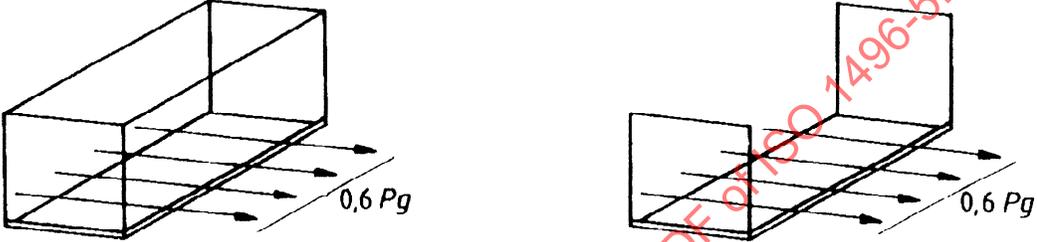


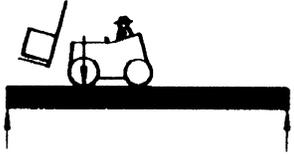

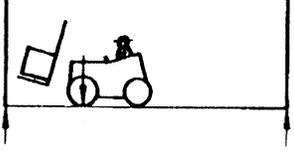
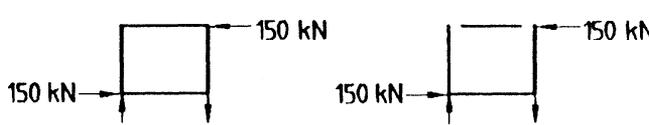
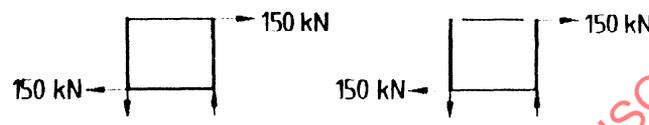




Figure No.	End elevations	Side elevations
A.8	<b>Platform container</b>	
	Effect of cargo loading 	
A.8	<b>Platform-based container</b>	
	Effect of cargo loading 	
A.9	<b>Platform-based container</b>	
	Roof load Test No. 7 	
Applicable where a rigid roof is provided: type 65 only		
A.10	<b>Platform container</b>	
	Wheel loads Test No. 8 	
A.10	<b>Platform-based container</b>	
	Wheel loads Test No. 8 	
1) 300 kg = 660 lb 2 x 2 730 kg = 2 x 6 000 lb		

Figure No.	End elevations
A.11	<b>Platform-based container</b>
	Rigidity (transversal) Test No. 9 
A.12	<b>Platform-based container</b>
	Rigidity (transversal) Test No. 9 
A.13	<b>Platform container</b>
	Lashing/securement at bottom 
A.13	<b>Platform-based container</b>
	Lashing/securement 
A.14	<b>Platform container</b>
	Lashing/securement at top 
A.14	<b>Platform-based container</b>
	Lashing/securement 
A.15	<b>Platform container</b>
	Lashing/securement at top 
A.15	<b>Platform-based container</b>
	Lashing/securement 

STANDARDSISO.COM · Click to view the full PDF of ISO 1496-5:1991

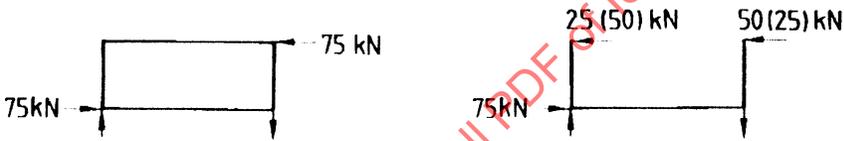
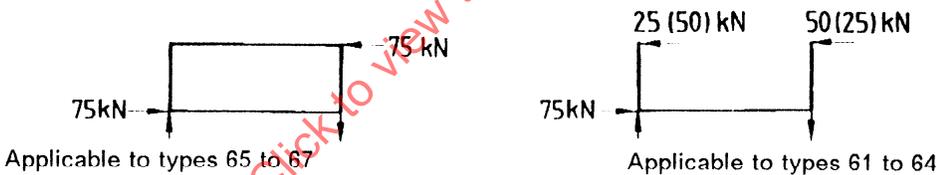
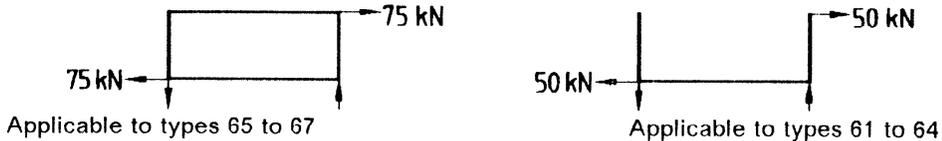
Figure No.	End elevations
A.16	<p style="text-align: center;"><b>Platform container</b></p>
	<p>Lashing/securement at bottom</p> 
A.16	<p style="text-align: center;"><b>Platform-based container</b></p>
	<p>Lashing/securement</p> 
A.17	<p style="text-align: center;"><b>Side elevations</b></p>
	<p style="text-align: center;"><b>Platform-based container</b></p> <p>Rigidity (longitudinal)</p> 
A.18	<p style="text-align: center;"><b>Platform-based container</b></p>
	
A.17A	<p style="text-align: center;"><b>Side elevations</b></p>
	<p style="text-align: center;"><b>Platform-based container</b></p> <p>Rigidity (longitudinal) Test No. 10</p> 
A.18A	<p style="text-align: center;"><b>Platform-based container</b></p>
	<p>Rigidity (longitudinal) Test No. 10</p> 

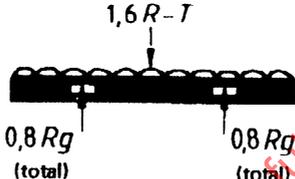
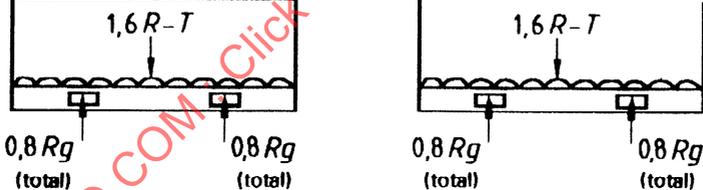
Figure No.	End elevations	Side elevations
A.19	Platform container	Platform-based container
	Lashing/securement at top  Applicable to code 60 containers only	Not applicable
A.20	Platform container	Platform-based container
	Lashing/securement at top  75 kN ← → 75 kN	Not applicable
A.21	Side elevations	
	Platform container	
	Fork-lift pockets Test No. 11 	
	Platform-based container	
Applicable to 1CC, 1C and 1CX containers when fitted with one set of fork-lift pockets 		


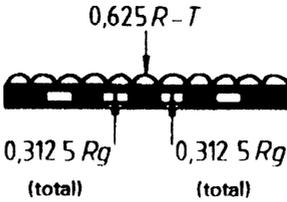
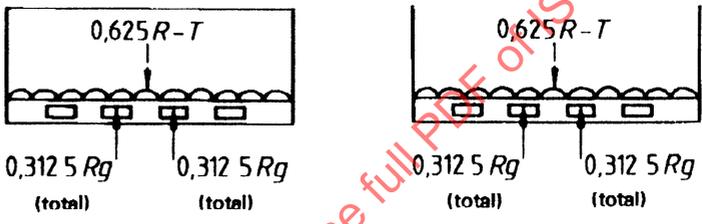
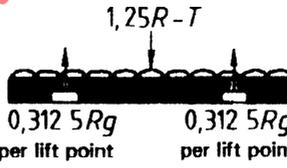
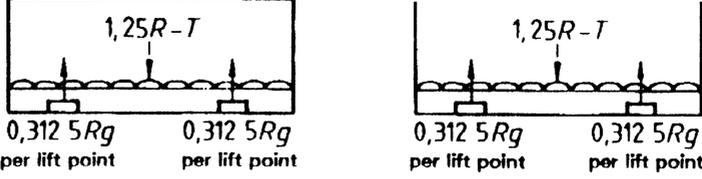
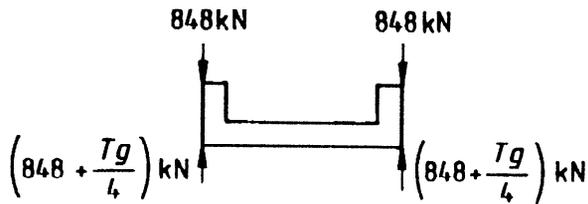
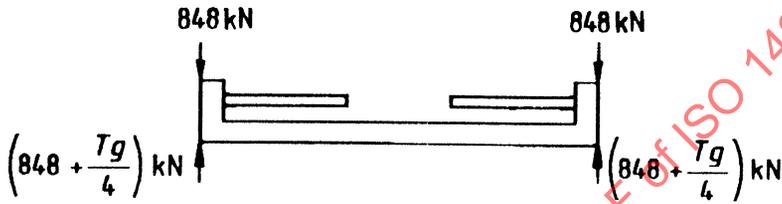
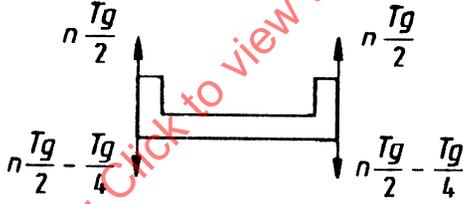
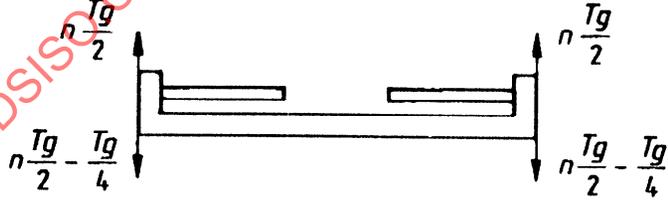
Figure No.	Side elevations
A.22	<b>Platform container</b>
	<p>Fork-lift pockets Test No. 11</p> 
	<b>Platform-based container</b>
	<p>Applicable to 1CC, 1C and 1CX containers when fitted with a second set of fork-lift pockets</p> 
A.23	<b>Platform container</b>
	<p>Grappler-arm lift Test No. 12</p>  <p>Applicable to all sizes when fitted with grapppler-arm lift positions</p>
	<b>Platform-based container</b>
	<p>Applicable to all sizes when fitted with grapppler-arm lift positions</p> 

Figure No.	Platform-based container with folding ends in folded condition — Type codes 63 and 64
A.1A	End elevations
	Stacking Test No. 14  
	Side elevations
	
Interlocked pile	
A.2A	End elevations
	Lifting from the top  
	Side elevations
	

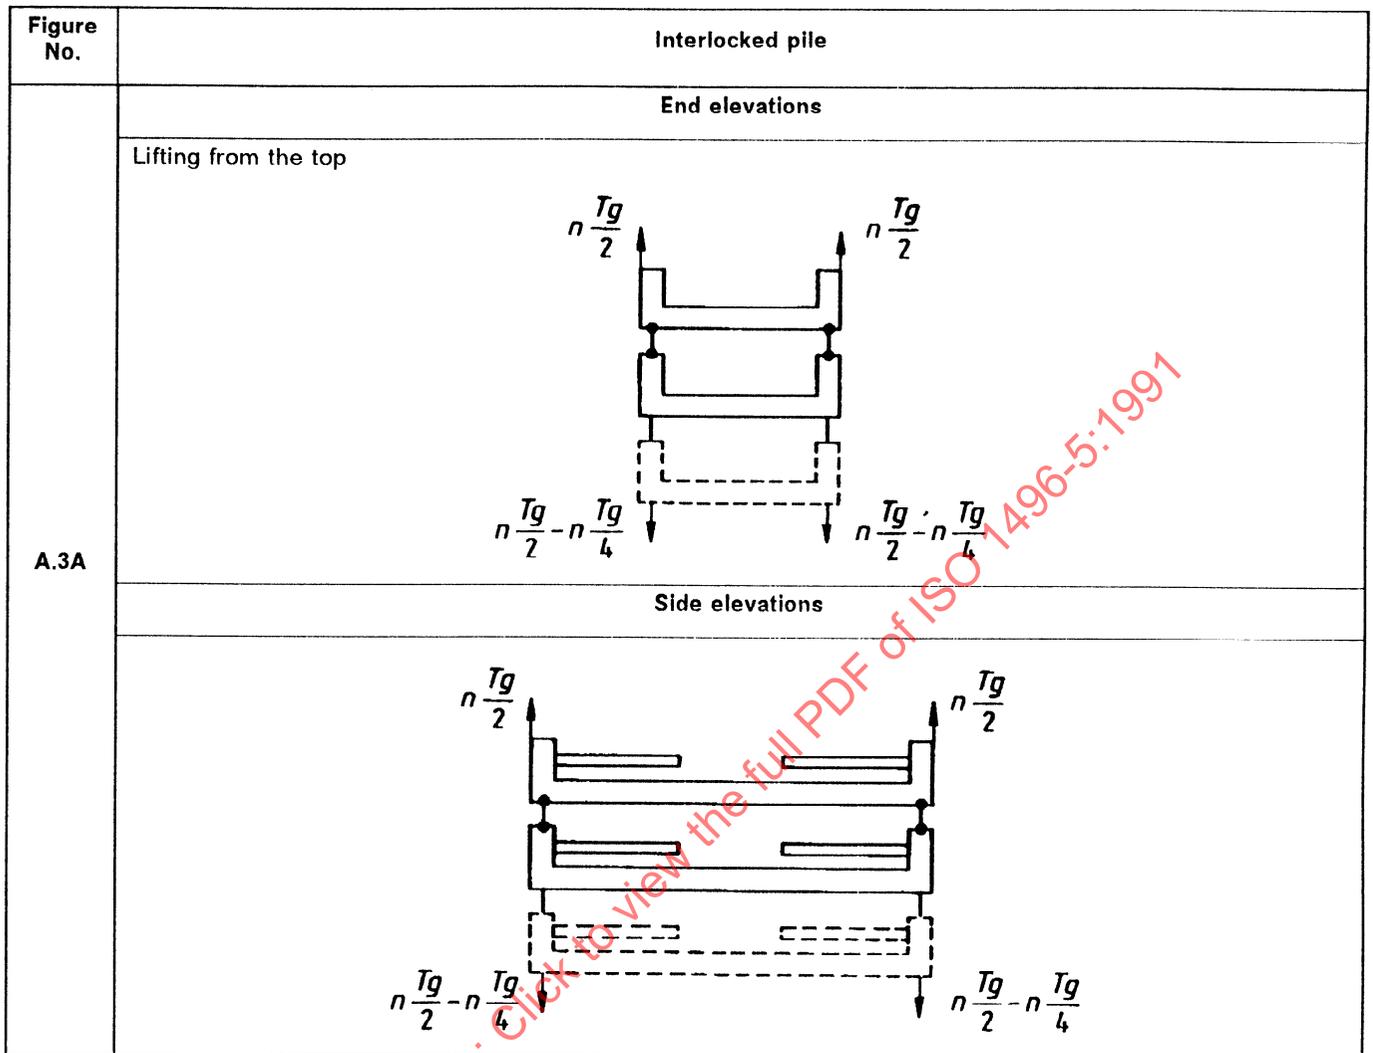STANDARDSIS.COM · Click to view the full PDF of ISO 1496-5:1991



STANDARDSISO.COM: Click to view the full PDF of ISO 1496-5:1991

## Annex B (normative)

### Details of requirements for load-transfer areas in base structures of containers

**B.1** The base structures of containers, i.e. the end transverse members and such intermediate members as may be fitted (or such flat undersides as may be provided) to constitute load-transfer areas, shall be capable of transferring load to or from the longitudinal members of a carrying vehicle which are assumed to lie within the two 250 mm<sup>13)</sup> wide zones defined (by the dotted lines) in figure B.1.

**B.2** Containers not having transverse members spaced 1 000 mm<sup>13)</sup> apart or less (and not having a flat underside) shall have load-transfer areas as indicated in figures B.2, B.3, B.4 and B.5, capable of meeting the following requirements.

**B.2.1** Each pair of load-transfer areas associated with an end transverse member shall be capable of transferring loads of not less than  $0,5R$ , i.e. the loads which may occur when a container is placed on a carrying vehicle of the kind which does not support the container by its corner fittings.

Furthermore, each pair of intermediate load-transfer areas shall be capable of transferring loads of not less than  $1,5R/n$ , where  $n$  is the number of pairs of intermediate load-transfer areas, i.e. loads which may occur during transport operations.

**B.2.2** The minimum number of pairs of load-transfer areas shall be:

For 1CC, 1C and 1CX containers	4
For 1BB, 1B and 1BX containers	5

For 1AA, 1A and 1AX containers	5
For 1AA, 1A and 1AX containers fitted with a non-continuous gooseneck tunnel	6

Where a greater number of pairs of load-transfer areas are provided, these should be approximately equally spaced along the length of the container.

**B.2.3** The spacing between the end transverse member and the nearest intermediate pair of load-transfer areas shall be:

- 1 700 mm to 2 000 mm<sup>13)</sup> for containers having the minimum number of pairs of load-transfer areas for the container concerned;
- 1 000 mm to 2 000 mm<sup>13)</sup> for containers having one more pair of load-transfer areas than the minimum required for the container concerned.

**B.2.4** Each load-transfer area shall have a longitudinal dimension of at least 25 mm<sup>13)</sup>.

**B.3** Minimum requirements for load-transfer areas in the vicinity of the gooseneck tunnel are shown in figure B.6.

NOTE 12 In figures B.2, B.3, B.4 and B.5, the load-transfer areas associated with the container base are shown in black. Gooseneck tunnel transfer areas are also shown in black in figure B.6.

<sup>13)</sup> 25 mm = 1 in; 250 mm = 10 in; 1 000 mm = 39 3/8 in; 1 000 mm to 2 000 mm = 39 3/8 in to 78 3/4 in; 1 700 mm to 2 000 mm = 66 15/16 to 78 3/4 in

Dimensions in millimetres<sup>1)</sup>


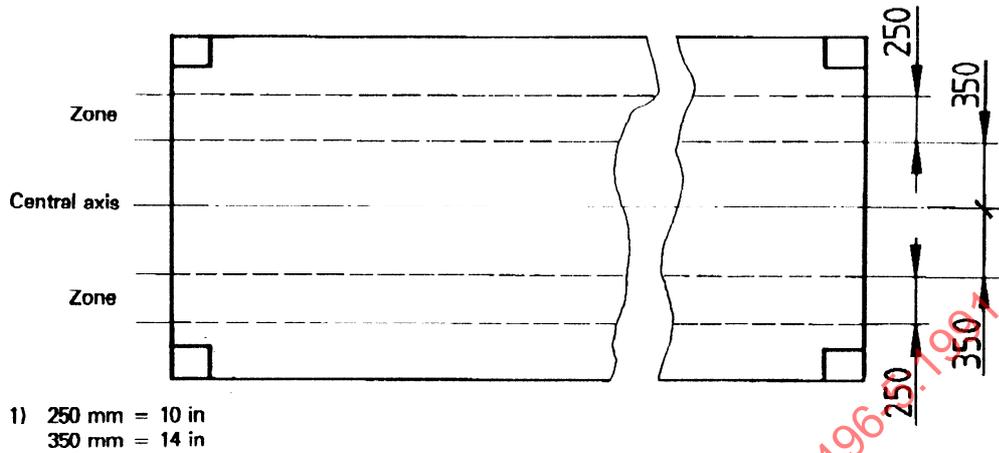



Figure B.1 — Zones for longitudinal members

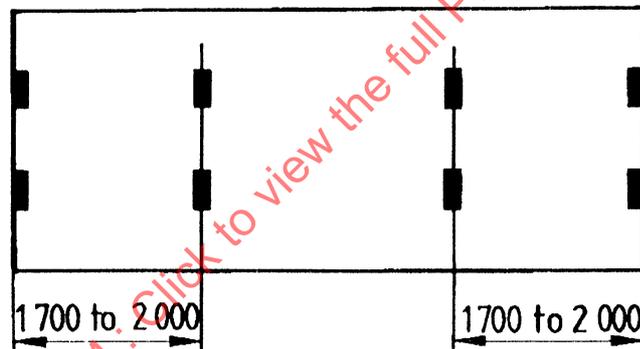Dimensions in millimetres<sup>1)</sup>



4 pairs of load-transfer areas  
(1 pair at each end plus 2 intermediate pairs)

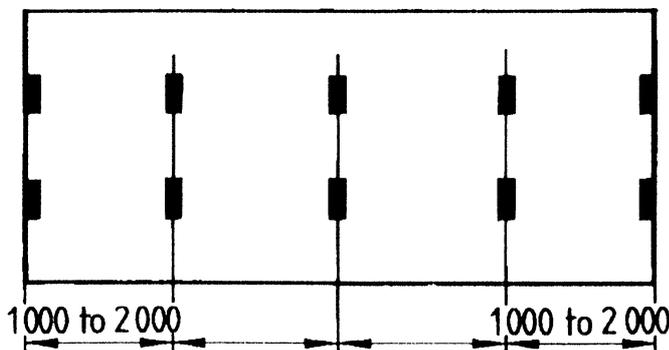a) Minimum requirements




b) Requirements applicable if 5 pairs of load-transfer areas are to be fitted

- 1) 1 700 mm to 2 000 mm = 66 15/16 in to 78 3/4 in
- 1 000 mm to 2 000 mm = 39 3/8 in to 78 3/4 in


Figure B.2 — 1CC, 1C and 1CX containers

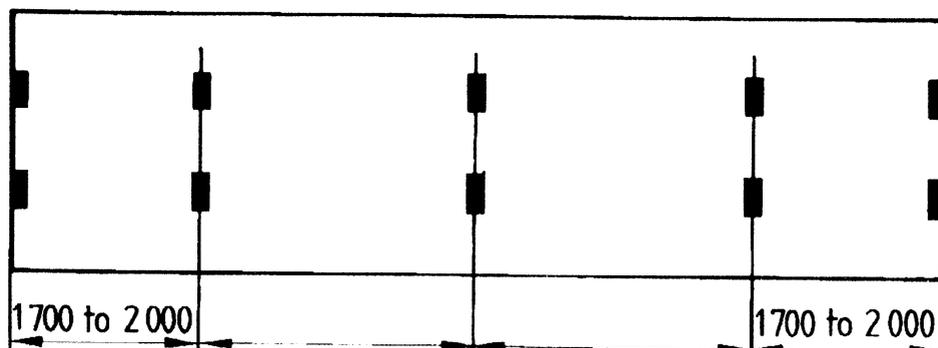Dimensions in millimetres<sup>1)</sup>



5 pairs of load-transfer areas  
(1 pair at each end plus 3 intermediate pairs)

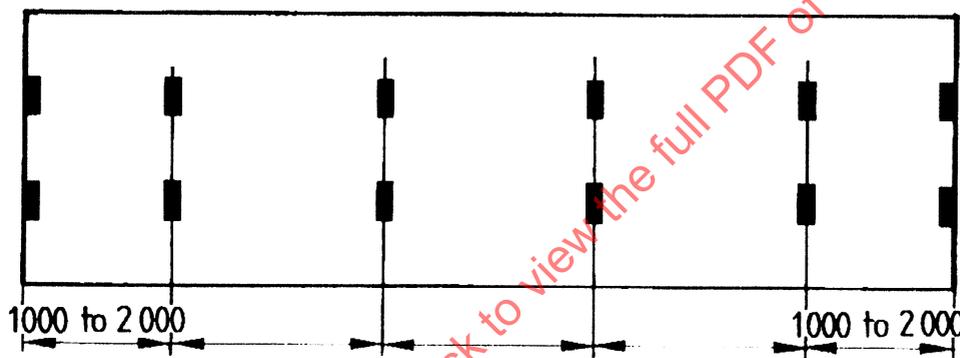a) Minimum requirements




b) Requirements applicable if 6 pairs of load-transfer areas are to be fitted

1) 1 700 mm to 2 000 mm — 66 15/16 in to 78 3/4 in

1 000 mm to 2 000 mm — 39 3/8 in to 78 3/4 in


Figure B.3 — 1BB, 1B and 1BX containers

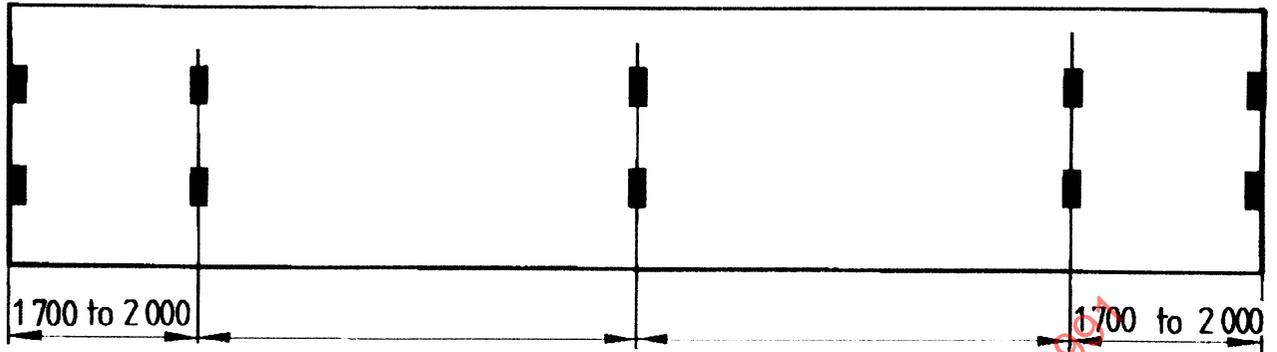Dimensions in millimetres<sup>1)</sup>



5 pairs of load-transfer areas  
(1 pair at each end plus 3 intermediate pairs)

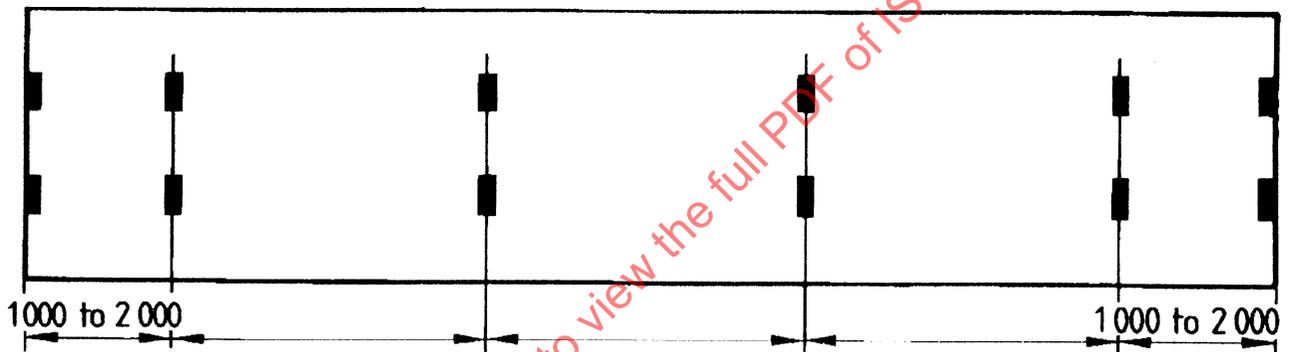a) Minimum requirements




b) Requirements applicable if 6 pairs of load-transfer areas are to be fitted

- 1) 1 700 mm to 2 000 mm = 66 15/16 in to 78 3/4 in
- 1 000 mm to 2 000 mm = 39 3/8 in to 78 3/4 in

Figure B.4 — 1AA, 1A and 1AX containers without gooseneck tunnel

STANDARDSISO.COM Click to view the full PDF of ISO 1496-5:1991

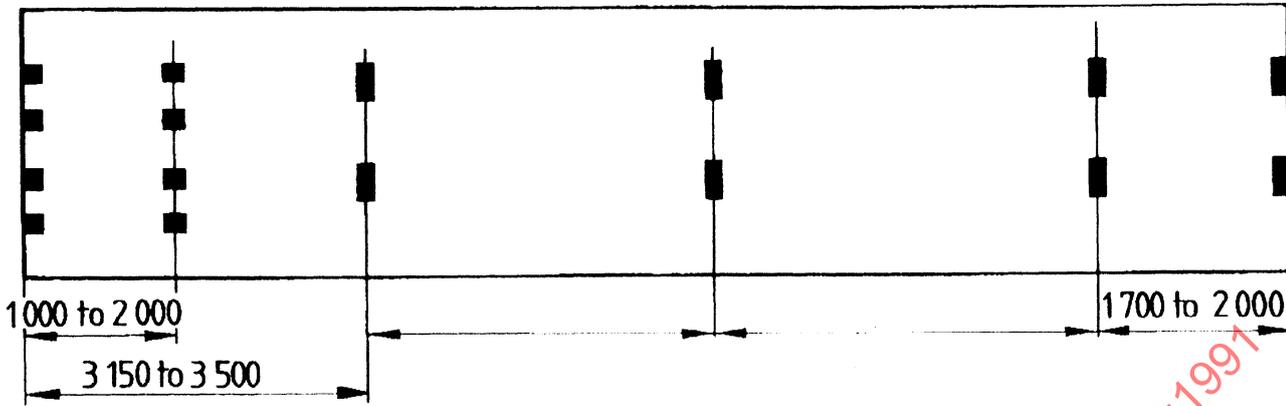
Dimensions in millimetres<sup>1)</sup>



(See also figure B.6)

6 pairs of load-transfer areas  
(1 pair at each end plus 4 intermediate pairs)

**a) Minimum requirements**

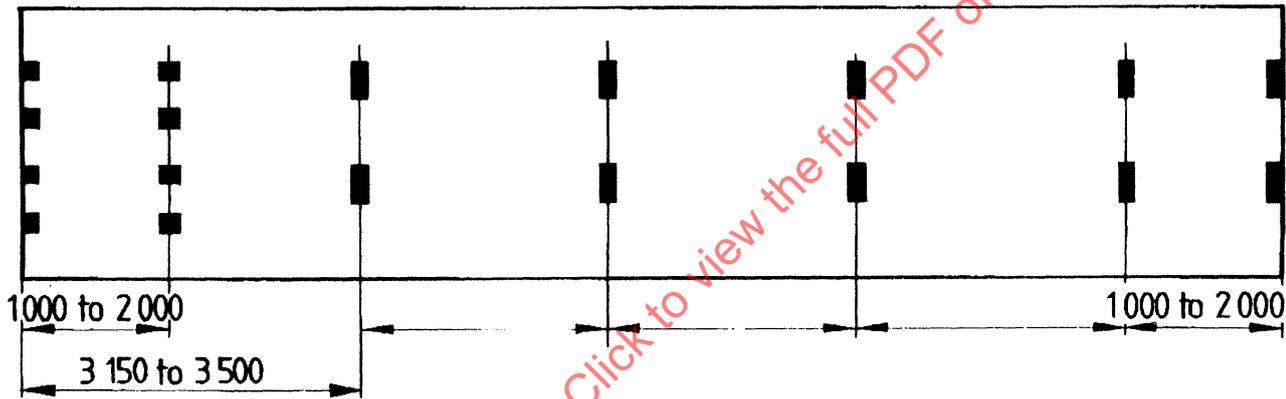


(See also figure B.6)

**b) Requirements applicable if 7 pairs of load-transfer areas are to be fitted**

- 1) 1 000 mm to 2 000 mm = 39 3/8 in to 78 3/4 in
- 1 700 mm to 2 000 mm = 66 15/16 in to 78 3/4 in
- 3 150 mm to 3 500 mm = 124 1/4 in to 137 7/8 in

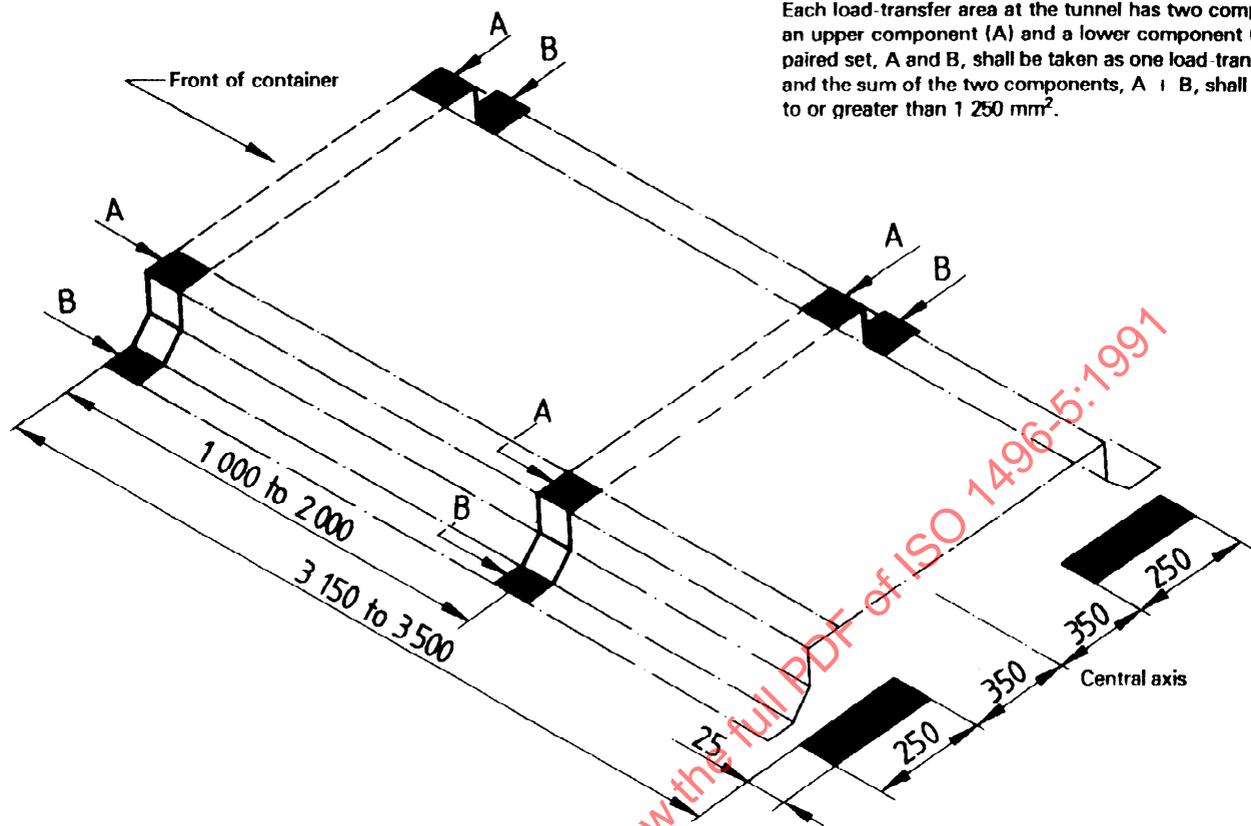**Figure B.5 — 1AA, 1A and 1AX containers with gooseneck tunnel (with minimum localized structure)**

Dimensions in millimetres<sup>1)</sup>

(See annex E for details of tunnel section.)

NOTE — Where continuous tunnel side members are provided, the load transfer areas situated between  $3\,150\text{ mm}$  and  $3\,500\text{ mm}$ <sup>1)</sup> from the end of the container may be omitted.

1)  $1\,250\text{ mm}^2 = 2\text{ in}^2$

$1\,000\text{ mm to }2\,000\text{ mm} = 39\frac{3}{8}\text{ in to }78\frac{3}{4}\text{ in}$

$3\,150\text{ mm to }3\,500\text{ mm} = 124\frac{1}{4}\text{ in to }137\frac{7}{8}\text{ in}$

$25\text{ mm} = 1\text{ in}$

$250\text{ mm} = 10\text{ in}$


$350\text{ mm} = 14\text{ in}$

Figure B.6 — Minimum requirements for load-transfer areas near gooseneck tunnel

**Annex C**  
(normative)

**Dimensions of fork-lift pockets (where provided)**

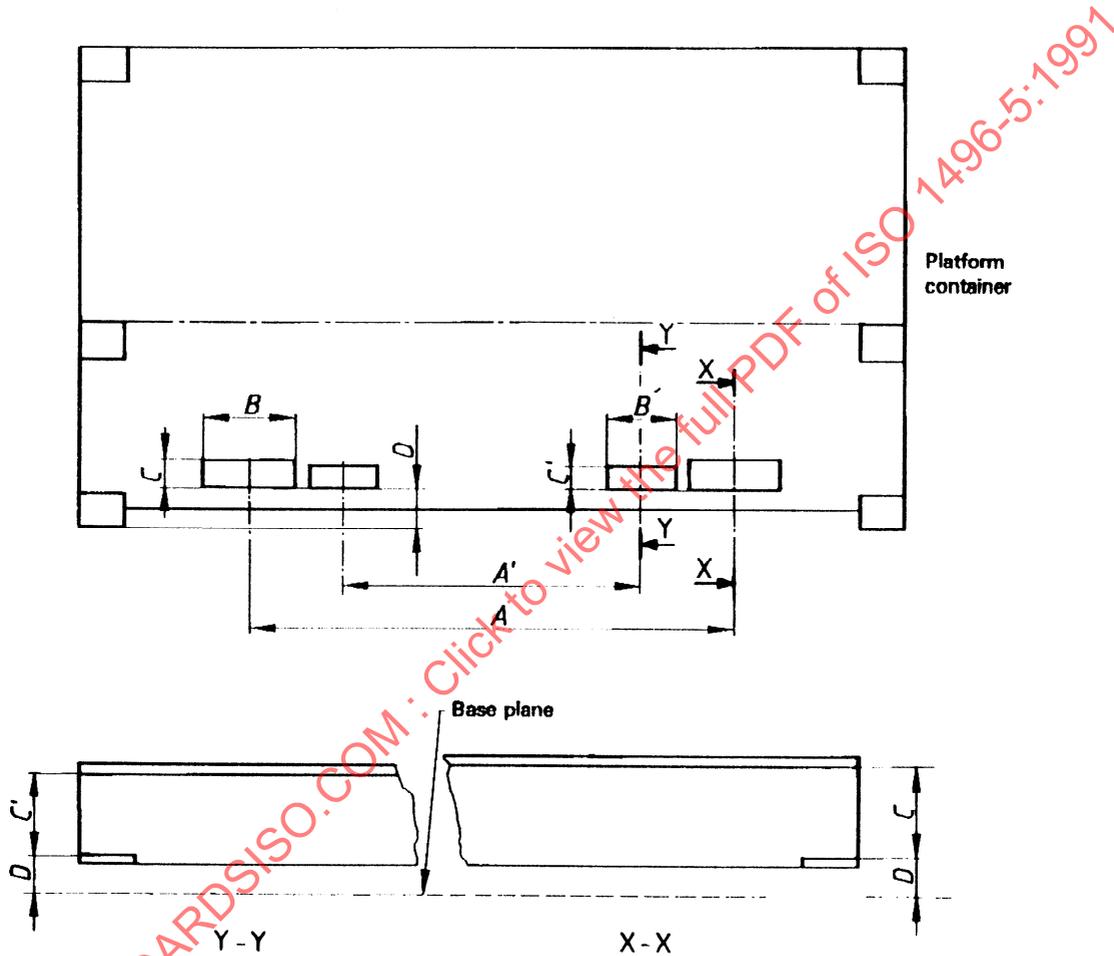See 5.9.1 and figure C.1.



Container	Dimensions													
	Fork-lift pockets for loaded and unloaded containers								Fork-lift pockets for unloaded containers only					
	mm				in				mm			in		
	A	B	C	D	A	B	C	D	A'	B'	C'	A'	B'	C'
1CC, 1C or 1CX	2 050 ± 50	355 min.	115 min.	20 min.	81 ± 2	14 min.	4 1/2 min.	1/32 min.	900 ± 50	305 min.	102 min.	35 1/2 ± 2	12 min.	4 min.

NOTE — C = clear opening

Figure C.1

**Annex D**  
(normative)

**Dimensions of grappler-arm lifting areas (where provided)**

See 5.9.2 and figure D.1.

STANDARDSISO.COM : Click to view the full PDF of ISO 1496-5:1991