
**Intelligent transport systems —
Framework for collaborative
telematics applications for regulated
commercial freight vehicles (TARV) —**

**Part 22:
Freight vehicle stability monitoring**

*Systèmes intelligents de transport — Cadre pour applications
télématiques collaboratives pour véhicules de fret commercial
réglementé (TARV) —*

*Partie 22: Surveillance de la stabilité des véhicules de transport de
marchandises*

STANDARDSISO.COM : Click to view the full PDF of ISO 15638-22:2019



STANDARDSISO.COM : Click to view the full PDF of ISO 15638-22:2019



COPYRIGHT PROTECTED DOCUMENT

© ISO 2019

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword	v
Introduction	vi
1 Scope	1
2 Normative references	1
3 Terms and definitions	2
4 Symbols and abbreviated terms	6
5 Conformance	7
6 General overview and framework	7
7 Basic conceptual operational requirement	9
7.1 General	9
7.2 Basic requirements	10
8 Requirements for services using generic vehicle data	11
8.1 General	11
8.1.1 Unregulated application services using only generic <i>basic vehicle data</i>	11
8.1.2 Unregulated application services using both generic vehicle data and additional application specific data	11
8.2 Conveyance identifiers	11
9 Concept of operations for unregulated application services with additional data requirements including roadside sensors	12
9.1 General	12
9.2 Statement of the goals and objectives of the system	12
9.3 Strategies, tactics, policies, and constraints affecting the system	13
9.4 Organizations, activities, and interactions among participants and stakeholders	13
9.5 Operational roles and processes for the system	13
9.5.1 Common role of the prime service provider	13
9.5.2 Common role of the application service provider	14
9.5.3 Role of the application service	14
9.5.4 Service requirements definition	14
9.5.5 Common role of user	15
9.5.6 Role of driver	15
9.5.7 Role of operator	15
9.5.8 Framework for operation	15
9.5.9 ROAM 'app' library and data pantry	16
10 Sequence of operations for identified unregulated application services with additional data requirements	16
10.1 General	16
10.1.1 Overview	16
10.2 Quality of service requirements	20
10.3 Test requirements	21
10.4 Marking, labelling and packaging	21
11 Common features of unregulated TARV application services	21
11.1 Generic operational processes for the system	21
11.2 Common characteristics for instantiations of unregulated application services	23
11.3 Common sequence of operations for unregulated application services	24
11.4 Quality of service	24
11.5 Information security	24
11.6 Data naming content and quality	24
11.7 Software engineering quality systems	25
11.8 Quality monitoring station	25
11.9 Audits	25

11.10	Data access control policy	25
11.11	Approval of IVSs and service provider	25
11.12	Approval of road side sensors	25
12	Declaration of patents and intellectual property	25
Annex A	(informative) Application examples	26
Annex B	(informative) Vehicle stability monitoring sensor examples	30
Bibliography	31

STANDARDSISO.COM : Click to view the full PDF of ISO 15638-22:2019

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 204, *Intelligent transport systems*.

A list of all parts in the ISO 15638 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

The unbalanced cargo inside the container loses vehicle stability condition and sometimes creates serious/dangerous situations where the vehicle loses control causing vehicle roll over on the road when speed exceeds the safe limit for that particular road circumstance. Some freight vehicles have a stability monitoring system on board; however most vehicles do not have such devices and adding a stability monitoring service from a remote service provider to the stand alone vehicle stability monitoring function can increase vehicle stability control during freight road transport. This document standardizes the conceptual operational framework of freight vehicle stability monitoring services provided by remote monitoring systems serviced by service providers. The ISO 15638 series of TARV application standards are based on a triumvirate of vehicle operators with in-vehicle systems, on-board application service providers and jurisdictions. The basic TARV standards focus on the transactions between these parties via ITS-stations, and roadside sensors and using this system architecture, additional remote vehicle stability monitoring service to freight vehicles can be realized. The new means of safe road transport management and enforcement may be enabled by using this document where jurisdiction needs such regulated monitoring.

It, therefore, seems appropriate to include this additional Part 22 to the ISO 15638 series of standards to provide the means to add safe road transport of freight vehicles.

It is necessary that the telematic applications can be integrated into the embedded computing systems available on the market. The need for interoperability of different solutions is also important as several actors with different solutions may be involved in information needs. Securing the data exchanged is also a particularly important point.

NOTE Related to EC regulations, ISO 15638-9¹⁾ already covers provisions consistent with EC 165/2014. This document is complementary to and not competitive to ISO 15638-9, and therefore consistent with EC 165/2014.

1) To be published. Stage at publication: 40.60

Intelligent transport systems — Framework for collaborative telematics applications for regulated commercial freight vehicles (TARV) —

Part 22: Freight vehicle stability monitoring

1 Scope

The ISO 15638 series of standards (Parts 1 to 21) define the framework for online fleet management of regulated commercial freight vehicles utilizing data communication between in-vehicle systems and an application service provider via on-board communication unit interfacing with road monitoring infrastructure and roadside sensors. In this document, an unregulated service architecture framework for freight vehicle stability monitoring architecture is defined. This statement does not preclude the regulated service where jurisdiction needs such a function.

The objective of this document is to provide a freight vehicle stability monitoring service function/application for non-enforcement applications [and sometimes for regulated application service (RAS)]. This is for road transport safety management purposes of regulated commercial freight vehicle movements. The scope of this document is to

- a) Reinforce vehicle stability monitoring for non-enforcement and other purposes by providing safety advisory information provisions to the freight vehicle drivers/operators transporting heavy goods on the freight vehicles.

This document defines the framework for remote vehicle stability monitoring for non-enforcement and other management purpose applications conceptual operation.

This document is complementary to, and does not replace, any ISO 15638 series standards. This document is beneficial to vehicle monitoring management purpose entities and it provides additional use cases for TARV service applications.

This document is specialized towards the realization of safer road transport of freight vehicles by providing safety advisory information to the vehicle from the service provider and it utilizes ISO 15638 series of standards basic architecture framework defined in ISO 15638-21. The vehicle on-board sensor detected freight vehicle and/or freight container stability data and/or road side sensor data (vehicle stability status detection at roadside) are sent out to the service provider through ITS communication media. The service provider provides users with safety information such as recommended safe speed limit for that particular vehicle and gives speed limit advice messages as necessary. The various V2I communication paths can be used according to the various use cases.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 14816, *Road transport and traffic telematics — Automatic vehicle and equipment identification — Numbering and data structure*

ISO 15638 (all parts), *Intelligent transport systems — Framework for cooperative telematics applications for regulated commercial freight vehicles (TARV)*

ISO 17262, *Intelligent transport systems — Automatic vehicle and equipment identification — Numbering and data structures*

ISO 24534-3, *Intelligent transport systems — Automatic vehicle and equipment data*

ISO 26683-2, *Intelligent transport systems — Freight land conveyance content identification and communication — Part 2: Application interface profiles*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <http://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org>

3.1

access methods

procedures and protocols to provision and retrieve data

3.2

app

small (usually) software applets, organized as software bundles, that support *application services* (3.3) by keeping the *data pantry* (3.18) provisioned with up to date data

3.3

application service

service provided by a *service provider* (3.36) enabled by accessing data from the *IVS* (3.23) of a *regulated vehicle* (3.33) via a wireless communications network

3.4

application service provider

ASP

party that provides an *application service* (3.3)

3.5

app library

separately secure area of memory in *IVS* (3.23) where apps are stored with different access controls to *data pantry* (3.18)

3.6

application service data file

ASD file

file held in the *data pantry* (3.18) of the *IVS* (3.23) containing data specific to an *application service* (3.3)

3.7

architecture

formalised description of the design of the structure of TARV and its *framework* (3.21)

3.8

audit

auditing

review of a party's capacity to meet, or continue to meet, the initial and ongoing certification agreements as a *service provider* (3.36)

3.9

authentication

function intended to establish and verify a claimed identity

3.10**basic vehicle data**

data maintained/provided by all *IVS* (3.23) [regardless of *jurisdiction* (3.27)]

3.11**certification**

formal affirmation that an applicant has satisfied all the requirements for appointment as an *application service provider* (3.4) or that an application service delivers the required service levels

3.12**certification authority**

<digital> organization which issues digital certificates for use by other parties (specifically in the context of communications security)

3.13**certification authority**

<regulatory> organization (usually independent) which conducts *certification* (3.11) and ongoing *audit* (3.8) for *service providers* (3.36) on behalf of a *jurisdiction* (3.27)

3.14**commercial application(s)**

ITS applications in *regulated vehicles* (3.33) for commercial (unregulated) purposes

EXAMPLE Asset tracking, vehicle and engine monitoring, cargo security, driver management etc.

3.15**consignment**

shipment of goods/cargo to a destination

3.16**conveyance**

vehicle or trailer used to transport from one place to another

3.17**cooperative ITS****C-ITS**

ITS applications for both regulatory and commercial purposes that require the exchange of data between uncontracted parties using multiple *ITS-stations* (3.25) communicating with each other and sharing data with other parties with whom they have no direct contractual relationship to provide one or more *ITS services* (3.24)

3.18**data pantry**

secure area of memory in *IVS* (3.23) where data values are stored [with different access controls to *app library* (3.5)]

3.19**driver**

person driving the *regulated vehicle* (3.33) at any specific point in time

3.20**facilities**

layer that sits on top of the communication stack and helps to provide data interoperability and reuse, and to manage applications and enable dynamic real time loading of new applications

3.21**framework**

particular set of beliefs and ideas referred to in order to describe a scenario or solve a problem

3.22

global navigation satellite system

GNSS

several networks of satellites that transmit radio signals containing time and distance data that can be picked up by a receiver, allowing the user to identify the location of its receiver anywhere around the globe

3.23

in-vehicle system

IVS

ITS-station (3.25) and connected equipment on board a vehicle

3.24

ITS service

communication functionality offered by an *ITS-station* (3.25) to an *ITS-station* application

3.25

ITS-station

ITS-s

entity in a communication network, comprised of application, *facilities* (3.20), networking and access layer components specified in ISO 21217 that operate within a bounded secure management domain

3.26

Java™

object oriented open source operating language developed by SUN systems

3.27

jurisdiction

government, road or traffic authority which owns the *regulatory applications* (3.31)

EXAMPLE Country, state, city council, road authority, government department (customs, treasury, transport).

3.28

local data tree

LDT

frequently updated data concepts stored in the on-board *data pantry* (3.18) containing a collection of data values deemed essential for either a) TARV regulated application service, or b) *cooperative intelligent transport systems* (3.17)

3.29

operator

fleet manager of a *regulated vehicle* (3.33)

3.30

prime service provider

service provider (3.36) who is the first contractor to provide *regulated application services* (3.32) to the *regulated vehicle* (3.33), or a nominated successor on termination of that initial contract

Note 1 to entry: The *prime service provider* is also responsible to maintain the installed *IVS* (3.23). If the *IVS* was not installed during the manufacture of the vehicle the *prime service provider* is also responsible to install and commission the *IVS*.

3.31

regulated/regulatory application

application arrangement using TARV utilised by *jurisdictions* (3.27) for granting certain categories of commercial vehicles rights to operate in regulated circumstances subject to certain conditions or to permit a vehicle to operate within the *jurisdiction*

Note 1 to entry: It may be mandatory or voluntary at the discretion of the *jurisdiction*.

3.32**regulated application service**

TARV application service to meet the requirements of a regulated application that is mandated by a regulation imposed by a *jurisdiction* (3.27), or is an option supported by a *jurisdiction*

3.33**regulated vehicle**

vehicle that is subject to regulations determined by the *jurisdiction* (3.27) as to its use on the road system of the *jurisdiction* in regulated circumstances, subject to certain conditions, and in compliance with specific regulations for that class of regulated vehicle

Note 1 to entry: At the option of *jurisdictions*, this may require the provision of information via TARV or provide the option to do so.

3.34**regime for open application management****ROAM**

facilities (3.20) layer for TARV, within the ISO 15638 series of standards, providing an open access, yet secure runtime environment for TARV and other applications, including cooperative vehicle applications, on top of the CALM communications environment

3.35**roadside sensor**

device installed at or near the roadside or above the road or embedded into the road that either

- a) collects data concerning the vehicle (e.g. licence plate, vehicle speed, vehicle emission data etc.) and passes that data to the vehicle IVS
- b) provides other dynamic data to the vehicle IVS (e.g. temporary or permanent speed limits or other restrictions or informative data)
- c) requests the IVS to take some action as a result of sensed information

for use in support or execution of a TARV application

3.36**service provider**

party which is certified by a *certification authority (regulatory)* (3.12) as suitable to provide regulated or commercial ITS *application services* (3.3)

3.37**session**

wireless communication exchange between the *ITS-station* (3.25) of an *IVS* (3.23) and the *ITS-station* of its *application service provider* (3.4) to achieve data update, data provision, upload apps, or otherwise manage the provision of the *application service* (3.3), or a wireless communication provision of data to the *ITS-station* of an *IVS* from any other *ITS-station*

3.38**specification**

explicit and detailed description of the nature and functional requirements and minimum performance of equipment, service or a combination of both

3.39**tamper****tampering**

conduct towards *IVS* (3.23) or a *service provider's* (3.36) system which is intended to prevent the *IVS* or the *service provider's* system from functioning correctly

3.40**telematics**

use of wireless media to obtain and transmit (data) from a distant source

3.41
Unified Modeling Language
UML

graphical language for visualizing, specifying, constructing, and documenting the artifacts of a software-intensive system

Note 1 to entry: *UML* offers a standard way to write a system's blueprints, including conceptual things such as business processes and system functions as well as concrete things such as programming language statements, database schemas, and reusable software components, and is standardised as ISO/IEC 19501 [Unified Modeling Language (*UML*)].

3.42
user

individual or party that enrolls in and operates within a regulated or *commercial application* (3.14) service

EXAMPLE *Driver* (3.19), *transport operator* (3.29), freight owner.

4 Symbols and abbreviated terms

ASD file	application service data file
ASP	application service provider
CALM	communications access for land mobiles
C-ITS	cooperative intelligent transport system
CONOPS	concept of operations
GNSS	global navigation satellite system
HV	heavy vehicle
ID	identity
ITS-S	ITS station
IVS	In-vehicle system
LDM	local dynamic map
LDT	local data tree
RAS	regulated application service
RHV	regulated heavy vehicle
ROAM	regime for open application management
RTM	remote tachograph monitoring
TARV	telematics applications for regulated vehicles
UML	Unified Modeling Language (ISO/IEC 19501)
WIM	weigh in motion

5 Conformance

Requirements to demonstrate conformance to any of the general provisions or specific application services described in this document shall be within the requirements defined by the service provider. Conformance requirements to meet the provisions of this document are therefore deemed to be under the control of, and to the specification of, the service provider where the application service(s) is/are instantiated.

6 General overview and framework

This document utilizes a framework and architecture for freight vehicle stability monitoring defined in ISO 15638-21. The general conceptual operation description of the roles of the actors in "extended" TARV architecture is defined in ISO 15638-21.

To understand deeply the extended TARV framework, architecture and detail specification of the roles of the actors involved, ISO 15638-1, ISO 15638-7 and ISO 15638-21 shall be read.

In summary, [Figure 1](#) shows the "extended" role model conceptual architecture showing the key actors and their relationships defined in ISO 15638-21.

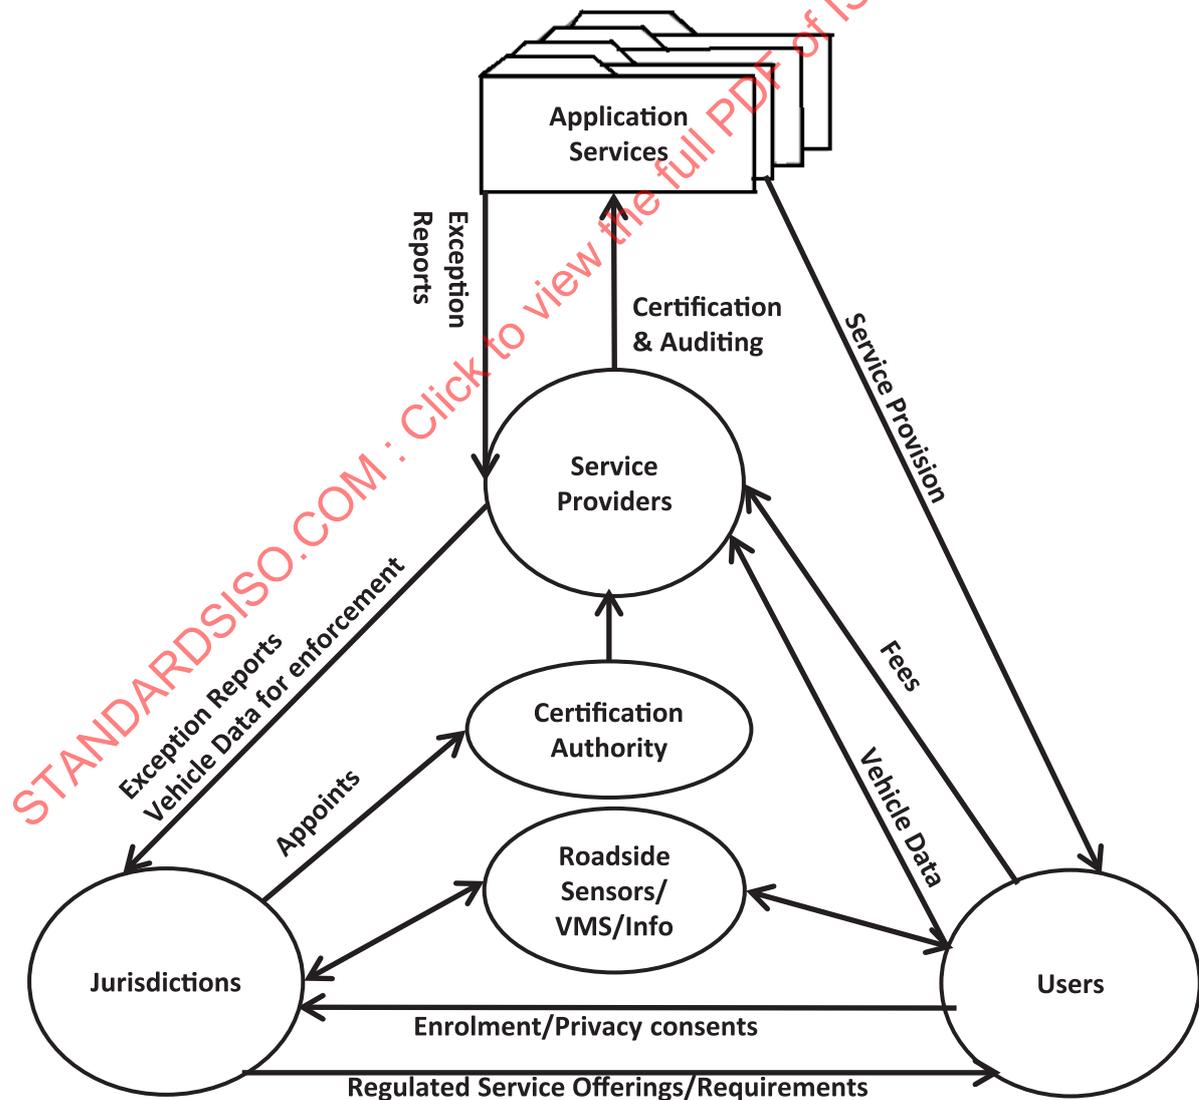


Figure 1 — Extended Role model conceptual architecture (3.7)

The ISO 15638 series of standards provides a suite of standards deliverables addresses and defines the framework for a range of cooperative telematics applications for regulated vehicles (such as electronic tachograph monitoring, Driver work records, emergency messaging/eCall, mass monitoring, 'Mass' information for jurisdictional control and enforcement, speed monitoring, access control, access methods, location monitoring, weigh in motion, etc.). The overall scope includes the concept of operation, legal and regulatory issues, and the generic cooperative ITS service platform. The framework is based on a (multiple) service provider oriented approach including provisions for the certification and auditing of service providers.

This document is for an unregulated service provision application for safe road transport by freight vehicles through the remotely monitoring vehicle stability during road transport and safety information provision to the vehicle such as safe driving speed information provision, information such as recommended safe speed, speed limit advice information. [Figure 2](#) shows the architecture from the view point of the provision of unregulated (commercial) application service, using the common "extended" TARV platform defined in ISO 15638-21.

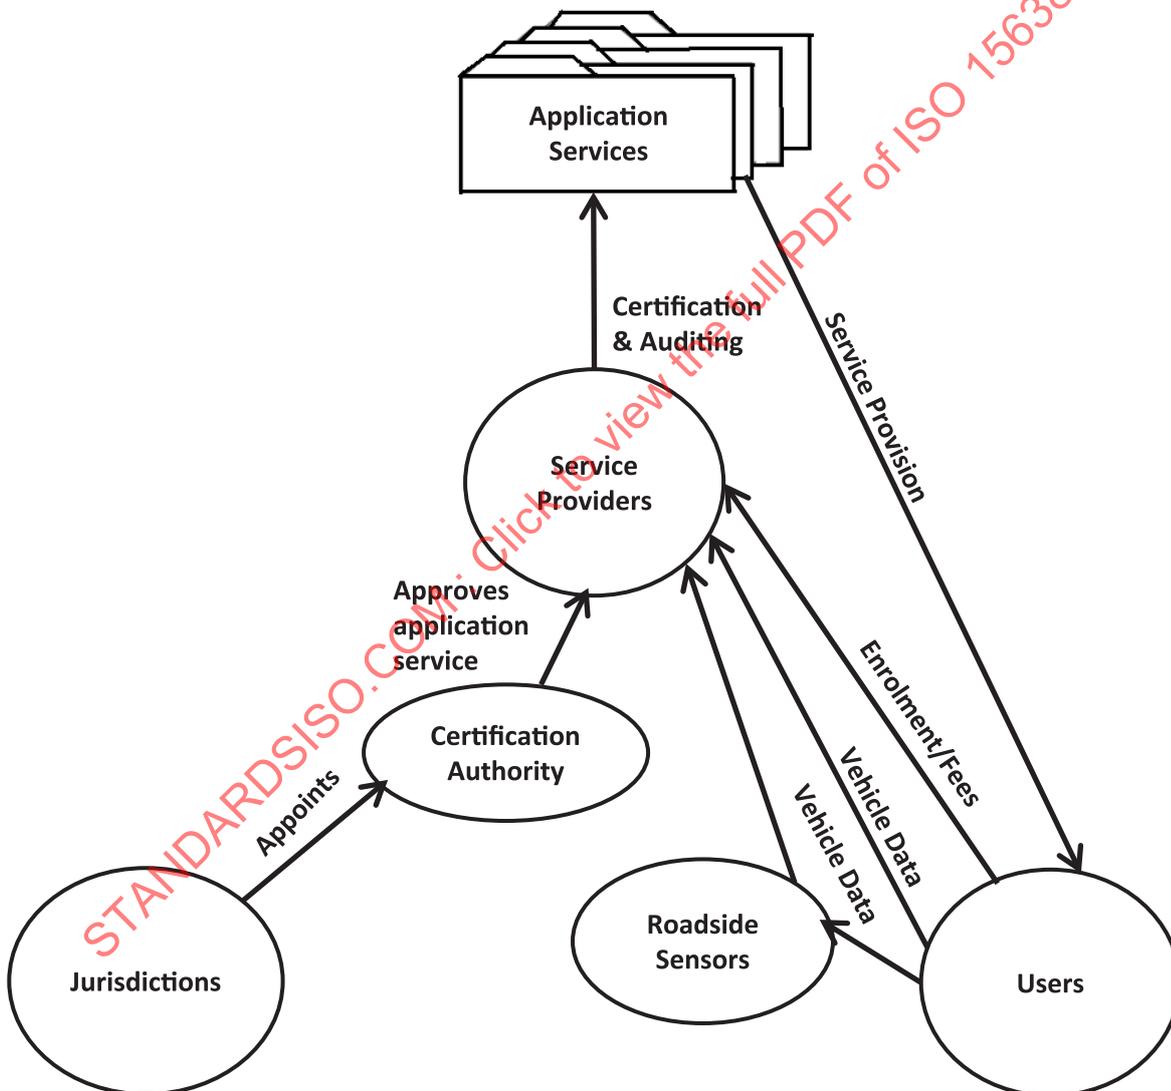


Figure 2 — Role model conceptual architecture unregulated service provision

An unbalanced freight container may cause a freight vehicle roll over on the roadway when its speed exceeds the safe speed limit for such unbalanced loading condition. The purpose of this document is to realize safe freight vehicle road transport, in particularly increasing the vehicle stability by maintaining the safe speed of a freight vehicle transporting freight and container. The proper recommended speed

limit information given to the vehicle driver/operator is calculated using vehicle model data, road shape map data ahead (longitudinal and lateral) at the service provider; they monitor vehicle stability and speed and give speed limit advisory messages to the driver when necessary. This document enables safe freight vehicle road transport stability realization and efficient freight fleet transport operation of the user vehicles by avoiding accidents such as vehicle roll over incidents on the roadways.

The freight vehicle stability information can be obtained from various sources, such as roadside embedded sensors, freight vehicle on board equipped stability monitors and/or specially designed gravity centre detection on board equipped sensors. The stability information is sent to the service provider to realize real time remote stability monitoring of freight vehicles and the service provider provides the calculated recommended safe speed for that particular part of the road for that vehicle. By providing the freight vehicle location (GNSS) data to the service provider, the service provider is able to obtain lateral and longitudinal road shape from LDM and can calculate the proper safe road transport driving speed for that part of the road and for that particular vehicle (model) with unbalanced freight on the freight vehicle.

The service provider provides this application service to/for a user who is an individual or party that enrolls in and operates within an unregulated application service or commercial application service in order to meet specific aspects of the requirements of a service provider for the operation of the regulated vehicle.

Examples of users are a transport operator, driver, freight owner, etc. Most commonly the user is the transport operator.

For basic TARV information, refer to ISO 15638-1.

This document defines the basic conceptual operational requirement for this application service, the freight vehicle stability monitoring.

It is important to note that where a commercial (unregulated) service can be instantiated using only the generic vehicle data specified in ISO 15638-5, no further standardisation is required. Where a TARV commercial application is simply instantiated as a commercial application conforming to the requirements of this document, no further standardisation is required so long as conformance to the requirements of this document can be demonstrated, and service offerings may vary from service provider to service provider. The service provider provides the application service to/for a 'user' who is an individual or party that enrolls and contracts to receive the commercial/civic application service.

7 Basic conceptual operational requirement

7.1 General

The basic conceptual framework is described as shown in [Figure 3](#).

The telematic application calculates the maximum speed so that an accident is avoided (rollover, jackknifing). This speed depends on the road characteristic and the dynamic behaviour of the vehicle.

It is important that dealing with the vehicle model is based on the interaction between the road and the vehicle, because the estimated speed is based on the vehicle model.

Moreover, the quality of the estimated speed is based on the accuracy of the model.

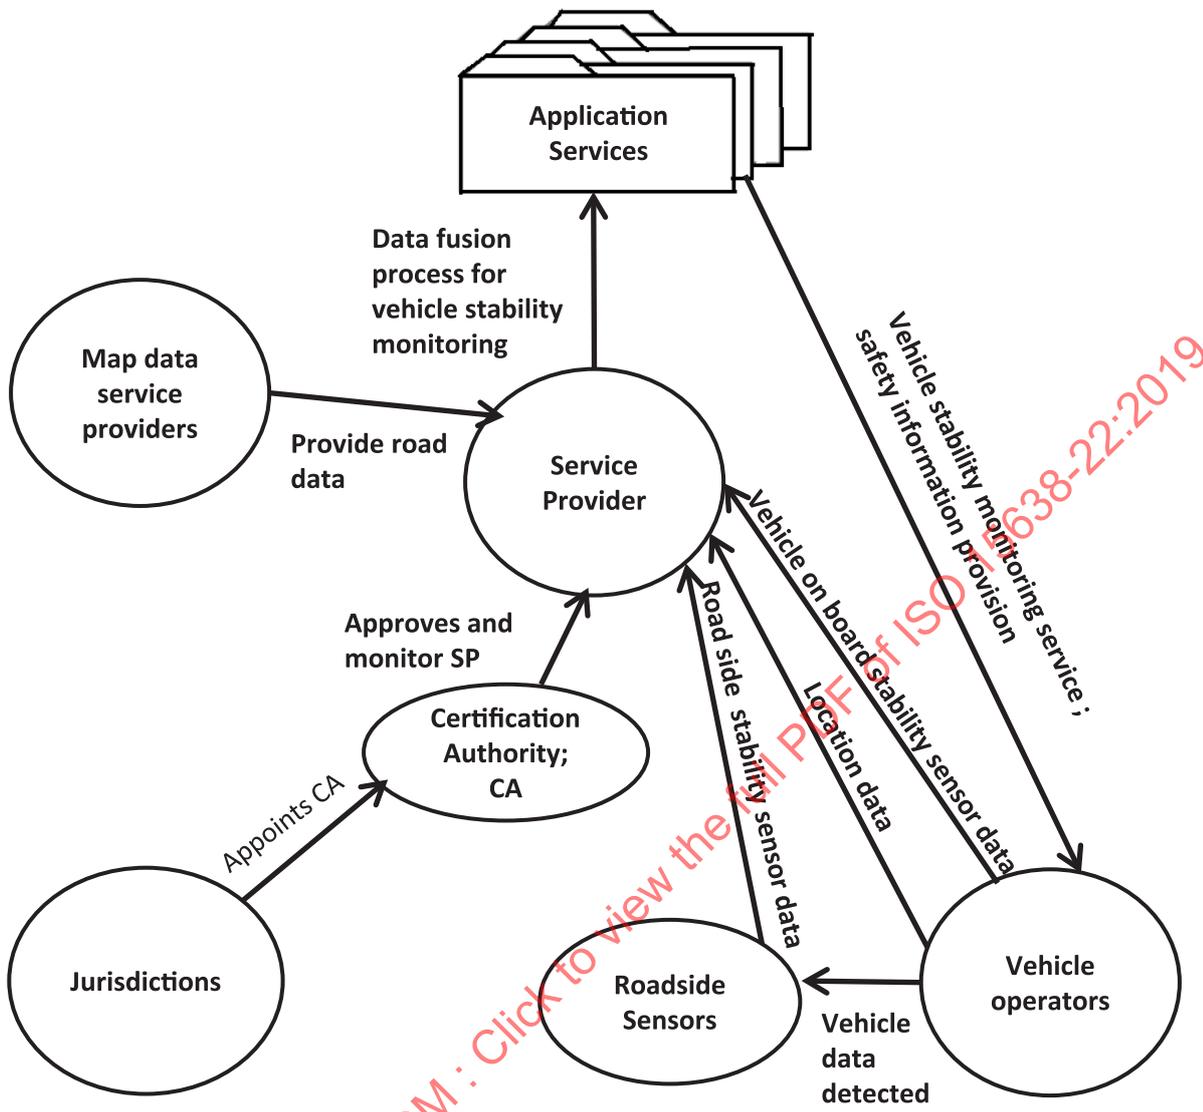


Figure 3 — Basic conceptual framework for vehicle stability monitoring service provision

7.2 Basic requirements

The basic requirements are as follows:

- a) Vehicle shall be equipped with vehicle stability monitoring sensors and such data shall be sent to service provider through on-board unit ITS communication media connected with service provider. If vehicle does not have such sensors, only road side sensor data will be used and continuous data acquisition is not possible.
- b) On board stability sensor shall monitor vehicle and freight stability continuously and shall detect freight unbalancing status. Road side sensor shall detect similar status when freight vehicle passes through it.
- c) Vehicle location data shall be sent to service provider so that service provider is able to track and trace vehicle on the LDM and road shape condition can be utilized to calculate safe speed limit for that particular vehicle.
- d) Service provider shall obtain LDM map data from map data service provider when such data are required for precise service provision.

- e) Service provider shall perform data fusion process for vehicle stability monitoring by combining sensor data, location data and LDM map data.
- f) Service provider shall provide safety information to vehicle operator when necessary and information described below shall be given;
 - Vehicle safe speed limit is XXX km/h and road ahead is steep downslope and safe speed is recommended at YYY km/h.
 - Due to unbalancing of freight on this particular vehicle, driving is unsafe in this unstable condition and reducing speed to ZZZ km/h is required.
 - Vehicle is approaching safe speed limit and caution should be taken to maintain this safe speed.
 - Vehicle is driving beyond safe speed limit and immediate discontinuation action shall be taken.

8 Requirements for services using generic vehicle data

8.1 General

The means by which the access commands for generic vehicle information specified in ISO 15638-7 can be used to provide all or part of the data required in order to support a regulated application service shall be as defined in ISO 15638-7.

This Clause provides means by which the access commands for generic vehicle information specified in ISO 15638-5 can be used to provide all or part of the data required in order to support an unregulated application service, and defines general requirements to assure data interoperability.

8.1.1 Unregulated application services using only generic *basic vehicle data*

Where all of the required data can be obtained via the access commands for generic 'essential vehicle information' specified in ISO 15638-5, the access methods defined in ISO 15638-5 shall be used consistently to obtain the values for the TARV LDT and C-ITS LDT data concepts. No further international standardization is required, and jurisdictions, subject to the privacy regulations pertaining within the jurisdiction, may develop, operate, and update their services according to local design with international interoperability being maintained through the provisions of ISO 15638-5 (TARV Generic vehicle information). All vehicles that are equipped to support ISO 15638 will normally be able to support such service provision. ISO 15638-5:2013, Clause 7 defines the following relevant commands:

- a) GET TARV LDT (local data tree) data
- b) GET C-ITS (co-operative intelligent transport systems) LDT data

See ISO 15638-5 for details of these commands.

8.1.2 Unregulated application services using both generic vehicle data and additional application specific data

See ISO 15638-7:2013, 7.1.2 for the generic sequence of operations for unregulated application services using both generic vehicle data and additional application specific data.

8.2 Conveyance identifiers

The regulated vehicle conveyance type shall be identified in accordance with ISO 26683-2, ISO 14816, ISO 17262, and ISO 24534-3.

9 Concept of operations for unregulated application services with additional data requirements including roadside sensors

9.1 General

This Clause describes the characteristics of a proposed system from the viewpoint of a user who will employ that system. Its objective is to communicate the quantitative and qualitative system characteristics to all stakeholders.

This Clause defines the general concept of operations for commercial/civic provision using the TARV platform and an application service provider for TARV commercial/civics that require data in addition to that available from the basic vehicle data, and provides the generic modus operandi for the provision of commercial/civic (unregulated) application services defined in the subsequent clauses of this document that relate to provisions for unregulated application services.

A 'concept of operations' (CONOPS) generally evolves from a concept and is a description of how a set of capabilities may be employed to achieve desired objectives.

This document enables data from roadside sensors to supplement data collected from within the vehicle.

9.2 Statement of the goals and objectives of the system

The overall objective of TARV commercial/civic application services with additional data requirements is use of a common telematics platform, (which was most probably installed to meet a regulatory requirement for the control of regulated commercial freights), to provide additional commercial/civic application services. Those services that require only the basic vehicle data defined in ISO 15638-5, do not require further standardization measures, so this document is focused to meet the requirements for commercial/civic provision in circumstances where data is required in addition to that provided by the basic vehicle data concept.

It is an underlying concept (described in ISO 15638-1) that these services are provided by agreement with the user and using an approved service provider to meet the requirements of the jurisdiction via an in-vehicle system (IVS) with communications capability between the vehicle and the service provider, and access to relevant data from the regulated commercial freight.

It is an underlying assumption that the vehicle is equipped with the means to acquire and provide the data (additional to the basic vehicle data), required by the specific application service. The requirements for specific additional data are not defined in this document, which standardizes only the general framework for commercial/civic provision using TARV. That means that the instantiation of services of the same title or description may be implemented differently by different application service providers, and therefore most frequently not interoperable. Such differences provide product differentiation, and where the service is discrete, enable a commercial market to flourish with competing product offerings. However, there may well be cases where, although the service is not required by regulation, there is benefit in standardizing some or all of the aspects and data exchanges of the service. Such services will require a further standardization deliverable, which refers to this document as the baseline standard for the provision of commercial/civic application services using TARV and needs to specify only the additional aspects that require standardization.

As with provisions for regulated application service provision using TARV, the actual equipment to be installed in order to provide that data provision functionality is not standardised and is a commercial decision of the application service provider, unless it is specified by the jurisdiction.

This document determines the nature of the data and how it is to be sent and received by the IVS, but does not standardise the equipment used to obtain the data, nor the definition of the actual service features received.

9.3 Strategies, tactics, policies, and constraints affecting the system

The services that are regulated as mandatory or optionally supported may vary from jurisdiction to jurisdiction. Therefore it is possible that a service that is mandatory in one jurisdiction, may be not required by another jurisdiction, but offered as a commercial/civic within that domain. If the requirements are met within the service definition in ISO 15638-6, or require only basic vehicle data, no further standardisation is required.

Modern trends in computing have moved away from the insular standalone solution where the demands for the provision of the service have to be entirely met by local capability, towards a 'cloud' computing conceptual architecture, where the bulk of the data processing and service provision is provided elsewhere within or behind the 'cloud', where it can be performed more efficiently and economically, and enabling simplification of the terminal equipment. It is a feature of TARV that the actual service provision takes place at and within the systems of the application service provider, and that the on-board equipment therefore largely services only to collect and provide data to enable that service provision, and in some cases, to receive a result.

This fundamentally simplifies the capabilities required by the TARV on board platform, enables practical instantiation of a similar service using different wireless media, and enables early implementation and deployment of such systems.

In respect of standardisation, it means that the commercial/civic application services that are supported by this document require only the standardisation of the data to be collected, its organisation within on-board memory to meet the requirements of ISO 15638-1, and the means and frequency of its collation, and possibly, but not always, indeed probably infrequently, the download back to the vehicle of the result of the service provision.

A service that requires complex on-board processing, or intensive bidirectional communication, is outside the scope of TARV, although it may use TARV to forward its data to its service provider, or receive data from its service provider.

A core strategy of this document is to ensure that an 'app' is only loaded legitimately, and that this prior loaded 'app' contains the destination address for the core application data. Instigating a 'GET TARVLDT' or 'GET CoreData' command only results in that data being sent to the previously determined destination address, and not to a spoof enquirer. While this has the advantage of security, and economy in/of use, it does mean that TARV is probably not the appropriate means for highly interactive 'on-line services' (for example collision avoidance). However, because TARV uses the same CALM communications platforms, the same on-board equipment can be used to support other 'cooperative vehicle systems'(C-ITS). See ISO 15638-1, ISO 15638-2, ISO 15638-3 and ISO 15638-5.

9.4 Organizations, activities, and interactions among participants and stakeholders

The classes, attributes and key relationships are described in ISO 15638-1 and ISO 15638-7, with the addition of the ability to collect data from roadside sensors.

9.5 Operational roles and processes for the system

9.5.1 Common role of the prime service provider

To facilitate the correct installation and monitoring of TARV IVS, a prime service provider has been contracted by the user. See ISO 15638-1 (TARV Framework and architecture). The prime service provider is the technical expert of their system and shall be responsible for its installation, maintenance and as necessary upgrade, but unless also appointed as an application service provider for a particular service, is not responsible for the operation of application service software.

The prime service provider shall be responsible to ensure that the multiple applications operate properly, and do not adversely impact each other.

It is envisaged that the IVS operating systems may require updating from time to time to improve functionality, fix software 'bugs' or update the protection from electronic threats such as software viruses and it shall be the responsibility of the prime service provider to undertake such tasks, possibly in collaboration with application service providers.

The role of the prime service provider shall be to ensure that the IVS performs during day to day operation in the same manner as it did when it was approved. The prime service provider shall put in place a regime to the satisfaction of the approval authority which shall periodically monitor the IVS via a number of means including receiving test data files generated by the on-board 'app' for that application service. The prime service provider shall be responsible to determine the IVS operational state, perform any necessary enhancements and efficiently deals with malfunctions when they occur.

The prime service provider shall report any malfunctions to the driver and application service provider as appropriate, and as technically possible (for example it may not be possible, during a working session, to advise the driver if the IVS has failed entirely, and such advice would have to be by post event 'offline' means).

The prime service provider shall work closely with the application service provider and vehicle operator to permit and enable the prompt repair and rectification of any malfunction with a TARV IVS.

9.5.2 Common role of the application service provider

The application service provider is the actor who is responsible for providing and operating the application service system.

The application service provider shall offer to users to provide the specific application service defined in the specification for that application service. This document specifies the format for key provisions of application service provision, but does not define any specific application service.

The application service provider is envisaged normally to be a commercial entity, but they may well also be a road users association or department of the jurisdiction providing a civic service to road users.

The application service provider shall be responsible to ensure that the application service system is correctly installed and performs during day to day operation in the same manner as it did when it was approved. The application service provider shall monitor the operation of the application service system and shall report malfunctions to the driver, the prime service provider, and if required, to the jurisdiction. The application service provider shall maintain operational knowledge of the system to determine its operational state, perform any necessary enhancements and deal efficiently with malfunctions if they occur.

Where physical maintenance of the IVS is required the application service provider shall notify the prime service provider and they shall jointly rectify the problem according to their defined responsibilities.

It is envisaged that the regulated application service systems may require updating from time to time to improve functionality, update maps, fix software 'bugs' or update the protection from electronic threats such as software viruses and it shall be the responsibility of the application service provider to undertake such tasks, possibly in collaboration with the prime service provider.

9.5.3 Role of the application service

This is the service defined and offered by an application service provider for an unregulated application service. Normally this is expected to be a commercial/civic provision, but it may be provided by or on behalf of the jurisdiction, a not-for-profit body, or road users association, providing a civic service to road users. The important characteristic that separates these application services from those defined in ISO 15638-6, is that the service provision has nothing to do with the requirements of a regulation.

9.5.4 Service requirements definition

Service requirements definition will vary from service to service, and in many cases from one application service provider instantiation to another. The application service specification, or a

standards deliverable specifying an interoperable service definition, will provide such a specification within the guidance of this document. This document provides generic requirements, not application specific requirements.

9.5.5 Common role of user

In the case of the most unregulated application services, the user may be the driver, or the driver, the vehicle operator, or potentially, the vehicle owner, or a combination of all three. Within this document, 'operator', 'driver' and 'owner' are considered as sub-classes of the class 'user'.

The 'user' is most usually the operator of the regulated commercial freight, but in some cases it may be a driver or an owner. The driver will enrol to have the service provided automatically by wireless communications. The driver will appoint an approved service provider to provide the application service.

The user will be responsible to pay any fees for the provision of the service agreed with the service provider to the service provider. The means by which this is achieved is a subject for the commercial marketplace and is outside the scope of this document.

9.5.6 Role of driver

The driver shall be responsible, where required by the system, for using the identification and authentication method supplied by the prime service provider/application service provider.

The driver shall be responsible for reporting any system malfunction alerts, or apparent system failures to the operator and/or application service provider as per the instructions provided to them at the commencement of their contract. The driver is not responsible for IVS or other equipment malfunction or rectification processes beyond these actions.

The driver shall be responsible for any equipment (such as a DRD, smart card, RFID device, barcode) provided to the driver to identify him/herself to the IVS when in control of the vehicle. If the driver loses any such device he/she shall be responsible to immediately advise the vehicle operator and application service provider.

9.5.7 Role of operator

The operator of the vehicle shall be responsible to advise and request action from the application service provider in the event that the driver advises the operator of a potential or actual system malfunction and shall make the vehicle reasonably accessible to the application service provider in order that they may rectify the problem.

9.5.8 Framework for operation

The security requirements are such that a common and secure provision for security needs to be provided on all cooperative ITS systems in order to both maintain security and offer interoperability, common use and reuse of data. These aspects are dealt with in ISO 15638-4 and all instantiations claiming compliance with this document shall also comply with ISO 15638-4 (TARV system security requirements).

ISO 15638-5 provides the specifications for generic basic vehicle data that it is required for all TARV IVSs to support and make available to application service providers via a wireless communications link supported by the IVS, in order to support the provision of regulated and commercial/civic application services.

The combination of basic vehicle data and those additional data concepts required within a particular jurisdiction (or class of TARVs) are known as 'core application data (CoreData)' for an application service within a particular jurisdiction. Basic vehicle data' will therefore be found in all equipped TARVs, while core application data (CoreData)' will be required in all equipped TARVs (or class of TARVs) within a particular jurisdiction.

The ROAM architecture defined in ISO 15638-1 provides the framework and operational environment for developing and deploying platforms for TARV applications within a general framework of cooperative vehicle telematics systems and is designed not only to support TARV application systems, but also general cooperative vehicle systems for all classes of vehicles. It is therefore designed to be compatible and interoperable with other cooperative vehicle standards and has used the successful results of research programmes and applications in these areas as its source of inspiration.

ROAM provides an open execution environment in which TARV applications can be developed, delivered, implemented and maintained during the life cycle of both service applications and equipment. Drivers and vehicle operators will be able to rely on their integrated in-vehicle system to allow TARVs to operate within the requirements of jurisdictions within which they drive their vehicles, and gain advantages from direct cooperative management of transport safety and efficiency wherever they drive.

Within the TARV environment, regulated applications are developed by jurisdictions and deployed by application service providers to 'Host Management Centres' (HMC). The HMC provides a service gateway that supervises the secure provision of software and services TARVs. HMCs manage the provisioning of applications to any authorised and subscribed user via its client system. After it is properly provisioned and installed on the client system it can enact the application. Mechanisms for flexible software deployment and management are provided by JAVA/OSGi (open services gateway initiative). See ISO 15638-1:2012, 6.1.3.

9.5.9 ROAM 'app' library and data pantry

A layer below these applications is the provision of data for the data pantry. This data provisioning is not generated by a single application, but by a number of small task specific 'Facilities Apps', which are generally small Java 'applets', organised as software bundles, that generally busy themselves keeping the data pantry provisioned with up to date data. This data provisioning is envisaged to be carried out by the 'Facilities Apps', each of which will service the updating of individual data elements in the basic vehicle data concept, and for the 'core application data (CoreData)' concept where a jurisdiction/application service has specified or provided an 'App' to do this. The process is defined in ISO 15638-1.

10 Sequence of operations for identified unregulated application services with additional data requirements

10.1 General

10.1.1 Overview

For the general sequence of operations, reference shall be made to the definitions described in ISO 15638-7:2013, Clause 9.

In the case of this document, the 'unregulated application service' is a software application system comprising four parts:

- a) 'landside' application software system;
- b) on-board app to generate the core data for the system;
- c) data collected from roadside sensors;
- d) instruction to provide data (to ASP) instigated by a roadside sensor.

The landside application software system that provides the unregulated application service is provided by the application service providers.

During the operation of the vehicle on the highway, data collected at roadside and on-board sensors shall be conveyed to service provider. When both data from on-board and roadside sensors are available, the service provider can detect/avoid tampering/incorrectly setting of on-board equipment; can provide means of using roadside sensors to validate the accuracy of on-board equipment.

The roadside sensors shall collect freight vehicle stability data. Road side sensors typically collect:

- vehicle weight,
- vehicle location data (present and accumulated),
- vehicle ID (privacy information such as VIN/license plate),
- vehicle driven history (privacy information such as time/location/type of road/motion sensor data),
- vehicle IVS data (engine, digital tachograph, and weigh in motion),
- vehicle engine emission data.

There could be circumstances to have an on-board device that gives advice to the driver of an issue or an unsafe situation. For example, if roadside equipment identifies that freight vehicle stability is decreasing, the driver should be advised that this is the case when the information is loaded into the on-board device. As another example, if the on-board sensor equipment identifies that the vehicle is unbalanced, the driver should be advised that this is the case when the information is loaded onto the on-board device.

10.1.1.1 Commands

Providing an unregulated TARV service is envisaged as one or a series of short transactions, in which, in order to obtain basic vehicle data or core application data one or two (of three) commands is invoked.

- GET TARV LDT data
- CREATE core data
- GET core data

The objective is to invoke the shortest possible link with the vehicle to obtain the required data, and then close the communication. If data is required at several geographical points or several points in time, this comprises a series of short sessions (and where required by the regulated application further detail of generic data specification for identified unregulated application services is provided in the definitions in ISO 15638-7, which may, or may not, require basic vehicle data or core application data as part of that service provision).

Communication link between user IVS and application service provider application includes the route through road side sensors.

If further data is subsequently required, or the data obtained is in any way deficient, this is solved by a subsequent communication session with the regulated vehicle.

All further data processing of the application service is effected by the application service provider, landside, using the application provider's application service software, not on-board by the IVS (and therefore outside the scope of ISO 15638).

This is designed to minimise the duty on the wireless interface (and with several wireless media cost models, also to minimise its cost), and to maximise on-board security.

10.1.1.2 GET TARV LDT

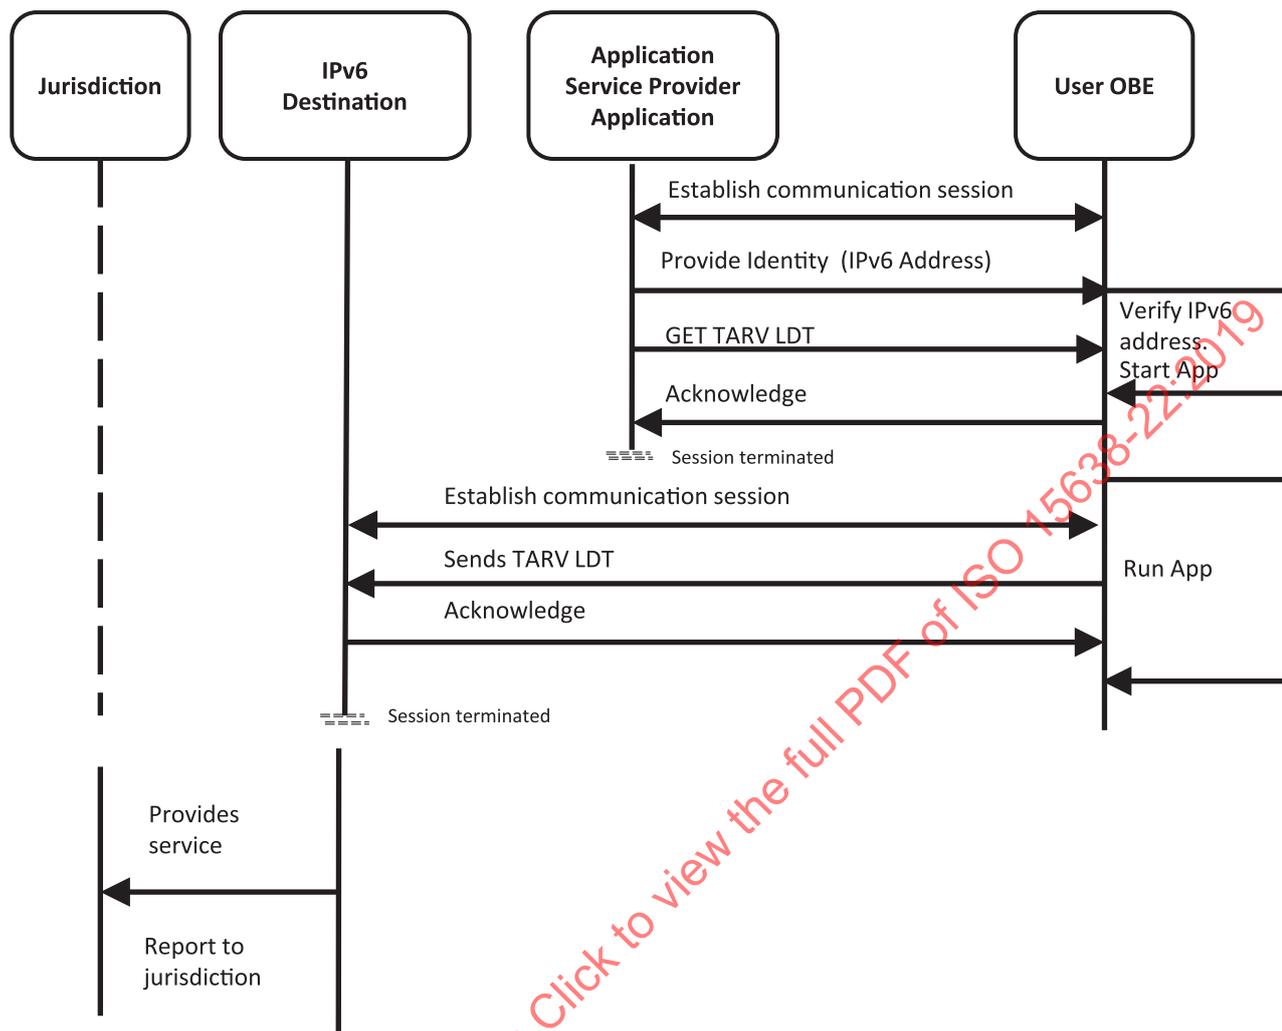


Figure 4 — Communications sequences to obtain TARV LDT

10.1.1.3 CREATE and GET CoreData

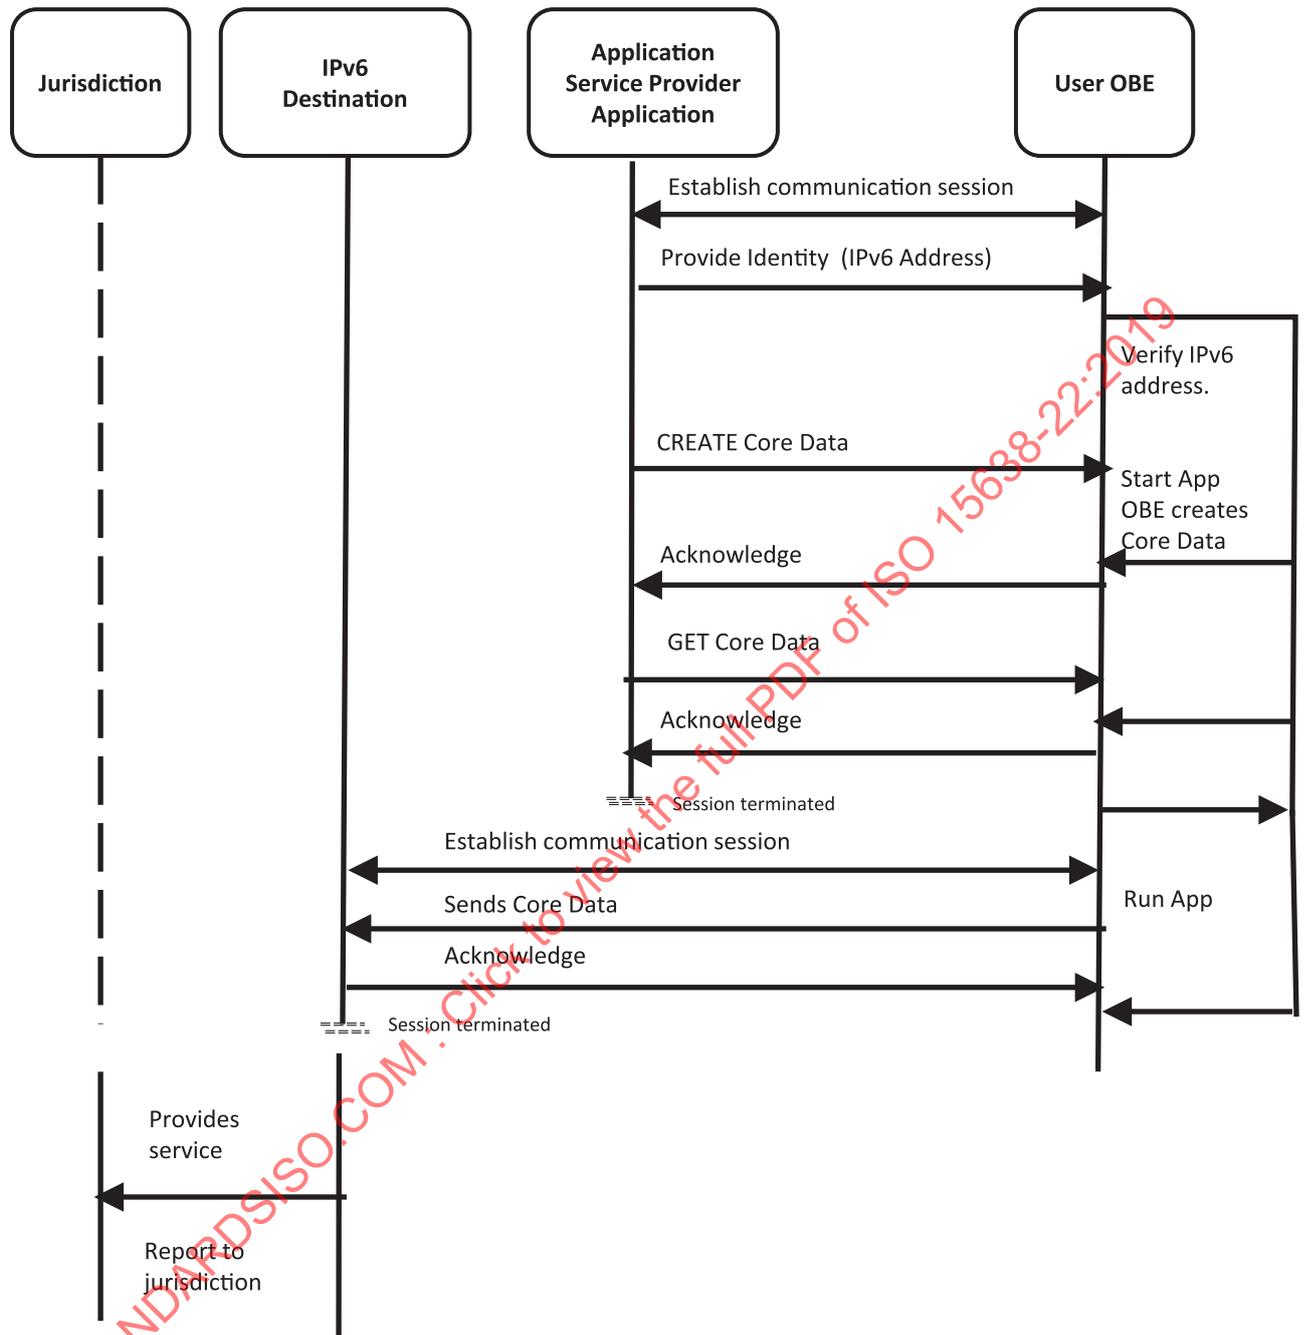


Figure 5 — Communications sequences to obtain CoreData

Most of the application services defined in this document requires data in addition to the basic vehicle data, and therefore, before the data can be obtained, the data pantry has to be updated. [Figure 6](#) below shows a hypothetical example of CoreData.

NOTE 1 In the TARV-ROAM architecture, the application system has no direct access to the source of data, only data in the data pantry that it is authorised to access.

In this event the application operating system shall establish the communication link in accordance with ISO 15638-2 and shall issue the command 'CREATE core data', The IVS then populates the Core Data concept with data as instructed by the on-board app associated with the IVS sends an acknowledgement that the command has been received and the session is closed.

The IVS then sends the Core Data to the predetermined IPv6 address contained in the content of the Core Data. The receiving IPv6 address sends an Acknowledgement. Once the IVS receives the ACKnowledgement) that TARV LDT is successfully received by the destination address, the session shall be closed.

NOTE 2 Core data includes the TARV LDT data.

Once the IVS receives an acknowledgement (ACK) that the 'CoreData' is successfully received by the enquirer, the session shall be closed. An example of the contents of 'core data' is provided in [Figure 6](#).

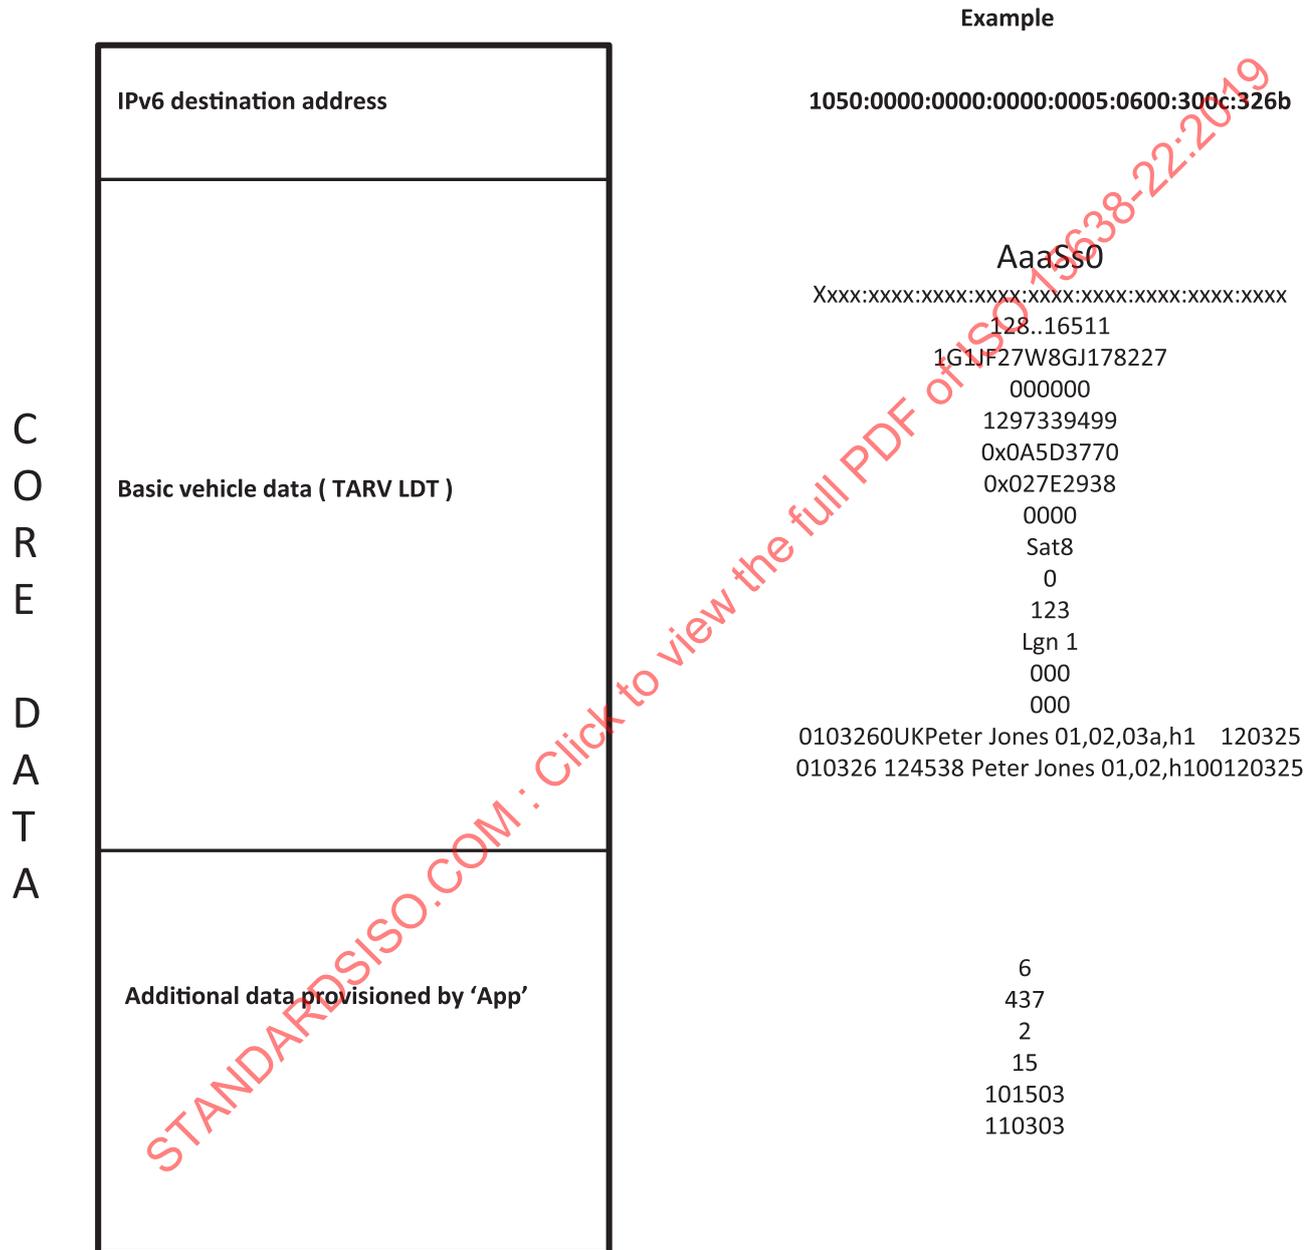


Figure 6 — Core application data

10.2 Quality of service requirements

This document contains no general requirements concerning quality of service (Q of S). Such aspects shall be determined by a service provider as part of its specification for any particular unregulated application service. However, where a specified unregulated application service has specific Q of S

requirements essential to maintain interoperability, these aspects shall be specified in the unregulated application service document.

10.3 Test requirements

This document contains no general requirements concerning test requirements. Such aspects shall be determined by a service provider as part of its specification for any particular unregulated application service and issued as a formal test requirements specification document. However, where a specified unregulated application service has specific test requirements essential to maintain interoperability, these aspects shall be specified in the document relating to that unregulated application service, or in a separate standards deliverable referenced within that clause. And where multiple service providers recognise a benefit to common test procedures for a specific unregulated application service, this shall be the subject of a separate standards deliverable.

10.4 Marking, labelling and packaging

This document has no specific requirements for marking, labelling or packaging.

However, where the privacy of an individual may be potentially or actually compromised by any instantiation based on the ISO 15638 series of standards, the contracting parties shall make such risk explicitly known to the implementing jurisdiction and shall abide by the privacy laws and regulations of the implementing jurisdiction and shall mark up or label any contracts specifically and explicitly drawing attention to any loss of privacy and precautions taken to protect privacy. Attention is drawn to ISO/TR 12859 in this respect.

11 Common features of unregulated TARV application services

11.1 Generic operational processes for the system

The details of the instantiation of unregulated application service are as designed by the application service system to meet the requirements of a particular service provider and are not defined herein. This document specifies the generic roles and responsibilities of actors in the systems, and the interoperability of key operational steps and actions required to support all TARV unregulated application service systems, and this clause addresses the generic provision of unregulated application services that require data in addition to, or instead of, basic vehicle data and core application data, and specifies the generic form and content of such data required to support such systems, and access methods to that data.

For detail of the operational processes see the sequence of operations in the clauses defining the unregulated application service and their related figures below.

It shall not be possible for collected or stored unregulated application service data in any software or non-volatile memory within the application service system to be accessible or capable of being manipulated by any person, device or system (including via any self-declaration device), other than that authorised by the application service provider.

The means by which data is provisioned into the data pantry, and the means to obtain the TARV LDT and core data are described in ISO 15638-7.

Specific unregulated application services (defined in Application Service Parts of the ISO 15638-series of standards, and see examples in [Annex A](#)), shall collect and transfer application specific data. Sometimes this shall be or shall include the TARV LDT or core data, in many cases additional application specific data will be required. This data shall be defined in the specific unregulated application services document.

Different application services may require connection to different application specific equipment. However, there are common basic processes behind TARV unregulated application services.

In order to minimise demand on the IVS (which it is assumed will be performing multiple application services simultaneously, as well as supporting general safety related cooperative vehicle systems), and because national requirements and system offerings will differ, a ‘cloud’ approach has been taken in defining TARV unregulated application services.

The TARV approach is for the on-board app supporting the application service to collect and collate the relevant data, and at intervals determined by the app, or on demand from the application service provider (ASP), passes that data to the ASP. All of the actual application service processing shall occur in the mainframe system of the ASP (in the ‘cloud’).

At a conceptual level, the TARV system is therefore essentially simple, as shown in [Figure 1](#). The process is similar to that for CoreData, but data is supplied to a different on-board file in the data pantry.

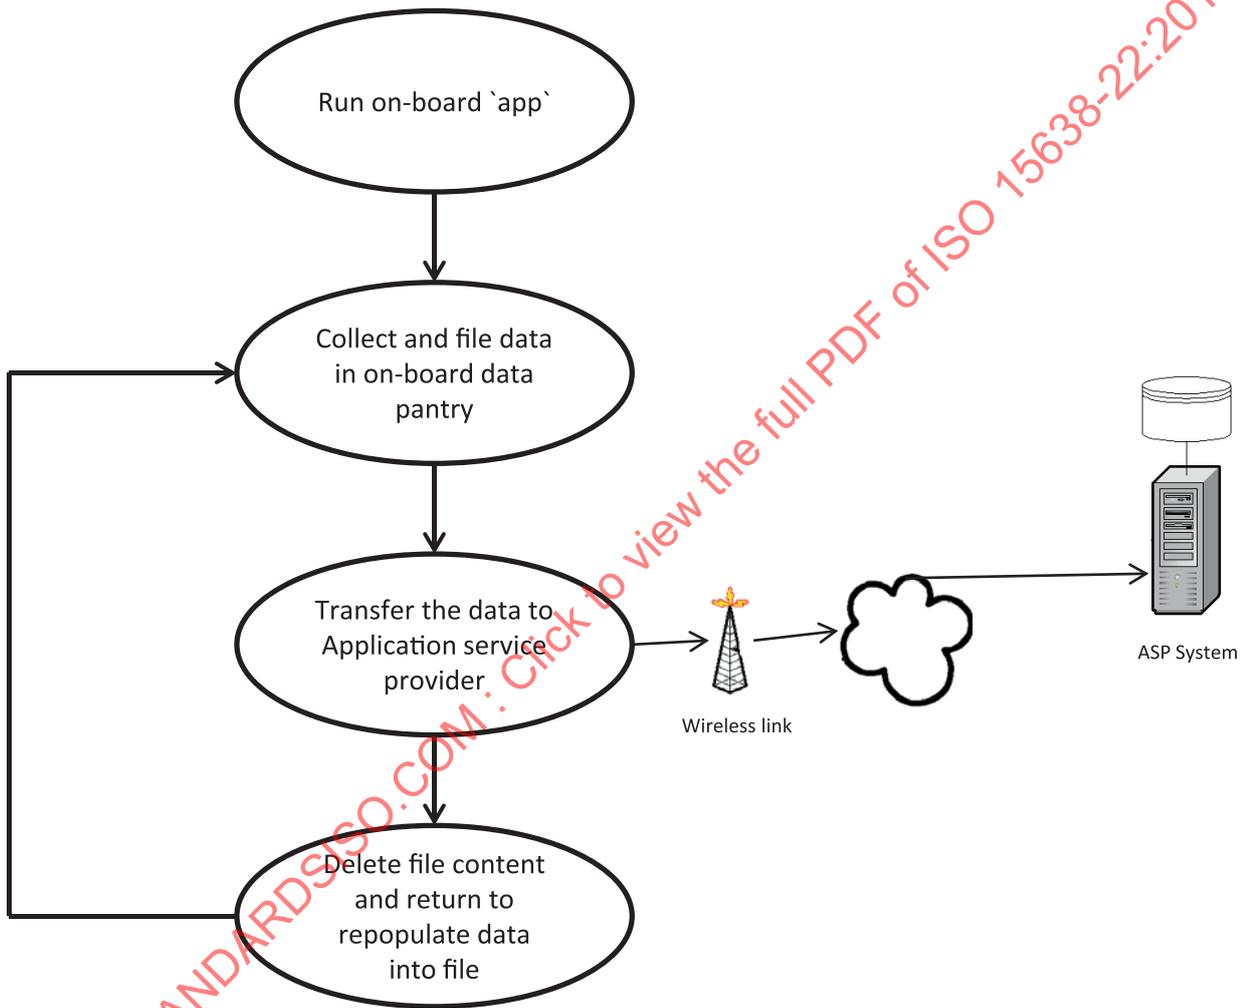


Figure 7 — TARV Regulated application service on-board procedure

NOTE The data in the on-board device can be stored for a period of time as required by any specific purposes.

At a common generic functional level, the connected equipment may/may not be required in all cases.

The common role of the jurisdiction, approval authority, and application service provider shall be as defined in ISO 15638-7.

The [Figure 7](#) contemplates that data is deleted from the on-board device after it has been sent to the ASP system; given the architecture of the ASP system, there may be multiple service providers interested in not only the most recent information but information that has been stored in the on-board device for some extended period of time (i.e. 24 h). The system should support the storage of information on the

on-board device for some use cases defined period of time in order to allow the ASP service to request either the most current data records or the records for the last xx hours/ days, etc.

11.2 Common characteristics for instantiations of unregulated application services

11.2.1 The common characteristics for instantiations of unregulated application services shall be as defined in ISO 15638-7.

Namely, an unregulated application service is approved; it utilises a TARV IVS which communicates to the prime service provider application service provider and may have the ability to insert a means to provide driver licence details, or link to another device such as a digital tachograph.

11.2.2 The application service provider shall load an app for an unregulated application service into the IVS of the operator's vehicles.

11.2.3 The app for the unregulated application service shall run whenever the regulated vehicle is operating, or to the instruction of the application service provider or operator.

11.2.4 The app for the unregulated application service shall record the data specified within the appropriate clauses of this document, in a uniquely named file (to a naming convention specified) (the 'application service data file {ASD file}') in the data pantry of the IVS.

11.2.5 The application service provider shall design/install/operate its unregulated system as approved by the certification authority (regulatory) if necessary.

11.2.6 The IVS shall provide the ASD file to the application service provider using the TARV IVS wireless link, on demand from the application service system or at the instigation by the on-board app for the unregulated application service, or at least once every 24 h.

Every transfer shall include framing data that identifies its sequential order, IVS ID, version number of IVS and version number of the app for the unregulated application service.

The system shall acknowledge receipt of the data via the TARV IVS wireless link. Once the data has been acknowledged it shall be deleted from the IVS memory unless the operator chooses to retain it in the IVS memory for other openly declared purposes with the assent of the user.

11.2.7 The application service system shall retain and back up the 'ASD file' data to the requirements of the system.

Where required by the application service specification approved by the certification authority (regulatory), the driver shall provide their identification to the system at commencement of a session using the identification and authentication method provided by the application service provider. When the regulated vehicle ignition is turned off, the system shall automatically close the session. Each time the regulated vehicle ignition is turned on, the driver shall be required to identify and authenticate himself/herself.

If drivers change without turning the engine off, the new driver shall identify himself/herself by the means provided by the application service provider.

Where required by the application service specification approved by the certification authority (regulatory), the application service provider provides the driver (i.e. driver specific) with their identification and authentication method for the IVS. The method of identification and authentication may be unique to each application service provider.

11.2.8 Electronic records are generated periodically by the IVS when the regulated vehicle is moving. The electronic record contains accurate time and location data as defined herein. These ASD file records are generated automatically during the session and also stored in the IVS.

11.2.9 'ASD files' generated by the IVS are sent to the application service provider. The application service provider transmits reports/data to the regulated vehicle operator in accordance with the system specification.

11.3 Common sequence of operations for unregulated application services

It is important to understand that different regions will require their own form of an unregulated application service, and that application service provider service offerings will also vary. The specific details of these application services are not defined within this document and for this document, at a generic level, the 'business process' is to collate the required data (as specified by the on-board app) and provide a uniquely named file containing that data to the application service provider system via a wireless interface.

11.4 Quality of service

Generic quality of service provisions for application services shall be as defined in ISO 15638-7.

Variations for specific application services are shown in the clauses describing that particular application service defined.

11.5 Information security

Information security shall be as defined in ISO 15638-4.

11.6 Data naming content and quality

Data naming and quality shall be as defined in ISO 15638-7.

In summary TARV application services are built around short communication sessions that simply transfer a file of data to an application service provider at intervals/times determined by the application, and receive back a confirmation that the data has been received.

An application service provider may stimulate the transfer of a file from the IVS to the application service system. In other situations, it is the on-board app that stimulates the file to be sent, in some application service instantiations it may be a combination of both.

Variations for specific application services are shown in the clauses describing that particular application service defined.

The process to obtain basic vehicle data (TARV LDT) data content shall be as defined in ISO 15638-5.

The electronic records declared and stored by the IVS shall be authenticated, have integrity and be secure from interception or corruption.

In order to enable the application service to identify files received, the files are named to the following convention:

<service name><date><time><vehicle registration number><driver licence number>

EXAMPLE

VDLM 110316 070603 GB 1 KV76WRR WILLI502139RK9MA85

As:

VDLM110316070603KV76WRR WILLI502139RK9MA85

Vehicle registration number shall be as specified in ISO 14816 CS4.

Driver licence number shall be as specified by the issuing driver licence jurisdiction.