
**Intelligent transport systems — Wide area
communication — Protocol management
information**

*Systèmes de transport intelligents — Communication étendue —
Protocole de gestion de l'Information*

STANDARDSISO.COM : Click to view the full PDF of ISO 15662:2006



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 15662:2006

© ISO 2006

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	2
3 Terms and definitions	2
4 Requirements for protocol management information items	2
4.1 Selection of communication system	2
4.2 Application identifiers	8
4.3 Address	9
4.4 Priority	11
4.5 Security	12
4.6 Application execution	14
Annex A (normative) Protocol management information structure	17
Annex B (normative) Protocol management information data type definition	18
Annex C (informative) Protocol management information usage	21
Annex D (informative) Extracting protocol management information items	32
Bibliography	34

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 15662 was prepared by Technical Committee ISO/TC 204, *Intelligent transport systems*.

STANDARDSISO.COM : Click to view the full PDF of ISO 15662:2006

Introduction

Most of the application services in the ITS sector use a variety of wide area communication systems in order to connect user terminals and "Service Centres". In addition, the application services that are currently being provided connect specific user terminals to specific service centres using specific wide area communications systems. In other words, the various conditions that must be established to provide services are fixed. However, when the future modes of service use are considered, it is assumed that a user will utilize the same terminal to access "Service Centre A" in some cases and "Service Centre B" in other cases. It can also be assumed that in some cases the user may be on foot and in others he or she may be travelling in a vehicle. It can also be assumed that some users may access the service centre from "smart phones", while others may do so from navigation systems, while still others may do so using interactive TVs.

When a variety of user terminals use a variety of wide area communications systems to connect to a variety of service centres in this manner, the type and content of the conditions that must be established will differ for each individual service usage. In order to provide appropriate service based on these conditions, it is crucial to establish a mechanism by which the type of conditions and the content established for them are transmitted to an appropriate entity and interpreted.

This International Standard summarizes information as a checklist to consider internal processing in communication systems, terminals and so forth ("protocol management information") suitable for providing ITS application services utilizing wide area communication systems.

Intelligent transport systems — Wide area communication — Protocol management information

1 Scope

This International Standard provides information as a checklist to consider handling messages that are defined by the application working groups of ISO/TC 204, installing systems and selecting suitable wide area communication systems for providing ITS application services.

The usages of this information are for frameworks of message headers, payload items for initializing communication links, checklists for system design and so on. Thus, these information items are not necessarily contained in message instances and/or headers that are actually transmitted.

For example, this information is used to organize the characteristics of messages such as those requesting hand-over based on the relationship between the size of the information service area and the communication range of each communication system (see Figure 1).

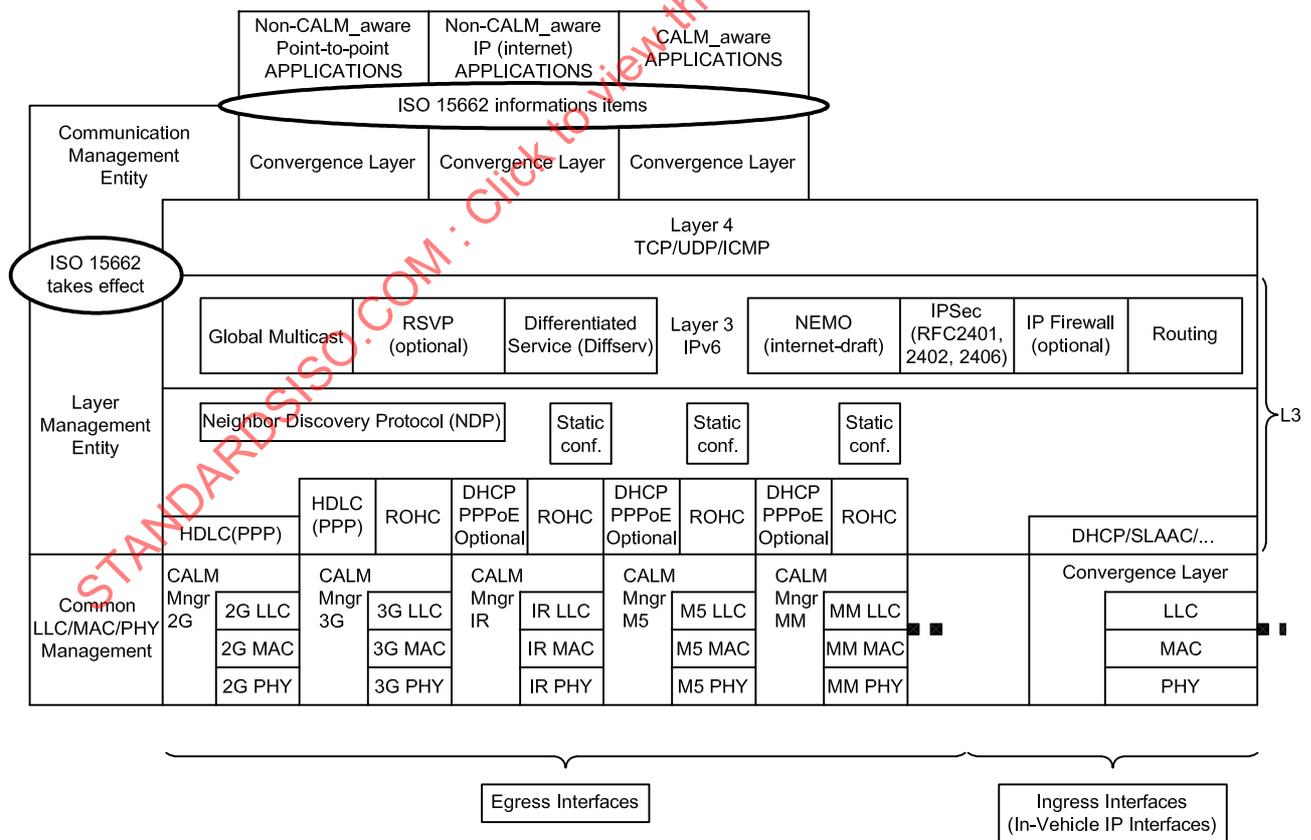


Figure 1 — Scope of 15662 (in the architecture of ISO/TC 204/WG 16)

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 14817, *Transport information and control systems — Requirements for an ITS/TICS central Data Registry and ITS/TICS Data Dictionaries*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 14817 and the following apply.

3.1 protocol management information

information as a checklist to consider handling messages that are defined by the application working groups of ISO/TC 204, installing systems and selecting suitable wide area communication systems for providing ITS application services

NOTE Protocol management information items are not necessarily contained in message instances and/or headers that are actually transmitted.

4 Requirements for protocol management information items

Protocol management information is defined as follows and its structure is described in Annex A. Each item is defined in the abstract, so it does not specify location and time reference manner, granularity and so on. If some service providers use them for message headers, they shall define the code strictly.

4.1 Selection of communication system

This information is for selecting the wide area communication system to be used for the response in accordance with the requirements for executing the application service, the usage environment of the service user, the status of the user terminal and so forth.

4.1.1 Responsiveness

4.1.1.1 Descriptive name

ProtocolManagementInformation. responsiveness

4.1.1.2 ASN.1 object identifier

```
{iso(1) standard(0) iso15662(15662) protocolManagementInformation(1)
selectionOfCommunicationSystem(1) responsiveness(1)}
```

4.1.1.3 Definition

This information represents the response speed and allowed delay time while receiving services in terms of whether response will take place in real time and how much delay time will be allowed.

In cases where response time is conditioned for executing application services, the wide area communication system shall be selected in accordance with the required response time, and this information can be used to make such assessment. Furthermore, in case of receiving information in an "on demand" mode, this information indicates the time from request until reception, for emergency bulletins, it indicates the time until the information reaches the other party, and for transportation support and the like, it indicates the time until forward road status, pavement status or other services are completed.

The following depict some examples of categories:

- Within 1 second,
- Within 30 seconds,
- Within 1 minute,
- Within 15 minutes,
- 15 minutes or longer.

In addition, the required response time may be concretely specified as necessary.

4.1.1.4 Descriptive name context

“Protocol management information”.

4.1.1.5 Data concept type

Data element concept.

4.1.2 Directionality

4.1.2.1 Descriptive name

ProtocolManagementInformation. directionality

4.1.2.2 ASN.1 object identifier

```
{ iso(1) standard(0) iso15662(15662) protocolManagementInformation(1)
selectionOfCommunicationSystem(1) directionality(2) }
```

4.1.2.3 Definition

This information indicates the combinations of unidirectional or bidirectional and symmetric or asymmetric with respect to transmission and reception of information.

In cases where the directionality of communications (unidirectional, interactive, etc.) is needed to execute application services, the wide area communication system shall be selected in accordance with the type of communication (unidirectional or bidirectional, symmetric or asymmetric), and this information can be used to make such assessment. Furthermore, interactive indicates cases where a response is expected to a given message, while unidirectional indicates cases where a response is not expected to a message.

The following depict combination examples:

- Unidirectional: In the case of an uplink, this corresponds to information provided from the vehicle such as emergency bulletins. In the case of a downlink, it corresponds to cases in which the service user cannot (or does not need to) make a request in order for the service provider to make the decision to start service.
- Interactive-symmetric: When service begins in response to a request from the service user and the amount of data being transmitted and data being received is almost equal.
- Interactive-asymmetric (large uplink): When service begins in response to a request from the service user and when the amount of data being transmitted is greater than the amount of data being received.
- Interactive-asymmetric (large downlink): When service begins in response to a request from the service user and when the amount of data being received is greater than the amount of data being transmitted.

4.1.2.4 Descriptive name context

“Protocol management information”.

4.1.2.5 Data concept type

Data element concept.

4.1.3 Usage environment

4.1.3.1 Descriptive name

ProtocolManagementInformation. usageEnvironment

4.1.3.2 ASN.1 object identifier

```
{ iso(1) standard(0) iso15662(15662) protocolManagementInformation(1)
  selectionOfCommunicationSystem(1) usageEnvironment(3) }
```

4.1.3.3 Definition

This information represents the combination of the means of transportation when using services and the speed of movement when receiving services.

Depending on the usage environment of the service user, the requirements for responsiveness and directionality may not be met in some cases. For this reason, the wide area communication system shall be selected in accordance with the means of transportation, speed of movement and other usage environment factors, and this information can be used for making such assessment.

The following depict examples of categories by means of transportation:

- Vehicle: In the case of driving a vehicle;
- Public transportation: In the case of riding on public transportation;
- Pedestrians: In the case of being on foot or on a bicycle;
- Other categories: Bicycle, Motorcycle, Moped, Car, Truck, Emergency vehicle, Bus, Tram, Train, Ferry, Taxi, etc.

The following indicate examples of categories by speed of movement:

- Fast: In the case of travelling on expressways, case of travelling on a railroad (60-350 km/h);
- Medium speed: In the case of travelling on ordinary roads (20-60 km/h);
- Slow: In the case of travelling slowly at speeds at which it is possible to stop quickly (less than 20 km/h);
- Stopped: In the case of not being in motion.

In addition, the speed may be more precisely specified as necessary.

4.1.3.4 Descriptive name context

“Protocol Management Information”.

4.1.3.5 Data concept type

Data element concept.

4.1.4 Service (provision) area

4.1.4.1 Descriptive name

ProtocolManagementInformation. serviceArea

4.1.4.2 ASN.1 object identifier

```
{iso(1) standard(0) iso15662(15662) protocolManagementInformation(1)
selectionOfCommunicationSystem(1) serviceArea(4)}
```

4.1.4.3 Definition


This information represents the range/areas at which users receive services and the need for continuity.

In cases where a service area and the continuity of this area and other conditions are required to use application services, the wide area communication system shall be selected to match the areas in which service can be provided, and this information can be used to make such assessment.

The following depict examples of categories for continuity:

- Continuous area designation: When the area in which service is provided shall be continuous and users shall be able to use the service anywhere (this can be broken down into two types: “area-wide continuity” covering an entire area and “linear continuity” limited to a specific route);
- Non-continuous: When service can only be used in specific non-continuous locations.

In addition, positional information of the range and areas at which services are provided are specified as the range/areas (see Figure 2).

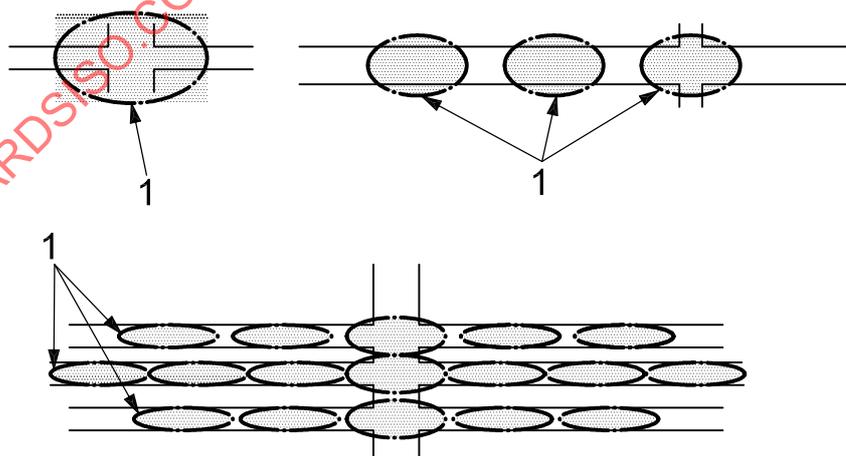

Key

1 area in which service is provided

Figure 2 — Service provision areas

4.1.4.4 Descriptive name context

“Protocol management information”.

4.1.4.5 Data concept type

Data element concept.

4.1.5 Service (provision) time

4.1.5.1 Descriptive name

ProtocolManagementInformation. serviceTime

4.1.5.2 ASN.1 object identifier

```
{iso(1) standard(0) iso15662(15662) protocolManagementInformation(1)
selectionOfCommunicationSystem(1) serviceTime(5)}
```

4.1.5.3 Definition

This information represents the information service starting time, service ending time and the continuity of service time.

When the conditions relating to communication connection time for use of application services are required, the wide area communication system must be selected to match the service time, and this information can be used to make such assessment.

The following depict examples of categories:

- Start and end times: In the case of specifying the times that information service starts and ends;
- Start time: In the case of specifying the time that information service starts;
- End time: In the case of specifying the time that information service ends;
- Continuous: In the case of specifying that information is provided continuously.

In addition, time is also specified as necessary.

4.1.5.4 Descriptive name context

“Protocol management information”.

4.1.5.5 Data concept type

Data element concept.

4.1.6 Bandwidth

4.1.6.1 Descriptive name

ProtocolManagementInformation. bandwidth

4.1.6.2 ASN.1 object identifier

```
{ iso(1) standard(0) iso15662(15662) protocolManagementInformation(1)
  selectionOfCommunicationSystem(1) bandwidth(6) }
```

4.1.6.3 Definition

This information represents the transmission ability in terms of the transmission capacity and format (text, audio, simple graphic, still image, video) required by the information to be provided.

Depending on the amount of information to be transmitted and the format of the data involved in the use of application services, the conditions for responsiveness and data format, etc. may not be satisfied in some cases. Accordingly, the wide area communication system shall be selected to match the transmission capacity, data format and other aspects of transmission ability, and this information can be used to make such assessment.

The following depict examples of describing transmission capacity and data format:

- Transmission capacity: Described according to the required transmission speed (bps);
- Format: Text, audio, simple graphic, still image, video, other special format which can describe the data volume.

4.1.6.4 Descriptive name context

“Protocol management information”.

4.1.6.5 Data concept type

Data element concept.

4.1.7 Connection cost

4.1.7.1 Descriptive name

```
ProtocolManagementInformation. connectionCost
```

4.1.7.2 ASN.1 object identifier

```
{ iso(1) standard(0) iso15662(15662) protocolManagementInformation(1)
  selectionOfCommunicationSystem(1) connectionCost(7) }
```

4.1.7.3 Definition

This information represents the communication cost requirements for providing information.

When conditions relating to communication connection costs (upper limit, etc.) for use of application services are required, the wide area communication system shall be selected to match the cost requirements, and this information can be used to make such assessment.

The following depict examples of categories:

- Upper limit specification: Case of specifying an upper limit price of the total cost value of communication;
- Unit price upper limit specification: Case of specifying the upper limit of the unit price of communication costs (in communication time units or transmitted information volume units).

In addition, the upper limit cost is specified as necessary.

4.1.7.4 Descriptive name context

“Protocol management information”.

4.1.7.5 Data concept type

Data element concept.

4.2 Application identifiers

This information is for identifying requested application services.

4.2.1 Message identifier

4.2.1.1 Descriptive name

ProtocolManagementInformation. messageIdentifier

4.2.1.2 ASN.1 object identifier

```
{iso(1) standard(0) iso15662(15662) protocolManagementInformation(1)
applicationIdentifiers(2) messageIdentifier(1)}
```

4.2.1.3 Definition

This identifies the message belonging to an application or a specific batch.

4.2.1.4 Descriptive name context

“Protocol management information”.

4.2.1.5 Data concept type

Data element concept.

4.2.2 Message number

4.2.2.1 Descriptive name

ProtocolManagementInformation. messageNumber

4.2.2.2 ASN.1 object identifier

```
{iso(1) standard(0) iso15662(15662) protocolManagementInformation(1)
applicationIdentifiers(2) messageNumber(2)}
```

4.2.2.3 Definition

This identifies the order of transmission and reception for a series of messages belonging to an application or a specific batch.

4.2.2.4 Descriptive name context

“Protocol management information”.

4.2.2.5 Data concept type

Data element concept.

4.2.3 Time of message transmission

4.2.3.1 Descriptive name

ProtocolManagementInformation. timeOfMessageTransmission

4.2.3.2 ASN.1 object identifier

```
{iso(1) standard(0) iso15662(15662) protocolManagementInformation(1)
applicationIdentifiers(2) timeOfMessageTransmission(3) }
```

4.2.3.3 Definition

This information represents the time when an individual message transmission was started.

The time is indicated at which an individual message was transmitted from the communication carrier to the user (see Figure 3).

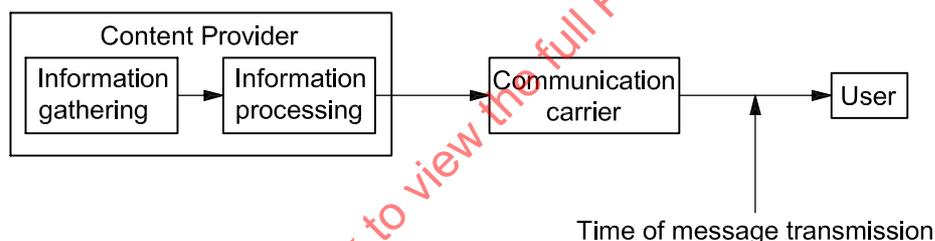


Figure 3 — Time of message transmission

4.2.3.4 Descriptive name context

“Protocol management information”.

4.2.3.5 Data concept type

Data element concept.

4.3 Address

This information is for identifying service users and the internal processing of the service provider.

A wide area communication system shall be selected and routing shall be performed for use of applications services to match the processing of the service provider and the communication system used by the service user, and this information is contained for this reason.

4.3.1 Address of origin (Address of service provider)

4.3.1.1 Descriptive name

ProtocolManagementInformation. addressOfOrigin

4.3.1.2 ASN.1 object identifier

```
{iso(1) standard(0) iso15662(15662) protocolManagementInformation(1) address(3)
  addressOfOrigin(1) }
```

4.3.1.3 Definition

This information represents the service provider or the internal processing of the service provider.

This contains the following data on the presumption of the use of multiple communication systems, IP communication and so forth:

— IP address in an IP network;

— Address information containing data that can be routed;

Example: “Area (Province) Code”, “Service Car type Code”, “Group Code Serial Number”, others which can identify the adequate user terminal;

— Multiple address information in case multiple communication systems can be used.

4.3.1.4 Descriptive name context

“Protocol management information”.

4.3.1.5 Data concept type

Data element concept.

4.3.2 Address of destination (Address of user)

4.3.2.1 Descriptive name

ProtocolManagementInformation.addressOfDestination

4.3.2.2 ASN.1 object identifier

```
{iso(1) standard(0) iso15662(15662) protocolManagementInformation(1) address(3)
  addressOfDestination(2) }
```

4.3.2.3 Definition

This information represents the address of the user terminal and so forth that has requested the service.

It contains the following data on the presumption of the use of multiple communication systems, IP communication and so forth:

— IP address in an IP network;

— Address information containing the data that can be routed;

— Multiple address information in case multiple communication systems can be used;

— Multiple address information in case multiple user terminals can be used.

4.3.2.4 Descriptive name context

“Protocol management information”.

4.3.2.5 Data concept type

Data element concept.

4.4 Priority

This information identifies the priority of application processing on the part of the service provider.

4.4.1 Interrupt handling**4.4.1.1 Descriptive name**

ProtocolManagementInformation. interruptHandling

4.4.1.2 ASN.1 object identifier

```
{ iso(1) standard(0) iso15662(15662) protocolManagementInformation(1) priority(4)
  interruptHandling(1) }
```

4.4.1.3 Definition

This information represents the priority level in the case of requiring interrupt.

In cases where the provided information is of high urgency, that information must be processed by interrupt processing, and this information can be used to make such assessment.

The priority may have 255 levels and/or the following depict examples of categories:

- Low priority: Case of interrupt having low priority;
- Medium priority: Case of interrupt having medium priority;
- High priority: Case of interrupt having high priority.

4.4.1.4 Descriptive name context

“Protocol management information”.

4.4.1.5 Data concept type

Data element concept.

4.4.2 Queue control**4.4.2.1 Descriptive name**

ProtocolManagementInformation. queueControl

4.4.2.2 ASN.1 object identifier

```
{ iso(1) standard(0) iso15662(15662) protocolManagementInformation(1) priority(4)
  queueControl(2) }
```

4.4.2.3 Definition

This information indicates the control method in case queuing in line has occurred in message processing.

Although control is typically performed on a first-in first-out (FIFO) basis, since it is also possible to perform processing based on last-in first-out (LIFO), this information can be used to make such assessment. In addition, in the case where transmission has failed due to a collision and so forth, this information also makes it possible to assess whether or not retry is necessary, the need for an error notification and so forth.

The following depict examples of processing categories of queuing lines:

- Undefined: Processing is based on first-in first-out (FIFO);
- LIFO: Processing is based on last-in first-out (LIFO);
- Random: Processing is performed randomly regardless of order.

The following depict processing categories when transmission has failed:

- Re-try: Case of performing resending processing when transmission has failed;
- Error notification: Case of notifying the transmission source of an error when transmission has failed.

4.4.2.4 Descriptive name context

“Protocol management information”.

4.4.2.5 Data concept type

Data element concept.

4.5 Security

This information represents the need for security for receiving and transferring messages.

Since messages may contain confidential or private information, and may not permit impersonation, tampering, disclosure and so forth, this information indicates what type of security is necessary.

4.5.1 Mutual authentication

4.5.1.1 Descriptive name

ProtocolManagementInformation. mutualAuthentication

4.5.1.2 ASN.1 object identifier

```
{iso(1) standard(0) iso15662(15662) protocolManagementInformation(1) security(5)
  mutualAuthentication(1) }
```

4.5.1.3 Definition

This information represents the need for authentication of both persons engaged in the receiving and transferring of data.

It can be used for authentication processing and so forth for preventing impersonation and the like in the transfer of data between service providers and users. In addition, this information identifies whether or not the user or terminal is to be authenticated as necessary based on the contents of the provided data and the conditions of the terminal used by the user.

The following depict examples of mutual authentication categories:

- User authentication: Case of requiring user authentication;
- Terminal authentication: Case of requiring terminal authentication.

4.5.1.4 Descriptive name context

“Protocol management information”.

4.5.1.5 Data concept type

Data element concept.

4.5.2 Data authentication

4.5.2.1 Descriptive name

ProtocolManagementInformation. dataAuthentication

4.5.2.2 ASN.1 object identifier

```
{ iso(1) standard(0) iso15662(15662) protocolManagementInformation(1) security(5)
  dataAuthentication(2) }
```

4.5.2.3 Definition

This information represents the need to authenticate the data to be transferred.

This information can be used for processing such as digital signatures in order to ensure reliability by preventing tampering and so forth of data to be transferred.

4.5.2.4 Descriptive name context

“Protocol management information”.

4.5.2.5 Data concept type

Data element concept.

4.5.3 Concealment

4.5.3.1 Descriptive name

ProtocolManagementInformation. concealment

4.5.3.2 ASN.1 object identifier

```
{ iso(1) standard(0) iso15662(15662) protocolManagementInformation(1) security(5)
  concealment(3) }
```

4.5.3.3 Definition

This information represents the need to conceal data to be transferred.

This information can be used for processing such as encryption and so forth in order to conceal confidential or private information that is to be transferred.

4.5.3.4 Descriptive name context

“Protocol management information”.

4.5.3.5 Data concept type

Data element concept.

4.6 Application execution

This information identifies the validity of the contents of provided services.

4.6.1 Valid time

4.6.1.1 Descriptive name

ProtocolManagementInformation. validTime

4.6.1.2 ASN.1 object identifier

```
{iso(1) standard(0) iso15662(15662) protocolManagementInformation(1)
applicationExecution(6) validTime(1)}
```

4.6.1.3 Definition

This information represents the valid time of the contents of services provided.

This information indicates the time period during which information contents are valid or that information contents are valid until the next information update. (Example: Distinguishing information used to control an automobile that is only valid for an extremely short period of time or other information for which the time during which effects are demonstrated is set, information that is regularly updated such as road traffic information, information that is valid only until the next update, or information for which these are not set.)

The following depict examples of categories:

- Receiving only: Case of being valid only at the time information is received;
- Time specified: Case of specifying the time at which information is valid.

In addition, the time (interval or end point) is specified as necessary.

4.6.1.4 Descriptive name context

“Protocol management information”.

4.6.1.5 Data concept type

Data element concept.

4.6.2 Time stamp

4.6.2.1 Descriptive name

ProtocolManagementInformation. timeStamp

4.6.2.2 ASN.1 object identifier

```
{iso(1) standard(0) iso15662(15662) protocolManagementInformation(1)
applicationExecution(6) timeStamp(2)}
```

4.6.2.3 Definition

This information represents the time when information processing was started.

This information indicates the times at which the content provider updates information and processes data as well as the times at which messages are generated (see Figure 4).

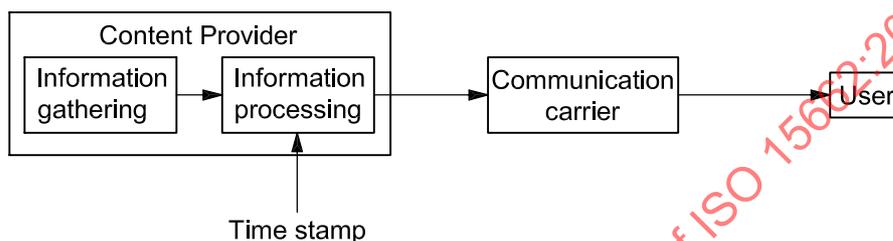


Figure 4 — Time stamp

4.6.2.4 Descriptive name context

“Protocol management information”.

4.6.2.5 Data concept type

Data element concept.

4.6.3 Target area

4.6.3.1 Descriptive name

ProtocolManagementInformation. targetArea

4.6.3.2 ASN.1 object identifier

```
{iso(1) standard(0) iso15662(15662) protocolManagementInformation(1)
applicationExecution(6) targetArea(3)}
```

4.6.3.3 Definition

This information represents the effective area of information in a service.


This information is for identifying the range over which the contents of information provided are indicated when using application services in cases where range is limited.

The following depict examples of categories:

- Spot: Local information such as that of an intersection;
- Zone: Information of a specified narrow region such as a parking lot;

- Interval: Information of a specified route or specified interval of highways (including expressways) and of ordinary roads;
- Region: Information on a specified region;
- Wide area information covering a wide area at the state level or larger.

In addition, location is specified by positional information as necessary (see Figure 5).

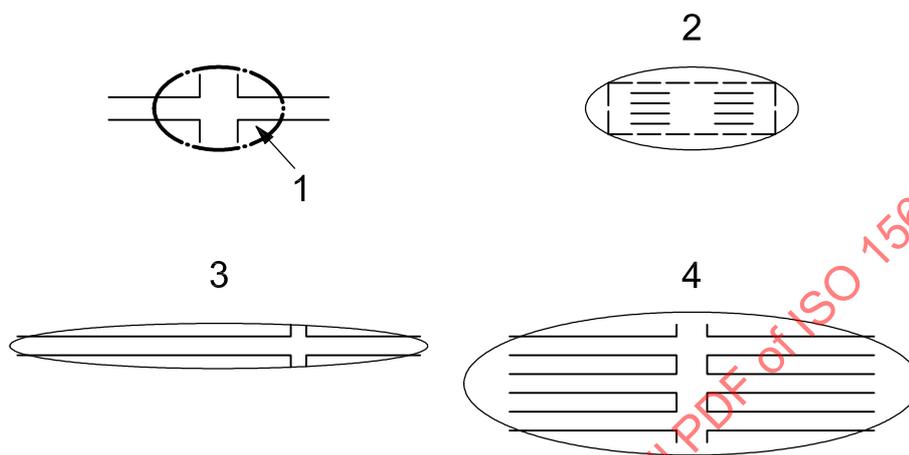

Key

- 1 spot
- 2 zone (a parking lot, etc.)
- 3 interval
- 4 region

Figure 5 — Target Area

4.6.3.4 Descriptive name context

“Protocol management information”.

4.6.3.5 Data concept type

Data element concept.

Annex A (normative)

Protocol management information structure

Protocol management information structure is as in Figure A.1:

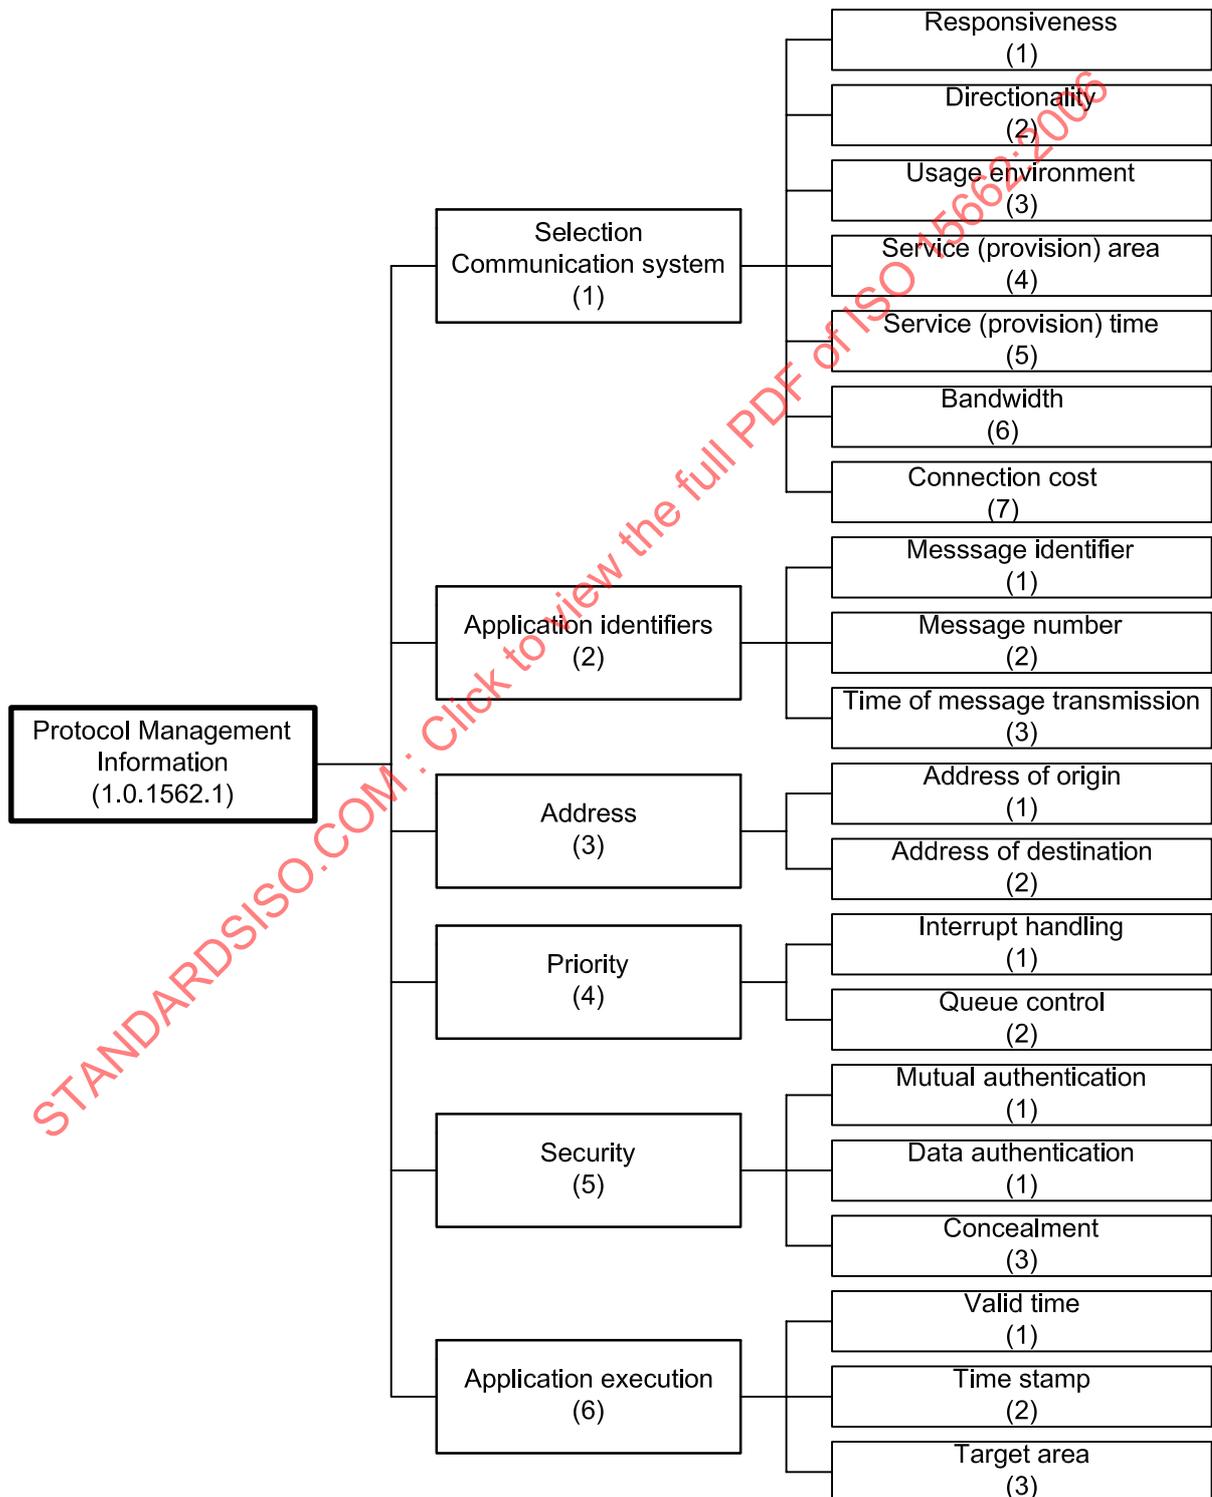


Figure A.1 — Protocol management information structure

Annex B (normative)

Protocol management information data type definition

Protocol management information is described using the ASN.1 technique according to ISO/IEC 8824-1.

```
ProtocolManagementInformation
{iso(1) standard(0) iso15662(15662) protocolManagementInformation(1)}
DEFINITIONS AUTOMATIC TAGS
 ::= BEGIN
```

```
ProtocolManagementInformation ::= SEQUENCE{
  selectionOfCommunicationSystem
      SelectionOfCommunicationSystem OPTIONAL,
  applicationIdentifiers      ApplicationIdentifiers OPTIONAL,
  address                     Address                OPTIONAL,
  priority                    Priority               OPTIONAL,
  security                    Security              OPTIONAL,
  applicationExecution        ApplicationExecution  OPTIONAL}
```

```
SelectionOfCommunicationSystem ::= SEQUENCE{ --see 4.1
  responsiveness      Responsiveness    OPTIONAL,
  directionality     Directionality    OPTIONAL,
  usageEnvironment   UsageEnvironment  OPTIONAL,
  serviceArea        ServiceArea       OPTIONAL,
  serviceTime        ServiceTime       OPTIONAL,
  bandwidth           Bandwidth         OPTIONAL,
  connectionCost     ConnectionCost    OPTIONAL}
```

```
ApplicationIdentifiers ::= SEQUENCE{ --see 4.2
  messageIdentifier      EXTERNAL        OPTIONAL,
  messageNumber         INTEGER         OPTIONAL,
  timeOfMessageTransmission GeneralizedTime  OPTIONAL}
```

```
Address ::= SEQUENCE{ --see 4.3
  addressOfOrigin      EXTERNAL        OPTIONAL,
  addressOfDestination EXTERNAL        OPTIONAL}
```

```
Priority ::= SEQUENCE{ --see 4.4
  interruptHandling      INTEGER{
    undefined      (0),
    lowPriority     (1),
    middlePriority  (2),
    highPriority    (3)},
  interruptHandlingLevel INTEGER    OPTIONAL,
  queueControl          INTEGER{
    undefined-FIFO (0),
    LIFO           (1),
    random         (2),
    re-try         (3),
    errorNotification (4)}}
```

```
Security ::= BIT STRING { --see 4.5
  userAuthentication      (0),
  terminalAuthentication  (1),
```

```

dataAuthentication          (2),
concealment                 (3) }

ApplicationExecution ::= SEQUENCE{          --see 4.6
    validTime                ValidTime,
    timeStamp                GeneralizedTime,
    targetArea               TargetArea}

Responsiveness ::= SEQUENCE{              --see 4.1.1
    responsivenessCode       INTEGER{
        undefined           (0),
        within1Sec         (1),
        within30Sec        (2),
        oneMinute           (3),
        fifteenMinute       (4),
        other                (5),
        error                (6)},
    responsivenessValue      UTCTime OPTIONAL}

Directionality ::= INTEGER{              --see 4.1.2
    undefined                 (0),
    unidirectional            (1),
    bidirectional-Symmetric  (2),
    bidirectional-UpLarger    (3),
    bidirectional-DownLarger (4) }

UsageEnvironment ::= SEQUENCE {          --see 4.1.3
    meansOfTransportation    BIT STRING{
        undefined           (0),
        vehicle              (1),
        publicTransport      (2),
        foot                 (3),
        bicycle              (4),
        motorCycle           (5),
        moped                (6),
        car                  (7),
        truck                (8),
        emergencyVehicle     (9),
        bus                  (10),
        tram                 (11),
        train                (12),
        ferry                (13),
        taxi                 (14),
        other                 (15)},
    speed                    INTEGER{
        undefined           (0),
        fast                 (1),
        middle               (2),
        slow                 (3),
        stopped              (4),
        other                (5)},
    speedValue               EXTERNAL OPTIONAL}

ServiceArea ::= SEQUENCE{                --see 4.1.4
    serviceAreaCode          INTEGER{
        undefined           (0),
        continuous          (1),
        non-continuous      (2)},
    serviceAreaValue         EXTERNAL OPTIONAL}

```

```

ServiceTime ::= SEQUENCE{                                     --see 4.1.5
    serviceTimeCode      INTEGER{
        undefined        (0),
        start-StopTime   (1),
        startTime         (2),
        stopTime          (3),
        continuous        (4)},
    serviceTimeValue     EXTERNAL OPTIONAL}

Bandwidth ::= SEQUENCE{                                     --see 4.1.6
    capacityOfTransmissionValue  INTEGER OPTIONAL,
    dataExpressionCode           BIT STRING{
        undefined        (0),
        text              (1),
        audio             (2),
        simpleGraphic     (3),
        stillImage        (4),
        video              (5),
        other              (6)}}

ConnectionCost ::= SEQUENCE{                               --see 4.1.7
    maximumCostRequirement  INTEGER{
        undefined          (0),
        totalCost           (1),
        timeUnitPrice       (2),
        bitUnitPrice        (3),
        other                (4)},
    maximumCostValue        EXTERNAL OPTIONAL}

ValidTime ::= SEQUENCE{                                   --see 4.6.1
    validTimeCode           INTEGER{
        undefined           (0),
        duringReceptionOnly (1),
        timeDesignated      (2),
        untilUpdated        (3),
        other                (4)},
    validTimeValue          EXTERNAL OPTIONAL}

TargetArea ::= SEQUENCE{                                   --see 4.6.3
    targetAreaCode          INTEGER{
        undefined           (0),
        spot                 (1),
        zone                 (2),
        interval             (3),
        region               (4),
        wideArea             (5),
        other                (6)},
    targetAreaValue         EXTERNAL OPTIONAL}

```

END

Annex C (informative)

Protocol management information usage

C.1 Protocol management information usage

This indicates usage examples and cautions that apply from the application side to the lower layers of the OSI layer (requesting wide area communication service) in the information (protocol management information) defined in this document by illustrating examples of message attributes and the characteristics of typical communication systems.

C.1.1 Examples of message attributes

The attributes of request messages (Table C.1) and response messages can be postulated in the manner shown below based on the example of emergency vehicle guidance information. Furthermore, request messages refer to messages made from an emergency vehicle to a service center and so forth requesting information such as the shortest route from the current location to the site of an emergency, while response messages are messages that return graphics and other information to the vehicle making such request.

Table C.1 — Example of message attributes

		Attributes of request messages	Attributes of response messages
Selection of communication system	Responsiveness	Within 30 seconds	Undefined
	Directionality	Interactive (ascending < descending)	Unidirectional
	Usage environment	Vehicle movement – speed	Vehicle movement – speed
	Service area	Discontinuous	Continuous
	Service time	Continuous	Continuous
	Bandwidth	Text data at about 10 kbps	Text and graphics data at about 100 kbps
	Connection cost	Undefined	Undefined
Application identifiers	Message identifier	Specification of emergency vehicle guidance request messages	Specification of emergency vehicle guidance response messages
	Message number	Specification of a sequential number	Specification of a sequential number
	Time of message transmission	Specification of time	Specification of time
Address	Address of origin	Compatible with Ipv6	Compatible with IPv6
	Address of destination	Compatible with Ipv6	Compatible with IPv6
Priority	Interrupt handling	High priority	High priority
	Queue control	Undefined	Undefined
Security	Mutual authentication	Undefined	Undefined
	Data authentication	Undefined	Undefined
	Concealment	Undefined	Undefined
Application execution	Valid time	Until time of information updating	Until time of information updating
	Time stamp	Undefined	Specification of time
	Target area	Spot	Interval

C.1.2 Example of organizing communication system characteristics (presumed)

See Table C.2.

Table C.2 — Example of organizing communication systems characteristics

	2GC(PDC/GSM)	3GC(IMT-2000)	Digital broadcast	DSRC (reference)
Responsiveness	Within 1 second	Within 1 second	Real-time within 30 seconds	Within 1 second
Directionality	Interactive (/symmetric)	Interactive (/asymmetric)	Unidirectional	Interactive (/symmetric)
Usage environment	Movement/vehicle speed 100 km/h	Movement/vehicle speed 100 km/h	Home, mobile - vehicle movement	Movement/vehicle speed 100 km/h
Service area	Wide specified area (coverage range)	Wide specified area (coverage range)	State	Spot narrow area
Service time	Irregular, on-demand	Irregular, on-demand	Constant	Irregular, on-demand
Bandwidth	10 kbps	144 kbps	Several 100 kbps	1Mbps
Connection cost	Charged by packets	Charged by packets	None for connection alone	None for connection alone

C.1.3 Usage and caution examples

C.1.3.1 Request messages

See Table C.3.

Table C.3 — Usage and caution example – Request message

		Attributes of request messages	Presumed media				Comments
			2GC	3GC	Digital broadcast	DSRC	
Selection of communication system	Responsiveness	Within 30 seconds	○	○		○	2GC and 3GC are assessed as being suitable for the communication system. DSRC is only possible at locations where beacons are installed.(*)
	Directionality	Interactive (ascending < descending)	○	○		○	
	Usage environment	Vehicle movement – speed	○	○	○	○	
	Service area	Discontinuous	○	○		○*	
	Service time	Continuous	○	○	○	○	
	Bandwidth	Text data at about 10 kbps	○	○	○	○	
	Connection cost	Undefined	○	○	○	○	
Application identifiers	Message identifier	Specification of emergency vehicle guidance request message	The receiving side uses information for identifying messages.				
	Message number	Specification of a sequential number					
	Time of message transmission	Specification of time					
Address	Address of origin	Compatible with IPv6	Used to confirm the message transmission source and perform routing.				
	Address of destination	Compatible with IPv6					
Priority	Interrupt handling	High priority	Requests high-priority interrupt processing.				
	Queue control	Undefined					
Security	Mutual authentication	Undefined	Not particularly requested since this is information that gives priority to high-speed processing and has little need as compared with priority.				
	Data authentication	Undefined					
	Concealment	Undefined					
Application execution	Valid time	Until time of information updating	Used to assess whether or not the information is valid.				
	Time stamp	Undefined					
	Target area	Region					

C.1.3.2 Response messages

See Table C.4.

Table C.4 — Usage and caution example – Request Message

		Attributes of response messages	Presumed media				Comments
			2GC	3GC	Digital broadcast	DSRC	
Selection of communication system	Responsiveness	Undefined	○	○	○	○	3GC and digital broadcasting are assessed as being suitable for the communications system.
	Directionality	Unidirectional	○	○	○	○	
	Usage environment	Vehicle movement – speed	○	○	○	○	
	Service area	Continuous	○	○	○		
	Service time	Continuous	○	○	○	○	
	Bandwidth	Text and graphics data at about 100 kbps		○	○	○	
	Connection cost	Undefined	○	○	○	○	
Application identifiers	Message identifier	Specification of emergency vehicle guidance response messages	Used to identify messages.				
	Message number	Specification of a sequential number					
	Time of message transmission	Specification of time					
Address	Address of origin	Compatible with IPv6	Used to confirm the message transmission source and perform routing.				
	Address of destination	Compatible with IPv6					
Priority	Interrupt handling	High priority	Requests high-priority interrupt processing.				
	Queue control	Undefined					
Security	Mutual authentication	Undefined	Not particularly requested since this is information that gives priority to high-speed processing and has little need as compared with priority.				
	Data authentication	Undefined					
	Concealment	Undefined					
Application execution	Valid time	Until time of information updating	Used to assess whether or not the information is valid.				
	Time stamp	Specification of time					
	Target area	Interval					


C.2 Service cases

The use of the information contained in this International Standard (“protocol management information”) is premised on its applicability for assessing the internal processing of communication systems, terminals and so forth which is suitable in terms of providing ITS application services based on wide area communication systems. Four cases of connection have been established on the presumption of the forms of service from now to the future:

- Basic case — In this case, the user terminal and content provider are linked directly with one another.
- Mobile Internet case — In this case, the user terminal connects to the content provider via the gateway server of the service provider. This assumes that the service provider and the content provider will be connected to one another via the Internet.
- Multicast case — In this case, the service provider uses a push system to provide content to previously registered user terminals. This assumes that the service provider and the content provider will be connected to one another via some type of network.
- Combined communication systems — In this case, the content request from the user terminal and the content response from the service provider are transmitted using different wide area communications systems. For example, requests might be transmitted by cellular phone and information provided by digital broadcast system.

C.2.1 Basic case

In this case, the service user and content provider are linked directly with one another via the communications carrier (see Figure C.1).

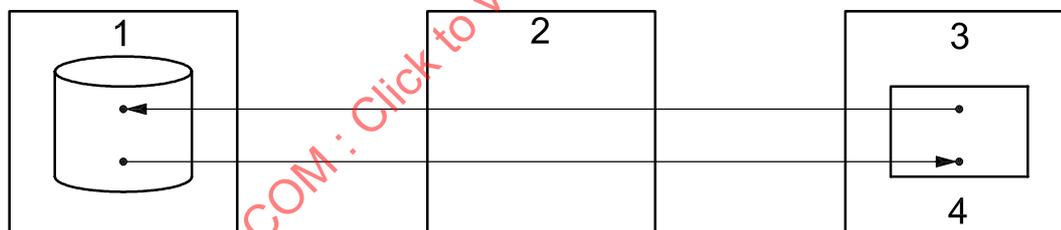

Key

- 1 content provider
- 2 communications carrier
- 3 user
- 4 terminal

Figure C.1 — Basic service case

C.2.2 Mobile Internet case

In this case, the service user connects to the gateway server of the communications carrier (service provider) and connects to the content provider via the Internet (see Figure C.2).

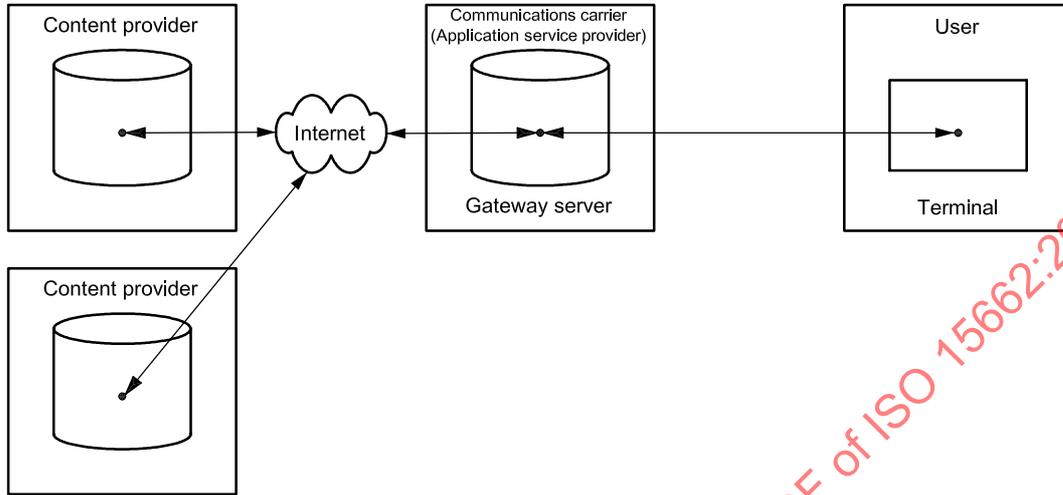


Figure C.2 — Mobile internet case

C.2.3 Multicast case

In this case, data stored by the communications carrier (service provider) is transmitted sequentially (see Figure C.3).

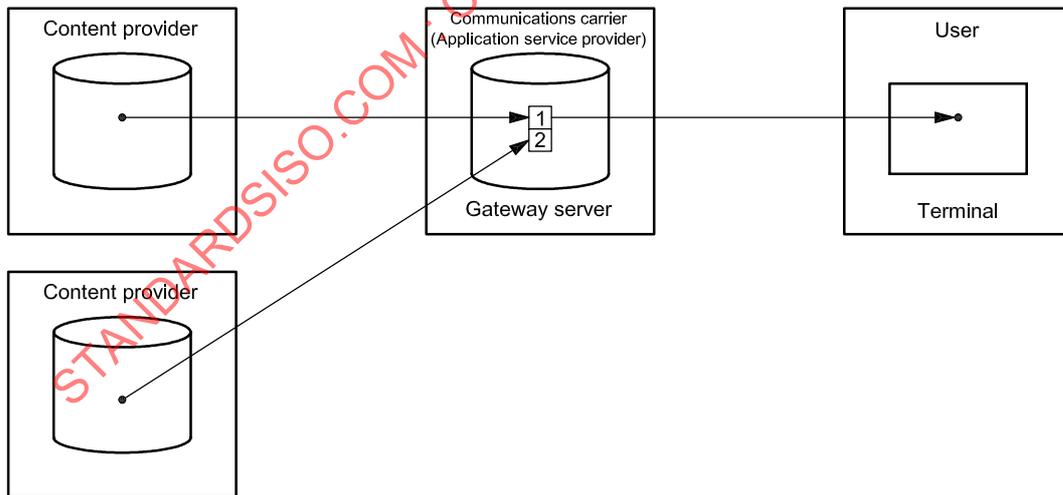


Figure C.3 — Multicast case

C.2.4 Combined communication systems case

In this case, transmission media are used freely in a complex manner. For example, requests might be transmitted by cellular telephone and information provided by broadcasting. A “Response Media” selection will be needed to identify the pattern of multimedia use (see Figure C.4).

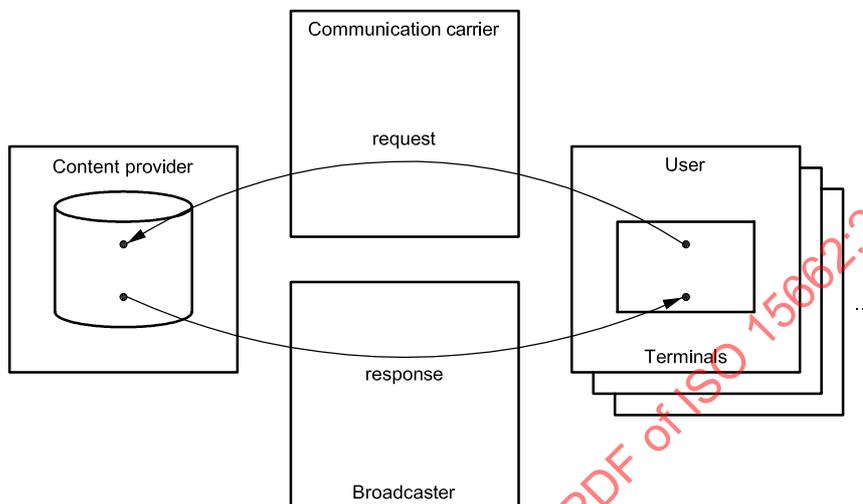


Figure C.4 — Combined communications case

C.3 Usage range of service providers in “protocol management information”

The usage range of service providers for each item in the protocol management information is shown in Table C.5. B-application processing (encircled with a bold line) is treated in this document.

Table C.5 — Usage range of service providers in “protocol management information”

Service format	Protocol management information item										
	A – communication connection					B – application processing					
	(1) Normal connection	(2) Address (routing)	(3) Priority	(4) Security	(5) Communication service format	(1) Selection of communication System	(2) Application ID	(3) Address (internal routing)	(4) Priority	(5) Security	(6) Application execution
1) Basis case	Communication carrier					Content provider					
2) Mobile internet case	Communication carrier					Communication carrier (Application service provider)			Content provider		
3) Multicasting case	Communication carrier					Communication carrier (Application service provider)				Content provider	
4) Combined communication systems case	Communication carrier					Content provider					
5) Other	Communication carrier Content provider										