

INTERNATIONAL
STANDARD

ISO
15872

First edition
2002-11-15

Aerospace — UNJ threads — Gauging

Aéronautique et espace — Filetage UNJ — Vérification par calibres

STANDARDSISO.COM : Click to view the full PDF of ISO 15872:2002



Reference number
ISO 15872:2002(E)

© ISO 2002

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 15872:2002

© ISO 2002

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.ch
Web www.iso.ch

Printed in Switzerland

Contents

| | Page |
|---|-----------|
| Foreword | iv |
| 1 Scope | 1 |
| 2 Normative references | 1 |
| 3 Terms, definitions, symbols and abbreviated terms | 1 |
| 3.1 Terms and definitions | 1 |
| 3.2 Symbols and abbreviated terms | 2 |
| 4 Types of gauges | 3 |
| 4.1 Gauges and setting plugs for external product threads | 3 |
| 4.2 Gauges for internal product threads | 3 |
| 5 Reference temperature | 4 |
| 6 Function, design and use of gauges | 4 |
| 6.1 Gauges for external threads | 4 |
| 6.2 Gauging for internal threads | 5 |
| 7 Setting gauges for external threads | 6 |
| 8 Gauging of threads | 6 |
| Annex A (normative) Prevalence of gauging by GO gauges | 26 |
| Bibliography | 27 |

STANDARDSISO.COM : Click to view the full PDF of ISO 15872:2002

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 15872 was prepared by Technical Committee ISO/TC 20, *Aircraft and space vehicles*, Subcommittee SC 4, *Aerospace fastener systems*.

Annex A forms a normative part of this International Standard.

STANDARDSISO.COM : Click to view the full PDF of ISO 15872:2002

Aerospace — UNJ threads — Gauging

1 Scope

This International Standard gives information for the gauging of ISO UNJ threads complying with ISO 3161.

Other methods of ensuring that the product is within the specified limits may be used, provided correlation with the specified gauges is established [see 8.2.e)].

2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this International Standard. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 1:2002, *Geometrical Product Specifications (GPS) — Standard reference temperature for geometrical product specification and verification*

ISO 3161:1999, *Aerospace — UNJ threads — General requirements and limit dimensions*

ISO 5408:1983, *Cylindrical screw threads — Vocabulary*

ISO 8015:1985, *Technical drawings — Fundamental tolerancing principle*

ISO 14253-1:1998, *Geometrical Product Specifications (GPS) — Inspection by measurement of workpieces and measuring equipment — Part 1: Decision rules for proving conformance or non-conformance with specifications*

ISO/TR 14638:1995, *Geometrical product specification (GPS) — Masterplan*

3 Terms, definitions, symbols and abbreviated terms

3.1 Terms and definitions

For the purposes of this International Standard, the terms and definitions given in ISO 5408 and the following apply.

3.1.1

best wire size

cylinder or sphere which has a radius so that it will contact the thread flanks at the pitch cylinder intersection

NOTE The radius of the best wire or sphere is theoretically equal to $0,288\ 68P$.

3.1.2

indicating gauge

device having contacts which will precisely compare the size of a work piece thread to a setting standard of known dimensions

NOTE The value for the indicated characteristic thus established is the dimensional value attributed to the work piece. An indicating gauge may have contacts designed to measure any thread characteristic. This International Standard specifies the characteristics and designs for ISO UNJ threads.

3.1.3

simple pitch diameter

diameter of an imaginary cylinder intersecting an actual thread over the width of one groove where that width is equal to one half of the basic pitch

3.1.4

virtual pitch diameter

pitch diameter of the smallest (for external threads) or largest (for internal threads) perfect thread form with GO gauge profile which can engage the product threads for a distance equal to the GO gauge thread engagement

3.2 Symbols and abbreviated terms

See Table 1.

Table 1 — Symbols, abbreviated terms and definitions

| Symbol or abbreviated term | Definition | Symbol or abbreviated term | Definition |
|----------------------------|--|----------------------------|--|
| D_1 | Basic minor diameter of the internal thread of a workpiece | $T_{\alpha 1}/2$ | Tolerance for each flank angle of a profile with complete flanks |
| d_2 | Basic pitch diameter of the external thread of a workpiece | $T_{\alpha 2}/2$ | Tolerance for each flank angle of a profile with truncated flanks |
| es | Fundamental deviation of the external thread of a workpiece | T_{CP} | Tolerance on the pitch diameter of GO and NOT GO screw check plugs, wear check plugs and setting plugs |
| EI | Fundamental deviation of the internal thread of a workpiece | T_d | Tolerance for the major diameter of the external thread of a workpiece |
| H | Height of the triangle of a thread profile | T_{d2} | Tolerance for the pitch diameter of the external thread of a workpiece |
| H_1 | Tolerance for the diameter of plain plug gauges | T_{d3} | Tolerance for the minor diameter of the external thread of a workpiece |
| H_P | Tolerance on the size of check plug gauges for plain calliper gauges | T_{D1} | Tolerance for the minor diameter of the internal thread of a workpiece |
| LML | Least material limit | T_{D2} | Tolerance for the pitch diameter of the internal thread of a workpiece |
| m | Distance between the middle of the tolerance zones T_R of a screw ring gauge and T_{CP} of a GO check plug | T_{PL} | Tolerance for the pitch diameter of GO and NOT GO screw plug gauges |
| MML | Maximum material limit | T_R | Tolerance for the pitch diameter of GO and NOT GO screw ring gauges |
| P | Pitch | W_{GO} | Amount available for permissible wear of GO screw plug gauges and GO screw ring gauges |

Table 1 (continued)

| Symbol or abbreviated term | Definition | Symbol or abbreviated term | Definition |
|----------------------------|---|----------------------------|---|
| W_{NG} | Amount available for permissible wear of NOT GO screw plug gauges and NOT GO screw ring gauges | Z_{PL} | Distance between the middle of the tolerance zone T_{PL} of a GO screw plug gauge and the lower limit of a workpiece thread |
| Z_1 | Distance between the middle of the tolerance zone H_1 of a GO plug gauge and the lower limit of the minor diameter of a workpiece | Z_R | Distance between the middle of the tolerance zone T_R of a GO screw ring gauge and the upper limit of a workpiece thread |

4 Types of gauges

4.1 Gauges and setting plugs for external product threads

The function, design and use of gauges and setting plugs for external product threads are explained in the following subclauses:

| Gauge type | Subclause |
|---|-----------|
| a) GO screw ring gauges | 6.1.2 |
| b) Setting plug for adjustable GO screw ring and indicating thread gauges | 7.1 |
| c) Virtual pitch diameter indicating thread gauges | 6.1.1 |
| d) Simple pitch diameter indicating thread gauges | 6.1.3 |
| e) Flat contact gauges for major diameter | 6.1.4 |
| f) Point contact indicating thread gauges for minor diameter | 6.1.5 |
| g) Optical comparator for root radius and minor diameter | 6.1.6 |

4.2 Gauges for internal product threads

The function, design and use of gauges for internal product threads are explained in the following subclauses:

| Gauge type | Subclause |
|---|-----------|
| a) GO screw plug gauges | 6.2.1 |
| b) NOT GO screw plug gauges | 6.2.2 |
| c) Plain gauges for minor diameter (plug gauge) | 6.2.3 |
| d) GO full form screw plug gauges | 6.2.3.2 |
| e) Virtual pitch diameter indicating thread gauges | 6.2.4 |
| f) Simple pitch diameter indicating thread gauges | 6.2.5 |
| g) Setting ring gauge for indicating thread gauges (solid type) | 6.2.6 |

5 Reference temperature

In accordance with ISO 1, the dimensions of the gauge and the product shall be checked at the temperature of 20 °C.

If the product and the gauge have the same coefficients of linear expansion, the temperature may deviate from 20 °C provided the temperature of the product and the gauge are the same.

If the product and the gauge have different coefficients of linear expansion, the temperature of both, at the time of gauging, shall be:

- a) 20 °C ± 2 °C for sizes 1,000 UNJ and smaller;
- b) 20 °C ± 1 °C for larger threads.

6 Function, design and use of gauges

6.1 Gauges for external threads

6.1.1 Virtual pitch diameter indicating thread gauges

6.1.1.1 It measures, on two or three segments or rolls, the maximum material virtual pitch diameter taking into account variations of form such as pitch variation, helix and flank variations, roundness and taper which produces an enlargement of the virtual pitch diameter. In addition, virtual pitch diameter control ensures the flank angle contact is sufficient to assure that the root radius does not exceed the maximum limit. Measurement of virtual pitch diameter with indicating gauges shall be obtained to calculate virtual minus simple pitch diameter differential unless the simple pitch diameter limits, gauged in accordance with 6.1.3, are within the limits defined by the maximum pitch diameter and the form variation limits in ISO 3161.

6.1.1.2 Indicating gauges have two or three contacts at 180° or 120° respectively. Gauges with segments or rolls are designed with the length of the GO virtual maximum material gauging elements equal to the GO ring gauge length equal to nine pitches (P) or the basic major diameter of the thread, whichever is the smallest. For configuration and profile requirements, see Figure 1.

6.1.1.3 The minor diameter of the GO virtual maximum material thread segments and the diameter of the circle surrounded by the roll cluster of GO virtual maximum material rolls shall be equal to the pitch diameter of the product minus $0,375H$, less the T_{PL} value in Table 2 minus tolerance when assembled in the gauge frame. This corresponds to a flat width of $0,3125P$ on the minor crest for the thread. The crest shall be flat in an axial plane and parallel to the axis of the segments or rolls.

6.1.1.4 The major diameter of the GO virtual maximum material segments and the root of the GO virtual maximum material rolls shall be cleared beyond a $0,125P$ flat either by an extension of the flanks of the thread toward a sharp vee or by an undercut no greater than $0,125P$ maximum width and approximately central. The root clearance shall be such that the major diameter of the full form section of the thread setting plug gauge is cleared after the assembled gauge has been properly set to size.

6.1.1.5 The pitch diameter cylinder axis of threaded segments and rolls shall be straight within the diameter tolerance zone equal to T_{PL} specified in Table 2. The half-angle variations in the segment or roll thread shall be within the limits specified in Table 3. For the pitch variations, see Table 4.

6.1.2 Solid or adjustable GO screw ring gauges

To ensure the ease of assembly of product threads and conformance to the maximum material virtual pitch diameter limits, GO screw ring gauges with thread form in accordance with Figure 1 and setting gauges in accordance with 7.1 may be used. Solid GO screw ring gauges shall not be permitted to exceed the product thread dimensional limits. The gauge thickness / length shall be standardized, see 6.1.1.2. The gauge tolerances shall be in accordance with the amount W_{GO} available for permissible wear of GO screw plug gauges and GO screw ring gauges, see Table 5.

6.1.3 Simple pitch diameter indicating thread gauges

The simple pitch diameter indicating gauge with cone and vee rolls or segments or rolls with best wire size radius is applied to insure that the pitch diameter is greater than the minimum limit. The indicators are set to the GO threaded setting plug gauge. Readings indicate the position of the pitch diameter and the minimum measurement shall be no less than the minimum pitch diameter limit. The minimum measured pitch diameter shall be within the ISO 3161 form variation limit compared to the virtual pitch diameter measurement in accordance with 6.1.1, i.e. the differential value.

The simple pitch diameter contacts have cone and vee rolls or segments which contact the product pitch cylinder. Other designs have two or three rolls with radii on annular ribs on rolls made to best wire size. The product thread contacts is restricted to 1,5 pitch lengths. See Figures 2 and 3 for design and contact form.

6.1.4 Major diameter gauges

The maximum limit of the major diameter may be checked with a plain ring gauge, a plain GO calliper, or plain diameter-measuring device, see Figure 4. The minimum limit of the major diameter shall be checked with a plain diameter measuring device set to a plain diameter plug with H_P tolerance, see Table 6. A plain micrometer calliper may be used to measure the major diameter and may have standard gauge block settings.

6.1.5 Minor diameter gauges

It shall be set to the plain minor diameter setting plug with H_P tolerance, see Table 6. See Figure 5 for design and contact form.

6.1.6 Optical comparator checks

The optical comparator shall be used to verify the root radius by comparing the shadow contour to the radius charts. The minor diameter may also be measured with an optical comparator using appropriate measuring techniques.

6.2 Gauging for internal threads

6.2.1 GO screw plug gauges

To ensure the ease of assembly of threads and conformance to the maximum material virtual pitch and major diameter limits, GO screw plug gauges or the full form GO screw plug gauge in accordance with 6.2.3.2 shall be used. For gauge tolerances, see Tables 2, 3 and 4.

6.2.2 NOT GO screw plug gauges

To check that the simple pitch diameter is not greater than the maximum limit, NOT GO screw plug gauges shall be used. For gauge tolerances, see Tables 2, 3 and 4.

6.2.3 Minor diameter gauges

6.2.3.1 The minimum minor diameter may be evaluated by a plain cylindrical GO plug gauge or a GO full form screw plug gauge in accordance with 6.2.3.2. The maximum minor diameter may be checked with a plain cylindrical NOT GO plug gauge. The diameters of the plain plugs shall be based on the minimum minor diameter specified in ISO 3161 with gauge tolerance H_1 specified in Table 7. Internal micrometer callipers may be used to measure the minor diameter.

6.2.3.2 The GO full form screw plug gauge shall be a modified GO screw plug gauge with a controlled root radius on the gauge, (see Figure 6), equal to the maximum external thread root radius specified in ISO 3161 with a radius tolerance in accordance with Table 8.

6.2.4 Virtual pitch diameter indicating thread gauges

6.2.4.1 It measures, on two or three segments or rolls, the maximum material virtual pitch diameter taking into account variations of form such as pitch variation, helix and flank variations, roundness and taper which produces a

decrease in the virtual pitch diameter. The virtual pitch diameter shall be measured using indicating gauges to calculate the simple minus virtual pitch diameter differential unless the simple pitch diameter limits are within the limits defined by the minimum pitch diameter and the form variation limits in ISO 3161.

6.2.4.2 Indicating gauges have two or three contacts at 180° or 120° respectively. Gauges with segments or rolls are designed with the length of the GO virtual maximum material gauging elements equal to the GO plug gauge length equal to nine pitches (P) or the basic major diameter of the thread, whichever is the smallest. For configuration and profile requirements, see Figure 7.

6.2.5 Simple pitch diameter indicating thread gauges

The simple pitch diameter indicating thread gauge with cone and vee rolls or segments or rolls with the best wire size radius is applied to insure that the pitch diameter is not greater than the maximum limit. The indicators are set to the GO threaded ring gauge. Readings indicate the position of the pitch diameter and the maximum measurement shall be not greater than the maximum pitch diameter limit. The maximum measured pitch diameter shall be within the ISO 3161 form variation limit compared to the virtual pitch diameter measurement made in accordance with 6.2.4.1.

The simple pitch diameter contacts have cone and vee rolls or segments which contact the product pitch cylinder. Other designs have two or three rolls with radii on annular ribs on rolls made to best wire size. The product thread contacts is restricted to 1,5 pitch lengths. See Figures 8 and 9 for design and contact form for simple pitch diameter indicating thread gauges.

6.2.6 Setting ring gauge for indicating thread gauges

The virtual pitch diameter indicating thread gauge and the simple pitch diameter indicating thread gauge to measure internal threads is set with the solid GO screw ring gauge.

7 Setting gauges for external threads

7.1 The virtual pitch diameter indicating gauge is set to the threaded setting plug whose average simple pitch diameter (see Figure 10), is below basic size by the value m specified in Table 9. The m factor adjusts the size of the setting plug so as to correct for the potential diametrical equivalents of the average variation which would be expected in the pitch and flank angles of the plug for adjustable GO screw ring gauges.

7.2 Set and check the GO screw ring gauge as required. Check the GO screw plug gauge as required.

7.3 Set the simple pitch diameter indicating gauge to the calibrated or marked pitch diameter setting plug gauge. These gauges are the same setting gauges as described in 7.1 to permit differential measurement calculations.

7.4 Set the major and minor diameter indicating gauges to their respective plain setting plugs. The diameter of these plain setting plugs shall be made to the maximum dimension with a negative tolerance of H_P , see Table 6 and Figures 11 and 12. The micrometer callipers may have standard gauge block settings.

8 Gauging of threads

8.1 Gauges with a wear allowance, which allows gauges to exceed the maximum or minimum limits of the product thread, are not permitted for UNJ threads.

A product thread characteristic is acceptable when any appropriate standardized gauge can be assembled. The manufacturer is responsible for ensuring that, whatever the case, the means ultimately assures characteristics in accordance with the envelope requirements (see annex A).

8.2 External threads shall be evaluated as follows:

- a) check the virtual pitch diameter by measurement using either an indicating gauge or an assembly with a GO threaded ring gauge;
- b) measure the simple pitch diameter with an indicating gauge;
- c) compare the difference between the virtual and simple pitch diameter measurements to evaluate the cumulative effect of variations defined in ISO 3161;
- d) check thread minor and major diameters with indicating gauge and root contour with an optical comparator or tracing machine;
- e) normally, the use of more than one gauge option is not required. A product thread characteristic is accepted if it satisfies any one appropriate standard gauge. However, if there is a conflict between gauges for the product external thread maximum material limit, the product thread shall be accepted as long as the thread satisfies the GO thread ring gauge. Wear check plugs shall not exceed the basic profile.

8.3 Internal threads shall be evaluated as follows:

- a) check the maximum material limit of the virtual pitch diameter as well as the minimum major diameter with a GO screw plug gauge. A full form screw plug gauge may be used for this check. A check for the virtual pitch diameter by measurement with an indicating thread gauge may be used also;
- b) check the minimum material pitch diameter with a NOT GO screw plug gauge. Measuring the simple pitch diameter with an indicating thread gauge is, except for thread sizes less than 0,190 in, required;
- c) check the minimum minor diameter with either a GO plain plug gauge or GO full form screw plug gauge. Use a NOT GO plain plug gauge to check the maximum minor diameter.

Table 2 — Tolerances for pitch diameter of GO and NOT GO screw plug gauges and on pitch diameter of GO and NOT GO screw check plugs, wear check plugs and setting plugs

| T_{d2} or T_{D2} | | T_{CP}^a | T_{PL}^b |
|---|---------------------|------------|------------|
| over | up to and including | | |
| — | 0,002 | 0,000 2 | 0,000 2 |
| 0,002 | 0,003 | | |
| 0,003 | 0,006 | 0,000 3 | 0,000 3 |
| 0,006 | 0,008 | 0,000 35 | 0,000 4 |
| 0,008 | 0,012 | 0,000 47 | 0,000 5 |
| 0,012 | 0,020 | 0,000 6 | 0,000 7 |
| 0,020 | 0,026 | 0,000 7 | 0,000 9 |
| <p>^a See Figure 10.</p> <p>^b See Figure 13.</p> | | | |

Table 3 — Tolerances for each half-angle

Tolerances in minutes of an angle

| Number of threads per inch | Pitch P in | $T_{\alpha 1}/2^a$ | $T_{\alpha 2}/2^a$ |
|----------------------------|--------------------|--------------------|--------------------|
| 80 | 0,012 500 | ± 60 | |
| 72 | 0,013 889 | ± 48 | |
| 64 | 0,015 625 | ± 40 | |
| 56 | 0,017 857 | ± 35 | |
| 48 | 0,020 833 | ± 31 | |
| 44 | 0,022 727 | ± 26 | |
| 40 | 0,025 000 | ± 25 | |
| 36 | 0,027 778 | ± 21 | |
| 32 | 0,031 250 | ± 18 | |
| 28 | 0,035 714 | ± 17 | ± 17 |
| 24 | 0,041 667 | ± 16 | ± 16 |
| 20 | 0,050 000 | ± 15 | |
| 18 | 0,055 556 | ± 13 | ± 16 |
| 16 | 0,062 500 | ± 12 | |
| 14 | 0,071 429 | ± 11 | |
| 13 | 0,076 923 | ± 10 | ± 14 |
| 12 | 0,083 333 | | |
| 11 | 0,090 909 | ± 9 | ± 13 |
| 10 | 0,100 000 | | |
| 9 | 0,111 111 | ± 8 | ± 11 |
| 8 | 0,125 000 | | |
| 7 | 0,142 857 | | |
| 6 | 0,166 667 | | ± 10 |
| 5 | 0,200 000 | | |
| 4,5 | 0,222 222 | | |
| 4 | 0,250 000 | | |

^a See Figure 14.

Table 4 — Pitch tolerances

Values in inches

| Gauge thread length | | |
|---------------------|---------------------------|---------------------------|
| $\leq 1,250$ | $> 1,250$ $\leq 2,000$ | $> 2,000$ $\leq 3,150$ |
| T_P | | |
| 0,000 2 | 0,000 24 | 0,000 28 |

NOTE The pitch tolerance T_P applies to the maximum measured error whether it occurs as a cumulative progressive error over the total length of thread or as a periodic error or as a local error of pitch.

For a double-length setting plug, the thread length used when determining the pitch deviation is one-half of the overall thread length of the setting plug, and the pitch tolerance is the maximum permissible deviation between any two threads spaced apart by not more than one-half the overall length of the setting plug.

Table 5 — Permissible wear of GO screw plug gauges and GO screw ring gauges

Tolerances in inches

| T_{d2} or T_{D2} | | Permissible wear |
|----------------------|---------------------|------------------|
| over | up to and including | W_{GO}^a |
| — | 0,002 | 0,000 4 |
| 0,002 | 0,003 | 0,000 5 |
| 0,003 | 0,006 | 0,000 6 |
| 0,006 | 0,008 | 0,000 8 |
| 0,008 | 0,012 | 0,001 |
| 0,012 | 0,020 | 0,001 3 |
| 0,020 | 0,026 | 0,001 6 |

^a See Figures 13 and 15.

Table 6 — Tolerances for plain setting plug for major and minor diameters of external threads

Tolerances in inches

| T_d | | Tolerance |
|-------|---------------------|-----------|
| over | up to and including | H_P^a |
| — | 0,003 | 0,000 08 |
| 0,003 | 0,005 | 0,000 1 |
| 0,005 | 0,013 | 0,000 15 |
| 0,013 | 0,033 | 0,000 24 |
| 0,033 | 0,037 | 0,000 31 |

^a See Figures 11 and 12.

Table 7 — Tolerances for plain plug for minor diameters of internal threads

Tolerances in inches

| T_{D1} | | Tolerance H_1^a |
|----------|---------------------|----------------------|
| over | up to and including | |
| — | 0,004 | 0,000 15 |
| 0,004 | 0,007 | 0,000 2 |
| 0,007 | 0,015 | 0,000 3 |
| 0,015 | 0,028 | 0,000 5 |
| 0,028 | 0,050 | 0,000 9 |

^a See Figure 16.

Table 8 — Controlled root radius tolerances for GO full form screw plug gauges

Tolerances in inches


| Threads per inch | Radius tolerance | Threads per inch | Radius tolerance |
|------------------|------------------|------------------|------------------|
| 80 | 0,000 21 | 36 | 0,000 51 |
| 72 | 0,000 24 | 32 | 0,000 55 |
| 64 | 0,000 28 | 28 | 0,000 71 |
| 56 | 0,000 31 | 24 | |
| 48 | 0,000 35 | 20 | 0,000 9 |
| 44 | 0,000 43 | 18 to 10 | 0,001 |
| 40 | 0,000 51 | 9 to 4 | 0,002 |

Table 9 — Factor m for setting gauges

Values in inches

| T_{d2} | | m^a |
|----------|---------------------|-------|
| over | up to and including | |
| — | 0,002 | 0,004 |
| 0,002 | 0,003 | 0,005 |
| 0,003 | 0,005 | 0,006 |
| 0,005 | 0,008 | 0,007 |
| 0,008 | 0,012 | 0,008 |
| 0,012 | 0,020 | 0,010 |
| 0,020 | 0,026 | 0,013 |

^a See Figure 10.

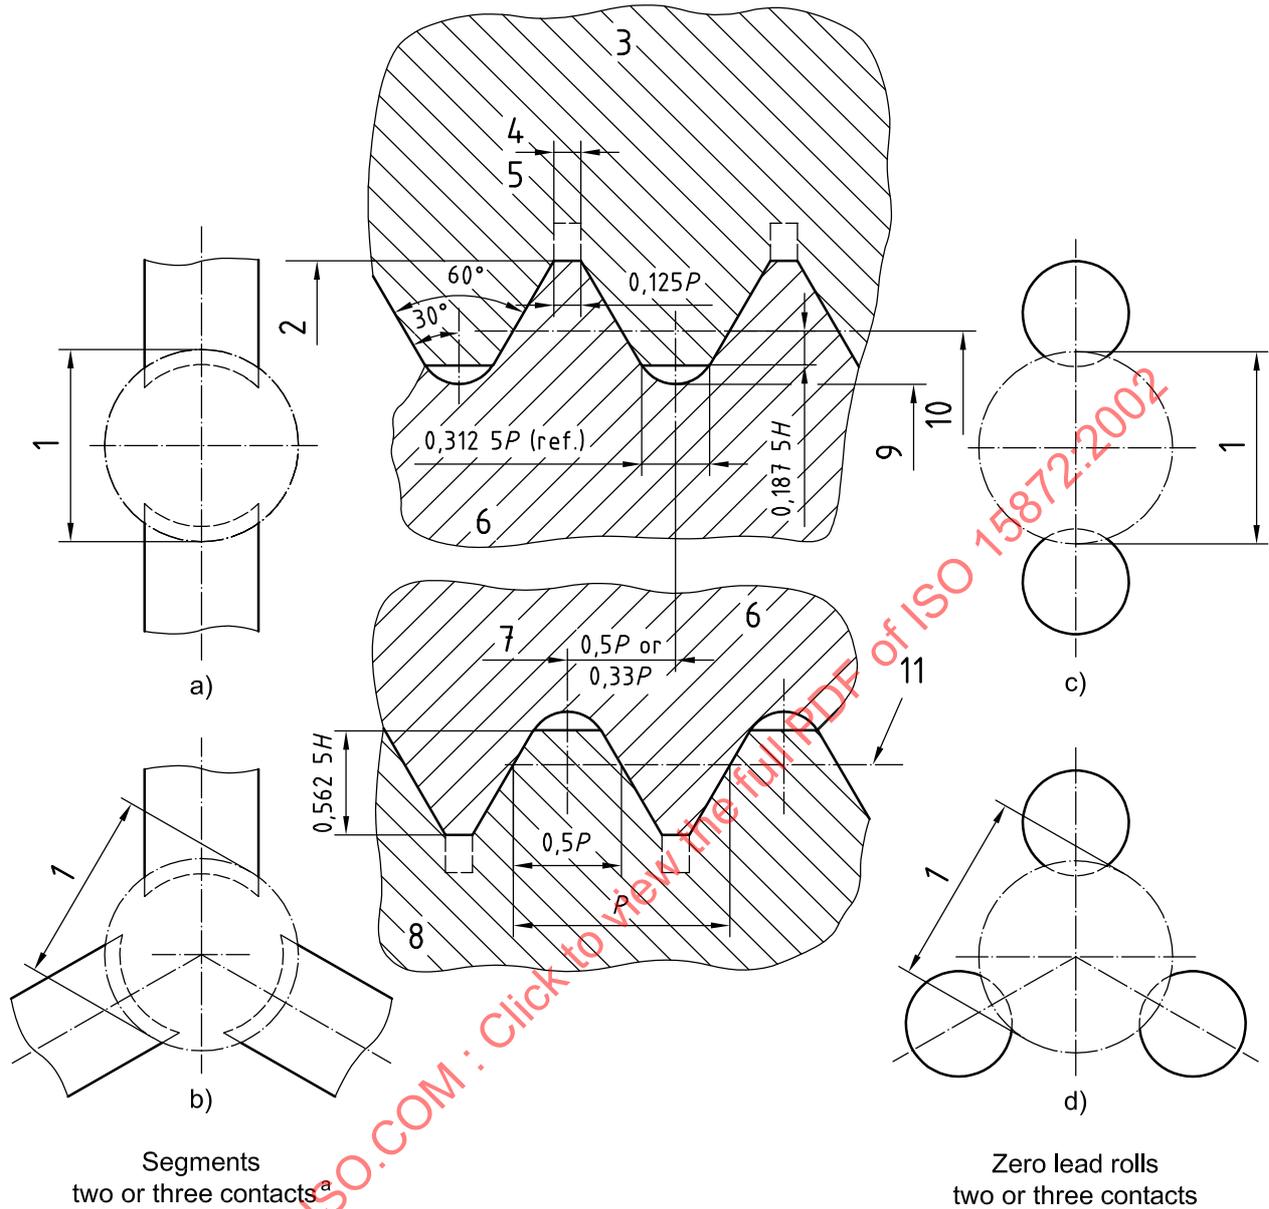


Key

- | | |
|---|--|
| 1 Pitch diameter | 7 For two or three contacts respectively |
| 2 Maximum major diameter of product external thread | 8 Form of segment or roll |
| 3 Gauge thread form | 9 Maximum minor diameter of product external thread |
| 4 Clear $0,125P$ when not undercut | 10 Maximum pitch diameter of product external thread |
| 5 Form of relief optional — Width approximately central when undercut | 11 Pitch cylinder |
| 6 Maximum product external thread | |

^a The total segment contact to be a minimum of 25 % of circumference.

Figure 1 — Virtual pitch diameter indicating thread gauges for external threads

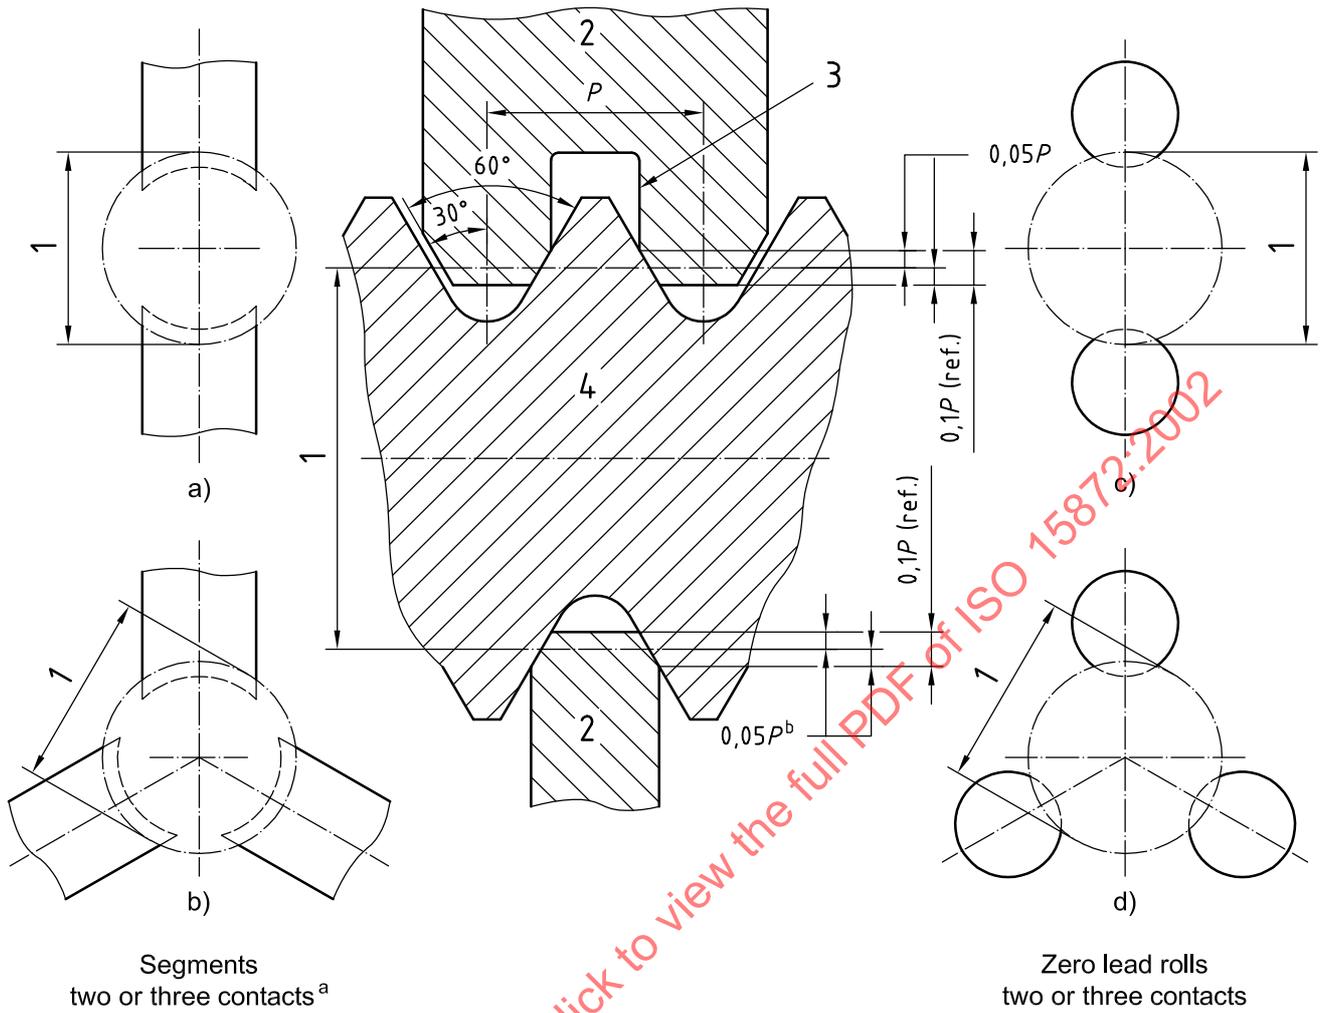


Key

- | | | | |
|---|-----------------|---|-------------------------|
| 1 | Pitch diameter | 3 | Form of relief optional |
| 2 | Gauging element | 4 | External thread |

^a The total segment contact to be a minimum of 25 % of circumference.

^b Contact central on pitch line.

Figure 2 — Simple pitch diameter indicating thread gauges with cone and vee for external threads

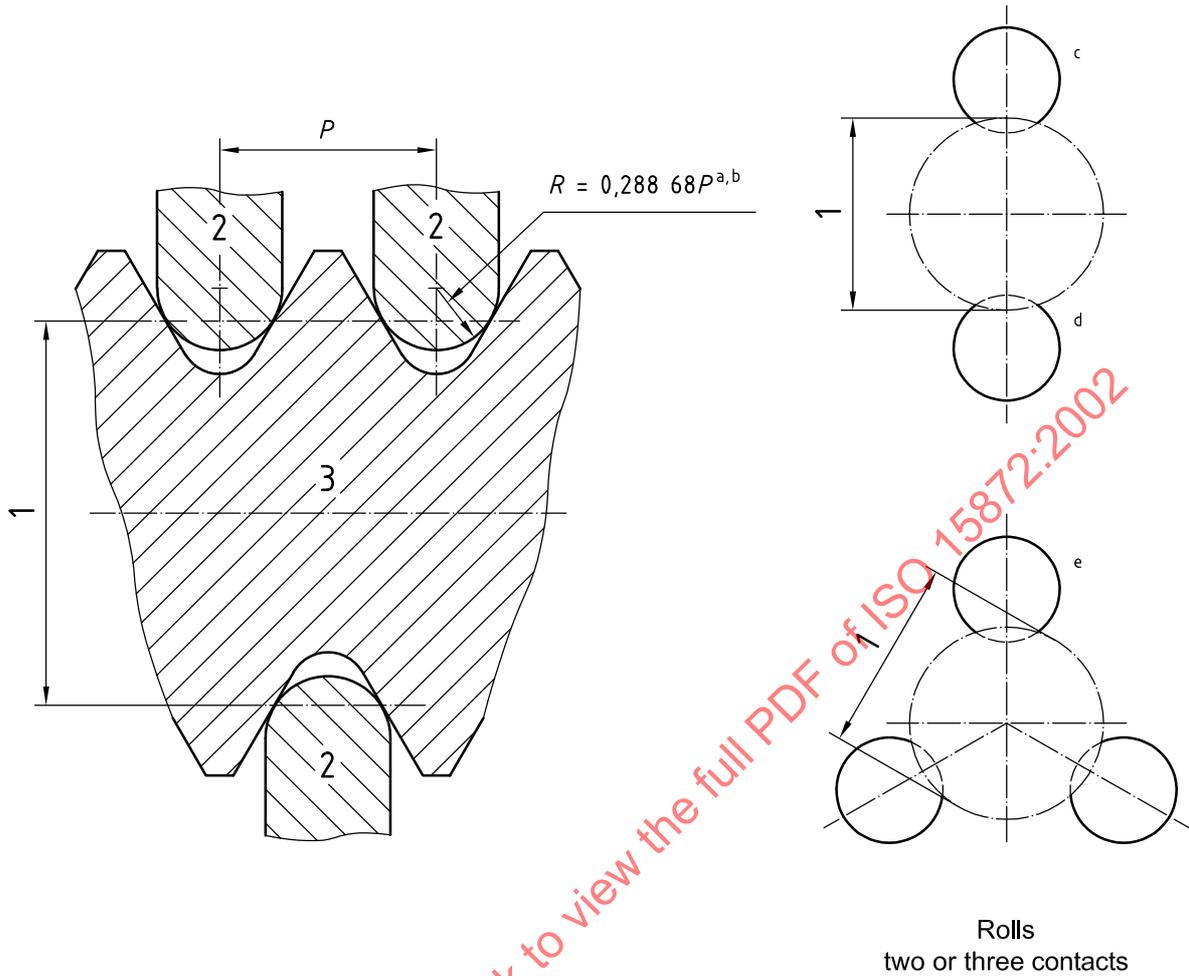


Key

- 1 Pitch diameter
- 2 Roll
- 3 External thread

- a Rolls — Gauging contacts
- b Best wire size radius
- c Two ribs on top roll
- d One rib on bottom roll
- e One rib on each roll, one-third pitch apart


Figure 3 — Simple pitch diameter indicating thread gauges with radius roll for external threads

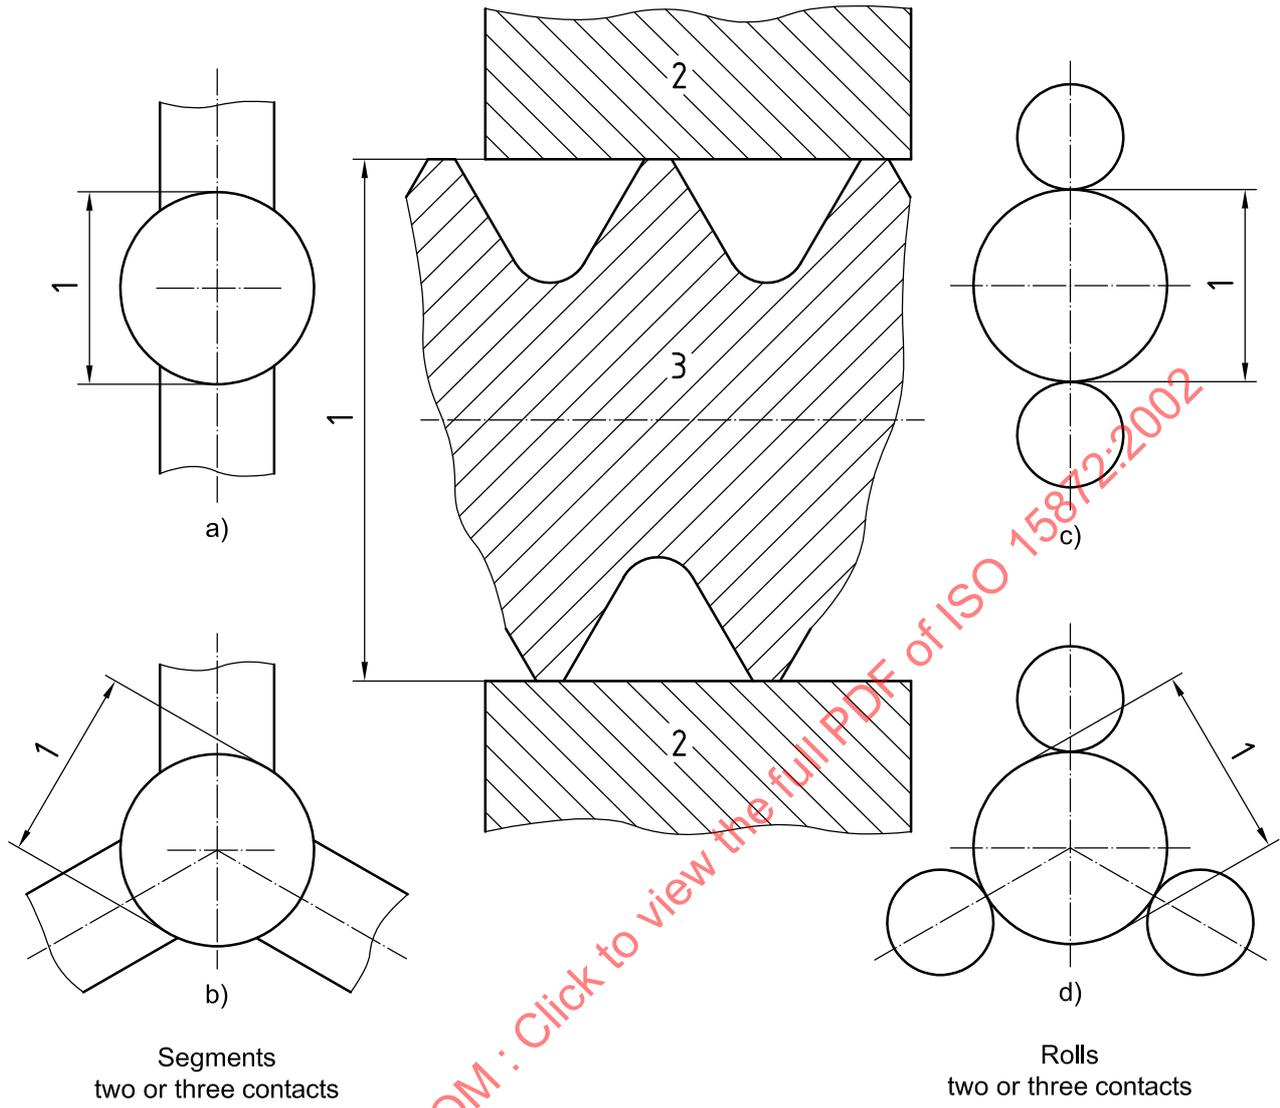

Key

- 1 Major diameter
- 2 Plain gauge contact
- 3 External thread

Figure 4 — Major diameter indicating plain gauges for external threads

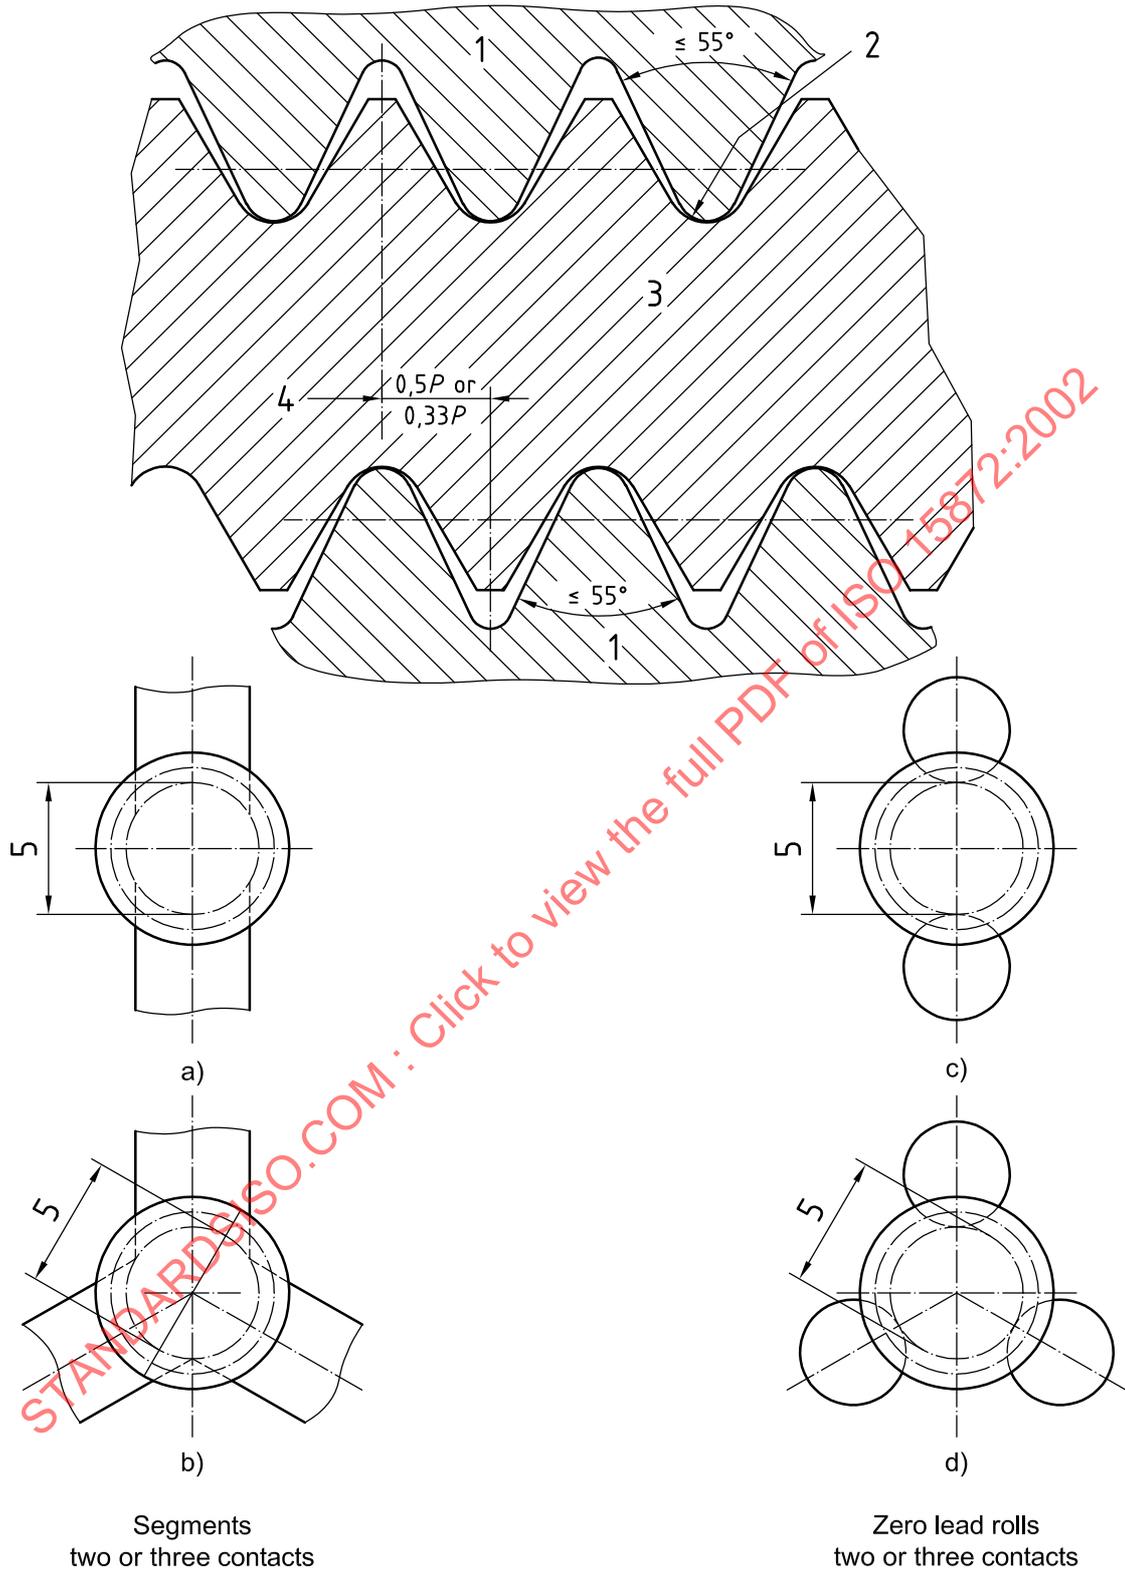


STANDARDISO.COM : Click to view the full PDF of ISO 15872:2002

Key

- | | | | |
|---|--|---|--|
| 1 | Three thread segments or rolls | 4 | For two or three contacts respectively |
| 2 | Radius not to exceed root radius of part | 5 | Minor diameter |
| 3 | External thread | | |

Figure 5 — Minor diameter indicating thread gauges for external threads

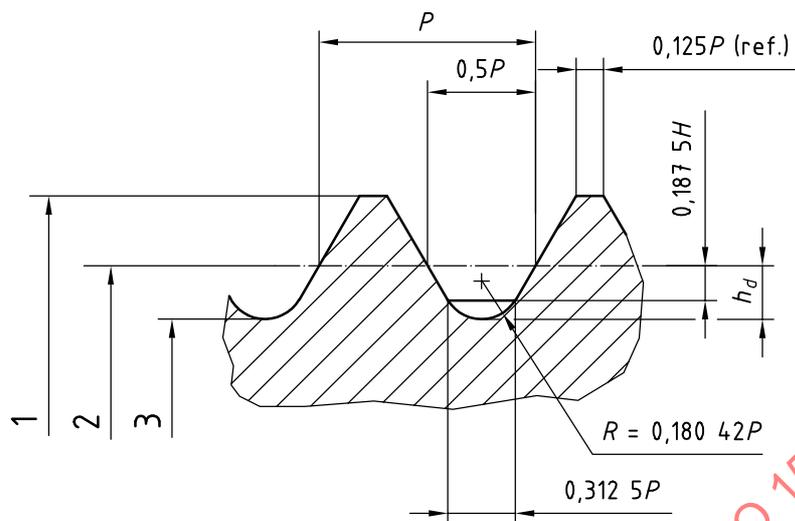


Key

- 1 Major diameter
- 2 Pitch diameter
- 3 Minor diameter

Figure 6 — GO full form screw plug gauges for internal maximum material threads

STANDARDSISO.COM : Click to view the full PDF of ISO 15872:2002

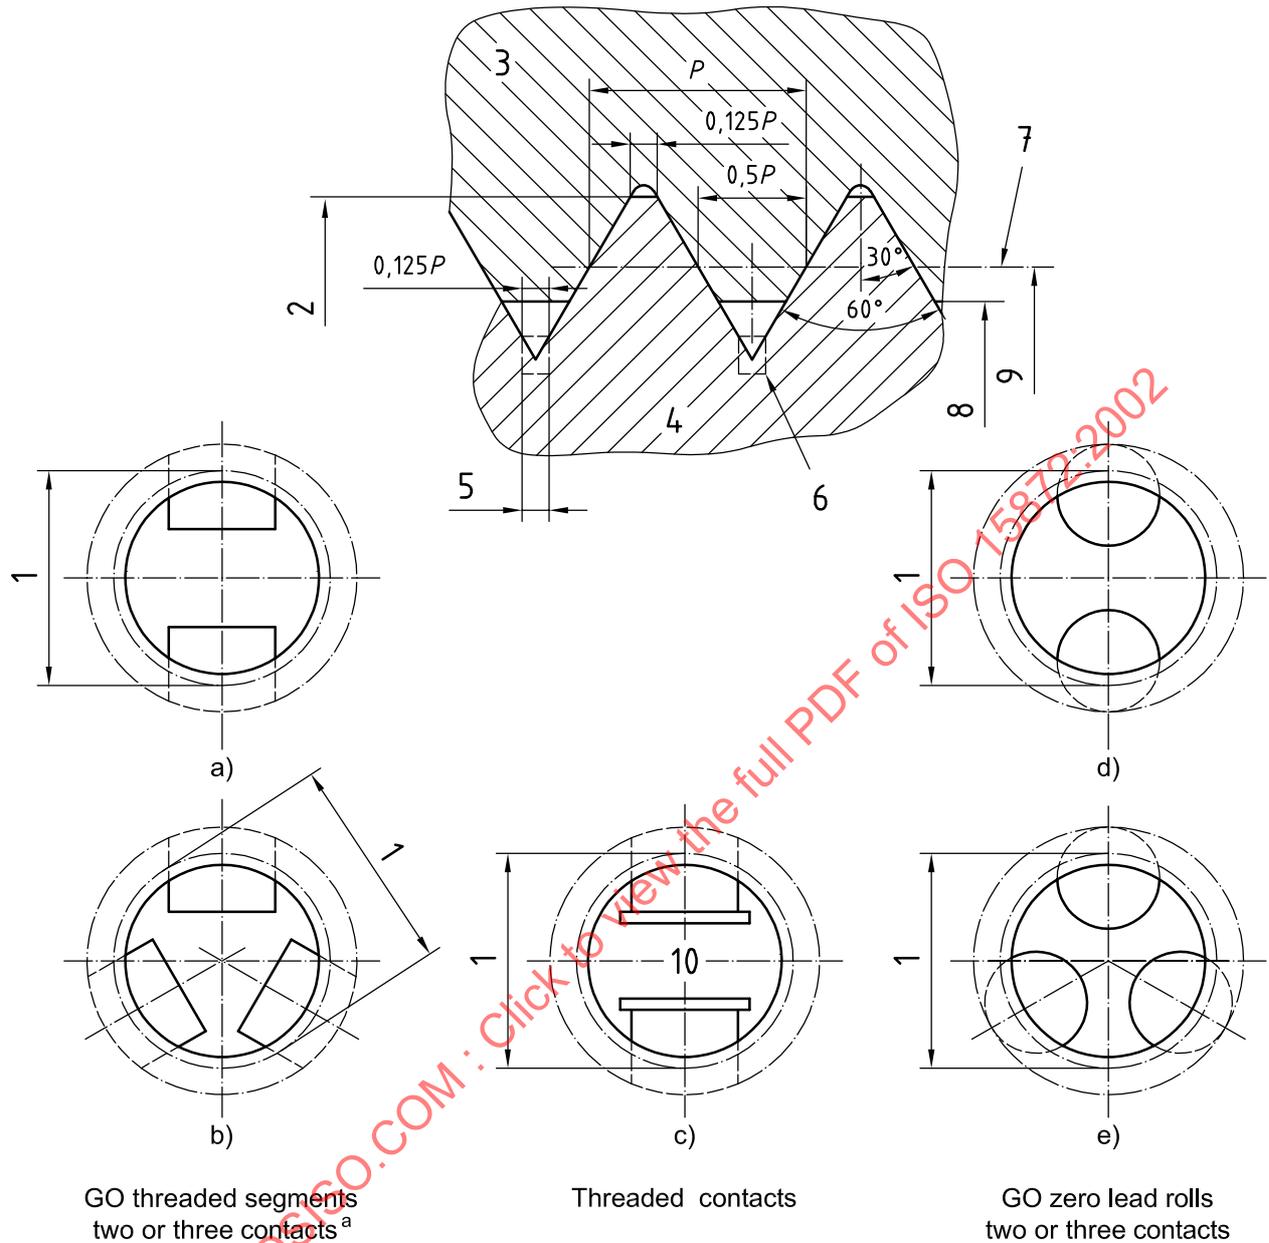

GO threaded segments
two or three contacts^a

Threaded contacts


GO zero lead rolls
two or three contacts

Key

- | | | | |
|---|---|----|---|
| 1 | Pitch diameter | 6 | Form of relief optional — Width approximately central when undercut |
| 2 | Minimum major diameter of product internal thread | 7 | Pitch cylinder |
| 3 | Minimum product internal thread | 8 | Minimum minor diameter of product internal thread |
| 4 | Gauge thread form | 9 | Minimum pitch diameter of product internal thread |
| 5 | Clear $0,125P$ when undercut | 10 | Fingers |


^a The total segment contact to be a minimum of 25 % of circumference.

Figure 7 — Virtual pitch diameter indicating thread gauges for internal threads

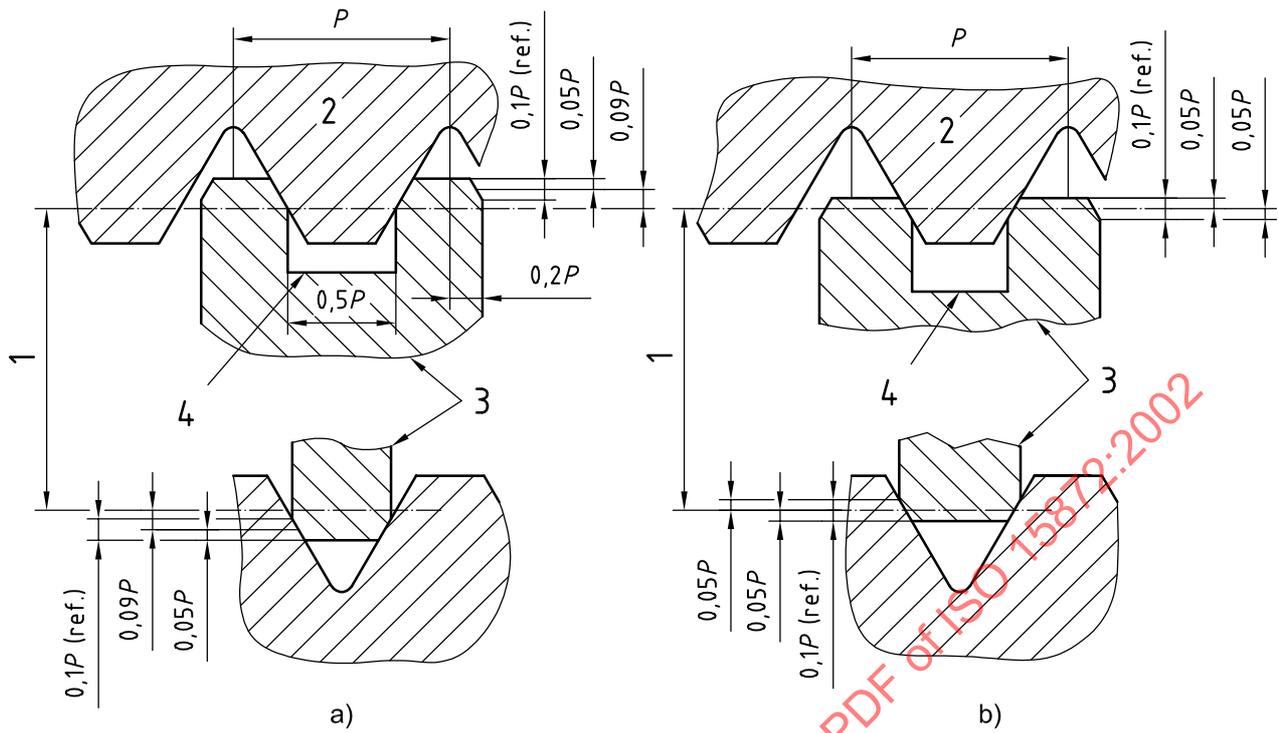


Contacts above pitch line^a

Contacts central on pitch line^a

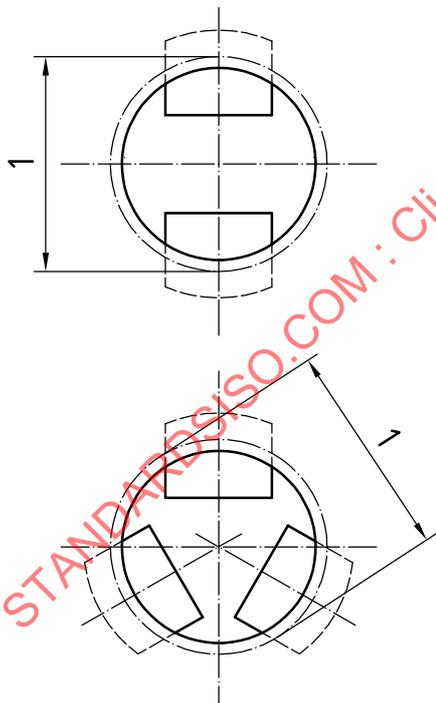

Segments
two or three contacts^b

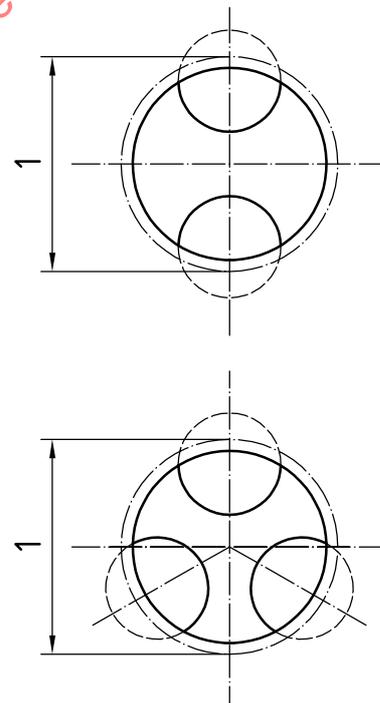

Rolls
two or three contacts


Key

- | | | | |
|---|-----------------|---|-------------------------|
| 1 | Pitch diameter | 3 | Gauging elements |
| 2 | Internal thread | 4 | Form of relief optional |



^a Alternate designs: Contacts in other positions near the pitch cylinder may also be applied.

^b The total segment contact to be 25 % or more of circumference.

Figure 8 — Simple pitch diameter indicating thread gauges with cone and vee for internal threads

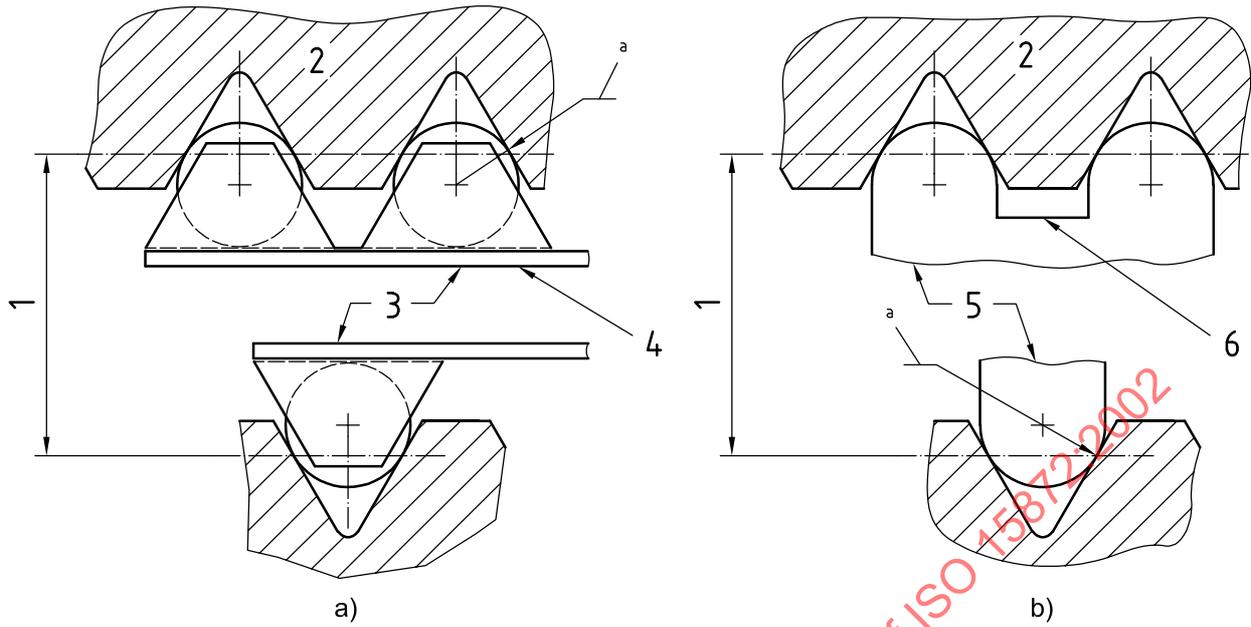

Three roll type: one rib on each roll,
one-third pitch apart
Two roll type: two ribs on one roll,
one rib on other roll, one-half pitch apart

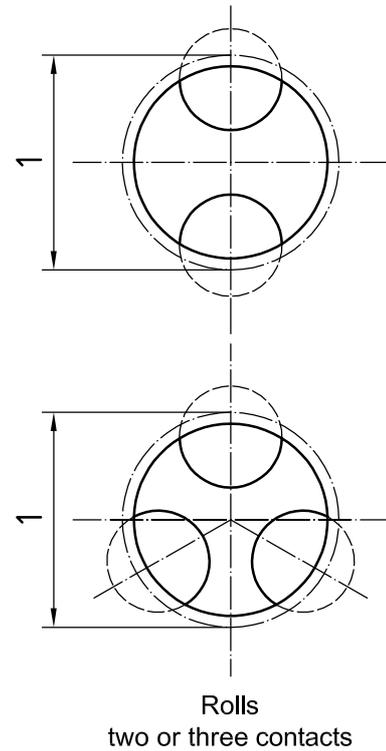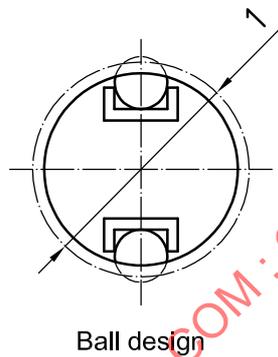


Key

- | | | | |
|---|--|---|---|
| 1 | Pitch diameter | 5 | Gauging contacts with one-half best size thread wire diameter |
| 2 | Internal thread | 6 | Form of relief optional |
| 3 | Gauging contacts with best size thread balls | | |
| 4 | Floating — Spaced three pitches apart | | |

^a Best wire size radius = 0,288 68P.

Figure 9 — Simple pitch diameter indicating thread gauges with radius roll for internal threads

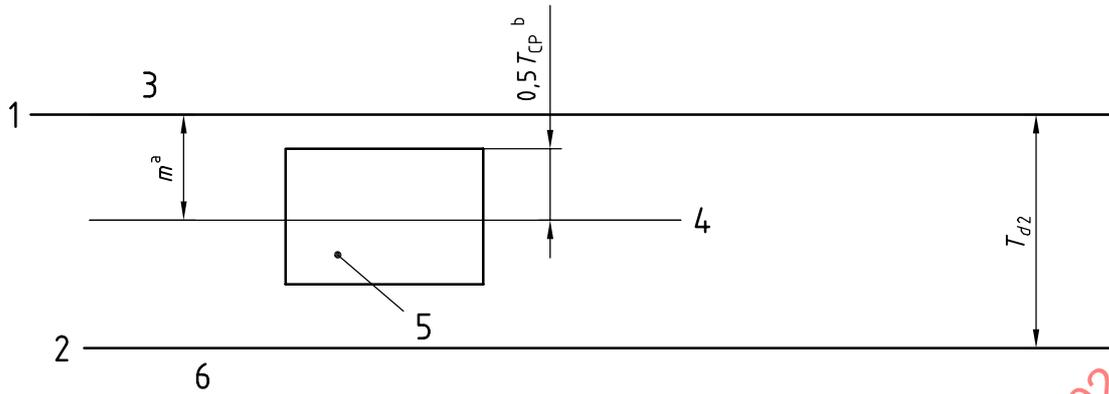


Key

- | | |
|---|---------------------------------|
| 1 GO | 4 Average simple pitch diameter |
| 2 NOT GO | 5 Gauge pitch diameter |
| 3 Maximum pitch diameter, external thread | 6 Lower limit |

- a See 7.1.
 b See Table 2.

Figure 10 — Tolerance zone for the pitch diameter of GO thread setting plug gauges

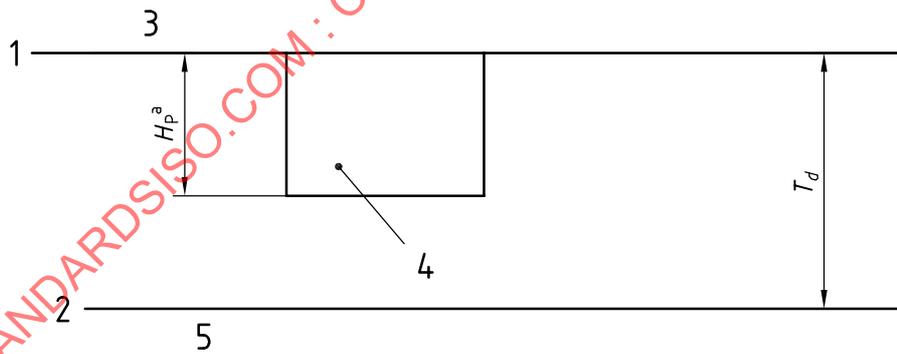


Key

- | | |
|---|----------------------|
| 1 GO | 4 Setting plug gauge |
| 2 NOT GO | 5 Lower limit |
| 3 Maximum major diameter, external thread | |

- a See 6.1.4.

Figure 11 — Tolerance zone for setting plain plug gauges for major diameter of external threads

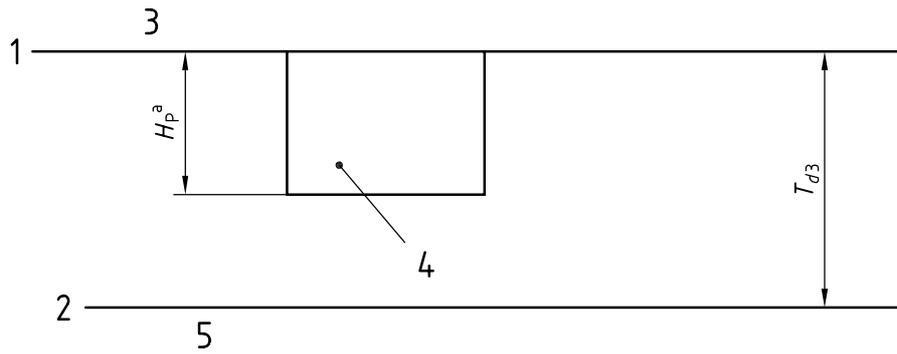**Key**

- | | | | |
|---|---|---|--------------------|
| 1 | GO | 4 | Setting plug gauge |
| 2 | NOT GO | 5 | Lower limit |
| 3 | Maximum minor diameter, external thread | | |

^a See 6.1.4.

Figure 12 — Tolerance zone for setting plain plug gauges for minor diameter of external threads

STANDARDSISO.COM : Click to view the full PDF of ISO 15872:2002