

---

---

**Road vehicles — Detection of exhaust  
system leaks — Helium test method and  
detection device specification**

*Véhicules routiers — Détection des fuites du dispositif  
d'échappement — Méthode d'essai à l'hélium et spécification du  
dispositif de détection*

STANDARDSISO.COM : Click to view the full PDF of ISO 16247:2004



**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 16247:2004

© ISO 2004

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 16247 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 5, *Engine tests*.

STANDARDSISO.COM : Click to view the full PDF of ISO 16247:2004

[STANDARDSISO.COM](https://standardsiso.com) : Click to view the full PDF of ISO 16247:2004

# Road vehicles — Detection of exhaust system leaks — Helium test method and detection device specification

## 1 Scope

This International Standard specifies a helium test method for detecting and localizing gas leaks in the exhaust systems of road vehicles equipped with an internal combustion engine, in order to improve the quality of exhaust gas measurements. In doing so, it completes the requirements of ISO 3929, applicable regulations and, depending on the leak rate to be detected, ISO 13556. The method is particularly applicable for use in automotive workshops, by end-of-line of automotive and exhaust parts manufacturers, in laboratories prior to exhaust emission tests, and in testing and diagnosis stations.

## 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3929, *Road vehicles — Measurement methods for exhaust gas emissions during inspection or maintenance*

## 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

### 3.1

#### **exhaust system**

all parts between the joint face of the cylinder head(s) and the outlet pipe(s)

### 3.2

#### **leak**

outward exhaust gas flow or inward air flow which can affect the exhaust emissions measurement result

### 3.3

#### **tracer gas**

gas used for detecting leaks

NOTE The method specified by this International Standard uses helium as the tracer gas.

### 3.4

#### **detection device**

device designed to detect low concentrations of specified tracer gas and so facilitate the location of leaks

### 3.5

#### **pressurisation device**

device used to keep the exhaust system at the pre-determined pressure

### 3.6

#### **restriction and calibration device**

device designed to increase the pressure in the exhaust line, in order to facilitate the detection and localization of leaks, and to gauge the exhaust line involving tracer gas introduced by a plugged outlet

3.7

**detection time**


time needed to obtain a signal useful for the operator which indicates a leak equivalent to a 0,1 mm diameter hole with the engine running at idle speed and 2 % helium (He) in the exhaust gas flow

**4 Apparatus**

**4.1 Equipment for auditive detection**

This shall consist of the following.

**4.1.1 Pressurization device**, comprising the following (see Figure 1).

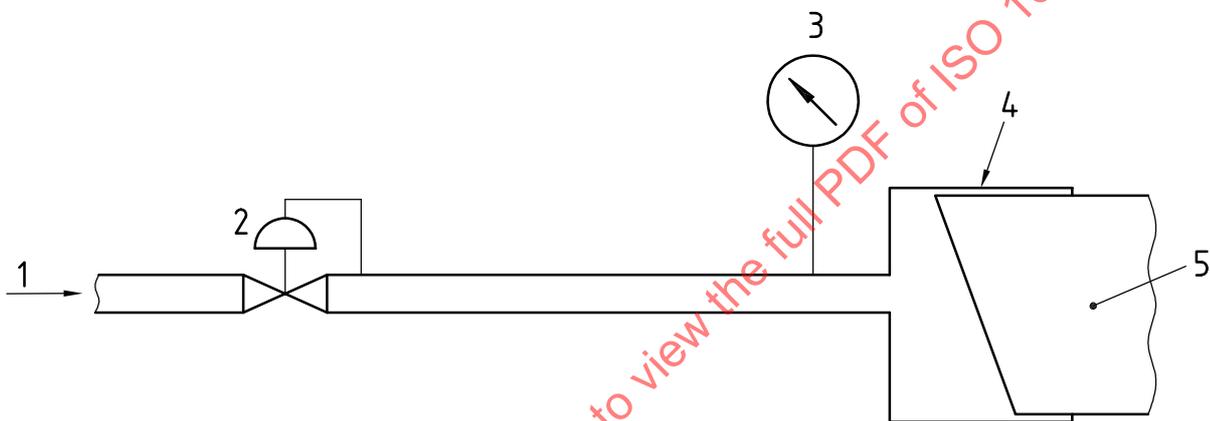

- Key**
- 1 air
  - 2 pressure regulator
  - 3 manometer
  - 4 flexible connecting device
  - 5 exhaust outlet

**Figure 1 — Pressurization device**

**4.1.1.1 Supply of clean, dry, oil-free and compressed air**, capable of maintaining the pressure given in 5.2 b).

**4.1.1.2 Adjustable pressure regulator**, with a limit of 40 kPa(= 0,4 bar)<sup>1)</sup>.

**4.1.1.3 Manometer**, suitable and having an accuracy of ± 2 %.

**4.1.1.4 Flexible, leak-proof connecting device**, used to connect the pressurization device to the exhaust outlet, and adaptable to external or internal exhaust outlet tubing.


For exhaust systems with multiple outlets, each outlet shall be pressurized and tested separately. Outlets not pressurized shall be plugged.

1) 1 bar = 0,1 MPa = 10<sup>5</sup> Pa; 1 MPa = 1 N/mm<sup>2</sup>

## 4.2 Equipment for helium detection

This shall consist of the following.

**4.2.1 Tracer gas injection device**, comprising the following (see Figure 2).

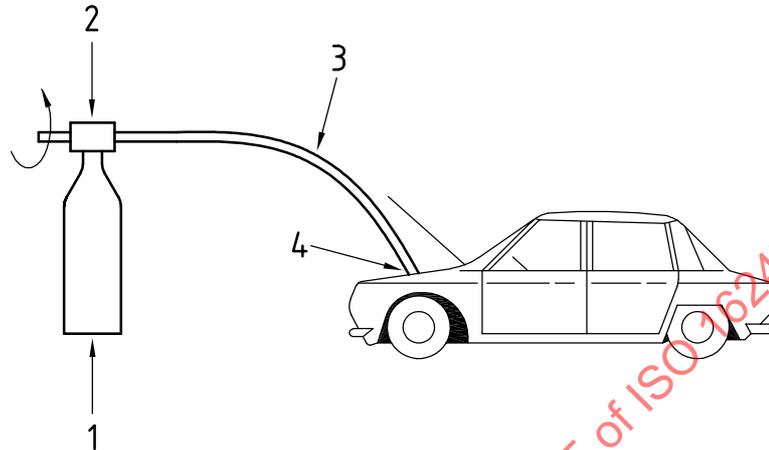

### Key

- 1 gas bottle
- 2 flow-rate adjusting device
- 3 gas injection pipe
- 4 engine air intake

**Figure 2 — Helium injection device**

**4.2.1.1 Industrial helium gas bottle**, with gas flow-rate adjusting device.


**4.2.1.2 Gas injection pipe**, to be connected to the engine air intake.

**4.2.2 Connecting device** for connecting the restriction and calibration device (4.2.3), adaptable to external or internal exhaust outlet tubing, and sufficiently flexible and leak-proof.

**4.2.3 Restriction and calibration device**, its restriction part being used to add 3 kPa (= 0,03 bar) pressure in the exhaust line, in order to make all leaks from the exhaust line positive compared to the initial state and render the detection more convenient, and its calibration part constituted by a 1 mm diameter calibrated hole for adjusting the helium concentration needed during the leak check.

NOTE Generally, in order to obtain a pressure increase of 3 kPa (= 0,03 bar), it is sufficient to reduce the exhaust outlet section to 15 mm with a section reducer.

See Figure 3.

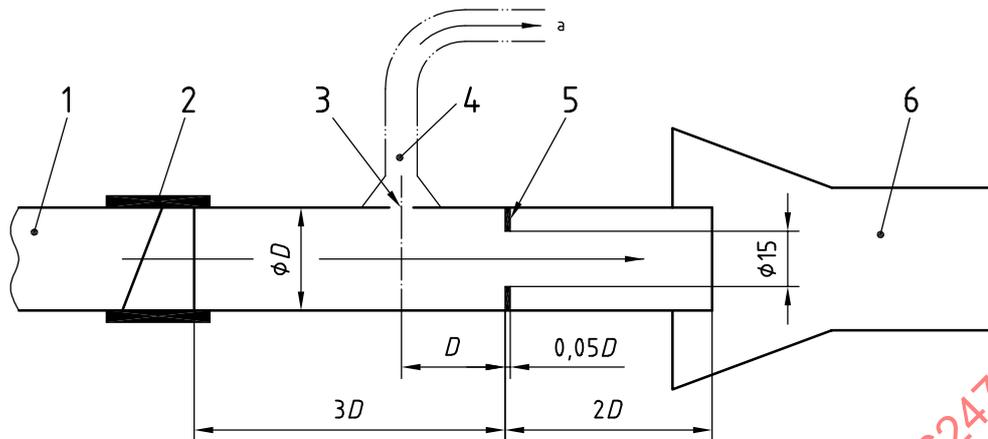

**Key**

- 1 exhaust outlet
- 2 flexible connecting device
- 3 1 mm diameter calibrated hole
- 4 sampling line
- 5 restriction device
- 6 gas outlet

<sup>a</sup> To the helium detector.

**Figure 3 — Restriction and calibration device**

**4.2.4 Detection device**, having the following characteristics and requirements.

- All components of its gas handling system shall be made of corrosion-resistant material, the material employed for the line shall not retain helium, and the material of the sampling probe shall withstand the exhaust gas temperature (200 °C) and shall be rigid.
- It shall have both a handheld display and an audio leak indicator.
- The sampling line tube length shall be at least 6 m.
- The sampling probe (see Figure 4) shall guarantee the accessibility to any area around the exhaust system.
- The sampled gas flow shall be filtered to remove any water and dust.
- The equipment shall provide a warning message to the operator when the sampled flow is insufficient.
- There shall be a 20 000 µl/l (= 20 000 ppm by volume)<sup>2)</sup> helium (He) mark on the display (see Figure 5).
- The detection device shall have
  - 1) a detection time ≤ 5 s,
  - 2) sensitivity only to helium,
  - 3) a capacity to detect a calibrated leak of 1 mm diameter under optimal detection conditions, with the engine running at the idle speed and 20 000 µl/l (= 20 000 ppm by volume) helium in the exhaust gas flow,


2) "Parts per million (ppm)" is a deprecated unit, i.e. not accepted by the International System of Units, SI. It is used exceptionally in this International Standard, in parentheses, immediately following the SI unit of equivalent value in order to correspond to other, closely related and already published, standards. The accepted SI form for the expression of a volume fraction is in units of microlitres per litre (µl/l), or, alternatively, as 10<sup>-6</sup> or as a percentage volume fraction (% volume fraction). See ISO 31-0:1992, 2.3.3, and ISO 31-8:1992.

- 4) a constant flow chosen to obtain the maximum reading sensitivity, and
- 5) when using a car running at idle speed or an equivalent gas generator, under optimal measurement conditions, the conventional calibration curve given in Figure 6, using a pipe with calibrated leaks of 0,1 mm, 0,2 mm, 0,5 mm, 0,8 mm and 1 mm.

— The detection device shall operate under the following conditions:


- 1) power supply appropriated to local standards and the user's needs;
- 2) ambient temperature of 5 °C to 40 °C;
- 3) relative ambient humidity of 90 % max;
- 4) ambient pressure of 860 hPa to 1 060 hPa.

Dimensions in millimetres

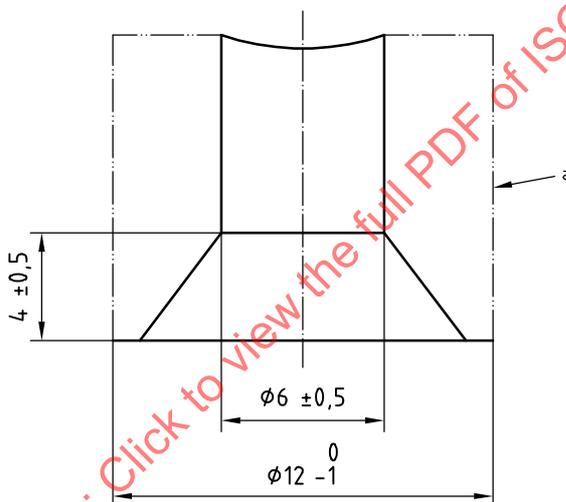

<sup>a</sup> Dimensions and external shapes are free choice.


Figure 4 — Sampling probe

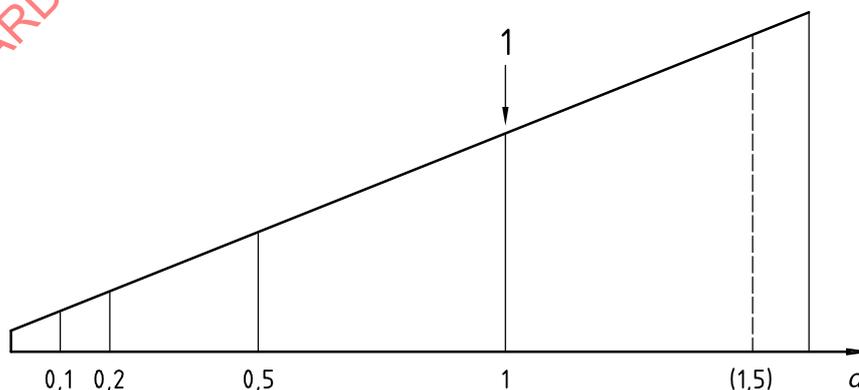

**Key**

- d* leak diameter, in mm
- 1 20 000 µl/l (= 20 000 ppm) mark

Figure 5 — Display scheme

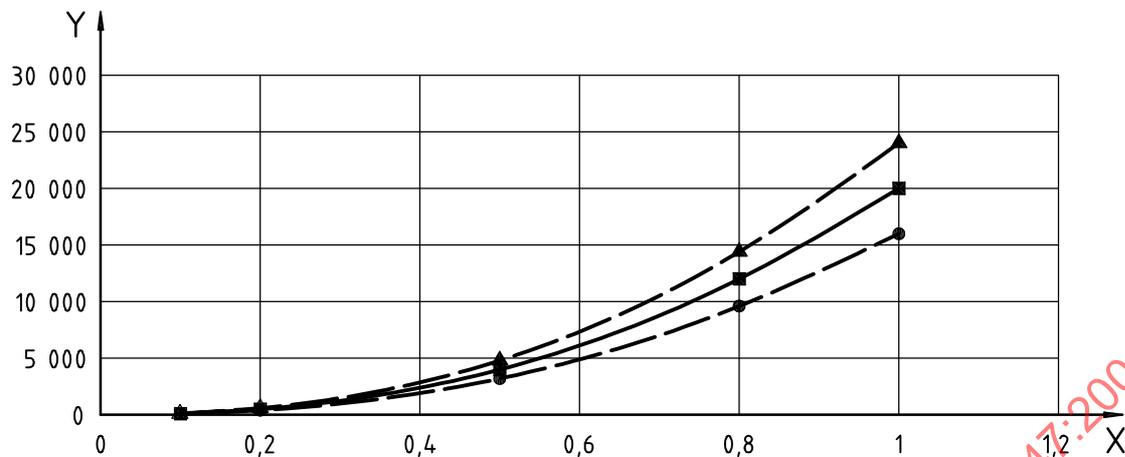

X hole diameter, mm  
 Y helium µl/l (ppm)

Figure 6 — Apparatus calibration data

## 5 Test method

### 5.1 General

The search for leaks is made in two main steps.

- Step 1: engine stopped — auditive detection — exhaust line pressurized.
- Step 2: engine running at idling speed — hot exhaust system — detection using helium tracer gas.

### 5.2 Procedure — Step 1


The aim of this procedure is to detect major exhaust system leaks, corresponding to holes 1,5 mm to 2 mm diameter and greater, in preparation for Step 2. It may be performed with the exhaust system hot, or cold and pressurized.

- a) Install the pressurization device at the exhaust outlet as shown in Figure 1.
- b) Pressurize the exhaust system to  $0,4 \text{ kPa} \pm 0,05 \text{ kPa}$  (=  $0,4 \text{ bar} \pm 0,05 \text{ bar}$ ).
- c) Detect and localize the leak; listen for the whistling which proves the presence of leak. The operator may be aided by the feeling of the air jet on his hand.
- d) Repair the leak on the defective part(s) according to the vehicle manufacturer's instructions.
- e) After repair, check again that there are no audible leaks.
- f) Remove the pressurization device.
- g) Before proceeding to Step 2, warm up the vehicle in accordance with either the manufacturer's instructions or ISO 3929.

### 5.3 Procedure — Step 2

The aim of this procedure is to detect exhaust systems leaks corresponding to up to a 0,1 mm diameter hole, using helium tracer gas.

- a) Install the equipment in accordance with Figure 7.
- b) Check that the detection device is prepared for detecting leaks following the manufacturer's instructions.
- c) Install the restriction and calibration device in accordance with Figure 3 at the exhaust line outlet, with the sampling probe over the 1 mm diameter hole.
- d) Install the helium tracer gas injector device at the engine air inlet in accordance with Figure 2.
- e) Slowly adjust the helium while the engine is running at idling speed, so that the display device is aligned at the 20 000  $\mu\text{l/l}$  (= 20 000 ppm by volume) He indicator mark (see Figure 5). Do not make any further adjustment.
- f) Remove the sampling probe from the 1 mm diameter hole. Plug the hole after removing the probe.
- g) Scan the whole exhaust line with the sampling probe. The audio signal indicates a leak (the gap between the sampling probe and the walls of the exhaust lines should be no greater than 2 cm).
- h) Look for the maximum signal in order to localize the position of the first leak. Mark this leak. Continue to scan the whole exhaust system and do the same in order to localize other potential leaks.
- i) Turn off the supply of helium at the bottle and stop the engine.
- j) After repairing all the identified leaks, repeat e) to i) until no further leaks are detected.

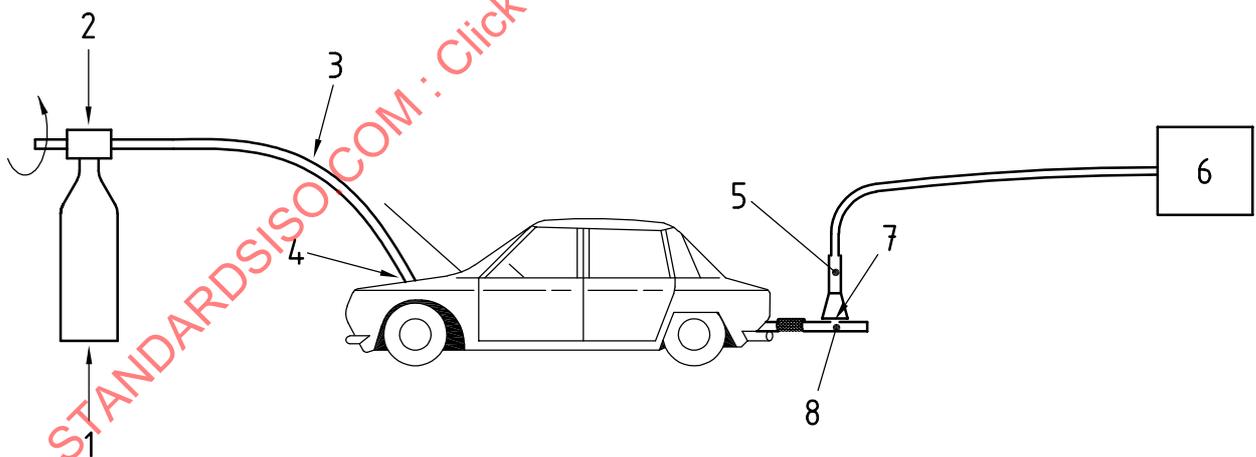

#### Key

- 1 gas bottle
- 2 flow-rate adjusting device
- 3 gas injection pipe
- 4 engine air intake
- 5 detection device
- 6 helium detector
- 7 0,1 mm diameter calibrated hole
- 8 pressurization device

Figure 7 — Test set-up — Step 2