

---

---

**Road vehicles — Tachograph  
systems —**

Part 4:  
**Display unit communication interface**

*Véhicules routiers — Systèmes tachygraphes —*

*Partie 4: Interface de communication de l'unité d'affichage*

STANDARDSISO.COM : Click to view the full PDF of ISO 16844-4:2022



STANDARDSISO.COM : Click to view the full PDF of ISO 16844-4:2022



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2022

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11  
Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

	Page
Foreword.....	iv
Introduction.....	v
<b>1 Scope.....</b>	<b>1</b>
<b>2 Normative references.....</b>	<b>1</b>
<b>3 Terms and definitions.....</b>	<b>1</b>
<b>4 Symbols and abbreviated terms.....</b>	<b>2</b>
<b>5 CAN physical layer requirements.....</b>	<b>3</b>
5.1 General.....	3
5.2 CAN bit-timing requirements.....	3
5.2.1 General.....	3
5.2.2 CAN bit-timing requirements for 250 kbit/s.....	3
5.2.3 CAN bit-timing requirements for 500 kbit/s.....	4
<b>6 CAN data link layer requirements.....</b>	<b>4</b>
<b>7 Transport layer requirements.....</b>	<b>4</b>
<b>8 Application layer.....</b>	<b>4</b>
8.1 General requirements and permissions.....	4
8.2 RQST — Request message.....	5
8.3 ACKM — Acknowledgement message.....	5
8.4 TD — Time/date.....	6
8.5 VI — Vehicle identification.....	6
8.6 VDHR — High-resolution vehicle distance.....	6
8.7 SERV — Service information.....	6
8.8 RESET — Reset.....	6
8.9 TCO1 — Tachograph.....	7
8.10 DI — Driver's identification.....	7
8.11 TDA — Time/date adjust.....	8
8.12 EEC1 — Electronic engine controller 1.....	8
<b>9 Optional parameter groups.....</b>	<b>9</b>
9.1 CL — Cab illumination message.....	9
9.2 Driving and rest times driver 1/2 - DRTD1/2.....	9
9.2.1 DRTD1 — Driver 1 driving rest times.....	9
9.2.2 DRTD2 — Driver 2 driving rest times.....	10
<b>10 Recommended source address (SA) assignments.....</b>	<b>10</b>
<b>Bibliography.....</b>	<b>12</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 31, *Data communication*.

This third edition cancels and replaces the second edition (ISO 16844-4:2015), which has been technically revised.

The main changes are as follows:

- part 5 of this series (ISO 16844-5) has been removed due to its technical irrelevance,
- correction of the typos and mistakes in the text,
- adoption of the content according to the new version of the ISO guidelines,
- adoption of the content according to the new technical requirements,
- alignment of the content regarding to the referred standards.

A list of all parts in the ISO 16844 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html).


## Introduction

This document supports and facilitates the communication between electronic control units (ECUs) and a digital tachograph.

The digital tachograph concept is based upon a recording equipment storing data, related to the activities of the various drivers driving the vehicle, on which it is installed.

During the normal operational status of the recording equipment, data stored in its memory are accessible to different entities (drivers, authorities, workshops, transport companies) in different ways (displayed on a screen, printed by a printing device, downloaded to an external device). Access to stored data is controlled by a smart card inserted in the tachograph.

A typical tachograph system is shown in [Figure 1](#).

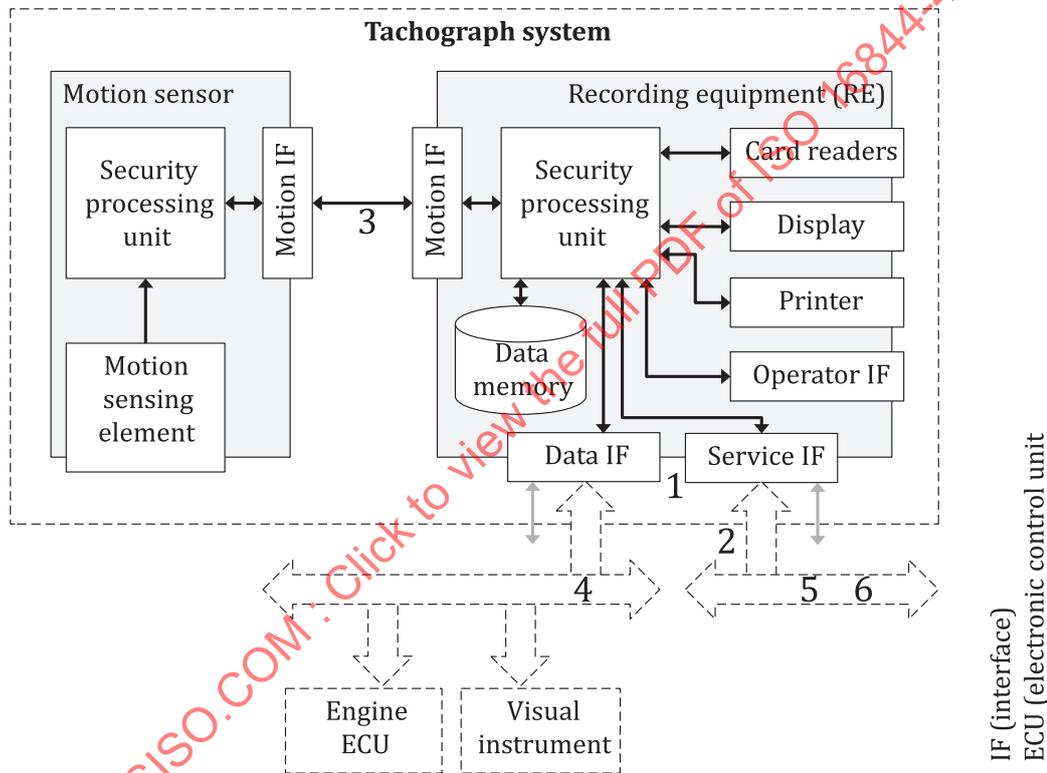

### Key

- |   |  |   |   |
|---|--|---|---|
| 1 | data and service IF connector standardized in ISO 16844-1                        | 4 | CAN-based data IF including parameter groups standardized in this document                  |
| 2 | electrical data and service IF requirements standardized in ISO 16844-2          | 5 | optional CAN-based service IF standardized in ISO 16844-6                                   |
| 3 | communication interface between motion sensor and RE standardized in ISO 16844-3 | 6 | data identifier (DID) specification for the optional service IF standardized in ISO 16844-7 |

**Figure 1 — Typical ISO 16844-conformant tachograph system**

[STANDARDSISO.COM](https://standardsiso.com) : Click to view the full PDF of ISO 16844-4:2022

# Road vehicles — Tachograph systems —

## Part 4: Display unit communication interface

### 1 Scope

This document specifies the CAN-based data communication between the display unit and other devices connected to an SAE J1939-based in-vehicle network. The provided requirements and recommendations cover physical, data link, network, and application layers according to the OSI reference model. Additionally, it specifies the parameter groups, which are supported.

### 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 11898-1, *Road vehicles — Controller area network (CAN) — Part 1: Data link layer and physical signalling*

ISO 16844-1, *Road vehicles — Tachograph systems — Part 1: Recording equipment data and service connector*

ISO 16844-7, *Road vehicles — Tachograph systems — Part 7: Parameters*

SAE J1939-11, *Physical Layer-250K bits/s, Twisted Shielded Pair*

SAE J1939-14, *Physical Layer, 500 Kbps*

SAE J1939-21, *Data Link Layer*<sup>1)</sup>

SAE J1939-71, *Vehicle Application Layer*

SAE J1939DA, *Digital Annex*

### 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 16844-1 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

#### 3.1

##### visual instrument

speedometer and display(s) for odometer and trip meter data

1) SAE does not use the terminology of the OSI reference model: the application and transport layer is named data link layer (SAE J1939/21) and the parameter value specification is named vehicle application layer (SAE J1939/71). The parameter specifications are provided in SAE J1939DA.

## 4 Symbols and abbreviated terms

For the purposes of this document, the following the following symbols and abbreviated terms apply.

ACK	positive acknowledge
BAM	broadcast announce message
CAN	controller area network
DA	destination address
DP	data page
ECU	electronic control unit
EDP	extended data page
EOL	end-of-line
LSB	least significant bit/byte
MSB	most significant bit/byte
NACK	negative acknowledge
OSI	open systems interconnection
P	priority
PDU	protocol data unit
PF	PDU format
PG	parameter group
PGN	parameter group number
Phase_Seg1	phase buffer segment 1
Phase_Seg2	phase buffer segment 2
Prop_Seg	propagation time segment
PS	PDU specific
RE	recording equipment
SA	source address
Sync_Seg	synchronization segment
TP.DT	transport protocol data transfer
$t_{BIT}$	bit time
$t_q$	time quanta
$t_{SEG1}$	timing segment 1
$t_{SEG2}$	timing segment 2

$t_{SJW}$             synchronization jump width  
 VIN                vehicle identification number

## 5 CAN physical layer requirements


### 5.1 General

The CAN physical layer interface shall meet the requirements of SAE J1939-11 and SAE J1939-14 unless otherwise specified in this document. The CAN cabling and termination is not in the scope of this document.

### 5.2 CAN bit-timing requirements

#### 5.2.1 General

Figure 2 shows the terms used in this document and those defined in ISO 11898-1. According to ISO 11898-1 the  $t_{Sync\_Seg}$  has the length of  $1 t_q$ .

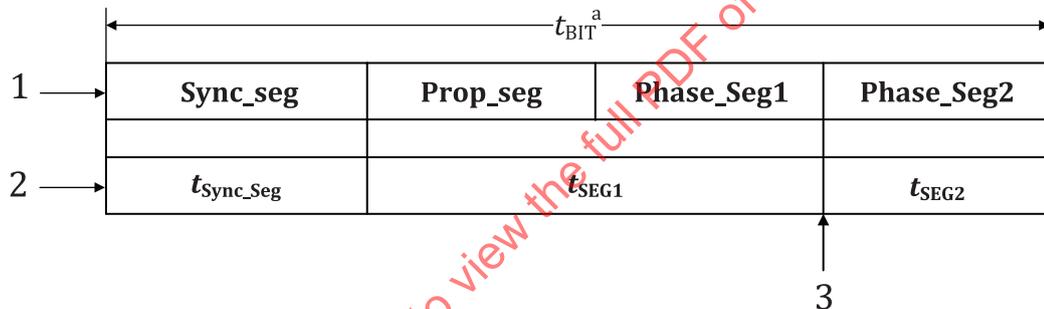

#### Key

- 1 ISO 11898 terms
- 2 ISO 16844 terms
- 3 sample-point
- <sup>a</sup> Nominal bit-time.

Figure 2 — Partition of bit time

For both specified bit-rates, 250 kbit/s and 500 kbit/s, the single sampling mode shall be used. The sample-point shall be between 80 % and 88 % of the nominal bit-time.

The following formula is used to calculate  $t_{SEG1}$ :

$$t_{SEG1} = t_{BIT} - t_q - t_{SEG2}$$

#### 5.2.2 CAN bit-timing requirements for 250 kbit/s

Table 1 specifies the CAN bit-timing parameters for 250 kbit/s.

Table 1 — CAN bit-timing parameter values for 250 kbit/s, single data sampling mode

Parameter	Timing setting		
	Minimum	Nominal	Maximum
$t_{BIT}$	3 980 ns	4 000 ns	4 020 ns

**Table 1** (continued)

Parameter	Timing setting		
	Minimum	Nominal	Maximum
$t_q$	—	—	400 ns

Table 2 specifies  $t_{SJW}$  and  $t_{SEG2}$  for several  $t_q$  values.

**Table 2 — CAN bit-timing parameter values for 250 kbit/s for a given time quanta,  $t_q$**

$t_q$	$t_{SJW}$	$t_{SEG2}$
200 ns	600 ns	600 ns
250 ns	500 ns	750 ns
334 ns	668 ns	668 ns
400 ns	800 ns	800 ns

### 5.2.3 CAN bit-timing requirements for 500 kbit/s

Table 3 specifies the CAN bit-timing parameters for 500 kbit/s.

**Table 3 — CAN bit-timing parameter values for 500 kbit/s, single data sampling mode**

Parameter	Timing setting		
	Minimum	Nominal	Maximum
$t_{BIT}$	1 980 ns	2 000 ns	2 020 ns
$t_q$	—	—	200 ns

Table 4 specifies  $t_{SJW}$  and  $t_{SEG2}$  for several  $t_q$  values.

**Table 4 — CAN bit-timing parameter values for 500 kbit/s for a given time quanta,  $t_q$**

$t_q$	$t_{SJW}$	$t_{SEG2}$
100 ns	300 ns	400 ns
125 ns	375 ns	375 ns
167 ns	334 ns	334 ns
200 ns	400 ns	400 ns

## 6 CAN data link layer requirements

The CAN data link layer shall comply with ISO 11898-1. Only CAN frames in classical extended frame format (CEFF) shall be transmitted. Remote frames shall not be transmitted.

## 7 Transport layer requirements

The transport layer shall comply with BAM as well as TP.DT as specified in SAE J1939-21.

## 8 Application layer

### 8.1 General requirements and permissions

The application layer shall comply with SAE J1939-21.

If the RE can provide the requested PG, it shall transmit it. If the RE cannot provide the requested PG, it shall respond with a NACK as specified in SAE J1939-21 in the case that it is addressed directly with addresses as specified in [Clause 10](#). In case of a global address, the RE shall ignore the RQST parameter group.

The CAN interface of the RE shall support the following messages (for details see SAE J1939DA):

- time/date (TD);
- vehicle identification (VI);
- high-resolution vehicle distance (HRVD);
- service information (SERV);
- reset (RESET);
- tachograph (TCO1);
- driver's identification (DI);
- time/date adjust (TDA);
- electronic engine controller 1 (EEC1).

The CAN interface of the RE may support the following messages (for details see SAE J1939DA):

- cab illumination (CL);
- and those specified in the [Clause 9](#).

Each parameter placed in the PG data field shall be implemented as specified in ISO 16844-7.

For parameters with a length of more than one byte, the LSB shall be located on the lower byte position. ASCII data shall be transmitted with the first character first. Exceptions are noted where applicable.

NOTE The PGNs in [Clause 8](#) can also be specified in SAE J1939<sup>[4]</sup> but are added here to provide an application specific baseline. Compatibility issues are addressed in the definition.

## 8.2 RQST — Request message

The request message shall comply with SAE J1939-21.

## 8.3 ACKM — Acknowledgement message

The acknowledgement message shall be according to SAE J1939-71. [Table 6](#) specifies the control byte values.

**Table 6 — Control byte specification**

Control byte	Definition	Use
0	Positive acknowledgment	<ul style="list-style-type: none"> <li>— When the local time adjustment was successful (see <a href="#">8.11</a>).</li> <li>— When the trip distance was reset (see <a href="#">8.8</a>).</li> </ul>
1	Negative acknowledgment	<ul style="list-style-type: none"> <li>— When a non-supported PGN was requested with a specific request.</li> <li>— When the local time adjustment was not successful (see <a href="#">8.11</a>).</li> </ul>
3	Cannot respond	<ul style="list-style-type: none"> <li>— When the PGN is supported but RE is busy and cannot respond now. Repeat request later.</li> </ul>

### 8.4 TD — Time/date

The time/date message shall be according to SAE J1939-71 (PG TD), except the message transmission rate, which shall be 1 s.

For parameters details, see ISO 16844-7.

### 8.5 VI — Vehicle identification

The vehicle identification message shall be according to SAE J1939-71. For parameters details, see [Table 7](#). The VIN data bytes shall be sent with MSB first, LSB last.

**Table 7 — PGN 65260 — VI parameter specification**

Byte pos.	Bit pos.	Parameter	Remark
1 to 17	-	VIN <sup>a</sup>	—
18	-	Delimiter (ASCII "**")	—

<sup>a</sup> This PG is defined with variable length in SAE J1939-71. For the use of the ISO 16844 series, the length shall be fixed as defined in [Clause 8](#).

### 8.6 VDHR — High-resolution vehicle distance

The high-resolution vehicle distance message shall be according to SAE J1939-71. For parameters details, see ISO 16844-7.

### 8.7 SERV — Service information

The service information message shall be according to SAE J1939-71. Service parameters shall be transmitted with the service component identification that has the nearest time until the next service inspection. The service components that shall be supported are the tachograph (periodic inspection due) and the two driver cards (card expiring). [Table 8](#) specifies the PG content.

**Table 8 — PGN 65216 — SERV parameter specification**

Byte pos.	Bit pos.	Parameter	Remark
1 to 3	-	Not used - send as "not available"	—
4	-	Service component identification	—
5	-	Service delay/calendar time based	—
6 to 8	-	Not used - send as "not available"	—

### 8.8 RESET — Reset

The reset information message shall be according to SAE J1939-71.

The RE shall accept reset from at least the visual instrument. The RE, upon reception of a correct reset message, shall reset the high-resolution trip distance and then send an ACK. A correctly formatted reset PG shall contain in parameter "Trip group 1" a value of 01<sub>2</sub>, and parameter "Service component identification" with a value of 252<sub>10</sub>. All other bits shall be set to one (1). The tachograph may use the reset message as a heartbeat from the visual instrument. Messages that are only used as heartbeat, i.e. do not request a reset, shall contain FF<sub>16</sub> in all data bytes. The heartbeat function of the reset message shall be EOL-programmable. [Table 9](#) specifies the PG attributes.

**Table 9 — PGN 56832 — RESET attribute specification**

Byte pos.	Bit pos.	Parameter	Remark
1	1 to 2	Trip group 1	—

Table 9 (continued)

Byte pos.	Bit pos.	Parameter	Remark
	3 to 4	Not used – send as "not available"	—
	5 to 8	Not used – send as "not available"	—
2	-	Service component identification	—
3 to 8	-	Not used – send as "not available"	—

## 8.9 TC01 — Tachograph

The TC01 PG shall be transmitted by the RE. All parameters except "Tachograph status — Direction indicator" are mandatory. The PG attributes shall be according to SAE J1939DA (PG TC01). [Table 10](#) specifies the PG content.

NOTE The transmission repetition time value can be configured according to ISO 16844-7.

Table 10 — PGN 65132 — TC01 parameter specification

Byte pos.	Bit pos.	Parameter	Remark
1	1 to 3	Work states — Driver 1 working state	—
	4 to 6	Work states — Driver 2 working state	—
	7 to 8	Work states — Drive recognize	—
2	1 to 4	Driver 1 states — Driver 1 time related states	—
	5 to 6	Driver 1 states — Driver card, driver 1	—
	7 to 8	Driver 1 states — Over speed	—
3	1 to 4	Driver 2 states — Driver 2 time related states	—
	5 to 6	Driver 2 states — Driver card, driver 2	—
	7 to 8	Reserved by document	—
4	1 to 2	Tachograph status — System event	—
	3 to 4	Tachograph status — Handling information	—
	5 to 6	Tachograph status — Tachograph performance	—
	7 to 8	Tachograph status — Direction indicator	—
5 to 6	-	Tachograph output shaft speed	—
7 to 8	-	Tachograph vehicle speed	—

## 8.10 DI — Driver's identification

The driver's identification message shall be according to SAE J1939-71.

The RE shall transmit driver identification as:

- if only driver card 1 is present, only the parameter driver 1 identification and two delimiters shall be transmitted,
- if only driver card 2 is present, a delimiter followed by parameter driver 2 identification and the second delimiter shall be transmitted,
- if both driver cards are present, the message is sent as stated in [Table 11](#), and
- if no driver cards are present, only the two delimiters shall be sent.

[Table 11](#) specifies the PG content. The driver 1 and driver 2 identification data bytes shall be sent with MSB first.

**Table 11 — PGN 65131 — DI parameter specification**

Byte pos.	Bit pos.	Parameter	Remark
1 to 19	-	Driver 1 identification	—
20	-	Delimiter (ASCII “*”)	—
21 to 39	-	Driver 2 identification	—
40	-	Delimiter (ASCII “*”)	—

### 8.11 TDA — Time/date adjust

The time/date adjust message shall be according to SAE J1939-71.

The RE shall accept time/date adjust from any device on the network. Upon reception of the message, the RE shall respond as follows:

- if the message was correct and the local offset time was adjusted correctly, the RE shall transmit an ACK;
- if the message was not correct or the local offset time was not adjusted, the RE shall transmit a NACK.

A correctly formatted time/date adjust message shall contain values other than "not available" in byte 7 and byte 8 only. Byte 1 to byte 6 shall always be transmitted with a value of "not available". All other messages will be considered as invalid. [Table 12](#) specifies the PG content.

**Table 12 — PGN 54528 — TDA parameter specification**

Byte pos.	Bit pos.	Parameter	Remark
1	-	Adjust seconds	Not used <sup>a</sup>
2	-	Adjust minutes	Not used <sup>a</sup>
3	-	Adjust hours	Not used <sup>a</sup>
4	-	Adjust month	Not used <sup>a</sup>
5	-	Adjust day	Not used <sup>a</sup>
6	-	Adjust year	Not used <sup>a</sup>
7	-	Adjust local minute offset	—
8	-	Adjust local hour offset	—

<sup>a</sup> Shall always be transmitted as "not available (FF<sub>16</sub>).

### 8.12 EEC1 — Electronic engine controller 1

The RE shall accept the EEC1 message when engine speed recording via CAN is implemented. The EEC1 message shall be according to SAE J1939-71. [Table 13](#) specifies the PG content.

**Table 13 — PGN 61444 — EEC1 parameter specification**

Byte pos.	Bit pos.	Parameter	Remark
1 to 3	-	Ignored	—
4 to 5	-	Engine speed	—
6 to 8	-	Ignored	—

## 9 Optional parameter groups

### 9.1 CL — Cab illumination message

The cab illumination information message shall be according to SAE J1939-71. When cab illumination via CAN is implemented, the RE shall accept the message from any source address and with destination address of the RE or the global address. [Table 14](#) specifies the PG content.

**Table 14 — PGN 53248 — CL parameter specification**

Byte pos.	Bit pos.	Parameter	Remark
1	-	Illumination brightness percentage	—
2	-	Switch backlight illumination brightness percentage	—
3	-	Switch indication illumination brightness percentage	—
4 to 8	-	Reserved by document	—

### 9.2 Driving and rest times driver 1/2 - DRTD1/2

#### 9.2.1 DRTD1 — Driver 1 driving rest times

The driving rest times of driver 1 PG shall be transmitted by the RE. All parameters are mandatory. It shall be used to transmit driver 1's driving times. [Table 15](#) specifies the PG attributes. [Table 16](#) specifies the PG content.

**Table 15 — PGN 64597— DRTD1 attribute specification**

Attribute	Value
Transmission repetition time	10 s
Data length	32 byte
Extended data page	0
Data page	0
PDU format	252 (PDU2)
PDU specific	85 (GE)
Default priority	6

**Table 16 — PGN 64597— DRTD1 parameter specification**

Byte pos.	Bit pos.	Parameter	Remark
1 to 2	-	Driver1RemainingCurrentDrivingTime	—
3 to 4	-	Driver1RemainingTimeUntilNextBreakOrRest	—
5 to 6	-	Driver1DurationOfNextBreakRest	—
7 to 8	-	Driver1RemainingTimeOfCurrentBreakRest	—
9 to 10	-	Driver1TimeLeftUntilNextDrivingPeriod	—
11 to 12	-	Driver1DurationOfNextDrivingPeriod	—
13 to 14	-	Driver1CurrentDailyDrivingTime	—
15 to 16	-	Driver1TimeLeftUntilNewDailyRestPeriod	—
17 to 18	-	Driver1MinimumDailyRest	—
19 to 20	-	Driver1RemainingDrivingTimeOfCurrentWeek	—
21 to 22	-	Driver1TimeLeftUntilNewWeeklyRestPeriod	—
23 to 24	-	Driver1MinimumWeeklyRest	—
25 to 26	-	Driver1OpenCompensationInTheLastWeek	—

Table 16 (continued)

Byte pos.	Bit pos.	Parameter	Remark
27 to 28	-	Driver1OpenCompensationInWeekBeforeLast	—
29 to 30	-	Driver1OpenCompensationIn2ndWeekBeforeLast	—
31 to 32	-	Driver1AdditionalInformation	—

### 9.2.2 DRTD2 — Driver 2 driving rest times

The driving rest times of driver 2 PG shall be transmitted by the RU. All parameters are mandatory. It shall be used to transmit driver 2's driving times. [Table 17](#) specifies the PG attributes. [Table 18](#) specifies the PG content.

Table 17 — PGN 64596— DRTD2 attribute specification

Attribute	Value
Transmission repetition time	10 s
Data length	32 byte
Extended data page	0
Data page	0
PDU format	252 (PDU2)
PDU specific	84 (GE)
Default priority	6

Table 18 — PGN 64596 — DRTD2 parameter specification

Byte pos.	Bit pos.	Parameter	Remark
1 to 2	-	Driver2RemainingCurrentDrivingTime	—
3 to 4	-	Driver2RemainingTimeUntilNextBreakOrRest	—
5 to 6	-	Driver2DurationOfNextBreakRest	—
7 to 8	-	Driver2RemainingTimeOfCurrentBreakRest	—
9 to 10	-	Driver2TimeLeftUntilNextDrivingPeriod	—
11 to 12	-	Driver2DurationOfNextDrivingPeriod	—
13 to 14	-	Driver2CurrentDailyDrivingTime	—
15 to 16	-	Driver2TimeLeftUntilNewDailyRestPeriod	—
17 to 18	-	Driver2MinimumDailyRest	—
19 to 20	-	Driver2RemainingDrivingTimeOfCurrentWeek	—
21 to 22	-	Driver2TimeLeftUntilNewWeeklyRestPeriod	—
23 to 24	-	Driver2MinimumWeeklyRest	—
25 to 26	-	Driver2OpenCompensationInTheLastWeek	—
27 to 28	-	Driver2OpenCompensationInWeekBeforeLast	—
29 to 30	-	Driver2OpenCompensationIn2ndWeekBeforeLast	—
31 to 32	-	Driver2AdditionalInformation	—

## 10 Recommended source address (SA) assignments

An RE conformant to this document shall use the SA of 238.

Listed ECUs shall use the addresses as defined in [Table 19](#).