

---

---

**Textile conveyor belts — Determination  
of the net length of an endless (spliced)  
conveyor belt**

*Courroies transporteuses à carcasse textile — Méthode de mesurage  
de la longueur nette d'une courroie transporteuse sans fin (jonctionnée)*

STANDARDSISO.COM : Click to view the full PDF of ISO 16851:2004



**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 16851:2004

© ISO 2004

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 16851 was prepared by the European Committee for Standardization (CEN) in collaboration with Technical Committee ISO/TC 41, *Pulleys and belts (including veebelts)*, Subcommittee SC 3, *Conveyor belts*, in accordance with the Agreement on technical cooperation between ISO and CEN (Vienna Agreement).

Throughout the text of this document, read “...this European Standard...” to mean “...this International Standard...”.

## Contents

Page

Foreword.....	v
1 Scope .....	1
2 Apparatus .....	1
3 Procedure .....	1
4 Calculation and expression of results.....	2
5 Test report .....	2
Bibliography .....	3

STANDARDSISO.COM : Click to view the full PDF of ISO 16851:2004

## Foreword

This document (EN ISO 16851:2004) has been prepared by Technical Committee CEN/TC 188 “Conveyor belts”, the secretariat of which is held by BSI, in collaboration with Technical Committee ISO/TC 41 “Pulleys and belts (including veebelts)”.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by June 2005, and conflicting national standards shall be withdrawn at the latest by June 2005.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

STANDARDSISO.COM : Click to view the full PDF of ISO 16851:2004



## 1 Scope

This European Standard specifies a method for determining the net length of an endless (spliced) conveyor belt.

It applies to all types of construction of conveyor belting with the exception of belts containing steel cord reinforcement. It is not suitable or valid for light conveyor belts described in EN 873<sup>1</sup>.

## 2 Apparatus

**Steel tape measure**, graduated in millimetres.

For measurement to be accurate it is essential that the tape is calibrated or subject to inspection.

## 3 Procedure

Lay out the endless conveyor belt so that it is flat and free from tension.

Using the flat part of the belt only, as indicated in Figure 1, place a mark on one edge of the inside surface at the point at which measurements are to begin (i.e. point A).

Mark point B further along the flat part of the belt as follows:

- a) for belts up to 30 m in circumferential length, the individual measurements shall be between one-quarter and one-third of the nominal circumferential length, except the final individual measurement, which may be less than one-quarter of the nominal circumferential length;
- b) for belts greater than 30 m in circumferential length, the individual measurements shall be between 7,5 m long and not more than one-third of the nominal circumferential length, except the final individual measurement, which may be less than 7,5 m long.

Measure and record the distance AB, between points A and B.

Rotate the belt and make consecutive measurements along the inside surface of the flat part of the belt only. Designate the individual measurements as AB, BC, CD etc., continuing until the last measurement xA can be taken.

NOTE In the event of a dispute, measurements should be taken at one of the standard atmospheres given in ISO 18573 <sup>[1]</sup>, as agreed between supplier and customer.

---

<sup>1</sup> EN 873 will be published as ISO 21183-1.

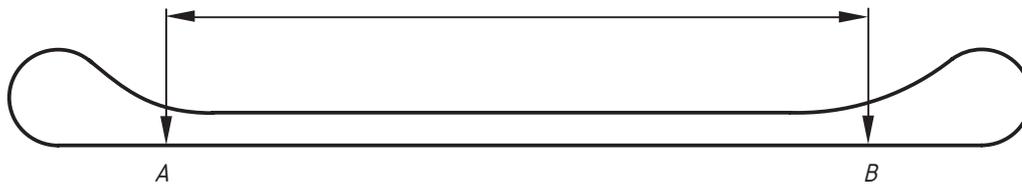


Figure 1 — Measurement of the length of an endless conveyor belt

#### 4 Calculation and expression of results

Calculate the net endless length,  $l_e$ , of the conveyor belt as follows:

$$l_e = [\overline{AB} + \overline{BC} + \overline{CD} + \dots + \overline{xA}] - \pi d$$

where

$d$  is the thickness of the belt

By taking measurements on the flat part of the belt only, the length along the neutral axis is obtained. To allow for the compression of the inside surface, it is necessary to deduct the amount  $\pi d$  in order to obtain the true inside length.

Express the results in millimetres.

NOTE Tolerances on lengths of endless conveyor belts are given in EN ISO 14890 <sup>[2]</sup>.

#### 5 Test report

The test report shall include the following:

- a) reference to this European Standard, EN ISO 16851;
- b) identification of the belt tested;
- c) net length of the conveyor belt in millimetres;
- d) date on which the belt was measured.