

INTERNATIONAL STANDARD

ISO 17433

First edition
2001-04-15

Space data and information transfer systems — Packet telemetry services

*Systèmes de transfert des informations et données spatiales — Services
de télémétrie par paquets*

STANDARDSISO.COM : Click to view the full PDF of ISO 17433:2001



Reference number
ISO 17433:2001(E)

© ISO 2001

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 17433:2001

© ISO 2001

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.ch
Web www.iso.ch

Printed in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 17433 was prepared by the Consultative Committee for Space Data Systems (CCSDS) (as CCSDS 103.0-B-1, May 1996) and was adopted (without modifications except those stated in clause 2 of this International Standard) by Technical Committee ISO/TC 20, *Aircraft and space vehicles*, Subcommittee SC 13, *Space data and information transfer systems*.

STANDARDSISO.COM : Click to view the full PDF of ISO 17433:2001

Space data and information transfer systems — Packet telemetry services

1 Scope

This International Standard specifies the requirements for packet telemetry services in space data and information transfer systems. The purpose of this document is to establish common requirements for the services provided between protocol layers of the space to ground link. It does not define the extension of these services across distributed components of the spacecraft or ground data systems.

The scope and field of application are furthermore detailed in subclauses 1.2 and 1.3 of the enclosed CCSDS publication.

2 Requirements

Requirements are the technical recommendations made in the following publication (reproduced on the following pages), which is adopted as an International Standard:

CCSDS 103.0.B-1, May 1996, *Recommendation for space data system standards — Packet telemetry services*.

For the purposes of international standardization, the modifications outlined below shall apply to the specific clauses and paragraphs of publication CCSDS 103.0-B-1.

Pages i to v

This part is information which is relevant to the CCSDS publication only.

Page 1-4

Add the following information to the reference indicated in the Chapter 1.7:

[1] Document CCSDS 102.0-B-4, November 1995 is equivalent to ISO 13419:1997.

[2] Document CCSDS 101.0-B-3, May 1992 is equivalent to ISO 11754:1994.

Page B-1

Replace the reference indicated in annex B with the following:

[B4] ISO 7498-3:1997, *Information technology — Open Systems Interconnection — Basic Reference Model: Naming and addressing*.

[B5] ISO/IEC 10731:1994, *Information technology — Open Systems Interconnection — Basic Reference Model — Conventions for the definition of OSI services*.

3 Revision of publication CCSDS 103.0-B-1

It has been agreed with the Consultative Committee for Space Data Systems that Subcommittee ISO/TC 20/SC 13 will be consulted in the event of any revision or amendment of publication CCSDS 103.0-B-1. To this end, NASA will act as a liaison body between CCSDS and ISO.

STANDARDSISO.COM : Click to view the full PDF of ISO 17433:2001


***Consultative
Committee for
Space Data Systems***

RECOMMENDATION FOR SPACE
DATA SYSTEM STANDARDS

**PACKET TELEMETRY
SERVICES**

CCSDS 103.0-B-1
BLUE BOOK

May 1996

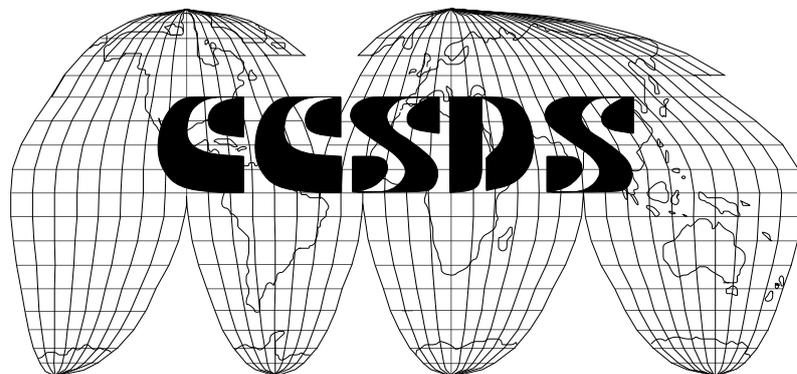

(blank page)

STANDARDSISO.COM : Click to view the full PDF of ISO 17433:2001

AUTHORITY

Issue:	Blue Book, Issue 1
Date:	May 1996
Location:	Pasadena, California, USA

This document has been approved for publication by the Management Council of the Consultative Committee for Space Data Systems (CCSDS) and represents the consensus technical agreement of the participating CCSDS Member Agencies. The procedure for review and authorization of CCSDS Recommendations is detailed in reference [B1], and the record of Agency participation in the authorization of this document can be obtained from the CCSDS Secretariat at the address below.

This Recommendation is published and maintained by:

CCSDS Secretariat
Program Integration Division (Code OI)
National Aeronautics and Space Administration
Washington, DC 20546, USA

STATEMENT OF INTENT

The Consultative Committee for Space Data Systems (CCSDS) is an organization officially established by the management of member space Agencies. The Committee meets periodically to address data systems problems that are common to all participants, and to formulate sound technical solutions to these problems. Inasmuch as participation in the CCSDS is completely voluntary, the results of Committee actions are termed **Recommendations** and are not considered binding on any Agency.

This **Recommendation** is issued by, and represents the consensus of, the CCSDS Plenary body. Agency endorsement of this **Recommendation** is entirely voluntary. Endorsement, however, indicates the following understandings:

- o Whenever an Agency establishes a CCSDS-related **standard**, this **standard** will be in accord with the relevant **Recommendation**. Establishing such a **standard** does not preclude other provisions which an Agency may develop.
- o Whenever an Agency establishes a CCSDS-related **standard**, the Agency will provide other CCSDS member Agencies with the following information:
 - The **standard** itself.
 - The anticipated date of initial operational capability.
 - The anticipated duration of operational service.
- o Specific service arrangements shall be made via memoranda of agreement. Neither this **Recommendation** nor any ensuing **standard** is a substitute for a memorandum of agreement.

No later than five years from its date of issuance, this **Recommendation** will be reviewed by the CCSDS to determine whether it should: (1) remain in effect without change; (2) be changed to reflect the impact of new technologies, new requirements, or new directions; or, (3) be retired or canceled.

In those instances when a new version of a **Recommendation** is issued, existing CCSDS-related Agency standards and implementations are not negated or deemed to be non-CCSDS compatible. It is the responsibility of each Agency to determine when such standards or implementations are to be modified. Each Agency is, however, strongly encouraged to direct planning for its new standards and implementations towards the later version of the Recommendation.

FOREWORD

This document is a technical **Recommendation** for use in developing packetized telemetry systems and has been prepared by the **Consultative Committee for Space Data Systems** (CCSDS). The Packet Telemetry Services described herein are intended for spacecraft-to-ground data communication within missions that are cross-supported between Agencies of the CCSDS.

This **Recommendation** establishes a common framework and provides a common basis for the data services of spacecraft telemetry systems. It allows implementing organizations within each Agency to proceed coherently with the development of compatible derived Standards for the flight and ground systems that are within their cognizance. Derived Agency Standards may implement only a subset of the optional features allowed by the **Recommendation** and may incorporate features not addressed by the **Recommendation**.

Through the process of normal evolution, it is expected that expansion, deletion or modification to this document may occur. This **Recommendation** is therefore subject to CCSDS document management and change control procedures which are defined in reference [B1].

STANDARDSISO.COM : Click to view the full PDF of ISO 17433:2001

At time of publication, the active Member and Observer Agencies of the CCSDS were

Member Agencies

- British National Space Centre (BNSC)/United Kingdom.
- Canadian Space Agency (CSA)/Canada.
- Central Research Institute of Machine Building (TsNIIMash)/Russian Federation.
- Centre National d'Etudes Spatiales (CNES)/France.
- Deutsche Forschungsanstalt für Luft- und Raumfahrt e.V. (DLR)/Germany.
- European Space Agency (ESA)/Europe.
- Instituto Nacional de Pesquisas Espaciais (INPE)/Brazil.
- National Aeronautics and Space Administration (NASA HQ)/USA.
- National Space Development Agency of Japan (NASDA)/Japan.

Observer Agencies

- Australian Space Office (ASO)/Australia.
- Austrian Space Agency (ASA)/Austria.
- Belgian Science Policy Office (SPO)/Belgium.
- Centro Tecnico Aeroespacial (CTA)/Brazil.
- Chinese Academy of Space Technology (CAST)/China.
- Communications Research Laboratory (CRL)/Japan.
- Danish Space Research Institute (DSRI)/Denmark.
- European Organization for the Exploitation of Meteorological Satellites (EUMETSAT)/Europe.
- European Telecommunications Satellite Organization (EUTELSAT)/Europe.
- Hellenic National Space Committee (HNSC)/Greece.
- Indian Space Research Organization (ISRO)/India.
- Industry Canada/Communications Research Centre (CRC)/Canada.
- Institute of Space and Astronautical Science (ISAS)/Japan.
- Institute of Space Research (IKI)/Russian Federation.
- KFKI Research Institute for Particle & Nuclear Physics (KFKI)/Hungary.
- MIKOMTEK, CSIR (CSIR)/Republic of South Africa.
- Ministry of Communications (MOC)/Israel.
- National Oceanic & Atmospheric Administration (NOAA)/USA.
- National Space Program Office (NSPO)/Taiwan.
- Swedish Space Corporation (SSC)/Sweden.
- United States Geological Survey (USGS)/USA.

DOCUMENT CONTROL

Document	Title	Date	Status
CCSDS 103.0-B-1	Recommendation for Space Data System Standards: Packet Telemetry Services	May 1996	Original Issue

STANDARDSISO.COM : Click to view the full PDF of ISO 17433:2001

CONTENTS

<u>Section</u>	<u>Page</u>
1 INTRODUCTION	1-1
1.1 PURPOSE	1-1
1.2 SCOPE	1-1
1.3 APPLICABILITY	1-1
1.4 RATIONALE.....	1-1
1.5 DOCUMENT STRUCTURE.....	1-1
1.6 CONVENTIONS AND DEFINITIONS.....	1-2
1.7 REFERENCES.....	1-4
2 OVERVIEW	2-1
2.1 PACKET TELEMETRY SERVICES	2-1
2.2 RELATIONSHIP TO OSI	2-1
2.3 PACKET TELEMETRY LAYERS.....	2-2
2.4 QUEUED VERSUS BUFFERED SERVICE.....	2-5
3 SOURCE DATA	3-1
3.1 SOURCE DATA OVERVIEW	3-1
3.2 SOURCE PACKET DATA	3-1
3.3 PRIVATELY DEFINED DATA	3-2
3.4 FRAME SECONDARY HEADER DATA	3-3
3.5 OPERATIONAL CONTROL FIELD DATA	3-3
4 LAYER D—SPACE TRANSFER LAYER	4-1
4.1 SPACE TRANSFER LAYER OVERVIEW	4-1
4.2 SOURCE PACKET TRANSFER SERVICE	4-2
4.3 PRIVATELY DEFINED DATA TRANSFER SERVICE	4-9
4.4 VIRTUAL CHANNEL FRAME SECONDARY HEADER SERVICE	4-15
4.5 VIRTUAL CHANNEL OPERATIONAL CONTROL FIELD SERVICE	4-20
5 LAYER C—VIRTUAL CHANNEL ACCESS LAYER	5-1
5.1 OVERVIEW OF VIRTUAL CHANNEL ACCESS LAYER	5-1
5.2 VIRTUAL CHANNEL FRAME SERVICE.....	5-1
5.3 MASTER CHANNEL FRAME SECONDARY HEADER SERVICE	5-7
5.4 MASTER CHANNEL OPERATIONAL CONTROL FIELD SERVICE	5-13
5.5 ADDITIONAL (OPTIONAL) FUNCTIONS OF THIS LAYER	5-19

CONTENTS (continued)

<u>Section</u>	<u>Page</u>
6 LAYER B—CHANNEL ACCESS LAYER	6-1
6.1 OVERVIEW OF CHANNEL ACCESS SERVICE	6-1
6.2 DEFINITIONS AND ABBREVIATIONS	6-1
6.3 CHANNEL ACCESS SERVICE SDU	6-3
6.4 PREREQUISITES FOR THE CHANNEL ACCESS SERVICE	6-3
6.5 SERVICE PRIMITIVES OF THE CHANNEL ACCESS SERVICE	6-4
6.6 CHANNEL ACCESS SERVICE PARAMETERS	6-4
6.7 DETAILED SPECIFICATION OF CHANNEL ACCESS SERVICE PRIMITIVES	6-5
ANNEX A ACRONYMS	A-1
ANNEX B INFORMATIVE REFERENCES	B-1
ANNEX C A BRIEF TUTORIAL ON OSI SERVICE TERMINOLOGY	C-1

Figure

2-1 OSI Service Concept	2-1
2-2 CCSDS Packet Telemetry Layers	2-4
2-3 Queued Service Model	2-5
2-4 Buffered Service Model	2-6
4-1 Examples of Space Transfer Layer Services	4-1
4-2 Packet Transfer Service	4-3
4-3 Abstract Model of SP-XFR Service	4-4
4-4 Privately Defined Data Service	4-10
4-5 Abstract Model of PDD-XFR Service	4-11
4-6 VC_Frame Secondary Header Service	4-16
4-7 Abstract Model of VC_FSH Service	4-17
4-8 VC_OCF Service	4-21
4-9 Abstract Model of VC_OCF Service	4-22
5-1 VC_Frame Service	5-2
5-2 Abstract Model of a VC_Frame Service	5-3
5-3 MC_Frame Secondary Header Service	5-8
5-4 Abstract Model of an MC_FSH Service	5-9
5-5 MC_OCF Service	5-14
5-6 Abstract Model of MC_OCF Service	5-15

CONTENTS (continued)

<u>Figure</u>	<u>Page</u>
6-1 Channel Access Service	6-2
6-2 Abstract Model of Channel Access Service	6-3
C-1 OSI-Service Model	C-2
C-2 Example of a Peer-to-Peer Connection-Mode Service	C-3
C-3 OSI-Service Components on Open Systems	C-4
 <u>Table</u>	
2-1 Summary of Packet Telemetry Services	2-3

STANDARDSISO.COM : Click to view the full PDF of ISO 17433:2001

1 INTRODUCTION

1.1 PURPOSE

The purpose of this Recommendation is to define the services of a packet telemetry system. To do so, it establishes a layered model of Packet Telemetry protocols and defines Packet Telemetry Services by specifying the behavior at the service interfaces to each layer. The layered model and services are based on the CCSDS Recommendations for *Packet Telemetry* and *Telemetry Channel Coding*, references [1] and [2]. These referenced Recommendations define the formats of the protocol-data-units used to transfer telemetry from spacecraft to ground or spacecraft to spacecraft, as well as the protocol procedures that support that transfer.

NOTE – Definitions of ‘service’, ‘layer’, and other terms used in this Recommendation are provided in 1.6, and are further explained in 2.2.

1.2 SCOPE

This Recommendation defines only the services provided between protocol layers of the CCSDS space to ground link. It does not define the extension of these services across distributed components of the spacecraft or ground data systems.

1.3 APPLICABILITY

This Recommendation applies to the creation of Agency standards and to the future exchange of Packet Telemetry between CCSDS Agencies in cross-support situations. The Recommendation includes comprehensive specification of the services that can be provided by remote space vehicles (spacecraft) for telemetering to space mission data processing facilities (which are usually located on Earth). The Recommendation does not attempt to define the architecture or configuration of these data processing facilities, except to describe assumed data processing services which affect the selection of certain on-board formatting options.

1.4 RATIONALE

The rationale for Packet Telemetry is presented in reference [B2].

1.5 DOCUMENT STRUCTURE

The remainder of this document is organized as follows:

- section 2 provides an overview of this Recommendation, including a layered model of packet telemetry services;
- section 3 describes the data that is transferred from data sources in space to data sinks on the ground by the packet Telemetry Services;

- section 4 defines Space Transfer services, which support the transfer of data units (created by applications) by means of Virtual Channels;
- section 5 defines Virtual Channel Access services, which provide for the transfer of Virtual Channel, and certain application data units, in a single stream of fixed-length Transfer Frames;
- section 6 defines Channel Access Coding services, which support the transfer of a stream of Transfer Frames over a noisy channel;
- annex A lists acronyms and abbreviations used in this text along with their definitions;
- annex B lists informative references;
- annex C provides a brief tutorial on OSI service terminology.

1.6 CONVENTIONS AND DEFINITIONS

1.6.1 DEFINITIONS FROM REFERENCED DOCUMENTS

The definitions below were adapted from references [B3], [B4], and [B5]. Concepts related to these terms are discussed in section 2 and in annex C of this Recommendation.

association: a cooperative relationship among entities in the same layer.

blocking: a protocol function that maps multiple service-data-units into one protocol-data-unit.

multiplexing: a protocol function that uses one association in the layer below to support more than one association for users of the protocol.

one-way communication: data communication in one pre-assigned direction.

primitive, service primitive: an abstract, atomic, implementation-independent representation of an interaction between a service-user and its service-provider.

protocol: a set of rules and formats (semantic and syntactic) which determines the communication behavior of layer entities in the performance of communication functions.

protocol-data-unit (PDU): a unit of data specified in a protocol and consisting of protocol-control-information and possibly user data.

segmentation: a protocol function that maps one service-data-unit into multiple PDUs.

service: a capability of a layer, and the layers beneath it (a service-provider), which is provided to service-users at the boundary between the service-provider and the service-users.

NOTE – The service defines the external behavior of the service-provider, independent of the mechanisms used to provide that behavior. Layers, layer entities, application-service-elements, etc. are components of a service-provider.

CCSDS RECOMMENDATION FOR PACKET TELEMETRY SERVICES

service-access-point (SAP): the point at which services are provided by an entity in a layer to an entity in the layer above.

service-data-unit (SDU): an amount of information whose identity is preserved when transferred between peer entities in a given layer and which is not interpreted by the supporting entities in that layer.

service-provider: an abstract representation of the totality of those entities which provide a service to service-users; i.e., a layer, and the layers beneath it.

service-user: an entity in a single system that makes use of a service.

NOTE – The service-user makes use of the service through a collection of service primitives defined for the service.

sink: an entity that receives SDUs from a service provider.

source: an entity that sends SDUs, using a service provider.

symmetric service: in a symmetric service, the local views at the service interfaces in two systems are the same. See annex C and reference [B5] for further discussion.

unconfirmed service: in an unconfirmed service, the sending end does not receive confirmation that data that it sends has reached the receiving end.

1.6.2 TERMS DEFINED IN THIS RECOMMENDATION

The terms defined below are used throughout this Recommendation. Many other terms that pertain to specific services are defined in the appropriate sections.

aperiodic: not occurring at a *constant rate* (see below).

asynchronous: not *synchronous* (see below).

constant rate; periodic: a sequence of events in which each event occurs at a fixed time interval (within specified tolerance) after the previous event in the sequence.

synchronous: a sequence of events occurring in a fixed time relationship (within specified tolerance) to another sequence of events. Note that 'synchronous' does not necessarily imply 'constant rate'.

user-optional: a qualification of a service capability indicating that the entity using the service may choose to use, or not to use, the capability. The service provider is presumed to provide the capability if requested, but also to be able to provide service that does not include the user-optional capability.

NOTE – An example of a user-optional capability is a Data-Quality Flag that a receiving user may choose not to receive.

1.6.3 USE OF BOLDFACE

Boldface characters are used for names of Packet Telemetry data units, layers and services.

1.7 REFERENCES

The following documents contain provisions which, through reference in this text, constitute provisions of this Recommendation. At the time of publication, the editions indicated were valid. All documents are subject to revision, and users of this Recommendation are encouraged to investigate the possibility of applying the most recent editions of the documents indicated below. The CCSDS Secretariat maintains a register of currently valid CCSDS Recommendations.

- [1] *Packet Telemetry*. Recommendation for Space Data Systems Standards, CCSDS 102.0-B-4. Blue Book. Issue 4. Washington, D.C.: CCSDS, November 1995.
- [2] *Telemetry Channel Coding*. Recommendation for Space Data Systems Standards, CCSDS 101.0-B-3. Blue Book. Issue 3. Washington, D.C.: CCSDS, May 1992.
- [3] *CCSDS Global Spacecraft Identification Field Code Assignment Control Procedures*. Recommendation for Space Data Systems Standards, CCSDS 320.0-B-1. Blue Book. Issue 1. Washington, D.C.: CCSDS, October 1993.

2 OVERVIEW

2.1 PACKET TELEMETRY SERVICES

This Recommendation complements the CCSDS Recommendations for *Packet Telemetry* (reference [1]), and *Telemetry Channel Coding* (reference [2]). The Packet Telemetry and Telemetry Channel Coding Recommendations

- define data units for telemetry systems;
- define formats of these data units;
- define rules and procedures for creation and use of these data units.

These Recommendations, however, do not specify the interface between a data source or sink and the entity providing transfer of data units from space to ground, nor do they explicitly define the characteristics of the transfer process, from the viewpoint of a data source or sink. This Recommendation for Packet Telemetry Services

- defines a layered model of a packet telemetry system consistent with references [1] and [2];
- defines services provided by each layer;
- provides parameters and conditions for use of each service.

This Recommendation *does not* alter or redefine reference [1] or [2].

2.2 RELATIONSHIP TO OSI

This Recommendation defines Packet Telemetry Services in the style established by the OSI Basic Reference Model (reference [B3]), which describes communications services as being provided by layers of protocols, each layer providing a service interface to users of the service in the layer above, as shown in figure 2-1. The concepts and terminology of the OSI Basic Reference Model are summarized in annex C.

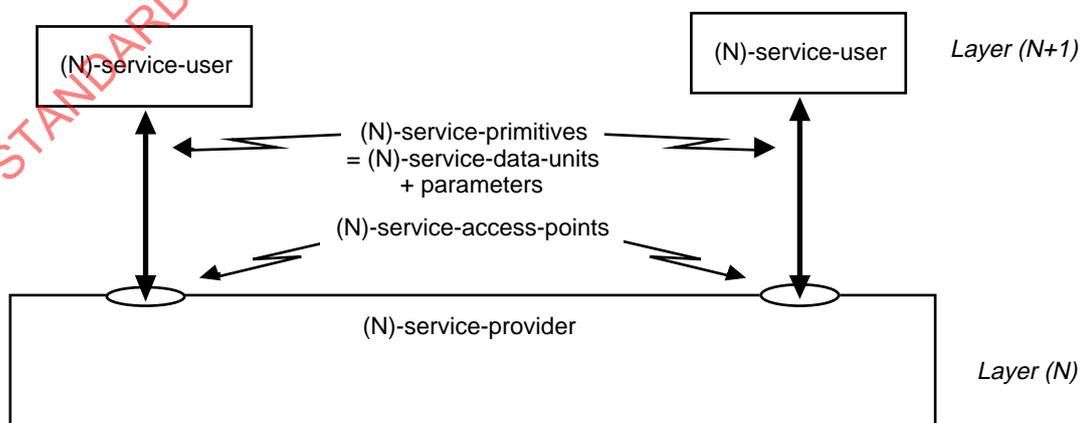


Figure 2-1: OSI Service Concept

A service interface is defined in terms of 'primitives', which present an abstract model of the exchange of data structures and control information between the layer and the service user. The primitives are independent of specific implementation approaches, and so do not specify aspects of the service interface that might vary from one implementation to another. These local issues include handshaking and flow control across the service interface (i.e., between the service user, in one layer, and the protocol entity in the layer below).

A 'service user' is not a mission user, such as a scientific investigator or spacecraft operator. A service user is typically a software process that is part of an instrument, subsystem, or data handling system on a spacecraft, or part of a data capture or data processing system on the ground.

2.3 PACKET TELEMETRY LAYERS

Although this Recommendation uses OSI concepts to define services, the services of Packet Telemetry are not structured into the same seven layers as are OSI services. Further, because a key design goal of Packet Telemetry is efficient use of limited space link resources, the Packet Telemetry PDUs are structured differently from those of OSI protocols. Because of these differences, the Packet Telemetry layers are identified by letters (A through D) rather than numbers (1 to 7), to avoid confusion with the seven OSI layers. Figure 2-2 illustrates the Packet Telemetry layers, and table 2-1 summarizes the services that these layers provide.

The services specified in this Recommendation are unidirectional services: one end (the spacecraft) can send, but not receive, data through the protocols providing the service, while the other end (on the ground) can receive, but not send.

These services are also *unconfirmed* services: the sending end (spacecraft) does not receive confirmation that data it sends has been received. This is a consequence of the design of the space link protocols, which avoid the delays involved in confirmed services.

These services can be implemented as asymmetrical services, in which the local view in one system is not the same as that in another system. That is, the implementation of the layers in one set of subsystems in space need not be structured in the same way as another set of subsystems on the ground.

CCSDS RECOMMENDATION FOR PACKET TELEMETRY SERVICES

Table 2-1: Summary of Packet Telemetry Services

Layer	Services	Service Capabilities
D Space Transfer layer	i. Packet Transfer Service	Transfer of a sequence of variable-length SOURCE PACKETs from a source application in space to one or more sink applications on the ground.
	ii. Privately Defined Data Service	Transfer of a sequence of PRIVATELY DEFINED DATA units of fixed length, along with status fields, from an on-board source to data sinks on the ground.
	iii. Virtual Channel Frame Secondary Header Service	Synchronous transfer of fixed-length FRAME SECONDARY HEADER in each frame on the VIRTUAL CHANNEL.
	iv. Virtual Channel Operational Control Field Service	Synchronous transfer of a fixed-length OPERATIONAL CONTROL FIELD in each frame of the VIRTUAL CHANNEL.
C Virtual Channel Access layer	i. Virtual Channel Frame Service	Transfer of Transfer FRAMES from each of one to eight VIRTUAL CHANNELS over one MASTER CHANNEL.
	ii. Master Channel Frame Secondary Header Service	Synchronous transfer of a fixed-length FRAME SECONDARY HEADER in each frame on a MASTER CHANNEL.
	iii. Master Channel Operational Control Field Service	Synchronous transfer of a fixed-length OPERATIONAL CONTROL FIELD in each frame of the MASTER CHANNEL.
B Channel Access layer	Channel Access Service	Constant-rate transfer of fixed-length TRANSFER FRAMES, with optional error detection/correction.
A Physical Access layer	Physical Access Service	Provision of a modulated radio link from spacecraft to ground. This service is not within the scope of this Recommendation, but is shown in this model since it provides the foundation for services defined here.

The emphasis in this Recommendation is on descriptions of a single instance of a type of service. It does not treat system engineering issues (such as relationships among various users of a particular data transfer service, or among those system elements that provide these services). Such issues are discussed in the Packet Telemetry Concepts and Rationale Report (reference [B2]).

This Recommendation makes no assumptions concerning the allocation of services, or the functions that provide services, to particular systems, subsystems or components, either on board a spacecraft, or in a ground system. Thus this Recommendation provides a design-independent description of services that could be provided, reserving for each mission the choice of which services to implement, and how to do so.

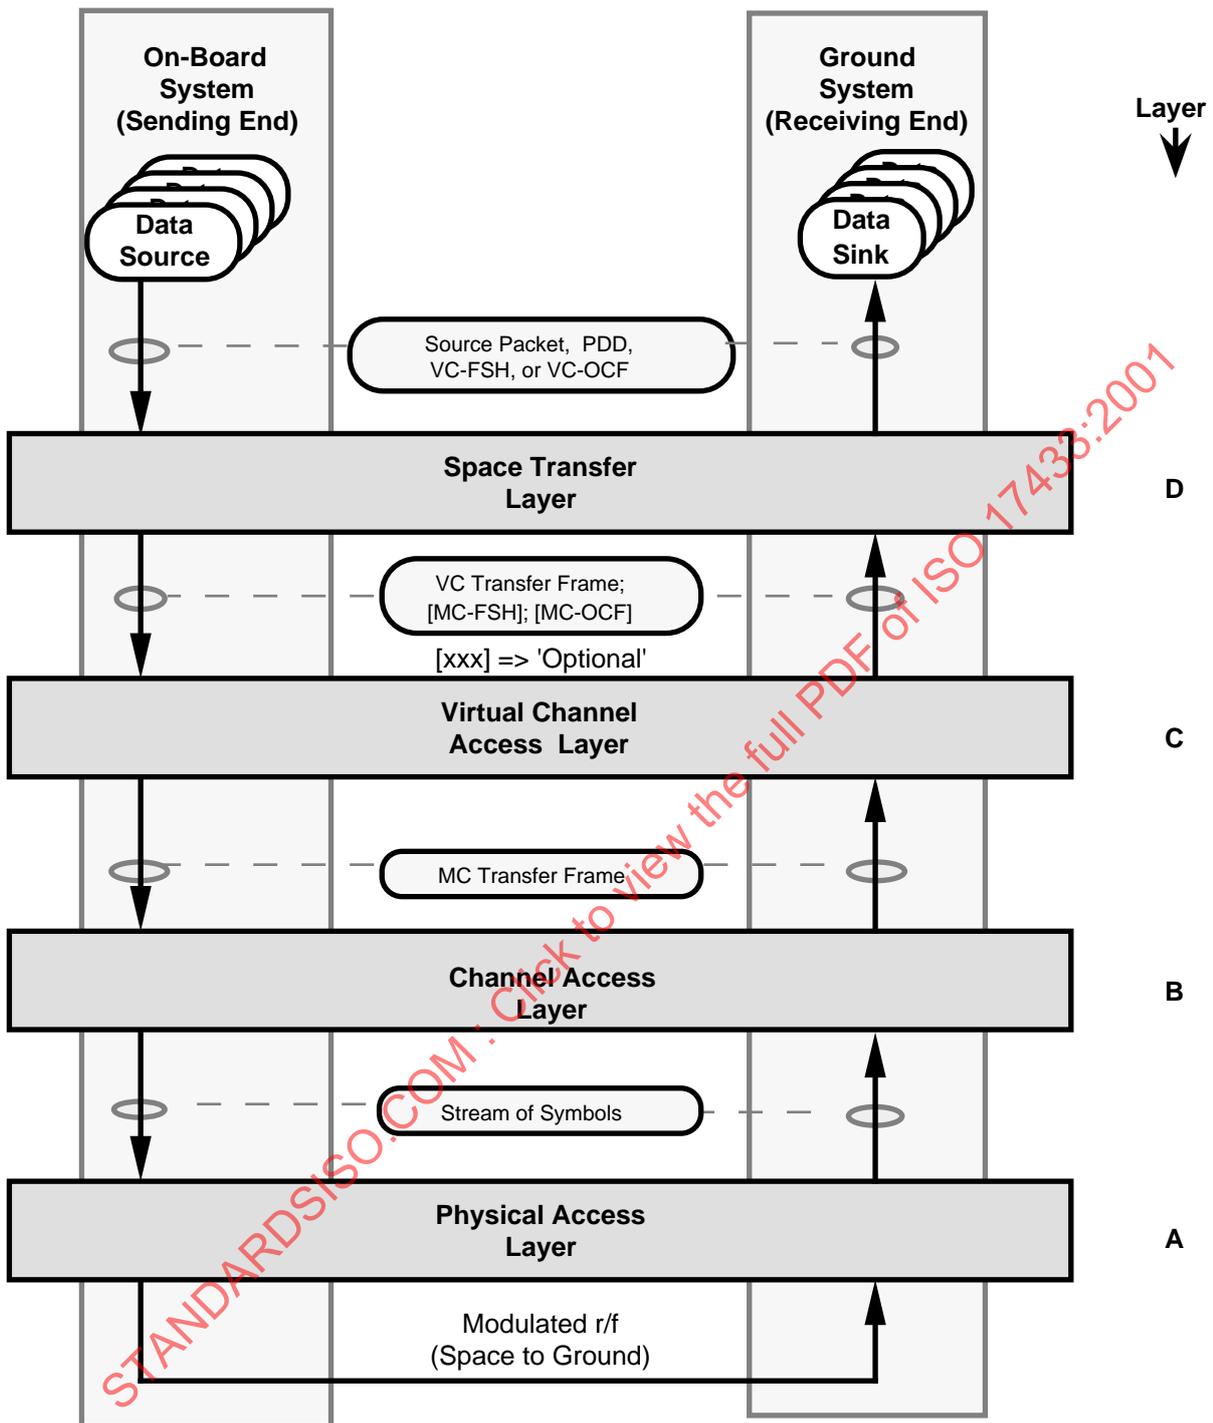


Figure 2-2: CCSDS Packet Telemetry Layers

2.4 QUEUED VERSUS BUFFERED SERVICE

Packet Telemetry Services are of two types: queued and buffered.

Queued service—In queued service (figure 2-3), each SDU from a sending user is placed in a queue, the contents of which are sent to a receiving user (or users) in the order in which they were presented. Although transmission errors may prevent delivery of some data units, the service provider attempts to transfer all data units provided by the user exactly once. The distinctive feature of queued service is that all of the data units from the sending user are transferred, and transferred only once.

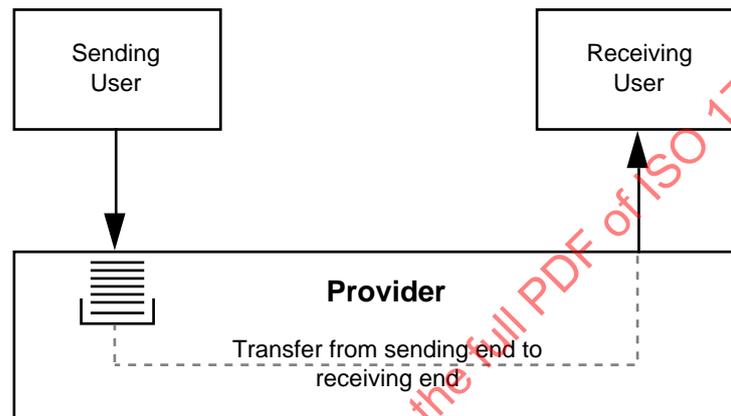


Figure 2-3: Queued Service Model

Buffered service—In buffered service (figure 2-4), each SDU from a sending user is placed in a buffer that can hold only one SDU; the contents of the buffer are sent to a receiving user (or users) at a time determined by the service (but usually known to the user). The timing may be constant rate (e.g., in every Transfer Frame sent by a spacecraft), or aperiodic (e.g., in every Transfer Frame of a Virtual Channel that produces frames at irregular intervals depending on the arrival of packets). The distinctive feature of buffered service, which is essentially time-division multiplexing, is that the timing of data transfer is driven by the service provider, not by the user. Thus a particular data unit from a user might be sent once, several times (if the ‘new’ value is not placed in the buffer soon enough), or not at all (if one value is replaced by a second before the service provider can send it).

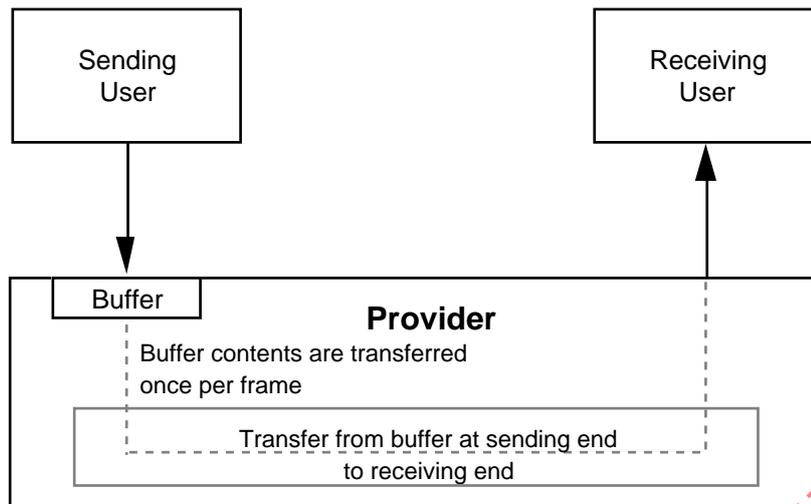


Figure 2-4: Buffered Service Model

These models of queued and buffered service are intended only to illustrate the characteristics of services. They are not intended to guide or restrict design of on-board or ground systems.

STANDARDSISO.COM : Click to view the full PDF of ISO 17433:2001

3 SOURCE DATA

3.1 SOURCE DATA OVERVIEW

3.1.1 This section describes the data that is transferred from data sources in space to data sinks on the ground by the Packet Telemetry Services described in sections 4 through 6.

3.1.2 The on-board data sources format the data units according to the specifications for the data units defined in reference [1]. These data units are

- a) the **Source Packet (SP)**;
- b) the **Privately Defined Data (PDD)** field;
- c) the **Frame Secondary Header (FSH)**;
- d) the **Operational Control Field (OCF)**.

3.1.3 These data units are passed to the **Space Transfer layer** for transfer across the space/ground link. On the ground are the sinks that accept the transferred data units.

3.1.4 The purpose of this subsection is to establish the requirements for formatted data units produced by on-board data sources, so that the interface requirements for the lower-layer services can be met. These service definitions also identify the data units delivered to sink applications by each of the transfer services provided by lower layers.

3.2 SOURCE PACKET DATA

3.2.1 The **Source Packet** is a data structure that carries variable-length **Packet Data Fields** from sources on board for transfer to sinks on the ground. A **source packet** consists of an integral number of octets, the format of which is specified in reference [1].

3.2.2 The **Source Packet** provides source identification (by means of the **Application Process Identifier (APID)**) and sequence control (by means of the **Source Sequence Count**) for the **Packet Data Fields** that it carries. Ancillary data, such as time-tagging, may be included within the **Packet Data Field**. Individual missions may choose to provide a standard approach for annotation, e.g., by using **Source Packet Secondary Headers**. (See reference [1] for definition of the **Packet Data Field**.)

3.2.3 Creation of **Source Packets** requires the specification of managed parameters, which serve to establish associations between space and ground protocol entities, specify address mappings, provide access authorization, and define operating limits.

3.2.4 Managed parameters include

- a) addressing information needed to route **Source Packets** to the **Virtual Channel** which is to provide the underlying **Source Packet Transfer (SP-XFR) Service**;

- b) which **APID** should be used to identify the **Source Packets**;
- c) requirements or restrictions on grouping of **Source Packets**;
- d) any mission- or Agency-specified limits on minimum or maximum **Source Packet** length;
- e) implementation-specific parameters for timing, latency, or flow control.

3.2.5 Neither this Recommendation nor reference [1] specifies methods, procedures, or formats for providing these managed parameters.

3.2.6 **Source Packets** are transferred from space to ground by the **SP-XFR Service** (see 4.2).

3.3 PRIVATELY DEFINED DATA

3.3.1 **PDD** units are fixed-length data units from source applications on board that can be transferred to sink applications on the ground. A **PDD** unit consists of an integral number of octets, the format of which is not defined by CCSDS.

3.3.2 Along with each **PDD** unit, **PDD Status Fields** are provided by the on-board source for transfer to the ground. The **PDD Status Fields** are the CCSDS **Transfer Frame First Header Pointer Field** and three other bits of the transfer frame Status Field: the **Packet Order Flag** (1 bit), and **Segment Length ID** (2 bits). These are undefined by CCSDS when a **Virtual Channel** is used to transfer **PDD**. They may (optionally) be used to convey information on the validity, sequence, or other status of the data in the **PDD**. Provision of this field is mandatory; semantics are user-optional.

3.3.3 Use of **PDD** requires the specification of managed parameters, which serve to establish associations between space and ground protocol entities, specify address mappings, provide access authorization, and define operating limits.

3.3.4 Managed parameters include

- a) addressing information needed to route **PDD** units to the **Virtual Channel** which is to provide the underlying **PDD Transfer Service**;
- b) the fixed length of the **PDD** units (see reference [1], section 5);
- c) implementation-specific parameters for timing, latency, or flow control.

3.3.5 Neither this Recommendation nor reference [1] specifies methods, procedures, or formats for providing these managed parameters.

3.3.6 **PDD** units are transferred by the **PDD Transfer (PDD-XFR) Service** to data sinks on the ground (see 4.3).

3.4 FRAME SECONDARY HEADER DATA

3.4.1 The **FSH** reference [1], section 5, is a data structure that carries fixed-length data from a source on board to a sink on the ground. Except for the **FSH** header defined in reference [1], CCSDS specifies no format or semantics for the content of an **FSH**.

3.4.2 **FSHes** may be sent in every frame of a **Virtual Channel**, using **Virtual Channel FSH (VC_FSH) Transfer (VC_FSH-XFR) Service** (see 4.4), or in every frame of a **Master Channel**, using **Master Channel FSH (MC_FSH) Transfer (MC_FSH-XFR) Service** (see 5.3).

3.4.3 Since **MC_FSH-XFR** and **VC_FSH-XFR** are buffered services as defined in 2.4, the creation and formatting of data to be transferred in **FSHes** may or may not be synchronized with the **Virtual Channel** or **Master Channel** that will provide the transfer service. Such synchronization, if required for timing or other purposes, is a mission-design issue.

3.4.4 The use of **FSHes** requires the specification of managed parameters, which serve to establish associations between space and ground protocol entities, specify address mappings, provide access authorization, and define operating limits.

3.4.5 Managed parameters include

- a) addressing information needed to route the **FSH** to the **Virtual Channel** or **Master Channel** which is to provide the underlying transfer service;
- b) the fixed length of the **FSH**;
- c) the **FSH Version Number**;
- e) implementation-specific parameters for timing, latency, or flow control.

3.4.6 Neither this Recommendation nor reference [1] specifies methods, procedures, or formats for providing these managed parameters.

3.5 OPERATIONAL CONTROL FIELD DATA

3.5.1 The **OCF** (reference [1], section 5) is a data structure that carries a fixed-length (32-bit) data unit from a source on board to a sink on the ground. As defined in reference [1], CCSDS specifies the use of the first bit of this field to indicate the type of data carried.

3.5.2 An instance of **OCF Service** may be carried in every frame of one **Virtual Channel**, using **Virtual Channel OCF (VC_OCF) Transfer (VC_OCF-XFR) Service** (see 4.5), or, in every frame of a **Master Channel**, using **Master Channel OCF (MC_OCF) Transfer (MC_OCF-XFR) Service** (see 5.4).

3.5.3 Since **MC_OCF-XFR** and **VC_OCF-XFR** are buffered services as defined in 2.4, the creation and formatting of data to be transferred in the **OCF** may or may not be synchronized

with the **Virtual Channel** or **Master Channel** that will provide the transfer service. Such synchronization, if required for timing or other purposes, is a mission-design issue.

3.5.4 Use of **OCF**s requires the specification of managed parameters, which serve to establish associations between space and ground protocol entities, specify address mappings, provide access authorization, and define operating limits. Managed parameters include

- a) addressing information needed to route the **OCF** to the **Virtual Channel(s)** or **Master Channel** which will provide the underlying transfer service;
- b) **OCF** Type;
- c) implementation-specific parameters for timing, latency, or flow control.

3.5.5 Neither this Recommendation nor reference [1] specifies methods, procedures, or formats for providing these managed parameters.

STANDARDSISO.COM : Click to view the full PDF of ISO 17433:2001

4 LAYER D—SPACE TRANSFER LAYER

4.1 SPACE TRANSFER LAYER OVERVIEW

4.1.1 The **Space Transfer layer** provides access to four transfer services from space to ground or space to space, using the **Virtual Channel Frame (VC_Frame)** as its PDU. These services are

- **SP-XFR Service;**
- **PDD-XFR Service;**
- **VC_FSH-XFR Service;**
- **VC_OCF-XFR Service.**

NOTE – **SP-XFR Service** and **PDD-XFR Service** are mutually exclusive on any one **Virtual Channel** during a mission phase. A given **Virtual Channel**, whether it carries **Source Packets** or **PDD**, may also carry an **FSH**, an **OCF**, both, or neither.

4.1.2 The interface between on-board users of space transfer services and the **Space Transfer layer** is illustrated in figure 4-1. This figure shows only a few of the possible combinations of services and users, and thus should not be interpreted as specification.

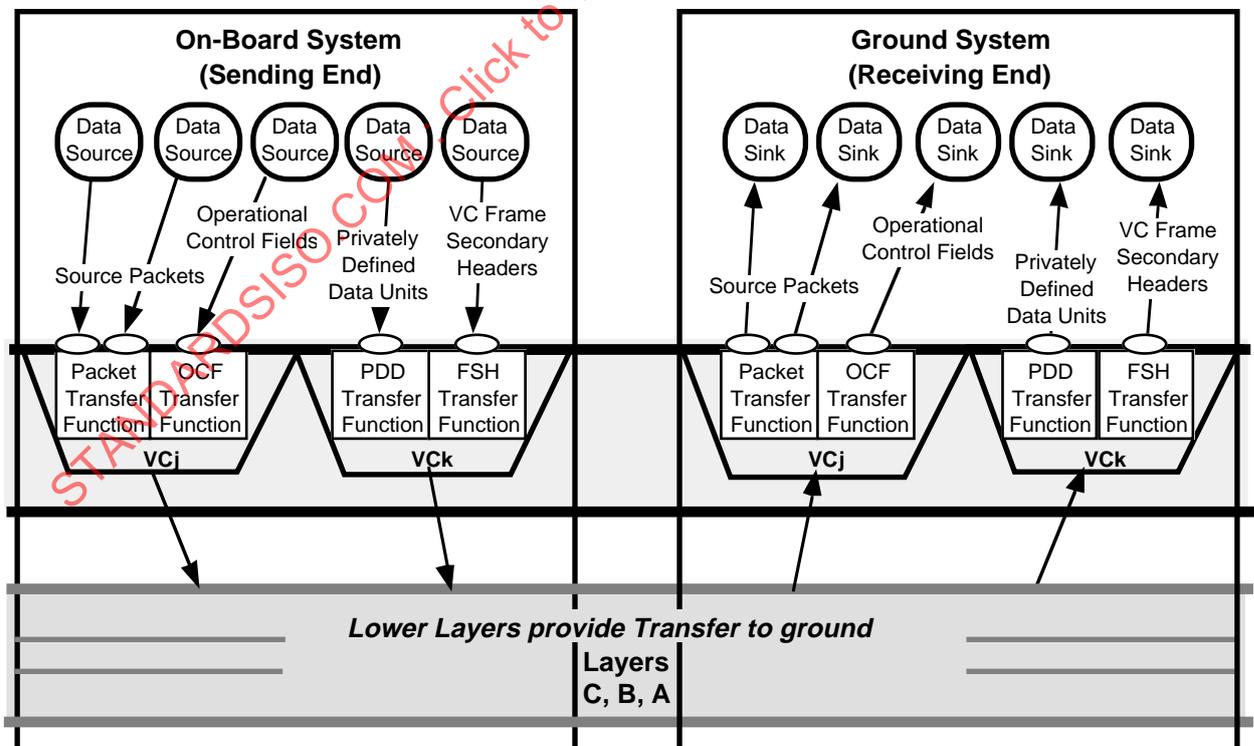


Figure 4-1: Examples of Space Transfer Layer Services

4.2 SOURCE PACKET TRANSFER SERVICE

4.2.1 OVERVIEW OF SP-XFR SERVICE

4.2.1.1 The **SP-XFR Service** transfers a sequence of variable-length **Source Packets** (reference [1]) from a source application in space to one or more sink applications on the ground. This service is one way (space to ground), and is inherently sequence preserving. It does not guarantee completeness, but can detect and signal gaps in the sequence of data units delivered to a sink application.

4.2.1.2 The service description below defines one instance of **SP-XFR Service**. As shown in figure 4-2, a single **Virtual Channel** may support multiple users of **SP-XFR Service**.

4.2.2 DEFINITIONS AND ABBREVIATIONS

For the purposes of this Service Definition, the following definitions and abbreviations apply:

- | | |
|---------------------------------|--|
| a) packet | a Source Packet ; |
| b) sending SP-XFR user | an on-board source of Source Packets , identified by one APID , to be transferred; |
| c) receiving SP-XFR user | a sink for Source Packets on the ground that receives the Source Packets from a particular Virtual Channel identified by a particular APID ; |
| d) SP-XFR SAP | service-access-point for the space transfer layer SP-XFR Service . |

CCSDS RECOMMENDATION FOR PACKET TELEMETRY SERVICES

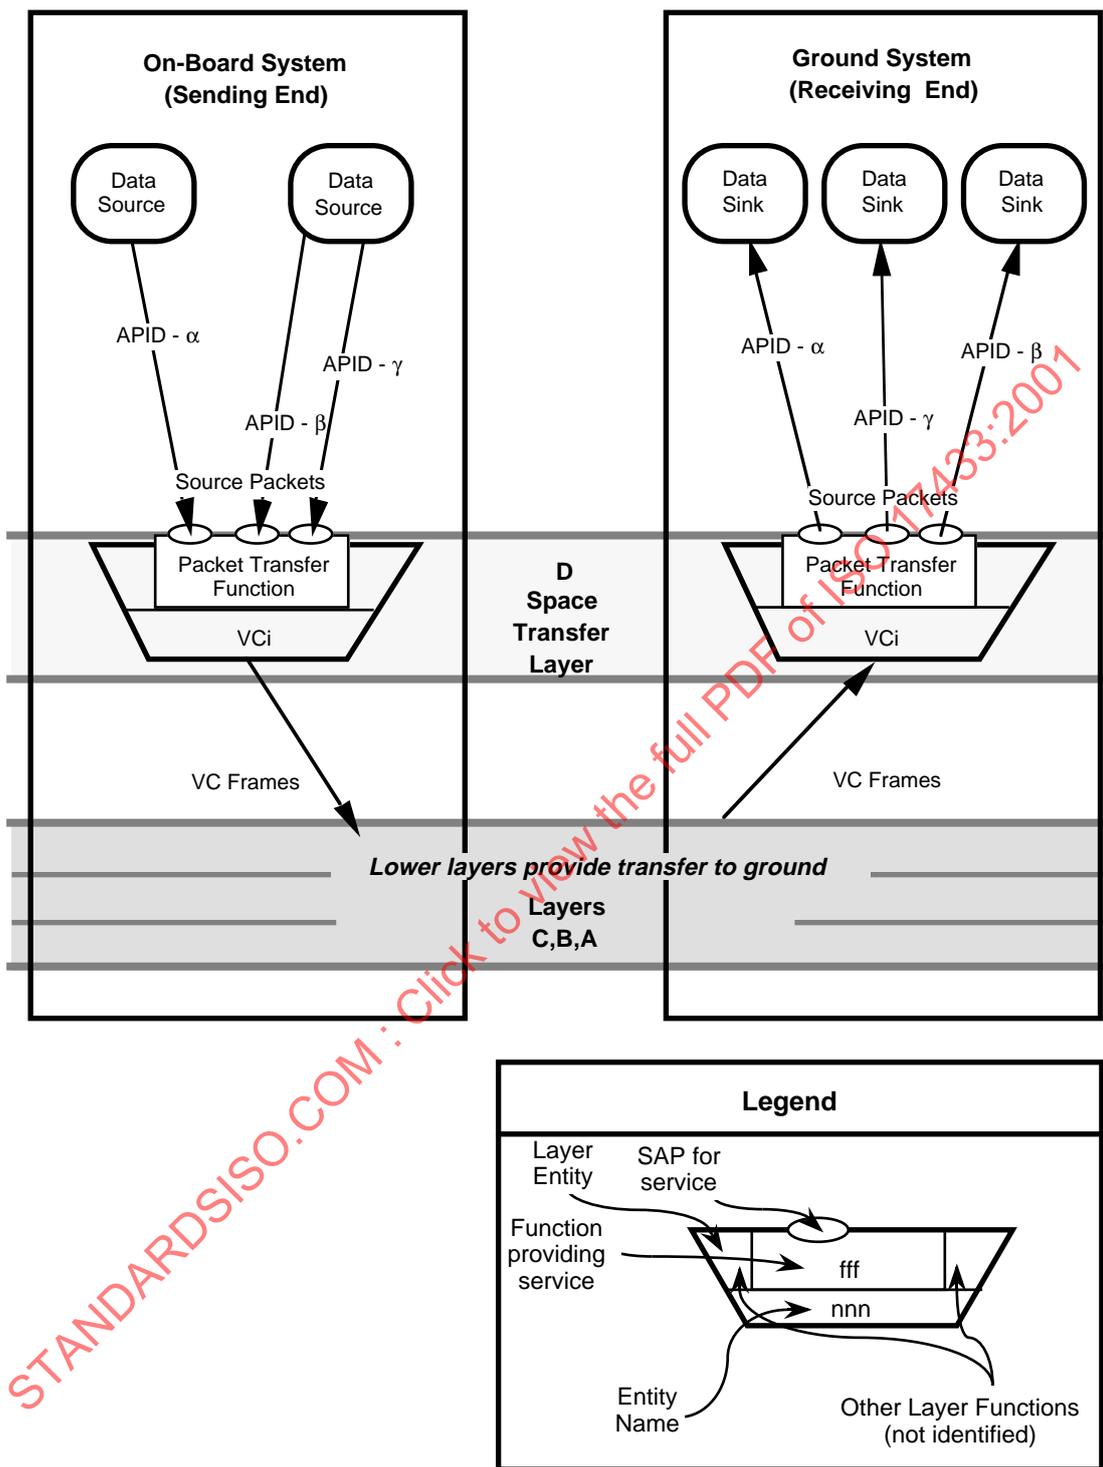


Figure 4-2: Packet Transfer Service

4.2.3 SP-XFR SERVICE SDU

4.2.3.1 The **SP-XFR Service** is modeled as a queued service linking the on-board **SP-XFR SAP** for a given **Virtual Channel** to the corresponding **SP-XFR SAP** on the ground. A separate queue exists for each **Virtual Channel**. This model is illustrated in figure 4-3.

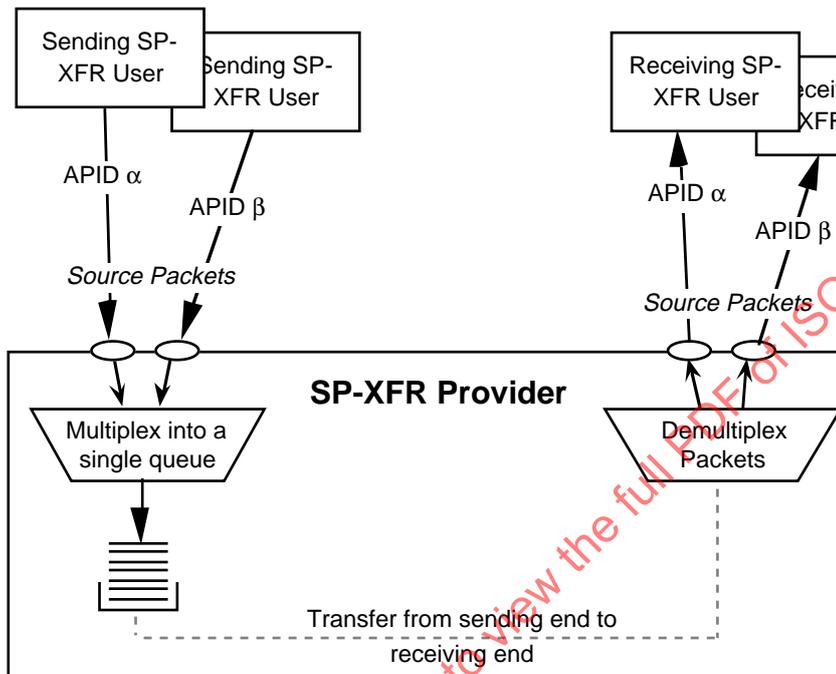


Figure 4-3: Abstract Model of SP-XFR Service

4.2.3.2 This model implies that

- the **Source Packets** sent are transferred in order;
- the timing, polling, or priority scheme used to multiplex **Source Packets** from various applications is mission-specific, but once accepted for transfer, the relationship between two **Source Packets**, whether of the same or different **APIDs**, is not altered; i.e., their position in the queue is not changed;
- the relationship of **SP-XFR Service** on one **Virtual Channel** to that on another **Virtual Channel** is not specified.

4.2.4 PREREQUISITES FOR SP-XFR SERVICE

4.2.4.1 The **SP-XFR Service** requires **VC_Frame Service** from the layers below (see 5.2). **SP-XFR Service** also requires the specification of managed parameters, which serve to establish associations between space and ground protocol entities, specify address mappings, provide access authorization, and define operating limits.

4.2.4.2 Managed parameters for **SP-XFR Service** include

- a) which **Virtual Channel** provides the **SP-XFR Service**;
- b) which **APIDs** are valid for the **Virtual Channel** providing the service;
- c) length of Frame Data Field;
- d) implementation-specific parameters for timing, latency, or flow control;
- e) maximum **Source Packet** length;
- f) use of packets or frames carrying Idle Data on the **Virtual Channel** providing the service.

NOTE – Idle Data may be required to meet requirements for timeliness of source data, or to maintain data flow at lower layers. See reference [1].

4.2.4.3 Neither this Recommendation nor reference [1] specifies methods, procedures, or formats for providing these managed parameters.

4.2.5 SERVICE PRIMITIVES OF THE SP-XFR SERVICE

The service primitives associated with this service are:

- a) **SP-XFR.request**

The **SP-XFR.request** primitive is passed from the **SP-XFR user** at the sending end to the **SP-XFR SAP** to request that a **SP-XFR_SDU**, structured as a **Source Packet**, be multiplexed into the specified **Virtual Channel**, and transferred to one or more sinks at the receiving end.

- b) **SP-XFR.indication**

The **SP-XFR.indication** is passed from the **SP-XFR layer** at the receiving end to the **SP-XFR user** to deliver an **SP-XFR_SDU**.

4.2.6 SP-XFR SERVICE DEFINITIONS

The parameters for the **SP-XFR Service** primitives are described below.

- a) **SP-XFR_SDU** The **SP-XFR service-data-unit**. A **SP-XFR_SDU** is a delimited, octet-aligned data unit which is necessarily formatted as a **SOURCE PACKET**. The content and format of a **Source Packet Primary Header** is both known to, and used by, the CCSDS protocols that support the PT service.

NOTE – At the receiving end, the **SP-XFR_SDU** delivered may be a partial **Source Packet**.

- b) **APID** **Application Identifier**. The **APID** field in the **Source Packet Header** identifies the **SP-XFR SAPs** for **SP-XFR_SDUs** within a specific **Virtual Channel**. The **APID** value must be between 0 and 2046. Assignment of **APID** values is at the discretion of each mission. These values are unique only within the mission's own administrative domain (which is named by the **Global Spacecraft Identifier (GSCID)**, as described in reference [3]). Within the ground network, user **APIDs** may have to be qualified to achieve a unique address; the parameter that qualifies them is the **GSCID**.

NOTE – The **APID** value 2047 (all '1's) is reserved by CCSDS.

- c) **SP-XFR_Sequence_Indicator** An indication of continuity of the sequence of **Source Packets** delivered at the receiving end.
- d) **SP-XFR_Quality_Indicator** An indication of quality (complete/partial packet) of a **Source Packet** delivered at the receiving end.

4.2.7 DETAILED SP-XFR SERVICE SPECIFICATION

4.2.7.1 General

This subsection describes in detail the primitives and parameters associated with the **SP-XFR Service**. The parameters are specified in an abstract sense and specify the information to be made available to the user of the primitive. The way in which a specific implementation makes this information available is not constrained by this specification.

4.2.7.2 SP-XFR.request

a) Function:

The **SP-XFR.request** primitive is the service request primitive for the PT service.

b) Semantics:

The **SP-XFR.request** primitive shall provide parameters as follows:

SP-XFR.request	(SP-XFR_SDU)
-----------------------	---------------------

c) When Generated:

The **SP-XFR.request** primitive is passed to the **Space Transfer layer** to request it to send the **SP-XFR_SDU**.

d) Effect On Receipt

Receipt of the **SP-XFR.request** primitive causes the **Space Transfer layer** to transfer the **SP-XFR_SDU**.

e) Additional comments:

- 1) The **SP-XFR.request** primitive is used to transfer CCSDS Packets across the space link.
- 2) The **APID** parameter is not explicitly shown, since it is contained in the **SP-XFR_SDU**.
- 3) The functions performed at the sending end when the **SP-XFR.request** primitive is sent are summarized below. This functional overview is not part of this Recommendation; see sections 4, 5.1, and 5.3 in *Packet Telemetry*, reference [1].

Functions include: (i) Multiplex Packets from one or more sources (each with unique **APID**). (ii) Block these packets into **VC_Frame Data Field**. (iii) Segment these Packets to span **VC_Frame** boundaries; also set flags and **First Header Pointer (FHP)** value. These functions produce: **Frame Data Field**, **FHP**, and other Flags, which are components of a **Transfer Frame**, and are collectively referred to in this Recommendation as a (partially formatted) **VC_Frame**. (iv) Other (optional) functions performed in this layer, not directly related to a specific **SP-XFR.request**, include addition of an idle packet to produce a complete **VC_Frame Data Field** or release of a **VC_Frame Data Field** containing only idle data.

4.2.7.3 SP-XFR.indication

a) Function:

The **SP-XFR.indication** primitive is the service indication primitive for the **SP-XFR Service**.

b) Semantics:

The **SP-XFR.indication** primitive shall provide parameters as follows:

SP-XFR.indication	(SP-XFR_SDU , SP-XFR_Sequence_Indicator , SP-XFR_Quality_Indicator)	(user-optional)
--------------------------	--	-----------------

c) When Generated:

The **SP-XFR.indication** primitive is passed from the **Space Transfer layer** to the **SP-XFR Service** user at the receiving end to deliver an **SP-XFR_SDU**. The address in the layer above to which the **SP-XFR_SDU** is to be delivered must be established through ground system management.

d) Effect on Receipt:

The effect of receipt of the **SP-XFR.indication** primitive by the user of the **SP-XFR** is undefined.

e) Additional Comments:

1) The **SP-XFR.indication** primitive is used to deliver **Source Packets** to the **SP-XFR user** process identified by the **APID** (i.e., the **APID** field in the **Packet Primary Header**, as qualified by the **Transfer Frame Identifier (TF_ID)**). This delivery may require the use of managed information to provide routing to the **SP-XFR user processes**. Incomplete **Source Packets** may be delivered (user-optional).

2) The functions performed at the receiving end before this primitive is sent are summarized below. This functional overview is not part of this Recommendation; see 5.1 and 5.3 in *Packet Telemetry*, reference [1].

Input from the layer below is a **VC_Frame**. Functions include: deblock; concatenate; demultiplex Packets from **Frame Data Field**; optionally, remove idle packets or idle data; generate sequence and quality indicators.

4.3 PRIVATELY DEFINED DATA TRANSFER SERVICE

4.3.1 OVERVIEW OF PDD-XFR SERVICE

The **PDD-XFR Service** provides transfer of a **PDD** unit of fixed length, along with status fields, from an on-board source to data sinks on the ground (see figure 4-4). The service is unidirectional (one way, space to ground), periodic, and order preserving. It does not guarantee completeness, but signals gaps. Only one instance of **PDD-XFR Service** can be provided on a **Virtual Channel**.

NOTE – **PDD-XFR Service** and **SP-XFR Service** (4.2) are mutually exclusive on any one **Virtual Channel**, within a mission phase.

4.3.2 DEFINITIONS AND ABBREVIATIONS

For the purposes of this Service Definition, the following definitions and abbreviations apply:

- | | |
|----------------------------------|---|
| a) PDD-XFR_SDU | a fixed-length data unit, consisting of an integral number of octets, the format of which is not defined by CCSDS (see reference [1]); |
| b) sending PDD-XFR user | an on-board source of PDD-XFR_SDU s to be transferred; |
| c) receiving PDD-XFR user | a sink for PDD-XFR_SDU s on the ground; a process that receives all PDD units of a particular Virtual Channel on the ground; |
| d) PDD-XFR SAP | service-access-point for PDD-XFR Service on a particular Virtual Channel . |

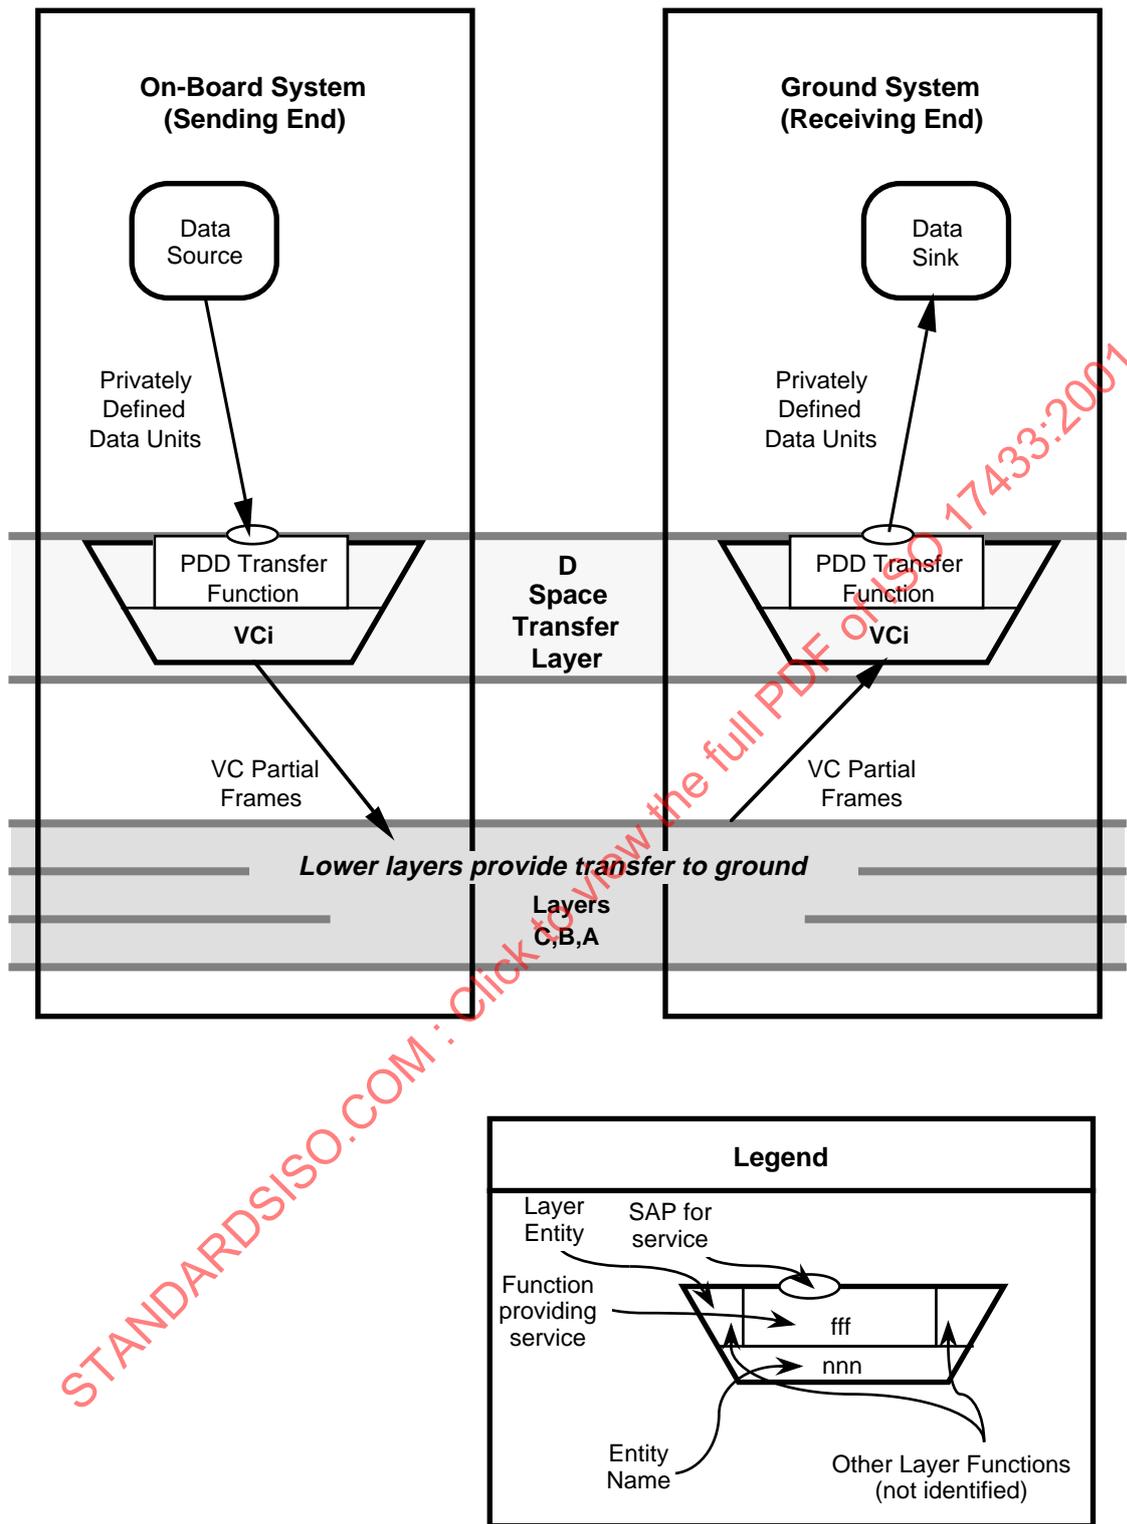


Figure 4-4: Privately Defined Data Service

4.3.3 PDD-XFR SERVICE SDU

4.3.3.1 The abstract model of **PDD-XFR Service** is a queue linking the on-board **PDD-XFR SAP** for a given **Virtual Channel** to the corresponding **PDD-XFR SAP** on the ground. A separate queue exists for each **Virtual Channel**. There shall be only one queue for **PDD-XFR Service** on a given **Virtual Channel**. This model is illustrated in figure 4-5.

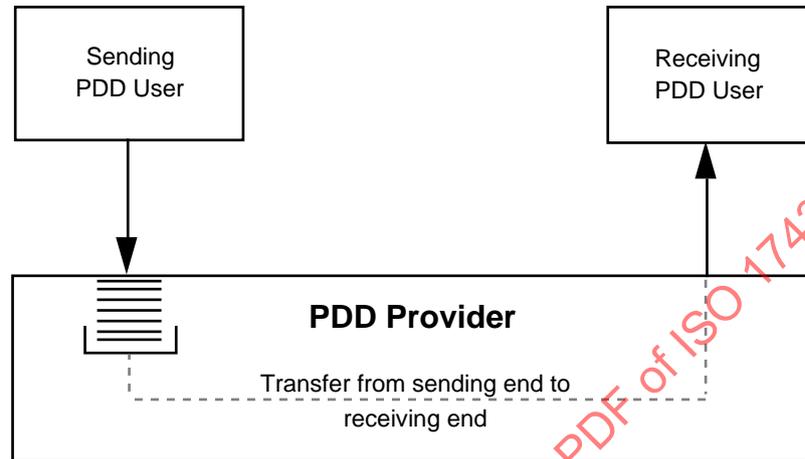


Figure 4-5: Abstract Model of **PDD-XFR Service**

4.3.3.2 This model implies that

- a) the **PDD-XFR_SDU**s sent by an on-board source are transferred in order;
- b) the time relationship between **PDD-XFR_SDU**s sent by different on-board sources, on different **Virtual Channel**s, is not specified.

4.3.4 PREREQUISITES FOR PDD-XFR SERVICE

4.3.4.1 The **PDD-XFR Service** requires **VC_Frame Service** from the layers below (see 5.2). **PDD-XFR Service** also requires the specification of managed parameters.

4.3.4.2 Managed parameters for **PDD-XFR Service** include

- a) which **Virtual Channel** is to carry **PDD**;
- b) which application is authorized as the source of **PDD** on the **Virtual Channel** providing the service;
- c) fixed length of **Frame Data Field**;
- d) routing information for delivery at receiving end;
- e) whether optional parameters are to be delivered with **PDD** at the receiving end.

4.3.4.3 Neither this Recommendation nor reference [1] specifies methods, procedures, or formats for providing these managed parameters.

4.3.5 SERVICE PRIMITIVES OF THE PDD-XFR SERVICE

The service primitives associated with this service are

a) **PDD-XFR.request**

The **PDD-XFR.request** primitive is passed from the **PDD-XFR Service user** at the sending end to the **PDD-XFR SAP** of a **Virtual Channel** to request that a **PDD-XFR_SDU** be transferred.

b) **PDD-XFR.indication**

The **PDD-XFR.indication** is passed from the **Space Transfer layer** to the **PDD-XFR user** at the receiving end to deliver a **PDD-XFR_SDU**.

4.3.6 PDD-XFR SERVICE PARAMETERS

The parameters for the **PDD-XFR Service** primitives are described below.

- a) **PDD-XFR_SDU** The **PDD-XFR service-data-unit**. A **PDD-XFR_SDU** is a delimited, fixed-length data unit, consisting of an integral number of octets. The content and format of a **PDD-XFR Unit** are not further specified by the CCSDS.
- b) **PDD Status Field** The CCSDS **Transfer Frame First Header Pointer Field** and three other bits of the **Transfer Frame Status Field**: the **Packet Order Flag** (1 bit) and **Segment Length ID** (2 bits). These are undefined by CCSDS when a **Virtual Channel** is used to transfer **PDD**. They may (optionally) be used to convey information on the validity, sequence, or other status of the data in the **PDD-XFR_SDU**. Provision of this field is mandatory; semantics are user-optional.
- c) **GVCID** The **GSCID** (see reference [3]) concatenated with the **Virtual Channel Identifier (VCID)**.

4.3.7.3 PDD-XFR.indication

a) Function:

The **PDD-XFR.indication** primitive is the service indication primitive for the **PDD-XFR Service**.

b) Semantics:

The **PDD-XFR.indication** primitive shall provide parameters as follows:

PDD.indication	(PDD-XFR_SDU, Status Fields, GVCID, Virtual Channel Frame Count)
-----------------------	---

c) When Generated:

The **PDD-XFR.indication** primitive is passed from the **Space Transfer layer** to the **PDD Service** user to deliver a **PDD-XFR_SDU**.

d) Effect on Receipt:

The effect of receipt of the **PDD-XFR.indication** primitive by the user of the **SP-XFR** is undefined.

e) Additional Comments:

- 1) The **PDD-XFR.indication** primitive is used to deliver **PDD** units to the **PDD-XFR user** sink application process(es) identified by managed information at the receiving end. **Virtual Channel Frame Count** provides the means to determine if data has been lost.
- 2) The functions performed at the receiving end before the **PDD-XFR.indication** primitive is sent are summarized below. This functional overview is not part of this Recommendation; see 5.3 in *Packet Telemetry*, reference [1].

Functions include: accept **VC_Frames** from the layer below; extract **Frame Data Field**, and **PDD Status**; deliver extracted fields with **GVCID** and **Virtual Channel Frame Count**.

4.4 VIRTUAL CHANNEL FRAME SECONDARY HEADER SERVICE

4.4.1 OVERVIEW OF VC_FSH SERVICE

The **VC_FSH Service** is a unidirectional (one way, space to ground) service which provides synchronous transfer of fixed-length **FSH** in each frame on the **Virtual Channel** (see figure 4-6). The transfer is synchronized with the release of **VC_Frames** for transfer in the **Master Channel**. The service is sequence preserving, but completeness is not guaranteed. Gaps in a sequence of **FSHes** can be detected by the receiving-end user.

NOTES

- 1 **VC_FSH Service** and **MC_FSH Service** are mutually exclusive.
- 2 Synchronization of the **VC_FSH** values to be transferred with the release of **VC_Frames** is user-optional. It is the responsibility of each implementation (i.e., each spacecraft) to assure that the timing requirements for the **FSH** are met, and that the time of measurement of data carried in the **FSH** can be determined, if necessary.

4.4.2 DEFINITIONS AND ABBREVIATIONS

For the purposes of this Service Definition, the following definitions and abbreviations apply:

- | | |
|---------------------------------|---|
| a) VC_FSH_SDU | an FSH to be sent on a particular Virtual Channel ; |
| b) sending VC_FSH user | an on-board source of VC_FSH_SDU s to be transferred; |
| c) receiving VC_FSH user | a sink for VC_FSH_SDU s on the ground; a process that receives all VC_FSHes of a particular Virtual Channel on the ground; |
| d) VC_FSH SAP | service-access-point for VC_FSH Service on a particular Virtual Channel . |

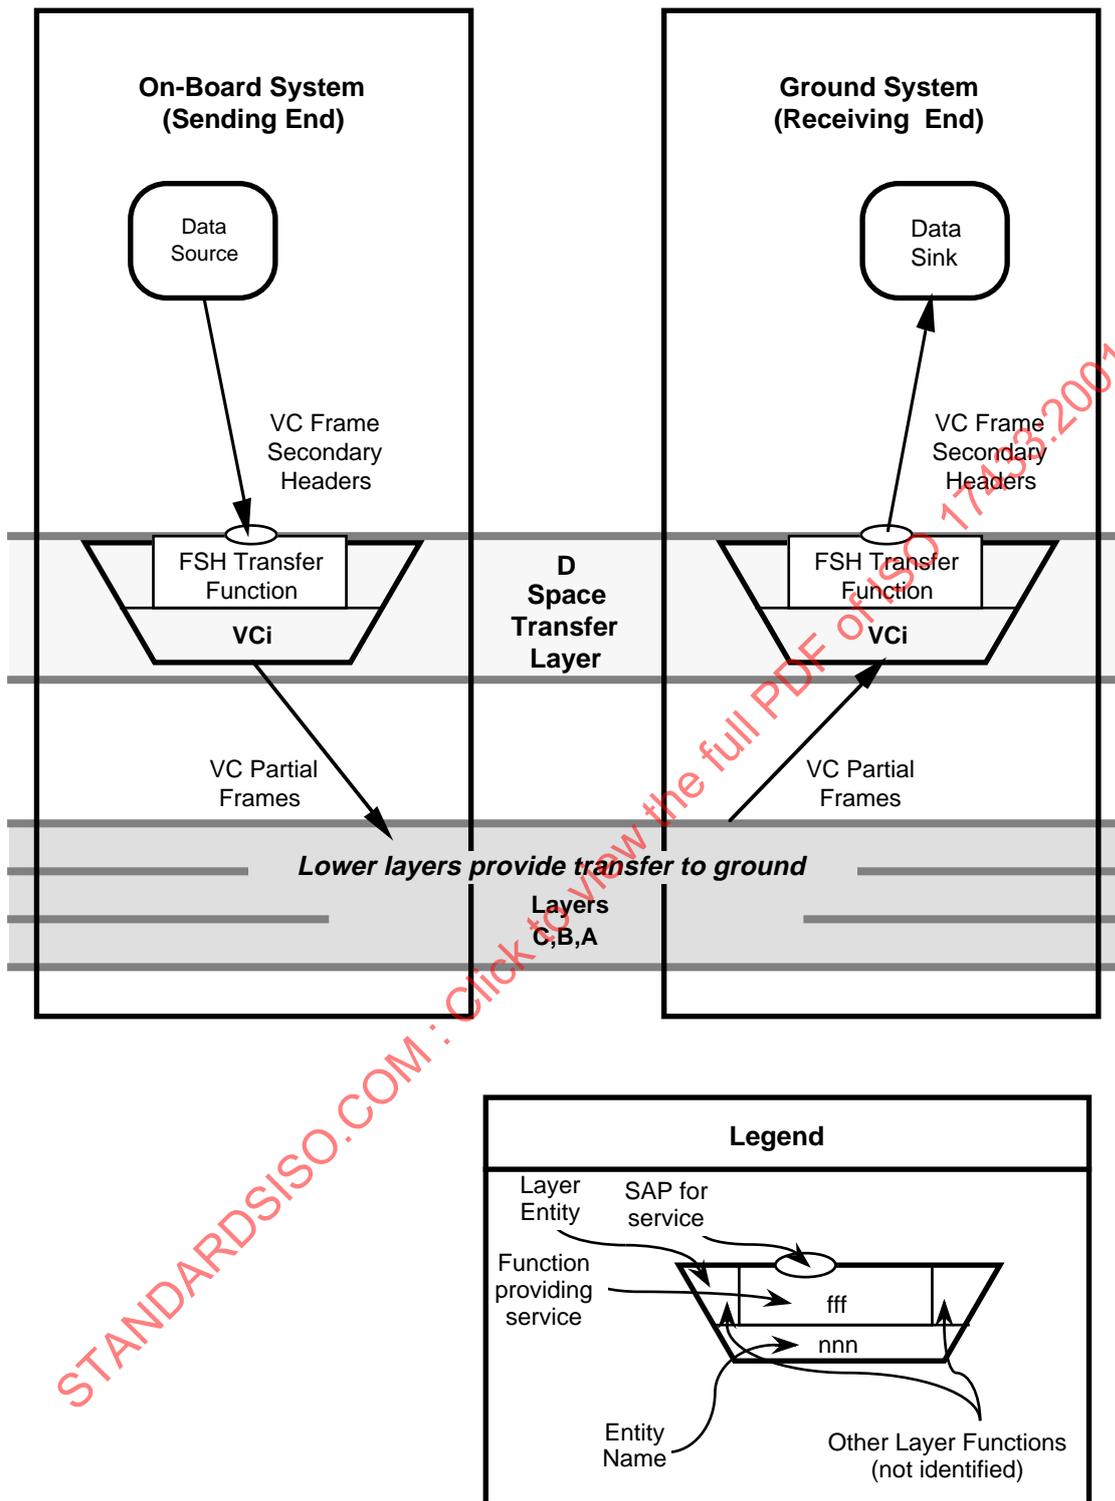


Figure 4-6: VC_Frame Secondary Header Service

4.4.3 VC_FSH SERVICE SDU

4.4.3.1 VC_FSH Service is modeled as a buffer at the sending-end **VC_FSH SAP**, the contents of which are transferred to the corresponding **VC_FSH SAP** on the ground. There shall be only one buffer for **VC_FSH Service** on a given **Virtual Channel**. This model is illustrated in figure 4-7.

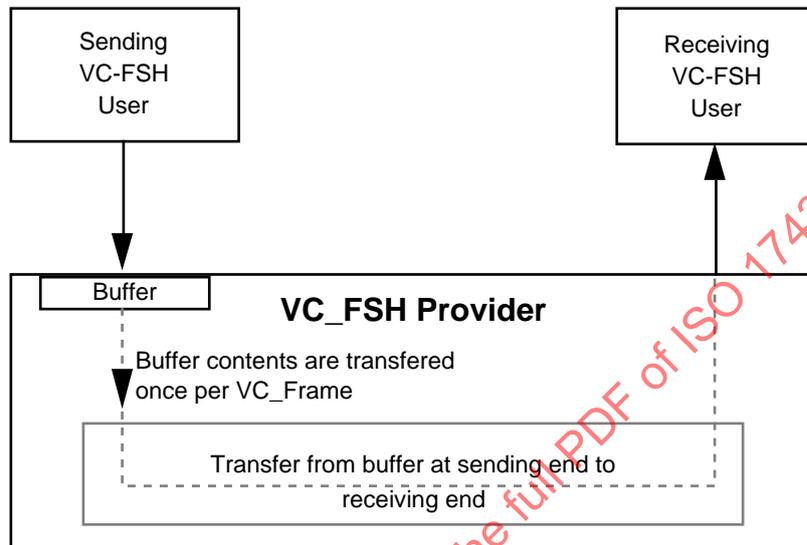


Figure 4-7: Abstract Model of VC_FSH Service

4.4.3.2 This model implies that

- exactly one **VC_FSH SDU** is sent per **VC_Frame**. Its value is the content of the buffer at some time between release of successive **VC_Frames**;
- the **VC_FSHes** sent by an on-board source are transferred in order;
- the time relationship between placing a new value of the **VC_FSH** in the buffer, and release of a **VC_Frame** is not specified; i.e., the timing, polling, or synchronization scheme used to coordinate between **VC_FSH** source and the **VC_FSH Service** provider is mission specific.

4.4.4 PREREQUISITES FOR VC_FSH SERVICE

4.4.4.1 The **VC_FSH Service** requires **VC_Frame Service** from the layer below (see 5.2). **VC_FSH Service** also requires the specification of managed parameters, which serve to establish associations between space and ground protocol entities, specify address mappings, provide access authorization, and define operating limits.

4.4.4.2 Managed parameters for **VC_FSH Service** include

- a) whether the **Virtual Channel** is to provide **VC_FSH Service**;
- b) which application is authorized as the source of **VC_FSH** data on the **Virtual Channel** providing the service;
- c) fixed length of the **FSH** on the **Virtual Channel**;
- d) implementation-specific parameters for timing, latency, or flow control.

4.4.4.3 Neither this Recommendation nor reference [1] specifies methods, procedures, or formats for providing these managed parameters.

4.4.5 SERVICE PRIMITIVES OF THE **VC_FSH SERVICE**

The service primitives associated with this service are

a) **VC_FSH.request**

The **FSH.request** primitive is passed from the user of the **VC_FSH Service** at the sending end to the **VC_FSH SAP** to request that a **VC_FSH_SDU**, structured as an **FSH**, be placed into the **FSH** buffer on the specified **Virtual Channel**.

b) **VC_FSH.indication**

The **FSH.indication** is passed from the **Space Transfer layer** at the receiving end to the **VC_FSH user** to deliver an **FSH_SDU**.

4.4.6 **VC_FSH SERVICE PARAMETERS**

The parameters for the **VC_FSH Service** primitives are described below.

- a) **VC_FSH_SDU** The **VC_FSH service-data-unit**. An **FSH_SDU** is a fixed-length data unit consisting of an integral number of octets.
- b) **Virtual Channel Frame Count** The **Virtual Channel Frame Count** of the **Transfer Frame** carrying a **VC_FSH**.

4.4.7.3 VC_FSH.indication

a) Function:

The **VC_FSH.indication** primitive is the service indication primitive for the **VC_FSH Service**.

b) Semantics:

The **VC_FSH.indication** primitive shall provide parameters as follows:

VC_FSH.indication (**FSH_SDU**,
 GVCID,
 Virtual Channel Frame Count)

c) When Generated:

The **VC_FSH.indication** primitive is passed from the **Space Transfer layer** to the **VC_FSH Service** user to deliver an **FSH_SDU**.

d) Effect on Receipt:

The effect of receipt of the **VC_FSH.indication** primitive by the user of the **SP-XFR** is undefined.

e) Additional Comments:

- 1) The **VC_FSH.indication** primitive is used to deliver **FSHes** to the **VC_FSH user** process identified by the **GVCID** (i.e., the **VCID** field in the **Transfer Frame Primary Header**, as qualified by the **GSCID**—see reference [3]). This delivery may require the use of managed information to provide routing to the **VC_FSH user** process.
- 2) The functions performed at the receiving end before the **VC_FSH.indication** primitive is sent are summarized below. This functional overview is not part of this Recommendation; see 5.1.5.1 and 5.2 in *Packet Telemetry*, reference [1].

Functions include: input **VC_Frames**; extract and deliver **VC_FSH** with **GVCID** and **Virtual Channel Frame Count**.

4.5 VIRTUAL CHANNEL OPERATIONAL CONTROL FIELD SERVICE

4.5.1 OVERVIEW OF VC_OCF SERVICE

The **VC_OCF Service** provides synchronous transfer of a fixed-length **OCF** in each frame of the **Virtual Channel** (see figure 4-8). The service is unidirectional (one way, space to ground). The transfer is synchronized with the release of **VC_Frames** for transfer in the **Master Channel**.

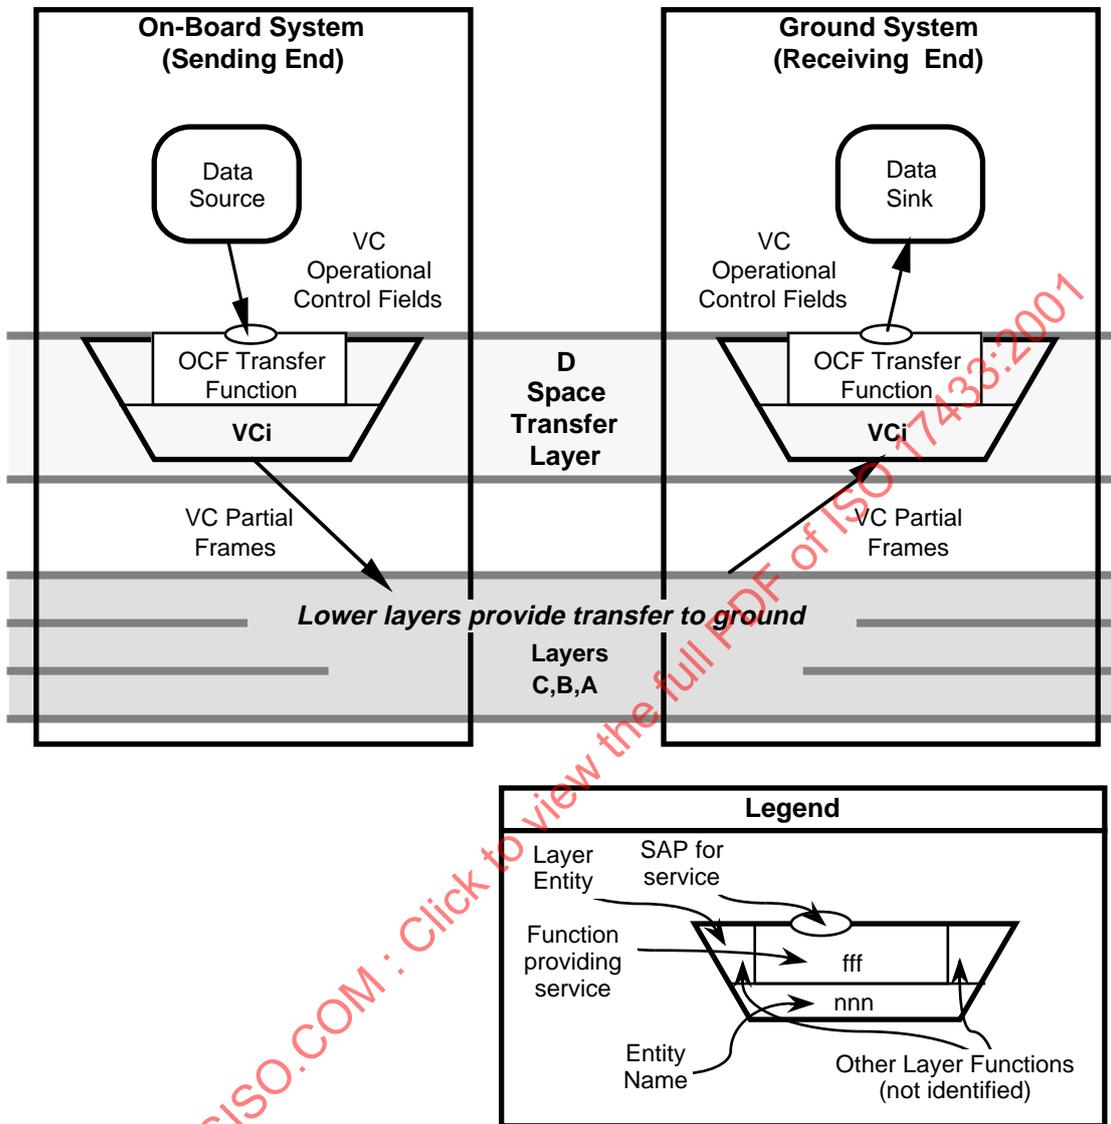


Figure 4-8: VC_OCF Service

NOTES

- 1 **VC_OCF Service** and **MC_OCF Service** are mutually exclusive.
- 2 The on-board data source providing the **VC_OCF** must make a value available for each **VC_Frame**. It is the responsibility of each implementation (i.e., each spacecraft) to assure that the timing requirements for the **VC_OCF** are met, and that the time of measurement of data carried in the **OCF** can be determined, if necessary.

4.5.2 DEFINITIONS AND ABBREVIATIONS

For the purposes of this Service Definition, the following definitions and abbreviations apply:

- a) **VC_OCF_SDU** the **VC_OCF service-data-unit**, an **OCF**;
- b) sending **VC_OCF user** an on-board source of **VC_OCF_SDU**s to be transferred;
- c) receiving **VC_OCF user** a sink for **VC_OCF_SDU**s on the ground; a process that receives the **VC_OCF_SDU**s of a particular **Virtual Channel** on the ground;
- d) **VC_OCF SAP** **service-access-point** for a **VC_OCF Service**.

4.5.3 VC_OCF SERVICE SDU

4.5.3.1 The abstract model of **VC_OCF Service** is a buffer at the sending-end **VC_OCF SAP**, the contents of which are transferred to the corresponding **VC_OCF SAP** on the ground. A separate buffer exists for each **Virtual Channel**. There shall be only one buffer for **VC_OCF Service** on a given **Virtual Channel**. This model is illustrated in figure 4-9.

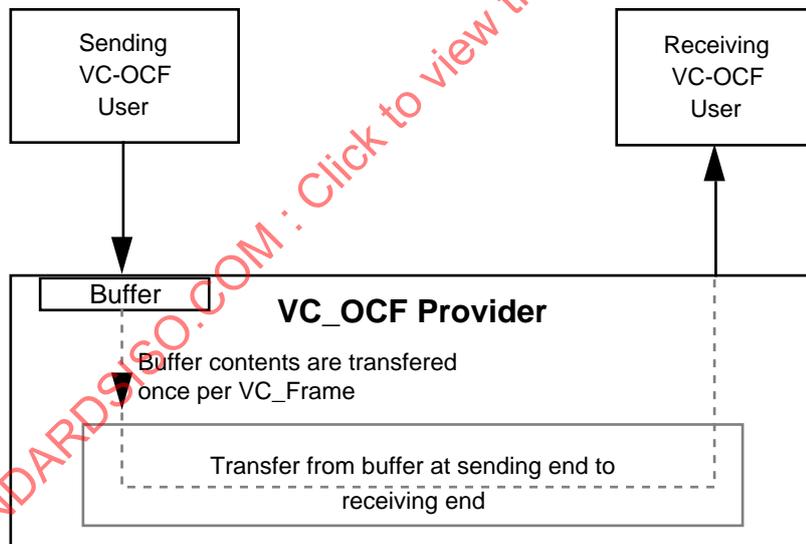


Figure 4-9: Abstract Model of VC_OCF Service

4.5.3.2 This model implies that

- a) the **OCFs** sent by an on-board source are transferred in order;
- b) the time relationship between **OCFs** sent by different on-board sources, on separate **Virtual Channels**, is not specified;

CCSDS RECOMMENDATION FOR PACKET TELEMETRY SERVICES

- c) **OCF** values are transferred only when a **VC_Frame** is released, thus some values placed in the buffer may be overwritten before they can be sent, and others may be sent more than once. Requirements for frequency or timing of **OCF** transfer are not specified by CCSDS.

4.5.4 PREREQUISITES FOR VC_OCF SERVICE

4.5.4.1 The **VC_OCF Service** requires **VC_Frame Service** from the layer below (see 5.2). **VC_OCF Service** also requires the specification of managed parameters, which serve to establish associations between space and ground protocol entities, specify address mappings, provide access authorization, and define operating limits.

4.5.4.2 Managed parameters for **VC_OCF Service** include

- a) whether the **Virtual Channel** is to provide **VC_OCF Service**;
- b) which application is authorized as the source of **VC_OCF** data on the **Virtual Channel** providing the service;
- c) implementation-specific parameters for timing, latency, or flow control.

4.5.4.3 Neither this Recommendation nor reference [1] specifies methods, procedures, or formats for providing these managed parameters.

4.5.5 SERVICE PRIMITIVES OF THE VC_OCF SERVICE

4.5.5.1 The service primitives associated with this service are

- a) **VC_OCF.request**

The **OCF.request** primitive is passed from the layer above at the sending end to the **OCF SAP** to request that a **VC_OCF_SDU** structured as an **OCF**, be inserted into the next **VC_Frame** on the specified **Virtual Channel**, and sent.

- b) **VC_OCF.indication**

The **OCF.indication** is passed from the **OCF layer** at the receiving end to the **OCF user** to deliver a **VC_OCF_SDU**.

4.5.5.2 The **VC_OCF.indication** primitive is used only on the ground to deliver an **OCF** to the layer above.

4.5.6 VC_OCF SERVICE PARAMETERS

The parameters for the **VC_OCF Service** primitives are described below.

- a) **VC_OCF_SDU** The **OCF service-data-unit**. A **VC_OCF_SDU** is a fixed-length data unit consisting of four octets.
- b) **VCID** The **Virtual Channel Identifier**.

4.5.7 DETAILED VC_OCF SERVICE SPECIFICATIONS

4.5.7.1 General

This subsection describes in detail the primitives and parameters associated with the **VC_OCF Service**. The parameters are specified in an abstract sense and specify the information to be made available to the user of the primitive. The way in which a specific implementation makes this information available is not constrained by this specification.

4.5.7.2 VC_OCF.request

- a) Function:

The **VC_OCF.request** primitive is the service request primitive for the **VC_OCF Service**.

- b) Semantics:

The **VC_OCF.request** primitive shall provide parameters as follows:

VC_OCF.request (**VC_OCF_SDU**)

- c) When Generated:

The **VC_OCF.request** primitive is passed to the **Virtual Channel Access** layer to request it to send the **VC_OCF_SDU**.

- d) Effect on Receipt:

Receipt of the **VC_OCF.request** primitive causes the **Virtual Channel Access** layer to replace the content of the OCF buffer with the new value in the **VC_OCF_SDU**.

- e) Additional Comments:

- 1) The **VC_OCF.request** primitive is used to transfer **OCFs**.

CCSDS RECOMMENDATION FOR PACKET TELEMETRY SERVICES

- 2) The functions performed at the sending end when the **VC_OCF.request** primitive is sent are summarized below. This functional overview is not part of this Recommendation; see 5.1.2.3 and 5.4 in *Packet Telemetry*, reference [1].

Functions include: input fixed-length **OCF**; synchronously insert **OCF** into **VC_Frame**.

4.5.7.3 VC_OCF.indication

- a) Function:

The **VC_OCF.indication** primitive is the service indication primitive for the **VC_OCF Service**.

- b) Semantics:

The **VC_OCF.indication** primitive shall provide parameters as follows:

VC_OCF.indication (VC_OCF_SDU)

- c) When Generated:

The **VC_OCF.indication** primitive is passed from the **Space Transfer layer** to the **VC_OCF Service** user to deliver a **VC_OCF_SDU**.

- d) Effect on Receipt:

The effect of receipt of the **VC_OCF.indication** primitive by the user of the **SP-XFR** is undefined.

- e) Additional Comments:

- 1) The **VC_OCF.indication** primitive is used to deliver **OCF**s to the **VC_OCF user** process identified by the **GVCID** (i.e., the **VCID** field in the **Transfer Frame Primary Header**, as qualified by the **GSCID**—see reference [3]). This delivery may require the use of managed information to provide routing to the **VC_OCF user** process.
- 2) The functions performed at the receiving end before the **VC_OCF.indication** primitive is sent are summarized below. This functional overview is not part of this Recommendation; see 5.1.2.3 and 5.4 in *Packet Telemetry*, reference [1].

Functions include: input **VC_Frames**; extract and deliver **VC_OCF** with sequence quality and **Virtual Channel** sequence count (optional).

(blank page)

STANDARDSISO.COM : Click to view the full PDF of ISO 17433:2001

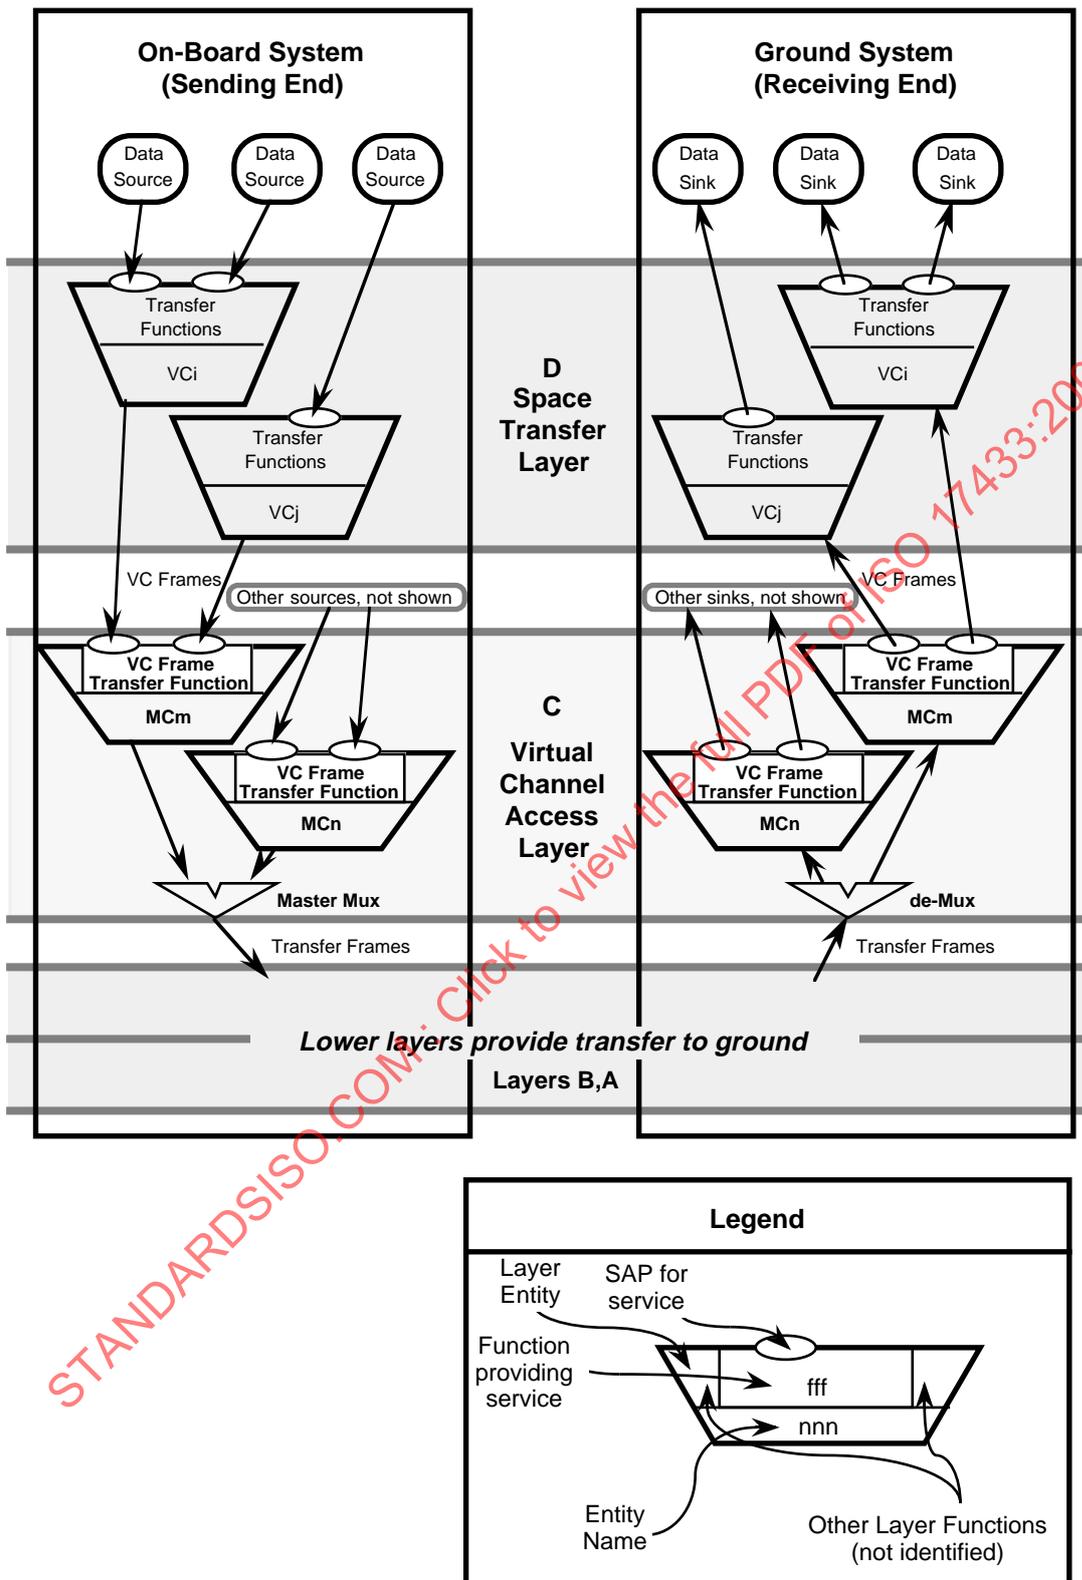


Figure 5-1: VC_Frame Service

5.2.3 VC_FRAME SERVICE SDU

5.2.3.1 The abstract model of **VC_Frame Service** is a queue linking the on-board **VCF SAP** for a given **Virtual Channel** to the corresponding **VCF SAP** on the ground. A separate queue exists for each **Virtual Channel**. This model is illustrated in figure 5-2.

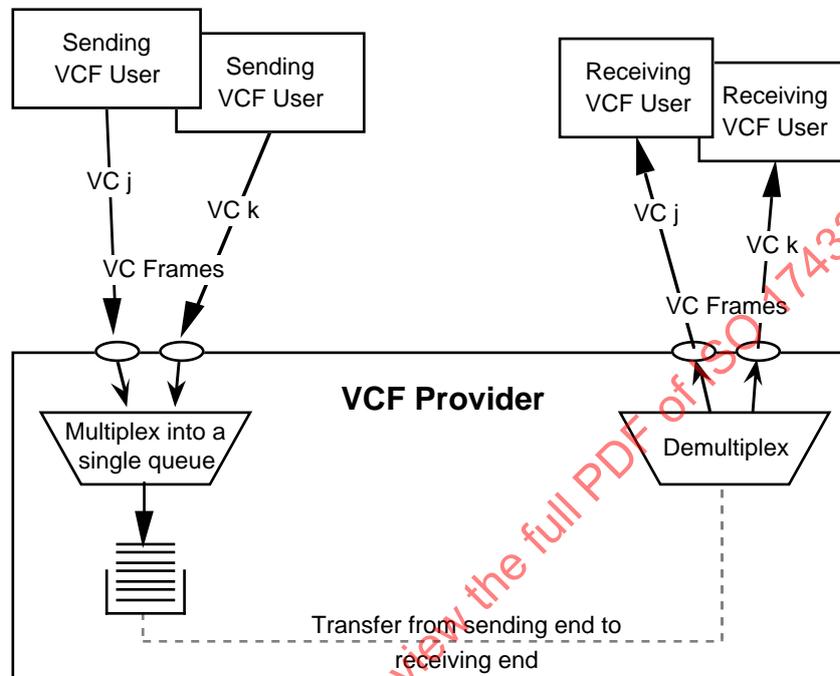


Figure 5-2: Abstract Model of a VC_Frame Service

5.2.3.2 This model implies that

- the **VC_Frames** sent by an on-board source are transferred in order;
- the time relationship between **VC_Frames** sent by different on-board sources is not specified.

5.2.4 PREREQUISITES FOR VC_FRAME SERVICE

5.2.4.1 The **VC_Frame Service** requires **Channel Access Service** from the layer below (see section 6) to provide synchronized, error-protected transmission across the space link.

5.2.4.2 The **VC_Frame Service** also requires the specification of managed parameters, which serve to establish associations between space and ground protocol entities, specify address mappings, provide access authorization, and define operating limits.

5.2.4.3 Managed parameters for **VC_Frame Service** include

- a) which **Virtual Channels** are to be provided **VC_Frame Service**;
- b) frame length;
- c) presence of **MC_OCF** and/or **MC_FSH** (and its length);
- d) use of **Frame Error Control Field (FECF)**;
- e) implementation-specific parameters for timing, latency, or flow control.

5.2.4.4 Neither this Recommendation nor reference [1] specifies methods, procedures, or formats for providing these managed parameters.

5.2.5 SERVICE PRIMITIVES OF THE VC_FRAME SERVICE

5.2.5.1 General

The service primitives associated with this service are defined below.

5.2.5.2 VCF.request

The **VCF.request** primitive is passed from the layer above at the sending end to the **VCF layer** to request that a **VCF_SDU**, structured as a **VC_Frame**, be multiplexed into the specified **Master Channel**, and sent.

5.2.5.3 VCF.indication

The **VCF.indication** is passed from the **VCF layer** at the receiving end to the **VCF user** to deliver a **VCF_SDU**.

5.2.6 VCF SERVICE PARAMETERS

The parameters for the **VCF Service** primitives are described below.

- a) **VCF_SDU** The **VCF service-data-unit**. A **VCF_SDU** is a **VC_Frame** which is a partially formatted **Transfer Frame**. A **VC_Frame** includes:
 - 1) all fields of the **Transfer Frame Primary Header**, excepting **Version Number**, **SCID**, **Master Channel Frame Count**, and possibly **OCF Flag** or **FSH Flag** (included only if **VC_OCF Service** or **VC_FSH Service**, respectively, are provided on the **Virtual Channel**);

CCSDS RECOMMENDATION FOR PACKET TELEMETRY SERVICES

- 2) optionally, a fixed-length **VC_FSH**;
 - 3) a fixed-length **Transfer Frame Data Field**;
 - 4) optionally, a fixed-length **VC_OCF**.
- b) **VCID** **Virtual Channel ID.**
- c) **MC_Sequence-
Quality_Indicator** Indication provided with delivery of a **VC_Frame** (at receiving end) that there has been a gap in **Master Channel** sequence numbers since the previous **VC_Frame** was delivered on the **Virtual Channel**.

5.2.7 DETAILED VCF SERVICE SPECIFICATION

5.2.7.1 General

This subsection describes in detail the primitives and parameters associated with the **VCF Service**. The parameters are specified in an abstract sense and specify the information to be made available to the user of the primitive. The way in which a specific implementation makes this information available is not constrained by this specification.

5.2.7.2 VCF.request

- a) Function:

The **VCF.request** primitive is the service request primitive for the **VCF Service**.

- b) Semantics:

The **VCF.request** primitive shall provide parameters as follows:

VCF.request (**VCF_SDU**)

- c) When Generated:

The **VCF.request** primitive is passed to the **Virtual Channel Access layer** to request it to send the **VCF_SDU**.

- d) Effect on Receipt:

Receipt of the **VCF.request** primitive causes the **Virtual Channel Access layer** to transfer the **VCF_SDU**.

e) Additional Comments:

- 1) The **VCF.request** primitive is used to transfer **VC_Frames**.
- 2) The functions performed at the sending end when the **VCF.request** primitive is sent are summarized below. This functional overview is not part of this Recommendation; see section 5, particularly subsections 5.1 and 5.5 in *Packet Telemetry*, Reference [1].

Functions include: accept **VC_Frames** from various **Virtual Channels**; multiplex **VC_Frames**; add **GSCID** (see reference [3]) and **Master Channel Frame Count** to **Frame Header**; optionally, add **FECF**; output to the layer below a constant-rate stream of sequentially numbered **MC_Frames**.

5.2.7.3 VCF.indication

a) Function:

The **VCF.indication** primitive is the service indication primitive for the **VCF Service**.

b) Semantics:

The **VCF.indication** primitive shall provide parameters as follows:

VCF.indication	(VCF_SDU , MC_Sequence-Quality_Indicator)
-----------------------	--

c) When Generated:

The **VCF.indication** primitive is passed from the **Virtual Channel Access** layer to the **VCF Service** user to deliver a **VCF_SDU**.

d) Effect on Receipt:

The effect of receipt of the **VCF.indication** primitive by the user of the **VCF Service** is defined in 4.2.7.3 e) 2), and 4.3.7.3 e) 2).

e) Additional Comments:

- 1) The **VCF.indication** primitive is used to deliver **VC_Frames** to the **VCF user** process identified by the **VCID** in the **VC_Frame Header**, as qualified by the **GSCID** (see reference [3]). This delivery may require the use of managed information to provide routing to the **VCF user** processes.

CCSDS RECOMMENDATION FOR PACKET TELEMETRY SERVICES

- 2) The functions performed at the receiving end before the **VCF.indication** primitive is sent are summarized below. This functional overview is not part of this Recommendation; see section 5, particularly 5.1 and 5.5 in *Packet Telemetry*, reference [1].

Functions include: input a stream of numbered **MC_Frames**; demultiplex **VC_Frames**; optionally, check **FECF**; output **VC_Frames** with **Master Channel** sequence quality.

5.3 MASTER CHANNEL FRAME SECONDARY HEADER SERVICE

5.3.1 OVERVIEW OF MC_FSH SERVICE

MC_FSH Service is a unidirectional service (one way, space to ground) which provides synchronous transfer of a fixed-length **FSH** in each frame on the **Master Channel** (see figure 5-3). The transfer is synchronized with the release of **MC_Frames**. The service is sequence preserving but does not guarantee completeness.

NOTES

- 1 **MC_FSH Service** and **VC_FSH Service** are mutually exclusive.
- 2 The on-board data source providing the **FSH** must make a value available for each **Transfer Frame** on the **Master Channel**. It is the responsibility of each implementation (i.e., each spacecraft) to assure that the timing requirements for the **FSH** are met, and that the time of measurement of data carried in the **FSH** can be determined.

5.3.2 DEFINITIONS AND ABBREVIATIONS

For the purposes of this Service Definition, the following definitions and abbreviations apply:

- | | |
|---------------------------------|--|
| a) MC_FSH_SDU | FSH to be sent on a Master Channel ; |
| b) sending MC_FSH user | an on-board source of MC_FSH_SDU s to be transferred; |
| c) receiving MC_FSH user | a sink for MC_FSH_SDU s on the ground; a process that receives the MC_FSH_SDU s of a particular Master Channel on the ground; |
| d) MC_FSH SAP | service-access-point for a Master Channel . |

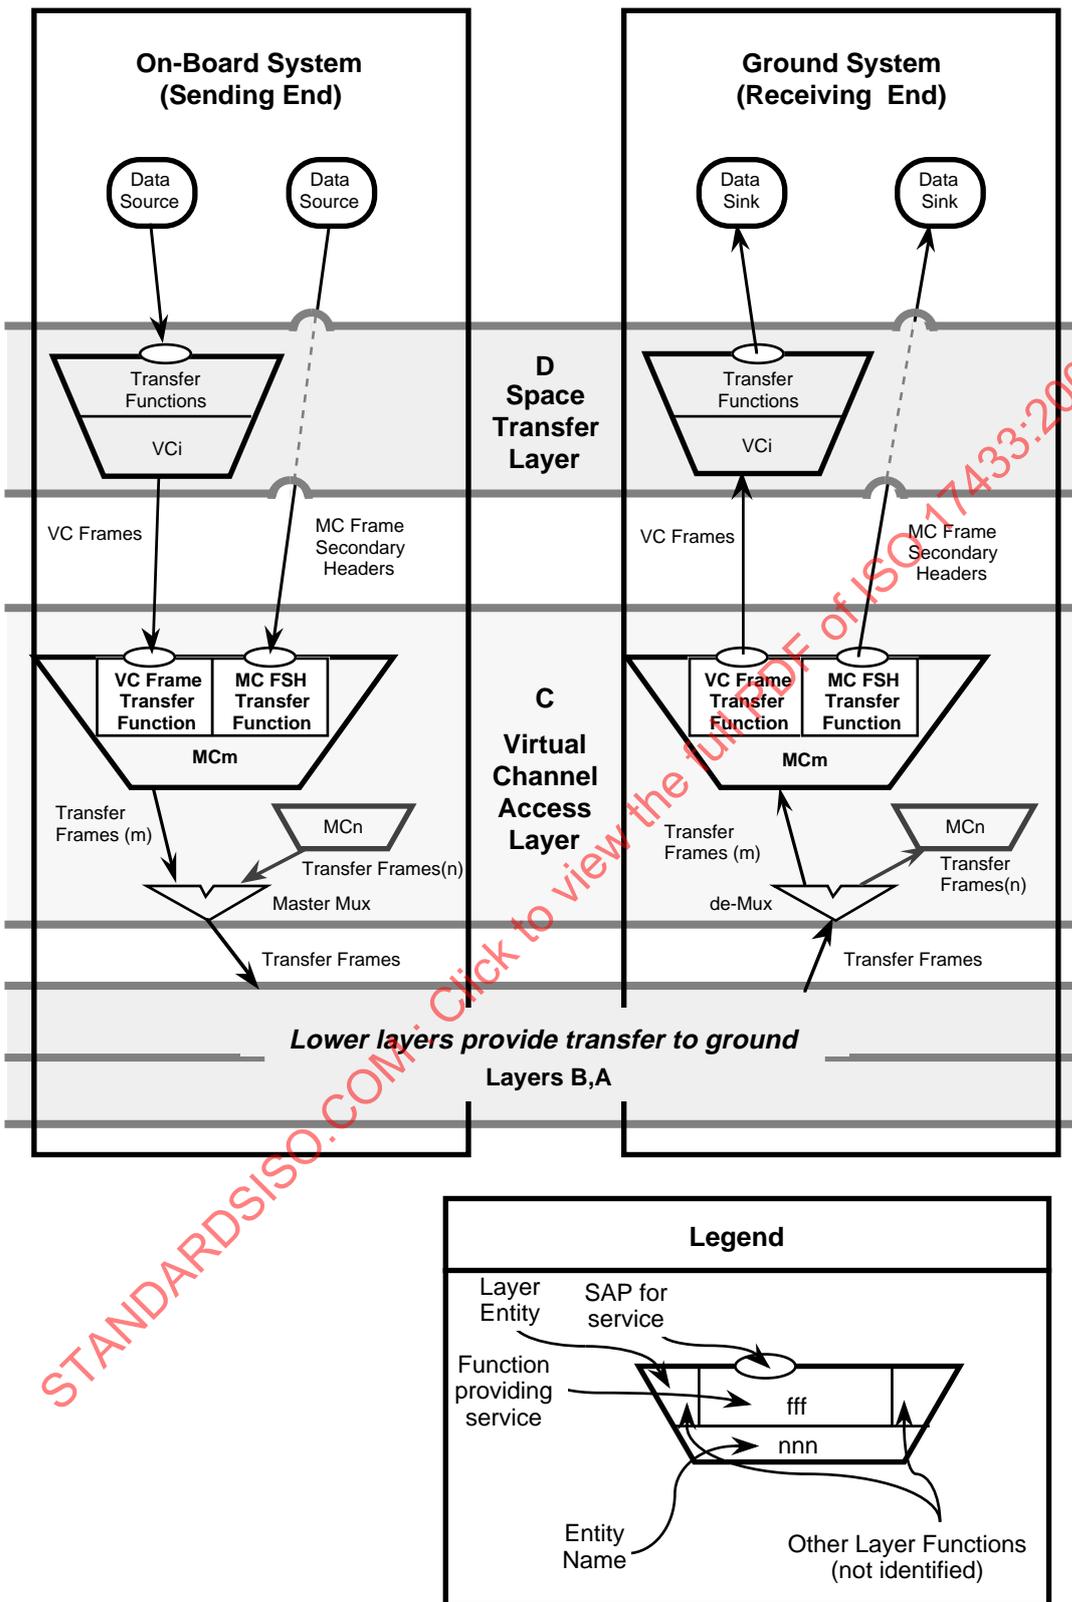


Figure 5-3: MC_Frame Secondary Header Service

5.3.3 MC_FSH SERVICE SDU

5.3.3.1 The abstract model of **MC_FSH Service** is a buffer at the sending-end **MC_FSH SAP**, the contents of which are transferred to the corresponding **MC_FSH SAP** on the ground. This model is illustrated in figure 5-4.

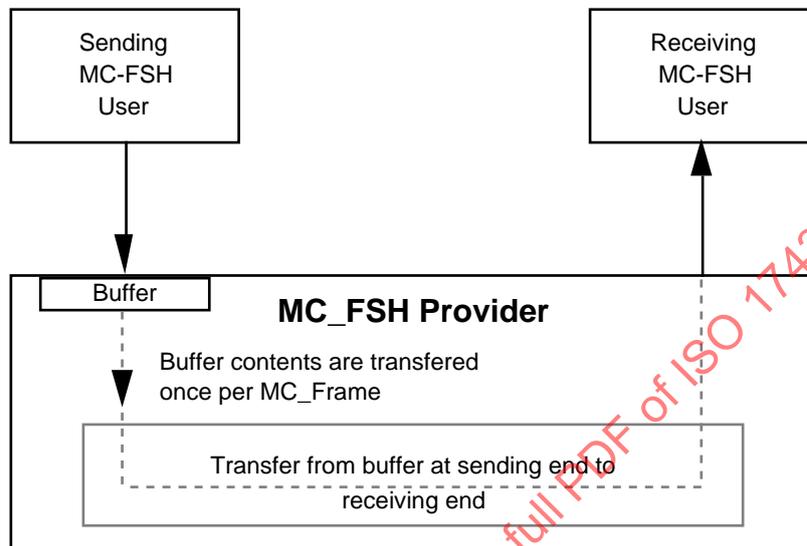


Figure 5-4: Abstract Model of an MC_FSH Service

5.3.3.2 This model implies that

- exactly one **MC_FSH** is sent per **MC_Frame**; its value is the content of the buffer at some time between release of successive **MC_Frames**;
- the **MC_FSHes** sent by an on-board source are transferred in order;
- the time relationship between placing a new value of the **MC_FSH** in the buffer, moving that value into the **FSH** field of the next **MC_Frame**, and release of that **MC_Frame**, is not specified; i.e., the timing, polling, or synchronization scheme used to coordinate between **MC_FSH** source and the **MC_FSH Service** provider is mission-specific.

5.3.4 PREREQUISITES FOR THE MC_FSH SERVICE

5.3.4.1 The **MC_FSH Service** requires **Channel Access Service** from the layer below (see section 6). **MC_FSH Service** also requires the specification of managed parameters, which serve to establish associations between space and ground protocol entities, specify address mappings, provide access authorization, and define operating limits.

5.3.4.2 Managed parameters for MC_FSH Service include

- a) whether the **Master Channel** is to provide **MC_FSH Service**;
- b) which application is authorized to be the source of **MC_FSH** data;
- c) fixed length of the **FSH** on the **Master Channel**;
- d) implementation-specific parameters for timing, latency, or flow control.

5.3.4.3 Neither this Recommendation nor reference [1] specifies methods, procedures, or formats for providing these managed parameters.

5.3.5 SERVICE PRIMITIVES OF THE MC_FSH SERVICE

The service primitives associated with this service are

a) MC_FSH.request

The **MC_FSH.request** primitive is passed from the layer above at the sending end to the **MC_FSH SAP** to request that an **MC_FSH_SDU** structured as an **FSH**, be placed in the buffer to be sent.

b) MC_FSH.indication

The **MC_FSH.indication** is passed from the **Virtual Channel Access** layer at the receiving end to the **MC_FSH user** to deliver an **MC_FSH_SDU**.

5.3.6 MC_FSH SERVICE PARAMETERS

The parameters for the **MC_FSH Service** primitives are described below.

- a) **MC_FSH_SDU** The **MC_FSH service-data-unit**. An **FSH_SDU** is a delimited, octet-aligned data unit which is formatted as an **FSH**.
- b) **GSCID** **Global Spacecraft Identifier** (see reference [3]). The **GSCID** identifies the **MC_FSH_SAP** for **MC_FSH_SDU**s within a specific **Master Channel**.
- c) **Master Channel Frame Count** The **Master Channel Frame Count** of the **Transfer Frame** carrying an **MC_FSH**.

5.3.7 DETAILED MC_FSH SERVICE SPECIFICATION

5.3.7.1 General

This subsection describes in detail the primitives and parameters associated with the **MC_FSH Service**. The parameters are specified in an abstract sense and specify the information to be made available to the user of the primitive. The way in which a specific implementation makes this information available is not constrained by this specification.

5.3.7.2 MC_FSH.request

a) Function:

The **MC_FSH.request** primitive is the service request primitive for the **MC_FSH Service**.

b) Semantics:

The **MC_FSH.request** primitive shall provide parameters as follows:

MC_FSH.request (FSH_SDU,
GSCID)

c) When Generated:

The **MC_FSH.request** primitive is passed to the **Virtual Channel Access layer** to request it to send the **MC_FSH_SDU**.

d) Effect on Receipt:

Receipt of the **MC_FSH.request** primitive causes the **Virtual Channel Access layer** to replace the contents of the buffer with the new value in the **MC_FSH_SDU**.

e) Additional Comments:

1) The **MC_FSH.request** primitive is used to transfer **FSHes**.

2) The functions performed at the sending end when the **MC_FSH.request** primitive is sent are summarized below. This functional overview is not part of this Recommendation; see 5.1.5.1 and 5.2 in *Packet Telemetry*, reference [1].

Functions include: input fixed-length **FSH**; place in buffer; synchronously insert contents of buffer into **FSH** field of **MC_Frame**.

5.3.7.3 MC_FSH.indication

a) Function:

The **MC_FSH.indication** primitive is the service indication primitive for the **MC_FSH Service**.

b) Semantics:

The **MC_FSH.indication** primitive shall provide parameters as follows:

MC_FSH.indication	(FSH_SDU, GSCID, MASTER CHANNEL FRAME COUNT)
--------------------------	---

c) When Generated:

The **MC_FSH.indication** primitive is passed from the **Virtual Channel Access layer** to the **MC_FSH Service** user to deliver an **MC_FSH_SDU**.

d) Effect on Receipt:

The effect of receipt of the **MC_FSH.indication** primitive by the user of the **MC_FSH Service** is undefined.

e) Additional Comments:

1) The **MC_FSH.indication** primitive is used to deliver **FSHes** to the **MC_FSH user** process identified by the **GSCID** (i.e., the **SCID** field in the **Transfer Frame Primary Header**, as qualified by the **Version Number**—see reference [3]). This delivery may require the use of managed information to provide routing to the **MC_FSH user** process.

2) The functions performed at the receiving end before the **MC_FSH.indication** primitive is sent are summarized below. This functional overview is not part of this Recommendation; see 5.1.5.1 and 5.2 in *Packet Telemetry*, reference [1].

Functions include: input **MC_Frames**; extract and deliver **MC_FSH** with sequence quality and **Master Channel Frame Count**.

5.4 MASTER CHANNEL OPERATIONAL CONTROL FIELD SERVICE

5.4.1 OVERVIEW OF MC_OCF SERVICE

The **MC_OCF Service** provides synchronous transfer of a fixed-length **OCF** in each frame of the **Master Channel** (see figure 5-5). The service is unidirectional (one way, space to ground). The transfer is synchronized with the release of **MC_Frames**. The **MC_OCF Service** is sequence preserving, but does not guarantee completeness.

NOTES

- 1 **MC_OCF Service** and **VC_OCF Service** are mutually exclusive.
- 2 The on-board data source providing the **MC_OCF** must make a value available for each **MC_Frame**. It is the responsibility of each implementation (i.e., each spacecraft) to assure that the timing requirements for the **MC_OCF** are met, and that the time of measurement of data carried in the **OCF** can be determined, if necessary.

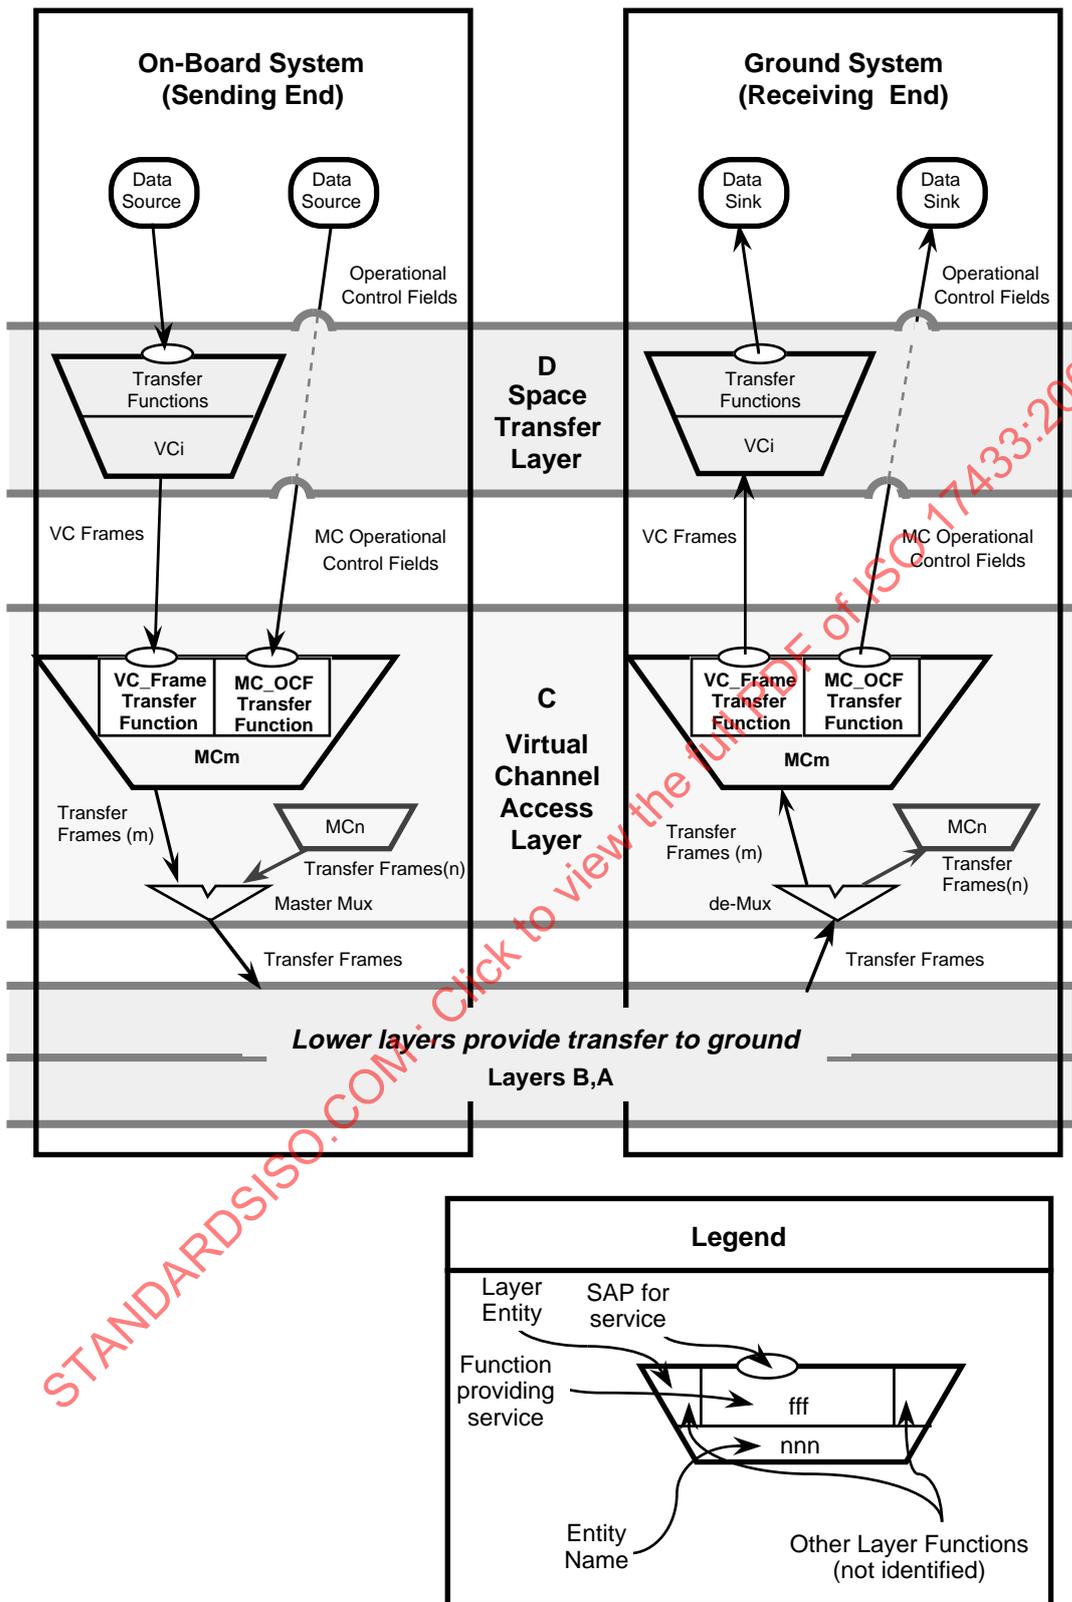


Figure 5-5: MC_OCF Service

5.4.2 DEFINITIONS AND ABBREVIATIONS

For the purposes of this Service Definition, the following definitions and abbreviations apply:

- | | | |
|----|------------------------------|--|
| a) | OCF | Operational Control Field; |
| b) | sending MC_OCF user | an on-board source of OCFs to be transferred; |
| c) | receiving MC_OCF user | a sink for OCFs on the ground; a process that receives the OCFs of a particular Master Channel on the ground; |
| d) | MC_OCF SAP | service-access-point for an MC_OCF Service . |

5.4.3 MC_OCF SERVICE SDU

5.4.3.1 The abstract model of **MC_OCF Service** is a buffer at the sending-end **MC_OCF SAP**, the contents of which are transferred to the corresponding **MC_OCF SAP** on the ground. This model is illustrated in figure 5-6.

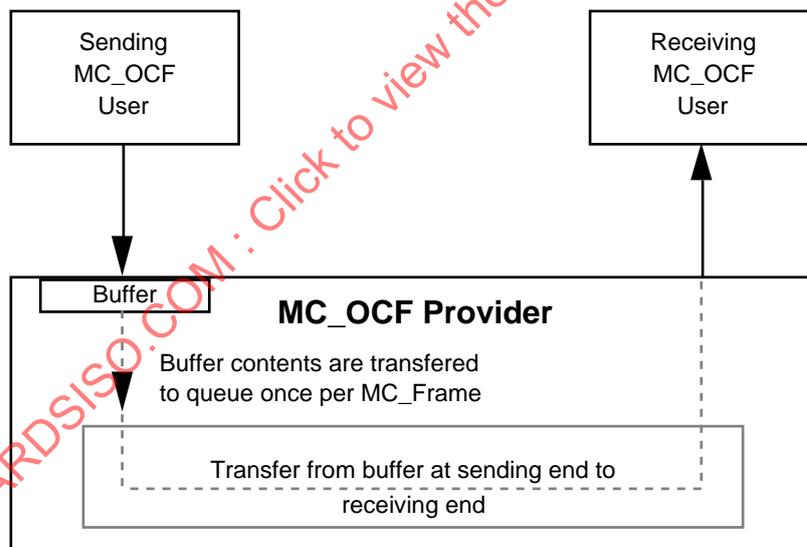


Figure 5-6: Abstract Model of MC_OCF Service

5.4.3.2 This model implies that the **OCFs** sent by an on-board source are transferred in order.

5.4.4 PREREQUISITES FOR THE MC_OCF SERVICE

5.4.4.1 The **MC_OCF Service** requires **Channel Access Service** from the layer below (see section 6). **MC_OCF Service** also requires the specification of managed parameters, which serve to establish associations between space and ground protocol entities, specify address mappings, provide access authorization, and define operating limits.

5.4.4.2 Managed parameters for **MC_OCF Service** include

- a) whether the **Master Channel** is to provide **MC_OCF Service**;
- b) which application is authorized as the source of **MC_OCF** data;
- c) implementation-specific parameters for timing, latency, or flow control.

5.4.4.3 Neither this Recommendation nor reference [1] specifies methods, procedures, or formats for providing these managed parameters.

5.4.5 SERVICE PRIMITIVES OF THE MC_OCF SERVICE

The service primitives associated with this service are

- a) **MC_OCF.request**

The **MC_OCF.request** primitive is passed from the layer above at the sending end to the **MC_OCF layer** to request that an **MC_OCF_SDU** structured as an **OCF**, be inserted into the **Transfer Frames** of a specified **Master Channel**, and sent.

- b) **MC_OCF.indication**

The **MC_OCF.indication** is passed from the **MC_OCF layer** at the receiving end to the **MC_OCF user** to deliver an **MC_OCF_SDU**.

5.4.6 MC_OCF SERVICE PARAMETERS

The parameters for the **MC_OCF Service** primitives are described below.

- | | |
|--------------------------------------|--|
| a) MC_OCF_SDU | The MC_OCF service-data-unit . An MC_OCF_SDU is a fixed-length, octet-aligned data unit. |
| b) GSCID | Global Spacecraft Identifier (see reference [3]). |
| c) Master Channel Frame Count | The Master Channel Frame Count of the Transfer Frame carrying an MC_FSH . |

5.4.7 DETAILED SPECIFICATION OF MC_OCF SERVICE PRIMITIVES

5.4.7.1 General

This subsection describes in detail the primitives and parameters associated with the **MC_OCF Service**. The parameters are specified in an abstract sense and specify the information to be made available to the user of the primitive. The way in which a specific implementation makes this information available is not constrained by this specification.

5.4.7.2 MC_OCF.request

a) Function:

The **MC_OCF.request** primitive is the service request primitive for the **MC_OCF Service**.

b) Semantics:

The **MC_OCF.request** primitive shall provide parameters as follows:

MC_OCF.request (MC_OCF_SDU,
GSCID)

c) When Generated:

The **MC_OCF.request** primitive is passed to the **Virtual Channel Access layer** to request it to send the **MC_OCF_SDU**.

d) Effect on Receipt:

Receipt of the **MC_OCF.request** primitive causes the **Virtual Channel Access layer** to replace the content of the **OCF** buffer with the new value in the **MC_OCF_SDU**.

e) Additional Comments:

1) The **MC_OCF.request** primitive is used to transfer **OCFs**.

2) The functions performed at the sending end when the **MC_OCF.request** primitive is sent are summarized below. This functional overview is not part of this Recommendation; see 5.1.2.3 and 5.4 in *Packet Telemetry*, reference [1].

Functions include: input fixed-length **OCF**; place in buffer; synchronously insert content of buffer into **OCF** field of **MC_Frame**.