

First edition  
2002-06-15

Corrected version  
2003-06-15

---

---

**Photography — Processing chemicals —  
Specifications for 4-(N-ethyl-N-2-  
methanesulfonylaminoethyl)-2-  
methylphenylenediamine sesquisulfate  
monohydrate**

*Photographie — Produits chimiques de traitement — Spécifications pour  
4-(N-éthyle-N-2-sulfonylaminoéthyle de méthane)-2-phénylénédiamine de  
méthyle sesquisulfate monohydraté*



Reference number  
ISO 17531:2002(E)

© ISO 2002

**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 17531:2002

© ISO 2002

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

Page

Foreword .....	iv
Introduction.....	v
1 Scope.....	1
2 Normative references.....	1
3 General .....	2
3.1 Physical properties .....	2
3.2 Hazardous properties .....	2
3.3 Handling and storage.....	2
4 Requirements .....	2
5 Reagents and glassware .....	3
6 Sampling .....	3
7 Test methods .....	3
7.1 Assay .....	3
7.2 Identity test .....	4
7.3 Residue after ignition.....	5
7.4 Heavy metals content .....	5
7.5 Iron content.....	6
7.6 Volatile matter.....	6
7.7 Appearance of solution .....	6
7.8 Photographic-use test .....	6
<b>Annex A (informative) Preparation of standard ammonium cerium (IV) hexanitrate solution,</b> $c[(\text{NH}_4)_2\text{Ce}(\text{NO}_3)_6] = 0,05 \text{ mol/l (27,41 g/l)}$ .....	<b>8</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 17531 was prepared by Technical Committee ISO/TC 42, *Photography*.

Annex A of this International Standard is for information only.

In this corrected version of ISO 17531, the following have been corrected:

- the lack of italicization of the symbol “N” in the main title and in a footnote;
- the definition of  $m$  in the equation of A.5;
- the non-italicization of the symbol for “concentration”;
- an incorrect reference to another International Standard in the Foreword;
- some minor typographical errors.

## Introduction

This International Standard is one of a series that establishes criteria of purity for chemicals used in processing photographic materials. General test methods and procedures cited in this International Standard are compiled in ISO 10349-1.

This International Standard is intended for use by individuals with a working knowledge of analytical techniques, which may not always be the case. Some of the procedures utilize caustic, toxic, or otherwise hazardous chemicals. Safe laboratory practice for the handling of chemicals requires the use of safety glasses or goggles and, in some cases, other protective apparel such as rubber gloves, face masks or aprons. Normal precautions for the safe performance of any chemical procedure shall be exercised at all times, but specific details have been provided for hazardous materials. Hazard warnings designated by a letter enclosed in angle brackets, < >, are used as a reminder in those steps detailing handling operations and are defined in ISO 10349-1. More detailed information regarding hazards, handling and use of these chemicals may be available from the manufacturer.

This International Standard provides chemical and physical requirements for the suitability of a photographic-grade chemical. The tests correlate with undesirable photographic effects. Purity requirements are set as low as possible consistent with these photographic effects. These criteria are considered to be the minimum requirements necessary to assure sufficient purity for use in photographic processing solutions; however, if the purity of a commonly available grade of chemical exceeds photographic processing requirements and if there is no economic penalty in its use, the purity requirements have been set to take advantage of the availability of the higher quality material.

Every effort has been made to keep the number of requirements to a minimum. Inert impurities are limited to amounts that will not unduly reduce the assay. All tests are performed on samples "as received" to reflect the condition of materials furnished for use. Although the ultimate criterion for suitability of such a chemical is its successful performance in an appropriate use test, the shorter, more economical test methods described in this International Standard are generally adequate.

Assay procedures have been included in all cases where a satisfactory method is available. An effective assay requirement serves not only as a safeguard of chemical purity, but also as a valuable complement to the identity test. Identity tests have been included whenever a possibility exists that another chemical or mixture of chemicals could pass the other tests.

All requirements listed in clause 4 are mandatory. The physical appearance of the material and any footnotes are for general information only and are not part of the requirements.

Efforts have been made to employ tests that are capable of being run in any normally equipped laboratory and, wherever possible, to avoid tests that require highly specialized equipment or techniques. Instrumental methods have been specified only as alternative methods or alone in those cases where no other satisfactory method is available.

Over the past several years, great improvements have been made in instrumentation for various analyses. Where such techniques have equivalent or greater precision, they may be used in place of the tests described in this International Standard. Correlation of such alternative procedures with the given method is the responsibility of the user. In case of disagreement in results, the method called for in the specification ought to prevail. Where a requirement states "to pass test", however, alternative methods are not to be used.



# Photography — Processing chemicals — Specifications for 4-(*N*-ethyl-*N*-2-methanesulfonylaminoethyl)-2-methylphenylenediamine sesquisulfate monohydrate

## 1 Scope

This International Standard establishes criteria for the purity of photographic-grade 4-(*N*-ethyl-*N*-2-methanesulfonylaminoethyl)-2-methylphenylenediamine sesquisulfate monohydrate<sup>1) 2)</sup> and specifies the test methods to be used to determine the purity.

## 2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this International Standard. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 565, *Test sieves — Metal wire cloth, perforated metal plate and electroformed sheet — Nominal sizes of openings*

ISO 10349-1, *Photography — Photographic-grade chemicals — Test methods — Part 1: General*

ISO 10349-4, *Photography — Photographic-grade chemicals — Test methods — Part 4: Determination of residue after ignition*

ISO 10349-5:1992, *Photography — Photographic-grade chemicals — Test methods — Part 5: Determination of heavy metals and iron content*

ISO 10349-8, *Photography — Photographic-grade chemicals — Test methods — Part 8: Determination of volatile matter*

---

1) Sold under such trade names as CD-3 (Eastman Chemicals), FCD-03 (Fuji), and Color Developer 3 (Merck). This information is given for the convenience of users of this International Standard and does not constitute an endorsement by ISO of these products.

2) Other names:

*N*-ethyl-*N*-(β-methylsulfonamidoethyl)-3-methyl-*p*-phenylenediamine sesquisulfate monohydrate

4-amino-*N*-ethyl-*N*-(β-methanesulfonamidoethyl)-*m*-toluidine sesquisulfate monohydrate

4-amino-*N*-(β-methanesulfonamidoethyl)-3-methylaniline sesquisulfate monohydrate

*N*-(4-amino-*N*-ethyl-*m*-toluidine)-ethylmethanesulfonamide sesquisulfate monohydrate

### 3 General

#### 3.1 Physical properties

4-(*N*-ethyl-*N*-2-methanesulfonylaminoethyl)-2-methylphenylenediamine sesquisulfate monohydrate ( $C_{12}H_{21}N_3O_2S \cdot 3/2 H_2SO_4 \cdot H_2O$ ) exists in the form of white to medium-tan or light-pink coloured granules or powder. It has a relative molecular mass of 436,52.

#### 3.2 Hazardous properties

4-(*N*-ethyl-*N*-2-methanesulfonylaminoethyl)-2-methylphenylenediamine sesquisulfate monohydrate may cause skin irritation and allergic skin reaction. Also, this material is corrosive and should under no circumstances be swallowed. (DANGER: <C> <S>)

NOTE Hazard warning codes are defined in ISO 10349-1.

#### 3.3 Handling and storage

Handle this material carefully, avoid contact with skin and avoid breathing the dust. Store in tightly sealed containers and protect from light at room temperature.

### 4 Requirements

A summary of the requirements is shown in Table 1.

Table 1 — Summary of requirements

Test	Limit	Subclause	International Standard in which test method is given
Assay	Minimum: 99,0 % Maximum: 102,9 %	7.1	ISO 17531
Identity test Infrared spectrum	Equivalent to Figure 1	7.2	ISO 17531
Residue after ignition	Maximum: 0,10 %	7.3	ISO 10349-4
Heavy metals content (as Pb)	Maximum: 0,002 %	7.4	ISO 10349-5
Iron content (Fe)	Maximum: 0,002 %	7.5	ISO 10349-5
Volatile matter	Maximum: 0,60 %	7.6	ISO 10349-8
Appearance of solution	Clear and colourless or pale pink colour and free from insoluble matter	7.7	ISO 17531
Photographic-use test	To pass test	7.8	ISO 17531
NOTE % equals mass fraction.			

## 5 Reagents and glassware

All reagents, materials and glassware shall conform to the requirements specified in ISO 10349-1, unless otherwise noted. The hazard warning symbols, used as a reminder in those steps detailing handling operations, are defined in ISO 10349-1. These symbols are used to provide information to the user and are not meant to provide conformance with hazardous labelling requirements, as these vary from country to country.

## 6 Sampling

For details on sampling, see ISO 10349-1.

## 7 Test methods

### 7.1 Assay

#### 7.1.1 Specification

Content of 4-(*N*-ethyl-*N*-2-methanesulfonylaminoethyl)-2-methylphenylenediamine sesquisulfate monohydrate shall be between 99,0 % and 102,9 %.

#### 7.1.2 Reagents

##### 7.1.2.1 Ammonium cerium (IV) hexanitrate, $c[(\text{NH}_4)_2\text{Ce}(\text{NO}_3)_6] = 0,050\ 0\ \text{mol/l}$ (27,41 g/l)

Commercially available analytical reagent solution is recommended. If the solution is to be prepared, see any quantitative analytical chemistry text.

NOTE A procedure for the preparation and standardization of this solution is given in annex A.

##### 7.1.2.2 Ferrous sulfate, $c(\text{FeSO}_4) = 0,025\ \text{mol/l}$ (3,80 g/l)

Dissolve 4,25 g of  $\text{FeSO}_4 \cdot \text{H}_2\text{O}$  in 1 litre of water. (Alternatively 5,60 g/l of  $\text{FeSO}_4 \cdot 4\text{H}_2\text{O}$ , 6,05 g of  $\text{FeSO}_4 \cdot 5\text{H}_2\text{O}$  or 6,95 g of  $\text{FeSO}_4 \cdot 7\text{H}_2\text{O}$  may be used.)

##### 7.1.2.3 Ferroin solution

Dissolve 1,48 g of 1,10-phenanthroline in 100 ml of 0,025 mol/l ferrous sulfate (7.1.2.2).

##### 7.1.2.4 Sulfuric acid, $c(\text{H}_2\text{SO}_4) = 0,5\ \text{mol/l}$ (DANGER: (C))

NOTE This may be prepared from sulfuric acid,  $\rho \sim 1,84\ \text{g/l}$  (DANGER: ((C))).

#### 7.1.3 Apparatus

7.1.3.1 **Potentiometric titrator**, automatic titrator or equivalent, equipped with a 20 ml or 25 ml burette.

7.1.3.2 **Indicator electrode**, platinum electrode.

7.1.3.3 **Reference electrode**, double-junction reference electrode.

7.1.3.4 **Stirring apparatus**, magnetic or the equivalent.

### 7.1.4 Procedure

Weigh, to the nearest 0,000 1 g, a test portion of about 0,10 g into a 250 ml beaker. Add 60 ml of 0,5 mol/l sulfuric acid (7.1.2.4) and dissolve the sample. While starting to titrate, add 5 drops of ferroin solution (7.1.2.3). Set the solution on a potentiometric titrator (7.1.3.1). Titrate the solution with 0,05 mol/l ammonium cerium (IV) hexanitrate (7.1.2.1). Determine the endpoint in accordance with the instruction of the automatic titrator or a textbook for potentiometric titration.

### 7.1.5 Expression of results

The assay, expressed as a percentage by mass, for 4-(*N*-ethyl-*N*-2-methanesulfonylaminoethyl)-2-methylphenylenediamine sesquisulfate monohydrate ( $C_{12}H_{21}N_3O_2S \cdot 3/2 H_2SO_4 \cdot H_2O$ ), may be given automatically on the automatic titrator, or is given by

$$A = 21,83 \times \frac{cV}{m}$$

where

- A* is the assay, expressed as a percentage by mass, for 4-(*N*-ethyl-*N*-2-methanesulfonylaminoethyl)-2-methylphenylenediamine sesquisulfate monohydrate ( $C_{12}H_{21}N_3O_2S \cdot 3/2 H_2SO_4 \cdot H_2O$ );
- c* is the actual concentration, expressed in moles per litre, of the standard ammonium cerium (IV) hexanitrate solution  $(NH_4)_2Ce(NO_3)_6$  (7.1.2.1);
- V* is the volume, expressed in millilitres, of the standard ammonium cerium (IV) hexanitrate solution (7.1.2.1) used to reach the titration endpoint;
- M* is the mass, expressed in grams, of the test portion;
- 21,83 is the conversion factor obtained from the mass of 4-(*N*-ethyl-*N*-2-methanesulfonylaminoethyl)-2-methylphenylenediamine sesquisulfate monohydrate equivalent to 1 mole of ammonium cerium (IV) hexanitrate (i.e.  $436,52/2 = 218,3$ )  $\times$  the conversion factor for millilitres to litres (i.e. 0,001)  $\times$  100 (for percentage).

The free base may be calculated by substituting the molecular weight of the free base (271,38) for the molecular weight of 4-(*N*-ethyl-*N*-2-methanesulfonylaminoethyl)-2-methylphenylenediamine sesquisulfate monohydrate (436,52).

## 7.2 Identity test

### 7.2.1 Infrared spectrum

#### 7.2.1.1 Specification

The infrared absorption curve shall be essentially the same as that of the reference spectrum (Figure 1).

#### 7.2.1.2 Apparatus

**7.2.1.2.1 Test sieve**, 63  $\mu$ m aperture size, conforming to ISO 565.

**7.2.1.2.2 Infrared spectrometer**, equipped for the 2  $\mu$ m to 16  $\mu$ m region, and with accessory equipment for using potassium bromide plates or mineral oil mull.

### 7.2.1.3 Procedure

Grind about 10 mg of the sample to a homogeneous fine powder and prepare a 0,5 % (mass fraction) mixture of the sample in finely ground potassium bromide. Grind together thoroughly to pass through the test sieve (7.2.1.2.1). Prepare a pressed plate of the mixture containing 0,13 g to 0,16 g of the mixture per square centimetre. Record the infrared spectrum from 2  $\mu\text{m}$  to 16  $\mu\text{m}$ . Compare with the reference spectrum given in Figure 1.

NOTE As an alternative procedure, the sample may be ground and dispersed in mineral oil. It will then be necessary to take into account the absorption bands of the oil.

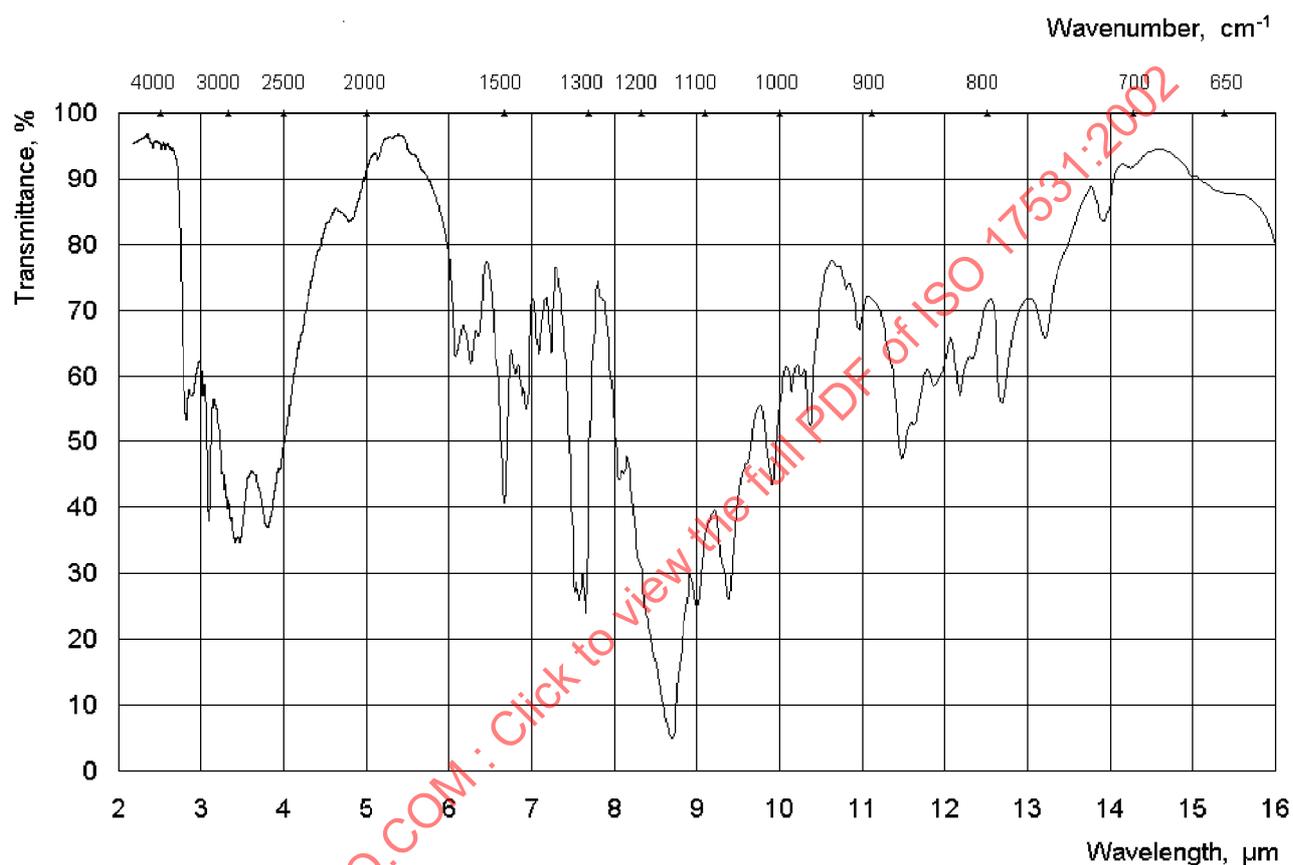


Figure 1 — Reference infrared spectrum of 4-(*N*-ethyl-*N*-2-methanesulfonylaminoethyl)-2-methylphenylenediamine sesquisulfate monohydrate (KBr plate)

## 7.3 Residue after ignition

### 7.3.1 Specification

Maximum residue after ignition shall be 0,10 %.

### 7.3.2 Procedure

Determine the percentage of the residue after ignition in accordance with ISO 10349-4. Use a test portion of about 5,0 g and ignite in a platinum crucible ( $600\text{ }^{\circ}\text{C} \pm 50\text{ }^{\circ}\text{C}$ , 4 h, 0,000 1 g). Keep this residue for the heavy metals and iron content tests in 7.4 and 7.5.

## 7.4 Heavy metals content

### 7.4.1 Specification

Maximum content of heavy metals shall be 0,002 %.

### 7.4.2 Procedure

NOTE The standard for the iron test (7.5) is prepared in the same way as the heavy metals standard.

Determine the percentage of heavy metals in accordance with ISO 10349-5. Use a test portion of the residue after ignition (7.3) corresponding to 2 g of the sample prepared in accordance with 7.1 of ISO 10349-5:1992 (i.e. 10 ml of the 25 ml residue solution). Use 4 ml of the heavy metals standard prepared in accordance with 8.1.1 of ISO 10349-5:1992.

## 7.5 Iron content

### 7.5.1 Specification

Maximum content of iron shall be 0,002 %.

### 7.5.2 Procedure

Determine the percentage of iron in accordance with ISO 10349-5. Use a test portion of the residue after ignition (7.3) corresponding to 2 g of the sample prepared in accordance with 7.1 of ISO 10349-5:1992 (i.e. 10 ml of the 25 ml residue solution). Use 4 ml of the iron standard prepared in accordance with 8.1.1 of ISO 10349-5:1992.

## 7.6 Volatile matter

### 7.6.1 Specification

Maximum volatile matter shall be 0,60 %.

### 7.6.2 Procedure

Determine the percentage of volatile matter at 70 °C in accordance with ISO 10349-8. Use a test portion of 5 g, weighed to the nearest 0,001 g into a dry glass-stoppered weighing bottle (70 °C, 4 h, 0,0001 g).

NOTE The notation system used for the drying process procedure is given in ISO 10349-1.

## 7.7 Appearance of solution

### 7.7.1 Specification

The solution shall be clear, colourless or a pale-pink colour, and free from insoluble matter.

### 7.7.2 Procedure

Dissolve a test portion of 10,0 g in 300 ml of water. Immediately observe the solution for colour and clarity.

## 7.8 Photographic-use test

### 7.8.1 Specification

To pass test.