

INTERNATIONAL  
STANDARD

ISO  
17940

First edition  
2015-09-01

---

---

**Ships and marine technology —  
Hinged watertight doors**

*Navires et technologie maritime — Portes étanches à charnières*

STANDARDSISO.COM : Click to view the full PDF of ISO 17940:2015



Reference number  
ISO 17940:2015(E)

© ISO 2015

STANDARDSISO.COM : Click to view the full PDF of ISO 17940:2015



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2015, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Ch. de Blandonnet 8 • CP 401  
CH-1214 Vernier, Geneva, Switzerland  
Tel. +41 22 749 01 11  
Fax +41 22 749 09 47  
copyright@iso.org  
www.iso.org

# Contents

	Page
Foreword .....	iv
<b>1 Scope</b> .....	<b>1</b>
<b>2 Normative references</b> .....	<b>1</b>
<b>3 Classifications and marking</b> .....	<b>1</b>
3.1 Opening direction .....	1
3.2 Structure and dimensions .....	1
<b>4 Materials</b> .....	<b>5</b>
<b>5 Quality of manufacture</b> .....	<b>5</b>
<b>6 Testing</b> .....	<b>6</b>
6.1 Testing of watertightness .....	6
6.2 15° inclined test .....	6
<b>7 Status display</b> .....	<b>7</b>
<b>8 Designation</b> .....	<b>8</b>
<b>Bibliography</b> .....	<b>9</b>

STANDARDSISO.COM : Click to view the full PDF of ISO 17940:2015

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT), see the following URL: [Foreword — Supplementary information](#).

The committee responsible for this document is ISO/TC 8, *Ships and marine technology*, Subcommittee SC 8, *Ship design*.

# Ships and marine technology — Hinged watertight doors

## 1 Scope

This International Standard specifies the classification, marking and requirements for packaging, storage and transportation of hinged watertight doors (hereinafter referred to as watertight doors).

This International Standard is applicable to the design, fabrication and acceptance of the watertight doors capable of bearing the pressure from both inside and outside due to a headwater up to 10 m.

## 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 8501-1, *Preparation of steel substrates before application of paints and related products — Visual assessment of surface cleanliness — Part 1: Rust grades and preparation grades of uncoated steel substrates and of steel substrates after overall removal of previous coatings*


IEC 60529, *Degrees of protection provided by enclosures (IP Code)*

## 3 Classifications and marking

### 3.1 Opening direction

Depending on the opening direction, watertight doors shall be classified into the following two types (see [Figure 1](#)):

- Type L-Left-hand watertight door (hinge stays left side viewed from where people are standing);
- Type R-Right-hand watertight door (hinge stays right side viewed from where people are standing).

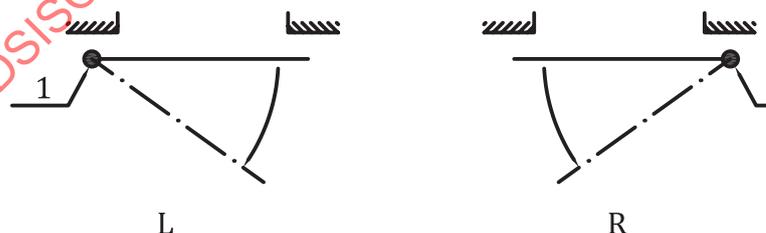


#### Key

- 1 hinge
- L left-hand
- R right-hand

Figure 1 — Opening direction

### 3.2 Structure and dimensions

3.2.1 The structure and main dimensions of watertight doors shall be in compliance with [Figure 2](#) and [Table 1](#).

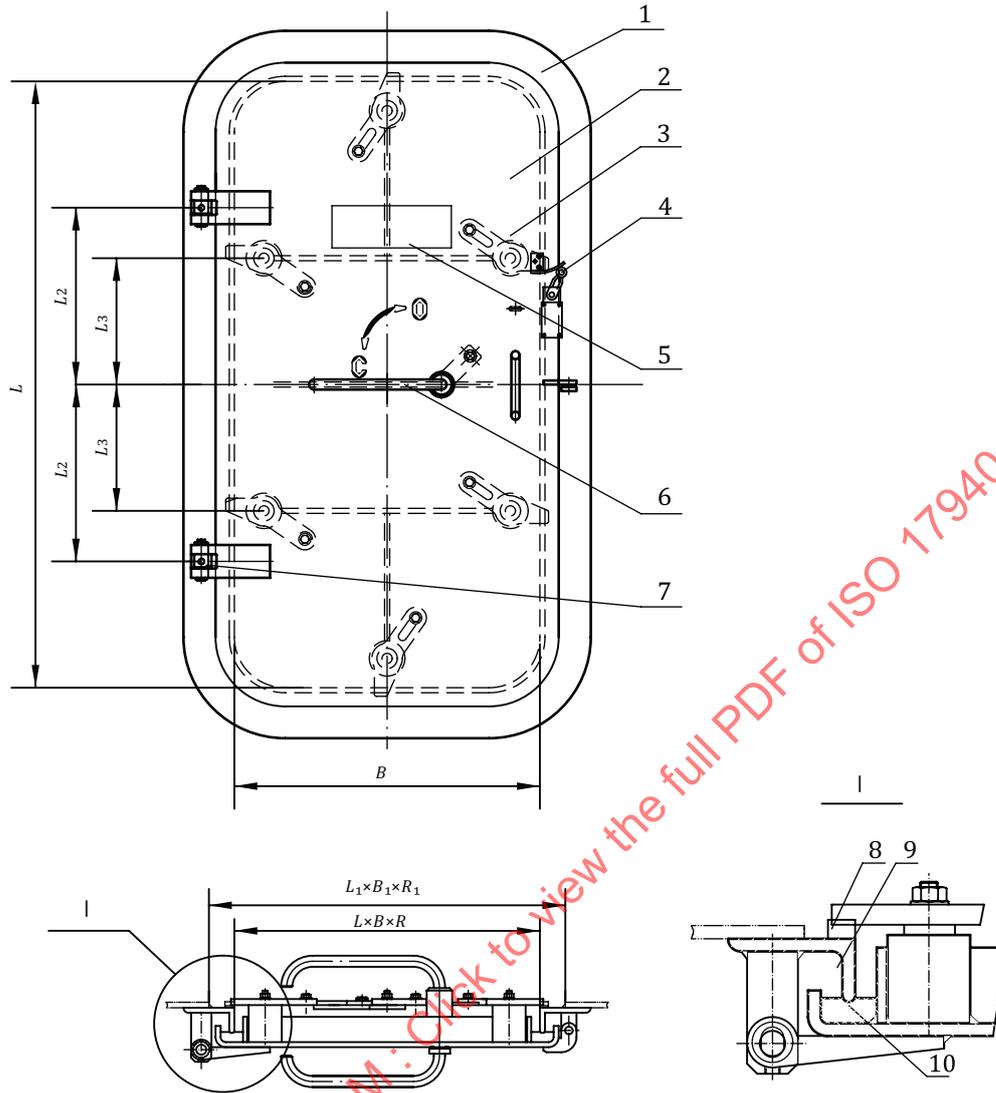

**Key**

- |                |                  |
|----------------|------------------|
| 1 door frame   | 6 closing device |
| 2 door plate   | 7 hinge          |
| 3 clip         | 8 wedge          |
| 4 limit switch | 9 limit block    |
| 5 notice plate | 10 seal          |

NOTE 1 When width B of the watertight door is 900 mm, 2 clips shall be fitted respectively at the top and bottom with a space of 300 mm.

NOTE 2 The figure shown is of a left-hand type door; the structure of the right-hand door is symmetrical to the left one.

**Figure 2 — Structure and dimensions**


Table 1 — Main dimensions for watertight door

Dimensions in millimetres

Door nominal size <i>L×B×R</i>	Opening dimension <i>L<sub>1</sub>×B<sub>1</sub>×R<sub>1</sub></i>	<i>L<sub>2</sub></i>	<i>L<sub>3</sub></i>
1 200×600×100	1 300×700×150	350	250
1 400×600×100	1 500×700×150	450	350
1 400×750×100	1 500×850×150	450	350
1 400×900×100	1 500×1 000×150	450	350
1 500×600×100	1 600×700×150	500	400
1 500×750×100	1 600×850×150	500	400
1 500×900×100	1 600×1 000×150	500	400
1 600×600×100	1 700×700×150	550	450
1 600×750×100	1 700×850×150	550	450
1 600×900×100	1 700×1 000×150	550	450
1 700×600×100	1 800×700×150	600	500
1 700×750×100	1 800×850×150	600	500
1 700×900×100	1 800×1 000×150	600	500
1 800×600×100	1 900×700×150	650	550
1 800×750×100	1 900×850×150	650	550
1 800×900×100	1 900×1 000×150	650	550

NOTE The nominal sizes are to be in accordance with ISO 3796.

3.2.2 The closing device is divided by two types, as shown in [Figure 3](#).

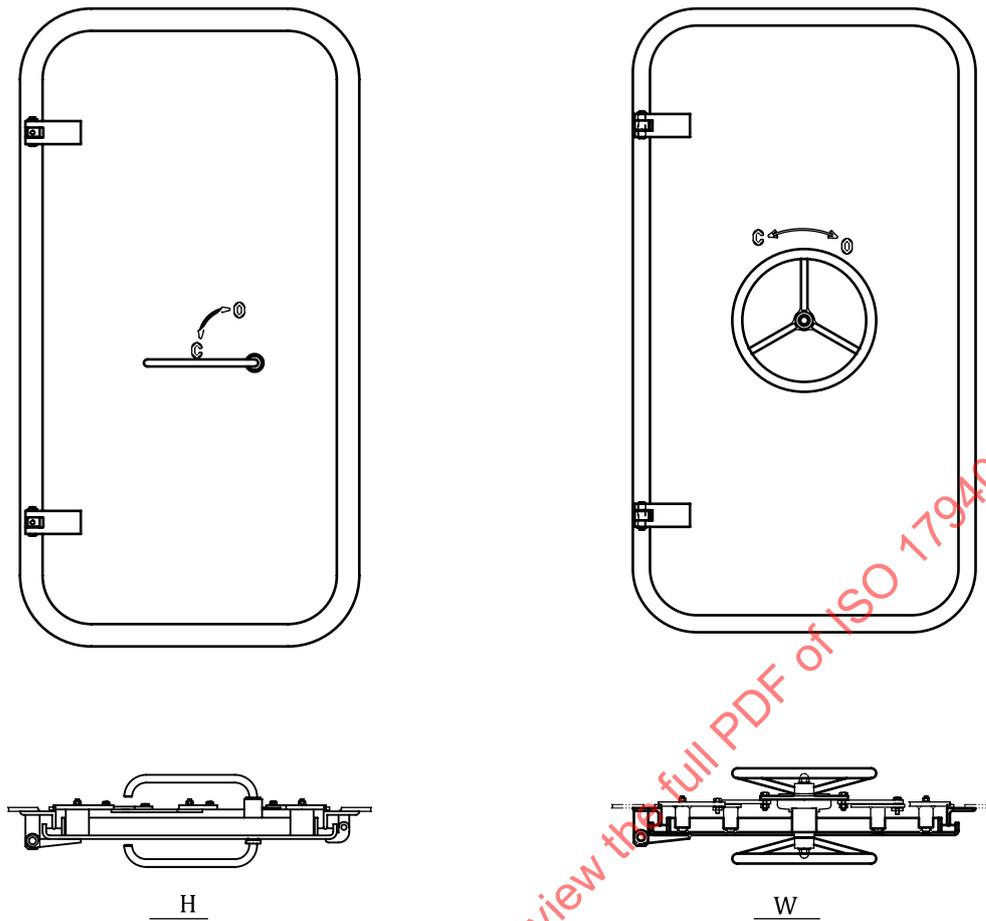


**Key**

H type H

W type W

**Figure 3 — Closing device**

3.2.3 A typical connecting rod structure is shown in [Figure 4](#).

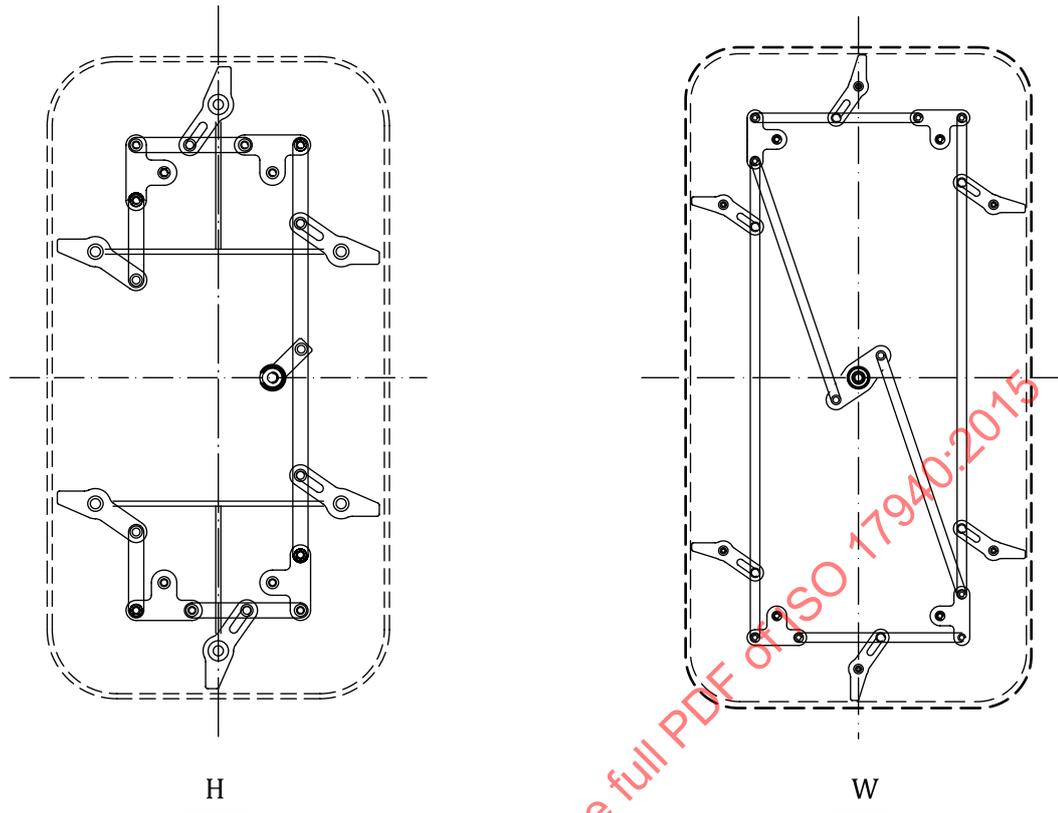**Key**

H type H

W type W

**Figure 4 — Typical connecting rod structure****4 Materials**

The door plates shall be manufactured from steel of 355 N/mm<sup>2</sup> minimum yield stress.

The door frames shall be manufactured from steel of 235 N/mm<sup>2</sup> minimum yield stress or equivalent shipbuilding-quality steel.

The door hinges shall be manufactured from mild steel of 235 N/mm<sup>2</sup> minimum yield stress.

The closing device shall be manufactured from corrosion-resistant steel of 315 N/mm<sup>2</sup> minimum yield stress.

Sealing material shall be satisfactory for service under marine conditions.

**5 Quality of manufacture**

The watertight door surface shall be free from burrs, sharp edges, scratches, indentations and other defects; welds shall be smooth, without defects such as air holes, cracks, slag inclusion, undercut, incomplete fusion, etc.

The door plate and frame shall be not deformed. The derusting grade for watertight doors shall reach Sa2½ or St3 as specified in ISO 8501-1. Anti-cession primer shall be painted.

Watertight door opening and closing shall be flexible without seizure. Moving areas shall be applied with grease for lubrication.

## 6 Testing

### 6.1 Testing of watertightness

The watertight door is to be fitted onto the dedicated pressure test box. Increase the water pressure inside the box to 0,1 MPa and keep it for 5 min, then discharge the pressure. No leakage or permanent deformation shall exist on the door.

The maximum test pressure is 0,1 MPa. Test pressure shall be in accordance with the location of each watertight door.

As per the full-scale ship installation condition, the watertight door is to be well fitted onto the pressure test box and is to be closed. A hose test is to be conducted under the pressure not less than 0,2 MPa with a nozzle diameter not less than 12,5 mm. Flushing operation is to be made towards the sealing strap from a distance not exceeding 1,5 m. No water leakage shall exist.

Apply powder uniformly on the door frame, close the door and then open it. The indent pressed on door plate shall be uniform and continuous: contact width  $\geq 5$  mm, compression depth  $\leq 4$  mm.

### 6.2 15° inclined test

The watertight door is installed on a simulated device. From both sides, push the watertight door manually inclined to any side (front, rear, left, right) by 15° (see [Figure 5](#)). The test result shall be that the door is able to proceed with “closed-open-closed” motions normally.

STANDARDSISO.COM : Click to view the full PDF of ISO 17940:2015

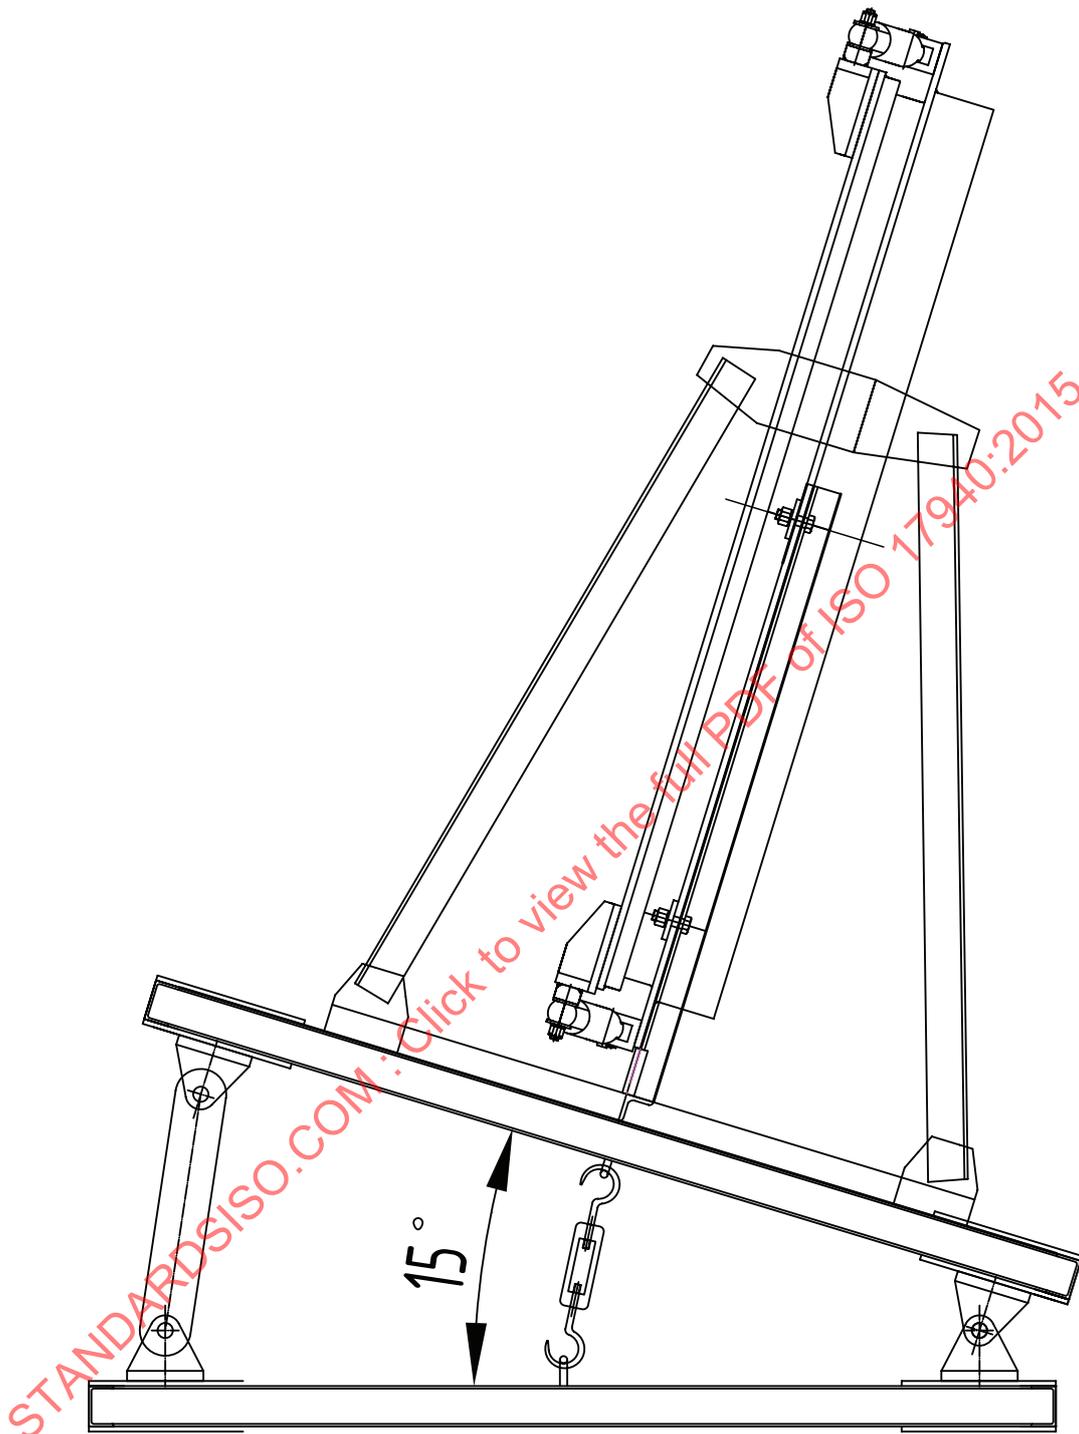


Figure 5 — 1 m head of water watertight door 15° inclined test

## 7 Status display

A local and remote indication shall be provided to show the door status. The red light will be on when the watertight door is fully open and the green light will be on when the watertight door is fully closed. If the clip is loose, an indicator will be activated with a visual alert. A remote indicator will be on the central operating console on the navigation bridge.