

---

---

**Space data and information transfer  
systems — Mission operations message  
abstraction layer**

*Systèmes de transfert des informations et données spatiales — Couche  
d'abstraction des messages des opérations de mission*

STANDARDSISO.COM : Click to view the full PDF of ISO 18202:2015



STANDARDSISO.COM : Click to view the full PDF of ISO 18202:2015



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2015, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Ch. de Blandonnet 8 • CP 401  
CH-1214 Vernier, Geneva, Switzerland  
Tel. +41 22 749 01 11  
Fax +41 22 749 09 47  
copyright@iso.org  
www.iso.org

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 18202 was prepared by the Consultative Committee for Space Data Systems (CCSDS) as CCSDS 521.0-B-2, March 2013 and was adopted without modifications except those stated in Clause 2 of this International Standard by Technical Committee ISO/TC 20, *Aircraft and space vehicles*, Subcommittee SC 13, *Space data and information transfer systems*.

[STANDARDSISO.COM](https://standardsiso.com) : Click to view the full PDF of ISO 18202:2015



The Consultative Committee for Space Data Systems

---

**Recommendation for Space Data System Standards**

**MISSION OPERATIONS  
MESSAGE  
ABSTRACTION LAYER**

**RECOMMENDED STANDARD**

**CCSDS 521.0-B-2**

**BLUE BOOK**

**March 2013**

STANDARDSISO.COM : Click to view the full PDF of ISO 18202:2015

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER**AUTHORITY**

Issue:	Recommended Standard, Issue 2
Date:	March 2013
Location:	Washington, DC, USA

This document has been approved for publication by the Management Council of the Consultative Committee for Space Data Systems (CCSDS) and represents the consensus technical agreement of the participating CCSDS Member Agencies. The procedure for review and authorization of CCSDS documents is detailed in *Organization and Processes for the Consultative Committee for Space Data Systems*, and the record of Agency participation in the authorization of this document can be obtained from the CCSDS Secretariat at the address below.

This document is published and maintained by:

CCSDS Secretariat  
Space Communications and Navigation Office, 7L70  
Space Operations Mission Directorate  
NASA Headquarters  
Washington, DC 20546-0001, USA

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER**STATEMENT OF INTENT**

The Consultative Committee for Space Data Systems (CCSDS) is an organization officially established by the management of its members. The Committee meets periodically to address data systems problems that are common to all participants, and to formulate sound technical solutions to these problems. Inasmuch as participation in the CCSDS is completely voluntary, the results of Committee actions are termed **Recommended Standards** and are not considered binding on any Agency.

This **Recommended Standard** is issued by, and represents the consensus of, the CCSDS members. Endorsement of this **Recommendation** is entirely voluntary. Endorsement, however, indicates the following understandings:

- o Whenever a member establishes a CCSDS-related **standard**, this **standard** will be in accord with the relevant **Recommended Standard**. Establishing such a **standard** does not preclude other provisions which a member may develop.
- o Whenever a member establishes a CCSDS-related **standard**, that member will provide other CCSDS members with the following information:
  - The **standard** itself.
  - The anticipated date of initial operational capability.
  - The anticipated duration of operational service.
- o Specific service arrangements shall be made via memoranda of agreement. Neither this **Recommended Standard** nor any ensuing **standard** is a substitute for a memorandum of agreement.

No later than three years from its date of issuance, this **Recommended Standard** will be reviewed by the CCSDS to determine whether it should: (1) remain in effect without change; (2) be changed to reflect the impact of new technologies, new requirements, or new directions; or (3) be retired or canceled.

In those instances when a new version of a **Recommended Standard** is issued, existing CCSDS-related member standards and implementations are not negated or deemed to be non-CCSDS compatible. It is the responsibility of each member to determine when such standards or implementations are to be modified. Each member is, however, strongly encouraged to direct planning for its new standards and implementations towards the later version of the Recommended Standard.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER**FOREWORD**

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CCSDS shall not be held responsible for identifying any or all such patent rights.

Through the process of normal evolution, it is expected that expansion, deletion, or modification of this document may occur. This Recommended Standard is therefore subject to CCSDS document management and change control procedures, which are defined in *Organization and Processes for the Consultative Committee for Space Data Systems* (CCSDS A02.1-Y-3). Current versions of CCSDS documents are maintained at the CCSDS Web site:

<http://www.ccsds.org/>

Questions relating to the contents or status of this document should be addressed to the CCSDS Secretariat at the address indicated on page i.

STANDARDSISO.COM : Click to view the full PDF of ISO 18202:2015

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

At time of publication, the active Member and Observer Agencies of the CCSDS were:

Member Agencies

- Agenzia Spaziale Italiana (ASI)/Italy.
- Canadian Space Agency (CSA)/Canada.
- Centre National d'Etudes Spatiales (CNES)/France.
- China National Space Administration (CNSA)/People's Republic of China.
- Deutsches Zentrum für Luft- und Raumfahrt e.V. (DLR)/Germany.
- European Space Agency (ESA)/Europe.
- Federal Space Agency (FSA)/Russian Federation.
- Instituto Nacional de Pesquisas Espaciais (INPE)/Brazil.
- Japan Aerospace Exploration Agency (JAXA)/Japan.
- National Aeronautics and Space Administration (NASA)/USA.
- UK Space Agency/United Kingdom.

Observer Agencies

- Austrian Space Agency (ASA)/Austria.
- Belgian Federal Science Policy Office (BFSP0)/Belgium.
- Central Research Institute of Machine Building (TsNII Mash)/Russian Federation.
- China Satellite Launch and Tracking Control General, Beijing Institute of Tracking and Telecommunications Technology (CLTC/BHTT)/China.
- Chinese Academy of Sciences (CAS)/China.
- Chinese Academy of Space Technology (CAST)/China.
- Commonwealth Scientific and Industrial Research Organization (CSIRO)/Australia.
- CSIR Satellite Applications Centre (CSIR)/Republic of South Africa.
- Danish National Space Center (DNSC)/Denmark.
- Departamento de Ciência e Tecnologia Aeroespacial (DCTA)/Brazil.
- European Organization for the Exploitation of Meteorological Satellites (EUMETSAT)/Europe.
- European Telecommunications Satellite Organization (EUTELSAT)/Europe.
- Geo-Informatics and Space Technology Development Agency (GISTDA)/Thailand.
- Hellenic National Space Committee (HNSC)/Greece.
- Indian Space Research Organization (ISRO)/India.
- Institute of Space Research (IKI)/Russian Federation.
- KFKI Research Institute for Particle & Nuclear Physics (KFKI)/Hungary.
- Korea Aerospace Research Institute (KARI)/Korea.
- Ministry of Communications (MOC)/Israel.
- National Institute of Information and Communications Technology (NICT)/Japan.
- National Oceanic and Atmospheric Administration (NOAA)/USA.
- National Space Agency of the Republic of Kazakhstan (NSARK)/Kazakhstan.
- National Space Organization (NSPO)/Chinese Taipei.
- Naval Center for Space Technology (NCST)/USA.
- Scientific and Technological Research Council of Turkey (TUBITAK)/Turkey.
- Space and Upper Atmosphere Research Commission (SUPARCO)/Pakistan.
- Swedish Space Corporation (SSC)/Sweden.
- United States Geological Survey (USGS)/USA.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

**DOCUMENT CONTROL**

<b>Document</b>	<b>Title</b>	<b>Date</b>	<b>Status</b>
CCSDS 521.0-B-1	Mission Operations Message Abstraction Layer, Recommended Standard, Issue 1	October 2010	Original issue (superseded)
CCSDS 521.0-B-2	Mission Operations Message Abstraction Layer, Recommended Standard, Issue 2	March 2013	Current issue (note): <ul style="list-style-type: none"> <li>– addresses the request to add a slight restriction to the MAL data model regarding polymorphism;</li> <li>– adds ability to use external data type specifications such as XML Schemas;</li> <li>– moves XML to the SANA registry;</li> <li>– changes type short forms to integers rather than strings;</li> <li>– shows optional fields in composites;</li> <li>– changes lists to a template rather than explicit types;</li> <li>– adds unsigned integer and File data types.</li> </ul>

NOTE – Changes from the original issue are too numerous to permit markup.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

## CONTENTS

<u>Section</u>	<u>Page</u>
<b>1 INTRODUCTION</b> .....	<b>1-1</b>
1.1 GENERAL.....	1-1
1.2 PURPOSE AND SCOPE.....	1-1
1.3 DOCUMENT STRUCTURE .....	1-1
1.4 DEFINITION OF TERMS .....	1-2
1.5 NOMENCLATURE .....	1-4
1.6 REFERENCES .....	1-4
<b>2 OVERVIEW</b> .....	<b>2-1</b>
2.1 GENERAL.....	2-1
2.2 ABSTRACT INTERFACE SPECIFICATIONS.....	2-1
2.3 ABSTRACT SERVICE SPECIFICATIONS .....	2-8
<b>3 ABSTRACT SERVICE SPECIFICATIONS</b> .....	<b>3-1</b>
3.1 OVERVIEW .....	3-1
3.2 TRANSACTION HANDLING .....	3-1
3.3 STATE TRANSITIONS.....	3-1
3.4 MESSAGE COMPOSITION .....	3-2
3.5 MAL SERVICE INTERFACE.....	3-4
3.6 ACCESS CONTROL INTERFACE.....	3-100
3.7 TRANSPORT INTERFACE.....	3-104
<b>4 MAL DATA TYPE SPECIFICATION</b> .....	<b>4-1</b>
4.1 OVERVIEW.....	4-1
4.2 FUNDAMENTALS.....	4-8
4.3 ATTRIBUTES.....	4-9
4.4 DATA STRUCTURES.....	4-14
<b>5 MAL ERRORS</b> .....	<b>5-1</b>
<b>6 SERVICE SPECIFICATION XML</b> .....	<b>6-1</b>
<b>7 CONFORMANCE MATRIX</b> .....	<b>7-1</b>
<b>ANNEX A SECURITY, SANA AND PATENT CONSIDERATIONS (NORMATIVE)</b> .....	<b>A-1</b>
<b>ANNEX B DEFINITION OF ACRONYMS (INFORMATIVE)</b> .....	<b>B-1</b>
<b>ANNEX C INFORMATIVE REFERENCES (INFORMATIVE)</b> .....	<b>C-1</b>

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

**CONTENTS (continued)**

<u>Figure</u>	<u>Page</u>
2-1 Message Exchange Sequence Example .....	2-2
2-2 Request, Indication, and Message Relationship .....	2-4
2-3 Consumer State Diagram Example .....	2-5
2-4 Message Decomposition Key .....	2-7
2-5 Message Header Decomposition Example .....	2-7
2-6 Message Body Decomposition Example .....	2-7
3-1 SEND Interaction Pattern Message Sequence .....	3-4
3-2 SUBMIT Interaction Pattern Message Sequence .....	3-8
3-3 SUBMIT Interaction Pattern Error Sequence .....	3-9
3-4 SUBMIT Consumer State Chart .....	3-10
3-5 SUBMIT Provider State Chart .....	3-11
3-6 REQUEST Interaction Pattern Message Sequence .....	3-16
3-7 REQUEST Interaction Pattern Error Sequence .....	3-17
3-8 REQUEST Consumer State Chart .....	3-18
3-9 REQUEST Provider State Chart .....	3-19
3-10 INVOKE Interaction Pattern Message Sequence .....	3-24
3-11 INVOKE Interaction Pattern Error Sequence .....	3-25
3-12 INVOKE Consumer State Chart .....	3-27
3-13 INVOKE Provider State Chart .....	3-28
3-14 PROGRESS Interaction Pattern Message Sequence .....	3-36
3-15 PROGRESS Interaction Pattern Error Sequence .....	3-37
3-16 PROGRESS Consumer State Chart .....	3-39
3-17 PROGRESS Provider State Chart .....	3-41
3-18 PUBLISH-SUBSCRIBE Interaction Pattern Message Sequence .....	3-53
3-19 PUBLISH-SUBSCRIBE Pattern Alternative Message Sequence .....	3-54
3-20 PUBLISH-SUBSCRIBE Interaction Pattern Consumer Error Sequence .....	3-59
3-21 PUBLISH-SUBSCRIBE Interaction Pattern Provider Error Sequence .....	3-60
3-22 PUBLISH-SUBSCRIBE Consumer State Chart .....	3-67
3-23 PUBLISH-SUBSCRIBE Broker to Consumer State Chart .....	3-70
3-24 PUBLISH-SUBSCRIBE Provider State Chart .....	3-72
3-25 PUBLISH-SUBSCRIBE Broker to Provider State Chart .....	3-74
3-26 CHECK Access Control Pattern Message Sequence .....	3-100
3-27 CHECK Access Control Pattern Error Sequence .....	3-101
3-28 SUPPORTEDQOS Transport Pattern Message Sequence .....	3-105
3-29 SUPPORTEDIP Transport Pattern Message Sequence .....	3-108
3-30 TRANSMIT Transport Pattern Message Sequence .....	3-111
3-31 TRANSMIT Transport Pattern Error Sequence .....	3-112
3-32 TRANSMITMULTIPLE Transport Pattern Message Sequence .....	3-115
3-33 TRANSMITMULTIPLE Transport Pattern Error Sequence .....	3-116
3-34 RECEIVE Transport Pattern Message Sequence .....	3-119
3-35 RECEIVEMULTIPLE Transport Pattern Message Sequence .....	3-122

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

**CONTENTS (continued)**

<u>Table</u>	<u>Page</u>
2-1 Example Operation Template .....	2-3
2-2 Example Primitive List .....	2-4
2-3 Service Overview Table .....	2-8
3-1 MAL Message Header Fields .....	3-3
3-2 SEND Operation Template .....	3-5
3-3 SEND Primitive List .....	3-5
3-4 SEND Message Header Fields .....	3-7
3-5 SUBMIT Operation Template .....	3-9
3-6 SUBMIT Primitive List .....	3-10
3-7 SUBMIT Message Header Fields .....	3-13
3-8 Submit ACK Message Header Fields .....	3-14
3-9 REQUEST Operation Template .....	3-17
3-10 REQUEST Primitive List .....	3-18
3-11 REQUEST Message Header Fields .....	3-21
3-12 Request RESPONSE Message Header Fields .....	3-22
3-13 INVOKE Operation Template .....	3-26
3-14 INVOKE Primitive List .....	3-26
3-15 INVOKE Message Header Fields .....	3-30
3-16 Invoke ACK Message Header Fields .....	3-31
3-17 Invoke RESPONSE Message Header Fields .....	3-33
3-18 PROGRESS Operation Template .....	3-38
3-19 PROGRESS Primitive List .....	3-38
3-20 PROGRESS Message Header Fields .....	3-44
3-21 Progress ACK Message Header Fields .....	3-45
3-22 Progress UPDATE Message Header Fields .....	3-47
3-23 Progress RESPONSE Message Header Fields .....	3-50
3-24 PUBLISH-SUBSCRIBE Operation Template .....	3-61
3-25 PUBLISH-SUBSCRIBE Register Operation Template .....	3-61
3-26 PUBLISH-SUBSCRIBE Publish Register Operation Template .....	3-62
3-27 PUBLISH-SUBSCRIBE Publish Operation Template .....	3-62
3-28 PUBLISH-SUBSCRIBE Publish Error Operation Template .....	3-62
3-29 PUBLISH-SUBSCRIBE Notify Operation Template .....	3-62
3-30 PUBLISH-SUBSCRIBE Notify Error Operation Template .....	3-63
3-31 PUBLISH-SUBSCRIBE Deregister Operation Template .....	3-63
3-32 PUBLISH-SUBSCRIBE Publish Deregister Operation Template .....	3-63
3-33 PUBLISH-SUBSCRIBE Primitive List .....	3-66
3-34 REGISTER Message Header Fields .....	3-77
3-35 REGISTER_ACK Message Header Fields .....	3-78
3-36 PUBLISH_REGISTER Message Header Fields .....	3-81
3-37 PUBLISH_REGISTER_ACK Message Header Fields .....	3-82
3-38 PUBLISH Message Header Fields .....	3-86

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

**CONTENTS (continued)**

<u>Table</u>	<u>Page</u>
3-39 PUBLISH_ERROR Message Header Fields .....	3-87
3-40 NOTIFY Message Header Fields .....	3-89
3-41 DEREGISTER Message Header Fields .....	3-92
3-42 DEREGISTER_ACK Message Header Fields .....	3-94
3-43 PUBLISH_DEREGISTER Message Header Fields .....	3-95
3-44 PUBLISH_DEREGISTER_ACK Message Header Fields .....	3-97
3-45 CHECK Operation Template .....	3-101
3-46 CHECK Primitive List .....	3-102
3-47 SUPPORTEDQOS Operation Template .....	3-106
3-48 SUPPORTEDQOS Primitive List .....	3-106
3-49 SUPPORTEDIP Operation Template .....	3-109
3-50 SUPPORTEDIP Primitive List .....	3-109
3-51 TRANSMIT Operation Template .....	3-112
3-52 TRANSMIT Primitive List .....	3-113
3-53 TRANSMITMULTIPLE Operation Template .....	3-116
3-54 TRANSMITMULTIPLE Primitive List .....	3-117
3-55 RECEIVE Operation Template .....	3-120
3-56 RECEIVE Primitive List .....	3-120
3-57 RECEIVEMULTIPLE Operation Template .....	3-123
3-58 RECEIVEMULTIPLE Primitive List .....	3-123
5-1 Standard MAL Error Codes .....	5-1
7-1 Conformance Matrix .....	7-1

STANDARDSISO.COM : Click to view the full PDF of ISO 18202:2015

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

## 1 INTRODUCTION

### 1.1 GENERAL

This Recommended Standard defines the Mission Operations (MO) Message Abstraction Layer (MAL) in conformance with the service framework specified in reference [C1], Mission Operations Services Concept.

The MO MAL is a framework that provides generic service patterns to the Mission Operation services defined in reference [C1]. These Mission Operations services are defined in terms of the MAL.

### 1.2 PURPOSE AND SCOPE

This Recommended Standard defines, in an abstract manner, the MAL in terms of:

- a) the concepts that it builds upon;
- b) the basic types it provides;
- c) the message headers required by the layer;
- d) the relationship between, and the valid sequence of, the messages and resulting behaviours.

It does not specify:

- a) individual implementations or products;
- b) the implementation of entities or interfaces within real systems;
- c) the methods or technologies required for communications.

### 1.3 DOCUMENT STRUCTURE

This Recommended Standard is organised as follows:

- a) section 1 provides purpose and scope, and lists definitions, conventions, and references used throughout the Recommended Standard;
- b) section 2 presents an overview of the concepts;
- c) section 3 specifies the interaction patterns used to define services;
- d) section 4 is a formal specification of the MAL data structures;
- e) section 5 is a formal specification of the MAL errors;
- f) section 6 is the formal service specification Extensible Markup Language (XML) schema;
- g) section 7 is the formal compliance requirements of the MAL.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER**1.4 DEFINITION OF TERMS**

**Software Component (component):** A software unit containing the business function. Components offer their function as Services, which can either be used internally or which can be made available for use outside the component through Provided Service Interfaces. Components may also depend on services provided by other components through Consumed Service Interfaces.

**Hardware Component:** A complex physical entity (such as a spacecraft, a tracking system, or a control system) or an individual physical entity of a system (such as an instrument, a computer, or a piece of communications equipment). A Hardware Component may be composed from other Hardware Components. Each Hardware Component may host one or more Software Components. Each Hardware Component has one or more ports where connections to other Hardware Component are made. Any given Port on the Hardware Component may expose one or more Service Interfaces.

**Service:** A set of capabilities that a component provides to another component via an interface. A Service is defined in terms of the set of operations that can be invoked and performed through the Service Interface. Service specifications define the capabilities, behaviour, and external interfaces, but do not define the implementation.

**Service Interface:** A set of interactions provided by a component for participation with another component for some purpose, along with constraints on how they can occur. A Service Interface is an external interface of a Service where the behaviour of the Service Provider Component is exposed. Each Service will have one defined 'Provided Service Interface', and may have one or more 'Consumed Service Interface' and one 'Management Service Interface'.

**Provided Service Interface:** A Service Interface that exposes the Service function contained in a component for use by Service Consumers. It receives the MAL messages from a Consumed Service Interface and maps them into API calls on the Provider component.

**Consumed Service Interface:** The API presented to the consumer component that maps from the Service operations to one or more Service Data Units(s) contained in MAL messages that are transported to the Provided Service Interface.

**Management Service Interface:** A Service Interface that exposes management functions of a Service function contained in a component for use by Service Consumers.

**Service System:** The set of Hardware and Software Components used to implement a Service in a real system. Service Systems may be implemented using one or more Hardware and Software Components.

**Service Provider (provider):** A component that offers a Service to another by means of one of its Provided Service Interfaces.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

**Service Consumer (consumer):** A component that consumes or uses a Service provided by another component. A component may be a provider of some Services and a consumer of others.

**Service Data Unit (SDU):** A unit of data that is sent by a Service Interface, and is transmitted semantically unchanged, to a peer Service Interface.

**Binding:** The access mechanism for a Service. Bindings are used to locate and access Service Interfaces. Services use bindings to describe the access mechanisms that consumers have to use to call the Service. The binding specifies unambiguously the protocol stack required to access a Service Interface. Bindings may be defined statically at compile time or they may use a variety of dynamic run-time mechanisms (DNS, ports, discovery).

**Service Capability Set:** A grouping of the service operations that remains sensible and coherent, and also provides a Service Provider with an ability to communicate to a Consumer its capability. The specification of services is based on the expectation that different deployments require different levels of complexity and functionality from a service. To this end a given service may be implementable at one of several distinct levels, corresponding to the inclusion of one or more capability sets.

**Service Connection (connection):** A communications connection between a Consumed Service Interface and a Provided Service Interface over a specific Binding. When a component consumes the services of a provider component, this link is known as a Service Connection (connection).

**Service Extension:** Addition of capabilities to a base Service. A Service may extend the capabilities of another Service with additional operations. An extended Service is indistinguishable from the base Service to consumers such that consumers of the base Service can also be consumers of the extended Service without modification.

**Protocol Stack:** The stack of Protocol Layers required for communication.

**Protocol Layer:** The implementation of a specific Protocol. It provides a Protocol Service Access Point to layers above and uses the Protocol Service Access Point of the layer below.

**Protocol Service Access Point (SAP):** The point at which one layer's functions are provided to the layer above. A layer may provide protocol services to one or more higher layers and use the protocol services of one or more lower layers. A SAP defines unambiguously the interface for a protocol that may be used as part of a Service Interface Binding specification.

**Protocol:** The set of rules and formats (semantic and syntactic) used to determine the communication behaviour of a Protocol Layer in the performance of the layer functions. The state machines that operate and the protocol data units that are exchanged specify a protocol.

**Service directory:** An entity that provides publish and lookup facilities to service providers and consumers.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

NOTE – Strictly speaking, a directory is not required if a well-known service is to be used; however, in most circumstances a directory provides required flexibility in the location of services. Service location can be statically configured, dynamically discovered through a service directory, or a combination of the two; this is an implementation choice. The service directory is itself, by definition, a service.

## 1.5 NOMENCLATURE

The following conventions apply throughout this Recommended Standard:

- a) the words ‘shall’ and ‘must’ imply a binding and verifiable specification;
- b) the word ‘should’ implies an optional, but desirable, specification;
- c) the word ‘may’ implies an optional specification;
- d) the words ‘is’, ‘are’, and ‘will’ imply statements of fact.

## 1.6 REFERENCES

The following documents contain provisions which, through reference in this text, constitute provisions of this Recommended Standard. At the time of publication, the editions indicated were valid. All documents are subject to revision, and users of this Recommended Standard are encouraged to investigate the possibility of applying the most recent editions of the documents indicated below. The CCSDS Secretariat maintains a register of currently valid CCSDS Recommended Standards.

- [1] *Mission Operations Reference Model*. Recommendation for Space Data System Standards, CCSDS 520.1-M-1. Magenta Book. Issue 1. Washington, D.C.: CCSDS, July 2010.
- [2] “MIME Media Types.” Internet Assigned Numbers Authority. <http://www.iana.org/assignments/media-types>.

NOTE – Informative references are listed in annex C.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

## 2 OVERVIEW

### 2.1 GENERAL

The MO service specifications detail a standard set of services. These services form a contract between a consumer of a service and the provider of that service. Each operation of a service has a set behaviour: a message is sent from the consumer to the provider to instigate the operation, and zero or more messages can be exchanged thereafter depending on the specific pattern and operation. This set of messages, and the pattern in which they are exchanged, needs to be defined for each operation of each service.

An interaction pattern details a standard exchange pattern that removes the need for each operation to detail its exchange pattern individually. By defining a pattern and stating that a given operation is defined in terms of that pattern, the operation definition can focus on the specifics of that operation and rely on the standard pattern to facilitate the interaction.

The MAL defines this set of standard interaction patterns as an abstract interface that is used by the MO services. There are three abstract interfaces defined in the MAL specification: the first is the abstract interface of the MAL that is presented to the higher layers, the second is the abstract interface of the Access Control component, and the third is the abstract interface that a Transport layer must provide to the MAL.

The MO service specifications and the MAL are abstract in their definition; they do not contain any specific information on how to implement them for a particular programming language or transport encoding. Moving from the abstract to the implemented system, two other specifications are needed. One is the Language Mapping that states how the abstract MAL and MO service specifications are to be realised in some specific language: this defines the API in that language. The second is the transport mapping from the abstract MAL data structures into a specific and unambiguous encoding of the messages and to a defined and unambiguous mapping to a specific data transport. It is only when these mappings are defined that is possible to implement services that use the MAL interface and use the transport bindings to exchange data. (For further information on this, see reference [1].)

This document contains the formal specification for these abstract interfaces. More information about the MO Concept can be found in reference [C1], and more information about the Reference Model can be found in reference [1].

### 2.2 ABSTRACT INTERFACE SPECIFICATIONS

#### 2.2.1 GENERAL

Each abstract interface is defined as a set of interaction patterns. For each pattern defined there is a common layout of the document section.

The following subsections describe the sections and diagram formats specific to the interaction patterns.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER


### 2.2.2 PATTERN OVERVIEW

The overview section of the pattern contains a message exchange sequence, which shows the interaction sequence between a source consumer and a destination provider.

The main aspects to note are the direction of the arrows (giving message direction) and the order of the messages (top down). The bars under the consumer and provider show synchronicity of the message exchange.

In the following example (figure 2-1) it can be seen that the consumer sends an initial message to the provider, which responds with an acknowledgement. The acknowledgement is in response to the initial message, as shown by the connected bars under the consumer and provider.

At some time in the future the provider will send another response:

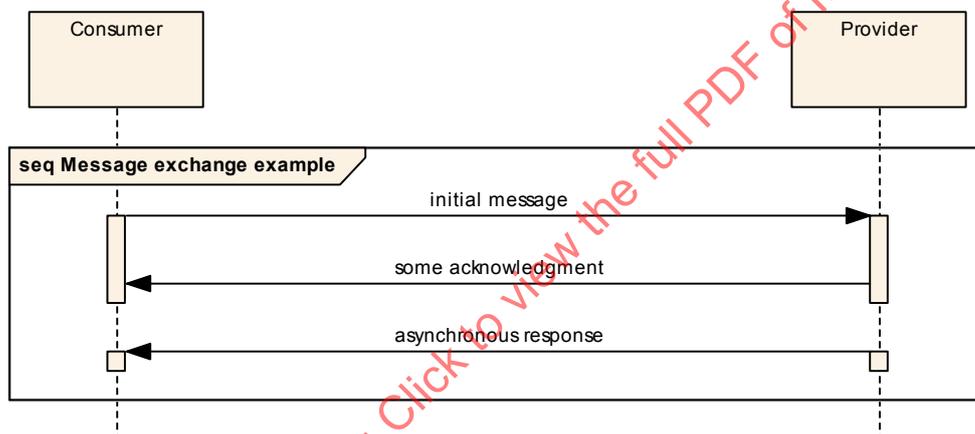

**Figure 2-1: Message Exchange Sequence Example**

Because the pattern shows the response, the consumer can expect it, but because the bars are not connected it is considered to be indeterminate. This means that although the message will arrive it cannot be determined when arrival will occur. It is important to note that any synchronicity shown is concerned only with messages; it does not imply, or require, a synchronous (blocking) behaviour in either the client or provider, as these are implementation issues.

### 2.2.3 DESCRIPTION AND USAGE

The Description and Usage sections are used to describe the pattern and define the expected usage respectively.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

## 2.2.4 ERROR HANDLING

The Error Handling section defines the positions in the pattern where errors are permitted to be generated. It uses the same sequence diagram notation as the nominal pattern sequence from the Overview section.

## 2.2.5 OPERATION TEMPLATE

Each interaction pattern definition contains a table that defines the template for operations that use that pattern:

**Table 2-1: Example Operation Template**

Operation Identifier	<<Operation name>>	
Interaction Pattern	<<Interaction pattern name>>	
Pattern Sequence	Message	Body Type
<<Message direction>>	<<Message name>>	<<Message types*>>
...		...

The message direction denotes the direction of the message relative to the provider of the pattern and is either IN or OUT. So all messages directed towards the provider are IN messages, and all messages directed away from the provider are OUT messages. It is expected that message names match those defined in the Primitives section.

Blue cells (dark grey when printed on a monochrome printer) contain table headings, light grey cells contain fields that are fixed for a pattern, and white cells contain values that must be provided by the operation or structure.

The Body Type column contains the list of types that make up the Body of a particular message. Zero to many types may be listed here and together define the body of the indicated message.

This document defines a data type specification language in section 4 (referred to as the MAL data types) that is expected to be the default data type specification language. The Body Types are defined using the MAL data types to define the various base data types, the notation used to describe them, and the rules for their combination into complex data structures. This is separate from the encoding technology used which is responsible for mapping the abstract data type notation from the data type specification into an actual 'bits and bytes' representation.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

Even though the Body Types in this specification are defined using the MAL data types, any data type specification language (such as XML Schema) may be used in an actual service specification.

2.2.6 PRIMITIVES

Each pattern defines a set of primitives in a table as below:

Table 2-2: Example Primitive List

Primitive
<<Primitive name>>

For each listed primitive there exists a Request, Message and Indication of the same name. The Requests and Indications are used by the following State Diagrams. Requests are transitions that are triggered by the component being modelled, Indications are transitions that are triggered by an external activity. Messages are the entities that are transferred between the two components to progress the interaction (see figure 2-2).

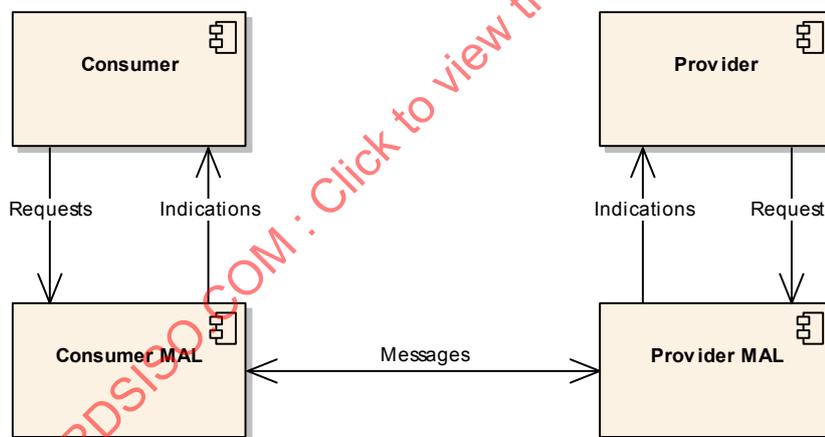



Figure 2-2: Request, Indication, and Message Relationship

Therefore a component issues Requests, which cause Messages to be transmitted, which raise Indications in the destination component.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

### 2.2.7 STATE CHARTS

For each defined interaction there can also be specified one or more state diagrams (see figure 2-3).

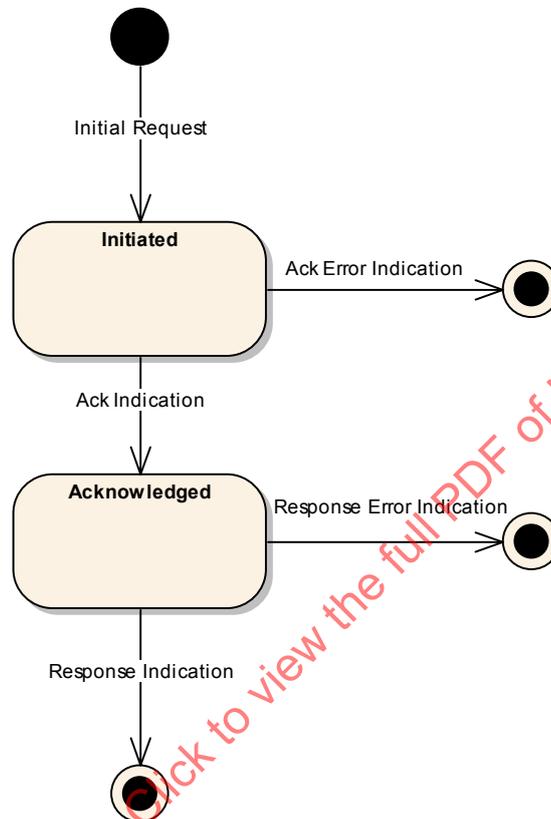

**Figure 2-3: Consumer State Diagram Example**

The diagrams define the allowed states and transitions between those states. The states are those of the MAL of the relevant component and apply to a single instance of a pattern; for example, figure 2-3 shows the allowed states and transitions for a specific pattern on the consumer, but it is the responsibility of the consumer MAL to maintain that state information and reject invalid state transitions. The state also only applies to a single instance of a pattern; as there can be many interactions concurrently active with one MAL, it needs to be able to track the state of each interaction instance independently.

Figure 2-3 shows the state diagram for the Consumer component from the example in figure 2-1, and includes some error state transitions that are not shown in the example.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER**2.2.8 REQUESTS AND INDICATIONS****2.2.8.1 General**

For each pattern there are a set of Requests that can be issued and a set of Indications that can be received. These sets are defined in the Primitives section for the pattern. The allowed state transitions are defined in the State Charts section for the pattern.

Each pattern defines the following subsections for each primitive.

**2.2.8.2 Function**

The Function subsection defines the use of a specific Request or Indication.

**2.2.8.3 Semantics**

The Semantics subsection defines what information is required for the Request or Indication. It is equivalent to the arguments of a programming language function call.

**2.2.8.4 When Generated**

The When Generated subsection specifies the circumstances that trigger the generation of the Request or Indication.

**2.2.8.5 Effect on Reception**

The Effect on Reception subsection specifies what the effects of the reception of a Request by a MAL or an Indication by an Application are. Usually for a Request is it the transmission of a Message to the destination and for an Indication it is pattern specific.

**2.2.8.6 Message Header**

The MAL defines a standard message header that is used to manage the interaction. The Message Header subsection specifies the values of the fields of the Message Header to be used for the message. The subsection can specify all the fields, or only fields that are different from another Request/Indication.

The full definition of the message header structure is provided in 3.4.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

2.2.9 MESSAGE EXAMPLE DECOMPOSITIONS

Each pattern is illustrated with an example which shows how each message will look when decomposed into a packet structure. It is important to note that such a type of structure is completely dependent on the chosen protocol.

For the example decomposition each message is split into up to three parts (figure 2-4), a standard message header, possibly a standard pattern body, and, finally, possibly a service-specific body:



Figure 2-4: Message Decomposition Key

Each message, in the examples, is split into the relevant fields; the example value is shown in the box, and the field name is given above (figure 2-5):

Message Header																
URI From	Auth Id	URI To	Timestamp	QoS	Priority	Domain	Zone	Session	Interaction	Stage	Trans Id	Area	Service	Operation	Version	Is Error
Provider	SC X	Broker		BEST	1	A.B.C	GROUND	LIVE	PUBSUB	3		Example	Example	testPubSub	1	FALSE

Figure 2-5: Message Header Decomposition Example

Field values are there to provide an example, and as such more human-readable values are often used rather than numeric equivalents that may be more efficient. For example, with enumerated values such as ‘Session’ the textual versions of the enumeration are given rather than the numerical versions, as this is more meaningful to a human. This is for example purposes only, however.

When more complex structures are being shown (figure 2-6), a single field can be part of a more complex structure which is itself part of another composite structure:

List<UpdateHeader>												List<TestNotify>							
List count	UpdateHeader							UpdateHeader					List count	Test Notify		Test Notify			
	Time stamp	Source URI	Update Type	EntityKey				Time stamp	Source URI	Update Type	EntityKey			Time	Value	Time	Value		
				1st	2nd	3rd	4th				1st	2nd						3rd	4th
2		SC X	Update	A	2	1	2		SC X	Update	A	4	1	2	2	Today, 09:30	1234	Today, 09:30	8888

Figure 2-6: Message Body Decomposition Example

In the example above the ‘Update Type’ field is part of the UpdateHeader structure which is itself part of the overall UpdateHeader list structure. The above example also demonstrates the difference between a pattern body and a service-specific body. The UpdateHeader list is the pattern body and is followed by the service-specific TestNotify part.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

NOTE – The structures used in the body of the examples for each pattern are only examples, and as such no explanation of contained values or meanings is provided or required.

### 2.3 ABSTRACT SERVICE SPECIFICATIONS

Each abstract service specification Blue Book is specified as an Area that consists of one or more services that are composed of a set of operations. Service Areas provide a simple way of grouping related Services together.

Each service specification includes an overview table that details the Area and Service Identifiers and then lists the operations of that service (see table 2-3).

**Table 2-3: Service Overview Table**

Area Identifier	Service Identifier	Area Number	Service Number	Area Version
Interaction Pattern	Operation Identifier	Operation Number	Support in replay	Capability Set

The values of table 2-3 are used to populate the [Service Area][Service][Service Operation][Area Version] fields of the Message Header. The Area Number, Service Number, and Operation Number fields provide an alternative numerical identification scheme parallel to the Identifier scheme.

The choice of whether to use Identifiers, numbers, or another alternative in an actual transport is transport specific, as long as it is possible to correctly determine the area, service, operation, and version values from the transmitted information. The numbers are expected to be used by transports that require a more efficient identification mechanism than Identifiers, and will not overlap with existing service definitions. The set of permissible values are in the UShort range and start at '1'.

The Area Version is a number that is used to differentiate between issues of a specification. Initially it will be set to the number '1', and future updates to the specification will increase that number. The set of permissible values are in the UOctet range.

Support in replay is used to denote whether a specific operation is allowed to be used in a Replay session and is either of the value 'Yes' or 'No'. For example, only operations that do

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

not modify history are usually supported in a replay session; operations such as setting a parameter would not be supported as they modify history.

The Capability set field is a numerical identifier that holds the Service Capability Set number for that operation. Operations that hold the same number within a service specification are considered to be part of the same Service Capability Set. The set of permissible values are in the UShort range.

STANDARDSISO.COM : Click to view the full PDF of ISO 18202:2015

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

### 3 ABSTRACT SERVICE SPECIFICATIONS

#### 3.1 OVERVIEW

There are three abstract interfaces defined in this specification. The first is the abstract interface of the MAL. The MAL abstract interface defines the interactions that are presented to the higher layers, the information and interaction between the two interacting components, and also the expected behaviour of the application layer that uses the MAL. It is detailed in 3.5.

The second is the abstract interface of the Access Control component. To support the access control and security aspects of the reference model in reference [1] the MAL requires a standard abstract interface to an Access Control component. The access control component only has the single interaction that is used by the MAL as defined in the Reference Model (reference [1]). The implementation of the Access Control component is deployment specific, as is the security policy and rules to be used; however, the interaction with that component is part of the MAL standard. It is detailed in 3.6.

The third is the abstract interface that a Transport layer provides to the MAL. It specifies what facilities must be made available to a compliant MAL and also the required behaviour of the Transport. It is detailed in 3.7.

General constraints that apply to all patterns are defined in 3.2, 3.3, and 3.4.

#### 3.2 TRANSACTION HANDLING

**3.2.1** The message header shall contain a transaction identifier field providing a mechanism for the originating MAL of a message exchange to uniquely identify the response, or set of responses, to a message.

**3.2.2** Each instance of a pattern shall be considered a single transaction.

**3.2.3** The transaction identifier shall be:

- a) used by the originating MAL to identify messages in a particular instance of an interaction pattern, and
- b) returned by the service provider in matching messages (returns from submits, etc.).

**3.2.4** The originating MAL shall ensure that the combination of the following Message Header fields form a unique index: pattern type, transaction identifier, the source address, the session, the domain, the network, the service area, the service, and operation.

#### 3.3 STATE TRANSITIONS

**3.3.1** Each pattern shall specify the set of states that both the provider and consumer can attain during the execution of the pattern.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

**3.3.2** To move between the states, each pattern shall define the set of legal transitions either as a Request or an Indication.

**3.3.3** For a Request to be issued, the source entity shall be in the correct state.

**3.3.4** Issuing a Request when in the incorrect state shall cause an INCORRECT\_STATE error to be raised by the local MAL, and the pattern shall end at this point.

**3.3.5** For Indications, the receiving entity shall be required to be in the correct state.

**3.3.6** Reception of an Indication in a state other than the correct one shall cause an INCORRECT\_STATE error to be raised by the local MAL, and the pattern shall end at this point.

### **3.4 MESSAGE COMPOSITION**

#### **3.4.1 MESSAGE HEADER FIELD VALUES**

**3.4.1.1** The header fields, with the values specified in table 3-1, shall be used for all interaction patterns.

**3.4.1.2** Each interaction pattern may override the values in table 3-1 with values defined in the relevant Request and Indication section for that pattern.

**3.4.1.3** The Domain shall be defined as a list of identifiers.

**3.4.1.4** The most significant domain part shall be listed first in the list (for example, Agency), and each subsequent domain identifier in the list narrows the preceding domain.

**3.4.1.5** Each Identifier part of the Domain shall be allowed the full range of Identifier values with the restriction that it is NOT allowed to contain the '.' character.

**3.4.1.6** The contents of URI From and URI To shall be transport specific (see reference [1] for more information).

**3.4.1.7** Authentication Id, QoSLevel, Priority, Network Zone, and Session fields shall be populated as defined in reference [1].

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

**Table 3-1: MAL Message Header Fields**

Field	Type	Value
URI From	URI	Message Source URI
Authentication Id	Blob	Source Authentication Identifier
URI To	URI	Message Destination URI
Timestamp	Time	Message generation timestamp
QoSLevel	QoSLevel	The QoS level of the message
Priority	UInteger	The QoS priority of the message
Domain	List<Identifier>	Domain of the message
Network Zone	Identifier	Network zone of the message
Session	SessionType	Type of session of the message
Session Name	Identifier	Name of the session of the message
Interaction Type	InteractionType	Interaction Pattern Type
Interaction Stage	UOctet	Interaction Pattern Stage
Transaction Id	Long	Unique to consumer
Service Area	UShort	Service Area
Service	UShort	Service
Operation	UShort	Service Operation
Area version	UOctet	Areaversion
Is Error Message	Boolean	'True' if this is an error message; else 'False'

### 3.4.2 MESSAGE BODY

**3.4.2.1** The message body shall be composed of the types listed in the Body Type column of the operation template in a service specification.

**3.4.2.2** Zero to many types may be listed in the Body Type column, each type being one part of the message body, and together form the complete body of the indicated message.

**3.4.2.3** The listed types should use the MAL data type specification (or service-specific types derived from these) as defined in section 4 of this specification; however, any data type specification (such as XML Schema) may be used.

**3.4.2.4** How the message body is actually encoded shall be dependent on the encoding technology used, but all message parts are expected to be supplied.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

### 3.4.3 ERROR MESSAGES

**3.4.3.1** A service specification shall define which error numbers may be returned for a specific operation and also if any extra information is provided with the error message.

**3.4.3.2** The service specification shall specify the data type of the extra information for the specific error.

**3.4.3.3** A UInteger value containing the Error Number (see section 5) shall immediately follow the Message Header.

**3.4.3.4** The extra information value shall immediately follow the Error Number.

**3.4.3.5** If no extra information is provided by an error, then the extra information value shall be set to NULL.

## 3.5 MAL SERVICE INTERFACE

### 3.5.1 SEND INTERACTION PATTERN

#### 3.5.1.1 Overview

The SEND pattern is the most basic interaction (figure 3-1); it is a single message from the consumer to the provider. No acknowledgement is sent by the provider.



**Figure 3-1: SEND Interaction Pattern Message Sequence**

#### 3.5.1.2 Description

The SEND pattern is the basic interaction of which all other patterns can be considered extensions. It is the simple passing of a message from a consumer to a provider. Because there is no message ‘conversation’ implied with a simple SEND, there is no requirement for a transaction identifier in the message. However, one may be specified. No return message is sent from the provider to the consumer, so the consumer has no indication the provider has received the message.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

### 3.5.1.3 Usage

The SEND pattern is expected to be used for non-critical messages where the possible loss of one or more of these messages is not considered critical. An example would be regular heartbeat-type messages.

### 3.5.1.4 Error Handling

Errors (see section 5) may be generated by the consumer service layers, but no error can be generated by the provider as the interaction pattern does not allow for the provider to return an error.

### 3.5.1.5 Operation Template

The SEND template only contains the operation name and the type of the structure that is sent as the message body:

**Table 3-2: SEND Operation Template**

Operation Identifier	<<Operation name>>	
Interaction Pattern	SEND	
Pattern Sequence	Message	Body Type
IN	SEND	<<Body type>>

### 3.5.1.6 Primitives

**Table 3-3: SEND Primitive List**

Primitive
SEND

### 3.5.1.7 State Charts

#### 3.5.1.7.1 Consumer Side

The state chart contains only one transition from the initial state to the final one, so it is not represented. This transition is triggered by the primitive **SEND Request**.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER**3.5.1.7.2 Provider Side**

The state chart contains only one transition from the initial state to the final one, so it is not represented. This transition is triggered by the primitive **SEND Indication**.

**3.5.1.8 Requests and Indications****3.5.1.8.1 SEND****3.5.1.8.1.1 Function**

**3.5.1.8.1.1.1** The **SEND Request** primitive shall be used by the consumer application to initiate a SEND Interaction.

**3.5.1.8.1.1.2** The **SEND Indication** primitive shall be used by the provider MAL to deliver a **SEND Message** to a provider and initiate a SEND Interaction.

**3.5.1.8.1.2 Semantics**

**SEND Request** and **SEND Indication** shall provide parameters as follows:

(SEND Message Header, SEND Message Body, QoS properties)

**3.5.1.8.1.3 When Generated**

- a) A **SEND Request** may be generated by the consumer application at any time.
- b) A **SEND Indication** shall be generated by the provider MAL upon reception of a **SEND Message**, once checked via the Access Control interface, from a consumer.

**3.5.1.8.1.4 Effect on Reception**

- a) Reception of a **SEND Request** shall, once checked via the Access Control interface, cause the consumer MAL to initiate a SEND Interaction by transmitting a **SEND Message** to the provider.
- b) The pattern shall end at this point for the consumer.
- c) On reception of a **SEND Indication** a provider shall process the operation.
- d) The pattern shall end at this point for the provider.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

### 3.5.1.8.1.5 Message Header

- a) For the **SEND Message** the message header fields shall be as defined in 3.4 except for the fields in table 3-4.
- b) The contents of the **SEND Message** body, as specified in the operation template, shall immediately follow the message header.

**Table 3-4: SEND Message Header Fields**

Field	Value
URI From	Consumer URI
Authentication Id	Consumer Authentication Identifier
URI To	Provider URI
Interaction Type	SEND
Interaction Stage	Not used
Transaction Id	Not used

### 3.5.1.9 Example

The following example shows a simple example service with a single SEND pattern-based operation:

Operation Identifier	testSend	
Interaction Pattern	SEND	
Pattern Sequence	Message	Body Type
IN	SEND	TestBody

The TestBody structure is defined below:

Name	TestBody		
Extends	Composite		
Short Form Part	Example Only		
Field	Type	Nullable	Comment
FirstItem	String	Yes	Example String item
SecondItem	Integer	Yes	Example Integer item

This corresponds to the following message:

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

Message Header														Test Body				
URI From	Auth Id	URI To	Timestamp	QoS	Priority	Domain	Zone	Session	Interaction	Stage	Trans Id	Area	Service	Operation	Version	Is Error	First Item	Second Item
Consumer	Op A	Provider		BEST	1	A.B.C	GROUND	LIVE	SEND		1233	Example	Example	testSend	1	FALSE	Hello	1234

NOTE – An actual service specification, rather than the example given here, would fully specify the meaning of, and required values of, all structures used by the service.

### 3.5.2 SUBMIT INTERACTION PATTERN

#### 3.5.2.1 Overview

The SUBMIT pattern is a simple confirmed message exchange pattern (figure 3-2). The consumer sends a message to a provider and the provider acknowledges it.

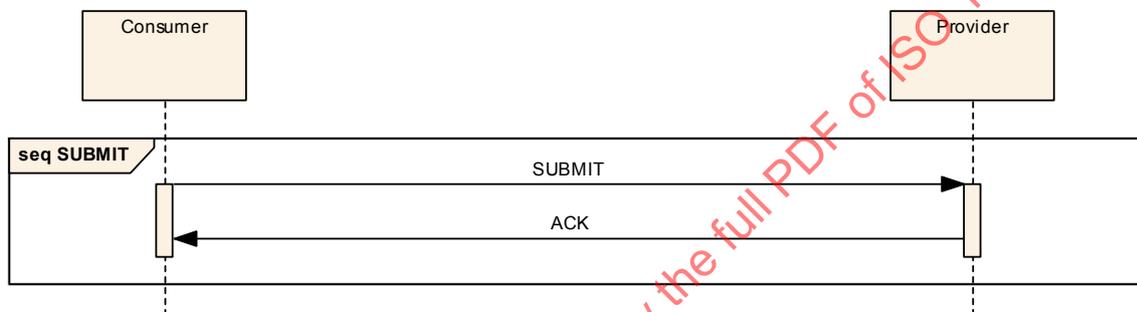


Figure 3-2: SUBMIT Interaction Pattern Message Sequence

The meaning of the return acknowledgement is operation specific. Each operation specification details the exact meaning of the operation’s return acknowledgement for its context.

#### 3.5.2.2 Description

The SUBMIT pattern extends the SEND pattern by providing a return acknowledgment message from the provider back to the consumer. The service specification details the meaning of the acknowledgment message for a specific operation.

#### 3.5.2.3 Usage

The SUBMIT pattern is used for simple operations that complete quickly but must be confirmed to the consumer.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

3.5.2.4 Error Handling

- a) The return acknowledgment shall be replaced with an error message (see section 5) if an error occurs during the processing of the operation as shown in figure 3-3.

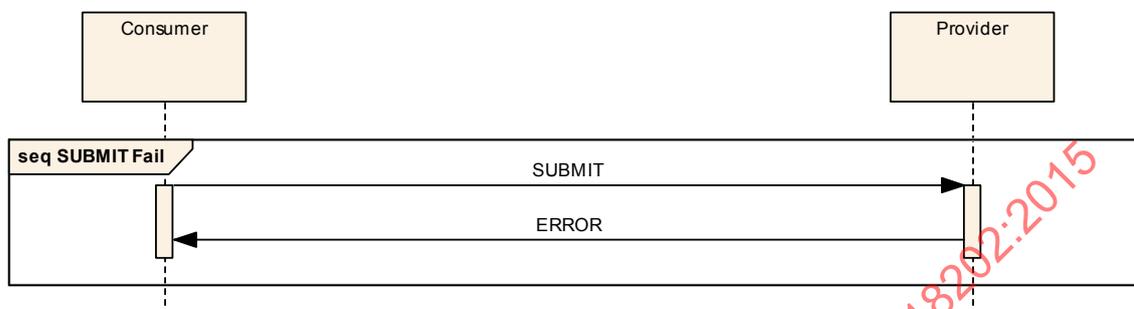


Figure 3-3: SUBMIT Interaction Pattern Error Sequence

- b) Either the acknowledgment or the error message shall be returned but never both.
- c) The service specification shall specify that the acknowledgement is not returned until all processing that can generate an error has been completed, if a service is required to be able to return an error during the processing of the message.

3.5.2.5 Operation Template

The SUBMIT template only contains the operation name and the type of the structure that is submitted as the Submit message body.

Table 3-5: SUBMIT Operation Template

Operation Identifier	<<Operation name>>	
Interaction Pattern	SUBMIT	
Pattern Sequence	Message	Body Type
IN	SUBMIT	<<Body type>>

The return acknowledgement message does not have a body to keep the operation as simple as possible. Because of this it is not shown in the operation template.

NOTE – If a service-defined return message is required, for example, to return an identifier for the operation, then the REQUEST pattern should be used instead of the SUBMIT pattern.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

## 3.5.2.6 Primitives

Table 3-6: SUBMIT Primitive List

Primitive
SUBMIT
ACK
ERROR

## 3.5.2.7 State Charts

## 3.5.2.7.1 Consumer Side

Figure 3-4 shows the consumer side state chart for the SUBMIT pattern:

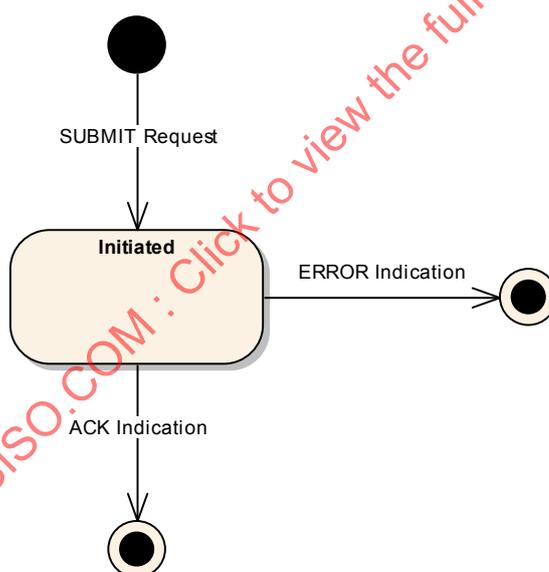


Figure 3-4: SUBMIT Consumer State Chart


- a) The initial transition is triggered by the primitive **SUBMIT Request** and shall lead to the **Initiated State**.
- b) There are two possible transitions from the **Initiated State**:
  - 1) the first is the indication of an acknowledgement, **ACK Indication**, and shall lead to the final state;

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

- 2) the second is the indication of an error, **ERROR Indication**, and shall lead to the final state.

### 3.5.2.7.2 Provider Side

Figure 3-5 shows the provider side state chart for the SUBMIT pattern:

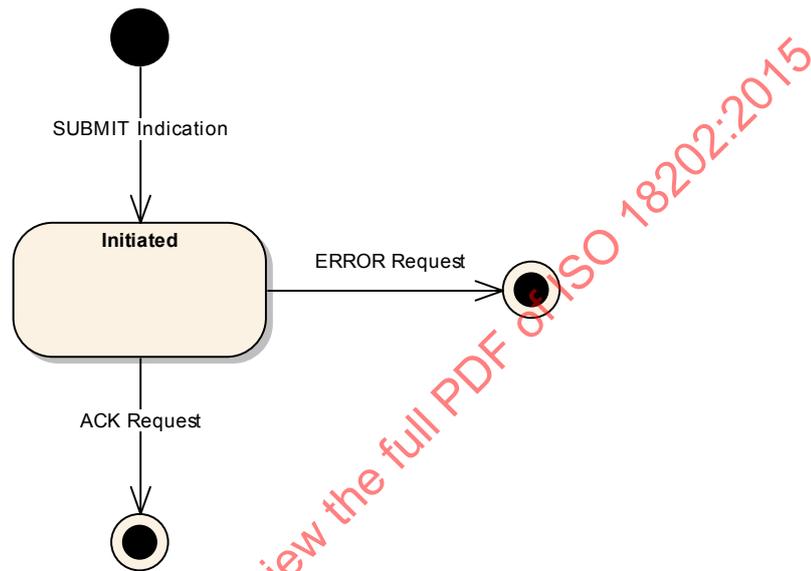

**Figure 3-5: SUBMIT Provider State Chart**

- a) The initial transition is triggered by the primitive **SUBMIT Indication** and shall lead to the **Initiated State**.
- b) There are two possible transitions from the **Initiated State**:
- 1) the first is the transmission of an acknowledgement, **ACK Request**, and shall lead to the final state;
  - 2) the second is the transmission of an error, **ERROR Request**, and shall lead to the final state.

## 3.5.2.8 Requests and Indications

### 3.5.2.8.1 SUBMIT

#### 3.5.2.8.1.1 Function

- a) The **SUBMIT Request** primitive shall be used by the consumer application to initiate a SUBMIT Interaction.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

- b) The **SUBMIT Indication** primitive shall be used by the provider MAL to deliver a **SUBMIT Message** to a provider and initiate a SUBMIT Interaction.

#### 3.5.2.8.1.2 Semantics

**SUBMIT Request** and **SUBMIT Indication** shall provide parameters as follows:

(SUBMIT Message Header, SUBMIT Message Body, QoS properties)

#### 3.5.2.8.1.3 When Generated

- a) A **SUBMIT Request** may be generated by the consumer application at any time.
- b) A **SUBMIT Indication** shall be generated by the provider MAL upon reception of a **SUBMIT Message**, once checked via the Access Control interface, from a consumer.

#### 3.5.2.8.1.4 Effect on Reception

- a) Reception of a **SUBMIT Request** shall, once checked via the Access Control interface, cause the consumer MAL to initiate a SUBMIT Interaction by transmitting a **SUBMIT Message** to the provider.
- b) The consumer MAL shall then enter the **Initiated State**.
- c) On reception of a **SUBMIT Indication** by the provider, the provider MAL shall enter the **Initiated State**.
- d) The provider shall then start processing the operation at this point.

#### 3.5.2.8.1.5 Message Header

- a) For the **SUBMIT Message** the message header fields shall be as defined in 3.4 except for the fields in table 3-7.
- b) The contents of the Message Body, as specified in the operation template, shall immediately follow the message header.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

**Table 3-7: SUBMIT Message Header Fields**

Field	Value
URI From	Consumer URI
Authentication Id	Consumer Authentication Identifier
URI To	Provider URI
Interaction Type	SUBMIT
Interaction Stage	1
Transaction Id	Provided by consumer MAL

### 3.5.2.8.2 ACK

#### 3.5.2.8.2.1 Function

- a) The **ACK Request** primitive shall be used by the provider application to acknowledge a SUBMIT Interaction.
- b) The **ACK Indication** primitive shall be used by the consumer MAL to deliver an **ACK Message** to a consumer.

#### 3.5.2.8.2.2 Semantics

**ACK Request** and **ACK Indication** shall provide parameters as follows:

(ACK Message Header, QoS properties)

#### 3.5.2.8.2.3 When Generated

- a) An **ACK Request** shall be used by the provider application with the provider MAL in the **Initiated State** to acknowledge a SUBMIT Interaction.
- b) An **ACK Indication** shall be generated by the consumer MAL in the **Initiated State** upon reception of an **ACK Message**, once checked via the Access Control interface, from a provider.

#### 3.5.2.8.2.4 Effect on Reception

- a) Reception of an **ACK Request** shall, once checked via the Access Control interface, cause the provider MAL to transmit an **ACK Message** to the consumer.
- b) The pattern shall end at this point for the provider.
- c) On reception of an **ACK Indication** a consumer shall end the interaction pattern with success.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

### 3.5.2.8.2.5 Message Header

For the **ACK message** the message header fields shall be as defined in 3.4 except for the fields in table 3-8.

**Table 3-8: Submit ACK Message Header Fields**

Field	Value
URI From	Provider URI
Authentication Id	Provider Authentication Identifier
URI To	Consumer URI
Interaction Type	SUBMIT
Interaction Stage	2
Transaction Id	Transaction Id from initial message

### 3.5.2.8.3 ERROR

#### 3.5.2.8.3.1 Function

- a) The **ERROR Request** primitive shall be used by the provider application to end a SUBMIT Interaction with an error.
- b) The **ERROR Indication** primitive shall be used by the consumer MAL to deliver an **ERROR Message** to a consumer.

#### 3.5.2.8.3.2 Semantics

**ERROR Request** and **ERROR Indication** shall provide parameters as follows:

(ERROR Message Header, Error Number, Extra Information, QoS properties)

#### 3.5.2.8.3.3 When Generated

- a) An **ERROR Request** shall be used by the provider application with the provider MAL in the **Initiated State** to transmit an error.
- b) An **ERROR Indication** shall be generated by the consumer MAL in the **Initiated State** upon one of two events:
  - 1) the reception of an **ERROR Message**, once checked via the Access Control interface, from a provider;
  - 2) an error raised by the local communication layer.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

### 3.5.2.8.3.4 Effect on Reception

- a) Reception of an **ERROR Request** shall, once checked via the Access Control interface, cause the provider MAL to transmit an **ERROR Message** to the consumer.
- b) The pattern shall end at this point for the provider.
- c) On reception of an **ERROR Indication** a consumer shall end the interaction with an error.

### 3.5.2.8.3.5 Message Header

- a) For the **ERROR Message** the message header fields shall be the same as for the **ACK Message** except for the 'Is Error Message' field which is set to TRUE.
- b) The Error number and any extra information (referred to as the 'Error information' from this point onwards) shall immediately follow the message header.

### 3.5.2.9 Example

The following example shows a simple example service with a single SUBMIT pattern-based operation:

Operation Identifier	testSubmit	
Interaction Pattern	SUBMIT	
Pattern Sequence	Message	Body Type
IN	SUBMIT	TestBody

The TestBody structure is defined in 3.5.1.9. This corresponds to the following message being transmitted:

Message Header																	Test Body	
URI From	Auth Id	URI To	Timestamp	QoS	Priority	Domain	Zone	Session	Interaction	Stage	Trans Id	Area	Service	Operation	Version	Is Error	First Item	Second Item
Consumer	Op A	Provider		BEST	1	A.B.C	GROUND	LIVE	SUBMIT	1	1234	Example	Example	testSubmit	1	FALSE	Hello	1234

and corresponds to the following acknowledgement being returned:

Message Header																
URI From	Auth Id	URI To	Timestamp	QoS	Priority	Domain	Zone	Session	Interaction	Stage	Trans Id	Area	Service	Operation	Version	Is Error
Provider	SC X	Consumer		BEST	1	A.B.C	GROUND	LIVE	SUBMIT	2	1234	Example	Example	testSubmit	1	FALSE


NOTE – An actual service specification, rather than the example given here, would fully specify the meaning of, and required values of, all structures used by the service.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

### 3.5.3 REQUEST INTERACTION PATTERN

#### 3.5.3.1 Overview

The REQUEST pattern extends the SUBMIT pattern by replacing the simple acknowledgement with a data response message (figure 3-6). No acknowledgement other than the data response is sent.

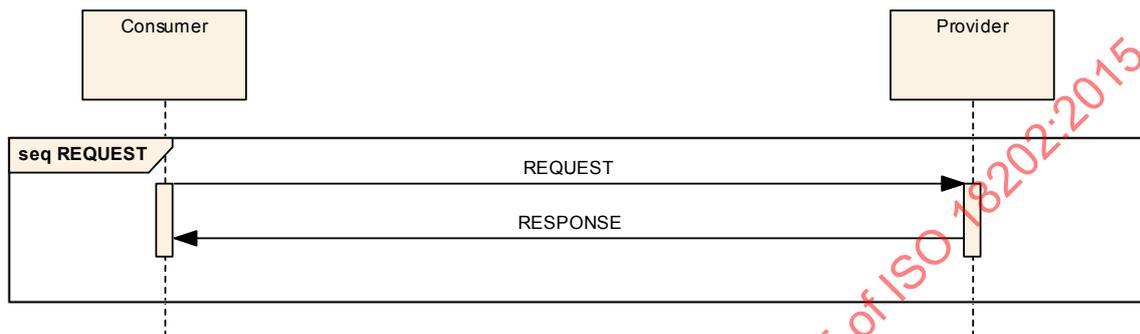

**Figure 3-6: REQUEST Interaction Pattern Message Sequence**

#### 3.5.3.2 Description

The REQUEST pattern provides a simple request/response message exchange. Unlike the SUBMIT pattern, no acknowledgement is sent upon reception of the request; however, a data response is sent. The lack of an acknowledgement and only the return data response for this pattern means that it is primarily expected to be used for situations where the operation takes minimal time.

#### 3.5.3.3 Usage

It is expected that the REQUEST pattern is to be used only for operations that complete in a relatively short period of time. If a more extended or indeterminate period is possible then the more advanced INVOKE or PROGRESS patterns should be specified.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

3.5.3.4 Error Handling

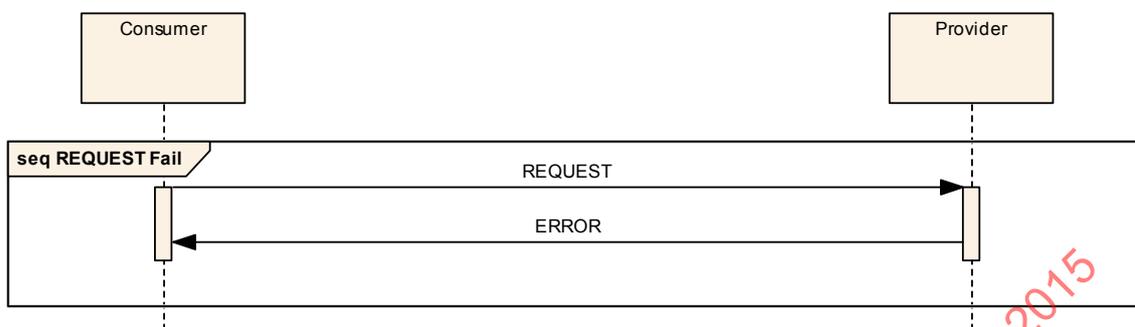


Figure 3-7: REQUEST Interaction Pattern Error Sequence

- a) The data response shall be replaced with an error message (see section 5) if an error occurs during the processing of the operation (figure 3-7).
- b) Either the data response or the error message shall be returned but never both.

3.5.3.5 Operation Template

The REQUEST pattern template extends the SUBMIT template by adding the requirement for a return type:

Table 3-9: REQUEST Operation Template

Operation Identifier	<<Operation name>>	
Interaction Pattern	REQUEST	
Pattern Sequence	Message	Body Type
IN	REQUEST	<<Request type>>
OUT	RESPONSE	<<Response type>>

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

## 3.5.3.6 Primitives

Table 3-10: REQUEST Primitive List

Primitive
REQUEST
RESPONSE
ERROR

## 3.5.3.7 State Charts

## 3.5.3.7.1 Consumer Side

Figure 3-8 shows the consumer side state chart for the REQUEST pattern:

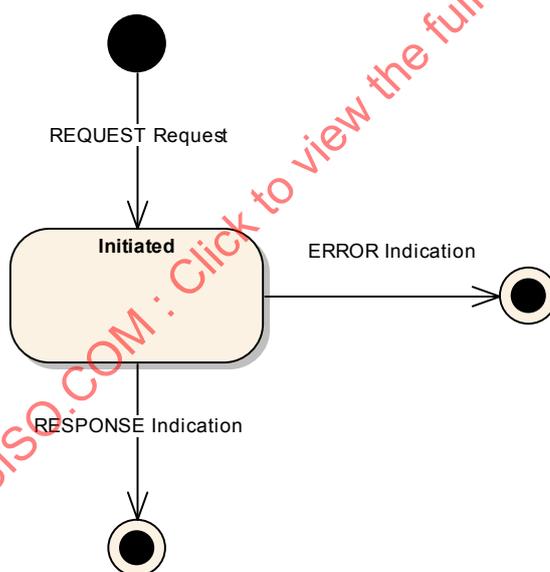


Figure 3-8: REQUEST Consumer State Chart


- a) The initial transition is triggered by the primitive **REQUEST Request** and shall lead to the **Initiated State**.
- b) There are two possible transitions from the **Initiated State**:
  - 1) the first is the indication of a response, **RESPONSE Indication**, and shall lead to the final state;

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

- 2) the second is the indication of an error, **ERROR Indication**, and shall lead to the final state.

### 3.5.3.7.2 Provider Side

Figure 3-9 shows the provider side state chart for the REQUEST pattern:

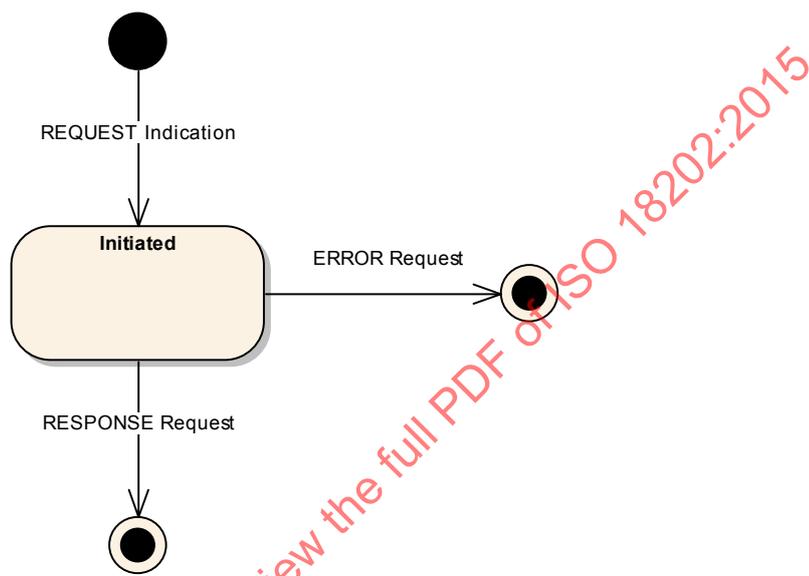

**Figure 3-9: REQUEST Provider State Chart**

- a) The initial transition is triggered by the primitive **REQUEST Indication** and shall lead to the **Initiated State**.
- b) There are two possible transitions from the **Initiated State**:
- 1) the first is the transmission of a response, **RESPONSE Request**, and shall lead to the final state;
  - 2) the second is the transmission of an error, **ERROR Request**, and shall lead to the final state.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER**3.5.3.8 Requests and Indications****3.5.3.8.1 REQUEST****3.5.3.8.1.1 Function**

- a) The **REQUEST Request** primitive shall be used by the consumer application to initiate a REQUEST Interaction.
- b) The **REQUEST Indication** primitive shall be used by the provider MAL to deliver a **REQUEST Message** to a provider and initiate a REQUEST Interaction.

**3.5.3.8.1.2 Semantics**

**REQUEST Request** and **REQUEST Indication** shall provide parameters as follows:

(REQUEST Message Header, REQUEST Message Body, QoS properties)

**3.5.3.8.1.3 When Generated**

- a) A **REQUEST Request** may be generated by the consumer application at any time.
- b) A **REQUEST Indication** shall be generated by the provider MAL upon reception of a **REQUEST Message**, once checked via the Access Control interface, from a consumer.

**3.5.3.8.1.4 Effect on Reception**

- a) Reception of a **REQUEST Request** shall, once checked via the Access Control interface, cause the consumer MAL to initiate a REQUEST Interaction by transmitting a **REQUEST Message** to the provider.
- b) The consumer MAL shall enter the **Initiated State** at this point.
- c) On reception of a **REQUEST Indication** by the provider, the provider MAL shall enter the **Initiated State**.
- d) The provider shall then start processing the operation at this point.

**3.5.3.8.1.5 Message Header**

- a) For the **REQUEST Message** the message header fields shall be as defined in 3.4 except for the fields in table 3-11.
- b) The contents of the Message Body, as specified in the operation template, shall immediately follow the message header.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

**Table 3-11: REQUEST Message Header Fields**

Field	Value
URI From	Consumer URI
Authentication Id	Consumer Authentication Identifier
URI To	Provider URI
Session	Session of message
Interaction Type	REQUEST
Interaction Stage	1
Transaction Id	Provided by consumer MAL

### 3.5.3.8.2 RESPONSE

#### 3.5.3.8.2.1 Function

- a) The **RESPONSE Request** primitive shall be used by the provider application to transmit a response to a REQUEST Interaction.
- b) The **RESPONSE Indication** primitive shall be used by the consumer MAL to deliver a **RESPONSE Message** to a consumer.

#### 3.5.3.8.2.2 Semantics

**RESPONSE Request** and **RESPONSE Indication** shall provide parameters as follows:

(RESPONSE Message Header, RESPONSE Message Body, QoS properties)

#### 3.5.3.8.2.3 When Generated

- a) A **RESPONSE Request** shall be used by the provider application with the provider MAL in the **Initiated State** to transmit a final response to a REQUEST Interaction.
- b) A **RESPONSE Indication** shall be generated by the consumer MAL in the **Initiated State** upon reception of a **RESPONSE Message**, once checked via the Access Control interface, from a provider.

#### 3.5.3.8.2.4 Effect on Reception

- a) Reception of a **RESPONSE Request** shall, once checked via the Access Control interface, cause the provider MAL to transmit the supplied response as a **RESPONSE Message** to the consumer.
- b) The pattern shall end at this point for the provider.
- c) On reception of a **RESPONSE Indication** a consumer shall end the interaction pattern with success.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

### 3.5.3.8.2.5 Message Header

- a) For the **RESPONSE Message**, the message header fields shall be as defined in 3.4 except for the fields in table 3-12.
- b) The contents of the Message Body, as specified in the operation template, shall immediately follow the message header.

**Table 3-12: Request RESPONSE Message Header Fields**

Field	Value
URI From	Provider URI
Authentication Id	Provider Authentication Identifier
URI To	Consumer URI
Interaction Type	REQUEST
Interaction Stage	2
Transaction Id	Transaction Id from initial message

### 3.5.3.8.3 ERROR

#### 3.5.3.8.3.1 Function

- a) The **ERROR Request** primitive shall be used by the provider application to end a REQUEST Interaction with an error.
- b) The **ERROR Indication** primitive shall be used by the consumer MAL to deliver an **ERROR Message** to a consumer.

#### 3.5.3.8.3.2 Semantics

**ERROR Request** and **ERROR Indication** shall provide parameters as follows:

(ERROR Message Header, Error Number, Extra Information, QoS properties)

#### 3.5.3.8.3.3 When Generated

- a) An **ERROR Request** shall be used by the provider application with the provider MAL in the **Initiated State** to transmit an error.
- b) An **ERROR Indication** shall be generated by the consumer MAL in the **Initiated State** upon one of two events:
  - 1) the reception of an **ERROR Message**, once checked via the Access Control interface, from a provider;
  - 2) an error raised by the local communication layer.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

#### 3.5.3.8.3.4 Effect on Reception

- a) Reception of an **ERROR Request** shall, once checked via the Access Control interface, cause the provider MAL to transmit an **ERROR Message** to the consumer.
- b) The pattern shall end at this point for the provider.
- c) On reception of an **ERROR Indication** a consumer shall end the interaction with an error.

#### 3.5.3.8.3.5 Message Header

- a) For the **ERROR Message** the message header fields shall be the same as the **RESPONSE Message** except for the 'Is Error Message' field which is set to TRUE.
- b) The Error information shall immediately follow the message header.

#### 3.5.3.9 Example

The following example shows a simple service that defines a single REQUEST operation:

Operation Identifier	testRequest	
Interaction Pattern	REQUEST	
Pattern Sequence	Message	Body Type
IN	REQUEST	TestBody
OUT	RESPONSE	TestResponse

The TestBody structure is defined in 3.5.1.9 and the TestResponse structure is defined below:

Name	TestResponse		
Extends	Composite		
Short Form Part	Example Only		
Field	Type	Nullable	Comment
RspnItem	Boolean	Yes	Example Boolean item
RspnField	Float	Yes	Example Float item

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

This corresponds to the following message being transmitted:

Message Header																Test Body		
URI From	Auth Id	URI To	Timestamp	QoS	Priority	Domain	Zone	Session	Interaction	Stage	Trans Id	Area	Service	Operation	Version	Is Error	First Item	Second Item
Consumer	Op A	Provider		BEST	1	A.B.C	GROUND	LIVE	REQUEST	1	1235	Example	Example	testRequest	1	FALSE	Hello	1234

And corresponds to the following response being returned:

Message Header																Test Response		
URI From	Auth Id	URI To	Timestamp	QoS	Priority	Domain	Zone	Session	Interaction	Stage	Trans Id	Area	Service	Operation	Version	Is Error	Rspn Item	Rspn Field
Provider	SC X	Consumer		BEST	1	A.B.C	GROUND	LIVE	REQUEST	2	1235	Example	Example	testRequest	1	FALSE	True	31.0

NOTE – An actual service specification, rather than the example given here, would fully specify the meaning of, and required values of, all structures used by the service.

### 3.5.4 INVOKE INTERACTION PATTERN

#### 3.5.4.1 Overview

The INVOKE pattern extends the REQUEST pattern to add a mandatory acknowledgement of the initial message (figure 3-10). This allows the operation to confirm the receipt of the request before proceeding to process the request.

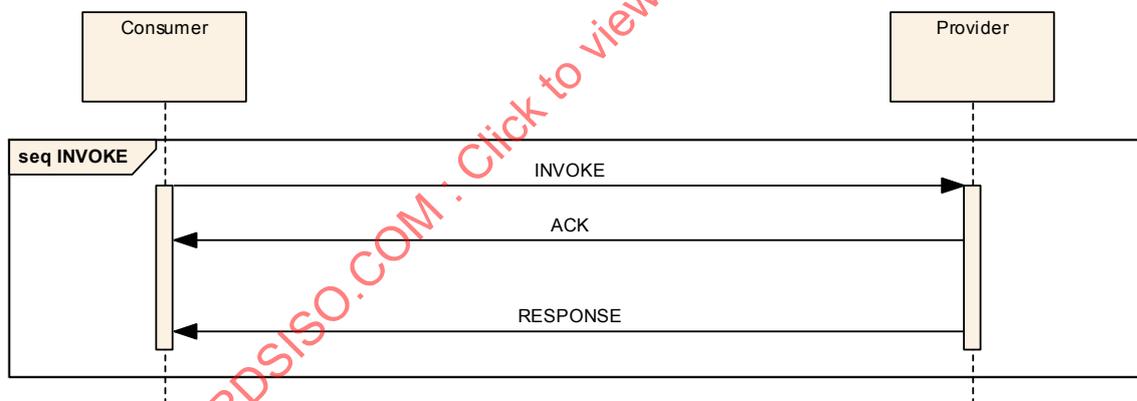


Figure 3-10: INVOKE Interaction Pattern Message Sequence

The acknowledgement message is an extension of the acknowledgment used in the SUBMIT pattern. This pattern allows the acknowledgment to return a service-specific message body. A service-defined acknowledgement is required because the INVOKE pattern is indeterminate. It allows an operation to provide an indication of the operation status upon INVOKE reception. An example would be validation of the invoke arguments.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

### 3.5.4.2 Description


The INVOKE pattern extends the REQUEST pattern with the addition of a mandatory acknowledgement of the initial message.

### 3.5.4.3 Usage

The INVOKE pattern is expected to be used when there is a significant or indeterminate amount of time taken to process the request and produce the data response. The provision of the service-defined acknowledgement message allows an operation to return supplementary, status, or summary information about the request before processing continues (for example, an identifier used for querying INVOKE status using another operation).

### 3.5.4.4 Error Handling

The INVOKE pattern can report failure in two distinct ways:

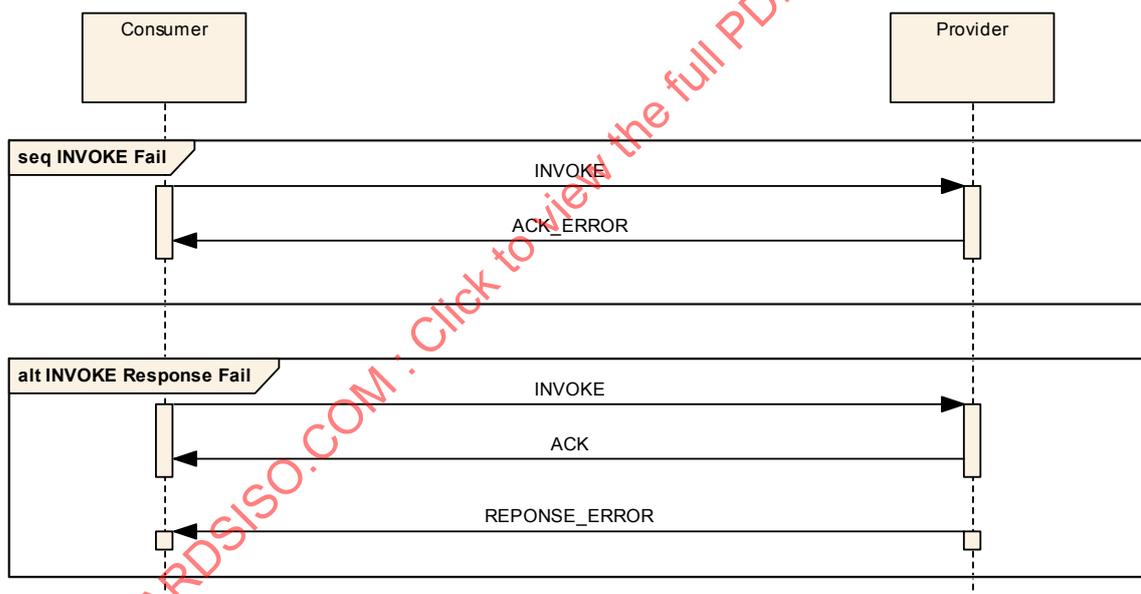

**Figure 3-11: INVOKE Interaction Pattern Error Sequence**

- a) The provider may return an error message (see section 5) in replacement of the ACK message, shown in the first sequence in figure 3-11.
- b) The provider may return an error after the acknowledgement is sent in replacement of the RESPONSE message, shown in the second sequence in figure 3-11.
- c) After an error message is sent no further messages shall be generated as part of the pattern.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

NOTE – It is expected that the first case would be used to report an error with the invoke request and the second to report an error that occurs during processing.

### 3.5.4.5 Operation Template

The INVOKE template extends the REQUEST pattern template by requiring a structure for the acknowledgment message. INVOKE operations take a single message body argument and return an acknowledgment structure and a single data response:

**Table 3-13: INVOKE Operation Template**

Operation Identifier	<<Operation name>>	
Interaction Pattern	INVOKE	
Pattern Sequence	Message	Body Type
IN	INVOKE	<<Request type>>
OUT	ACK	<<Ack type>>
OUT	RESPONSE	<<Response type>>

### 3.5.4.6 Primitives

**Table 3-14: INVOKE Primitive List**


Primitive
INVOKE
ACK
RESPONSE
ACK_ERROR
RESPONSE_ERROR

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

### 3.5.4.7 State Charts

#### 3.5.4.7.1 Consumer Side

Figure 3-12 shows the consumer side state chart for the INVOKE pattern:

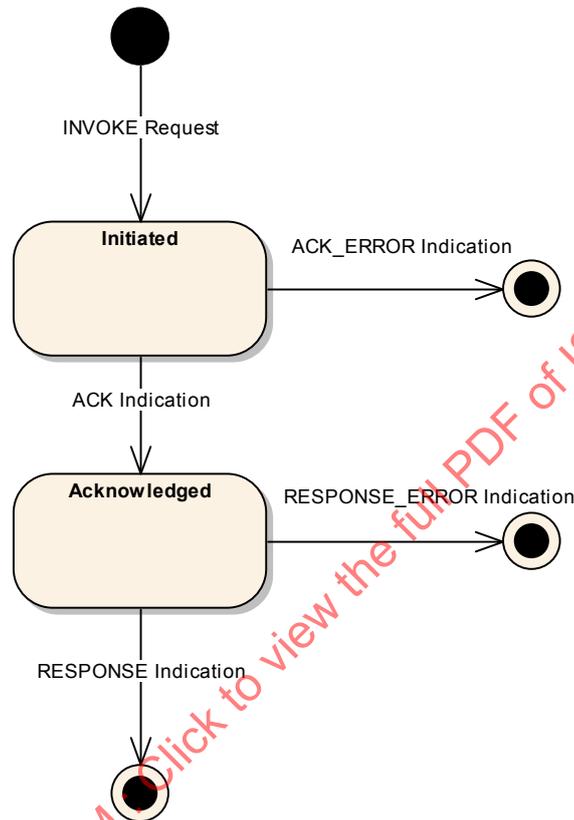

**Figure 3-12: INVOKE Consumer State Chart**


- a) The initial transition is triggered by the primitive **INVOKE Request** and shall lead to the **Initiated State**.
- b) There are two possible transitions from the **Initiated State**:
  - 1) the first is the indication of an acknowledgement, **ACK Indication**, and shall lead to the **Acknowledged State**;
  - 2) the second is the indication of an error, **ACK\_ERROR Indication**, and shall lead to the final state.
- c) There are two possible transitions from the **Acknowledged State**:
  - 1) the first is the indication of a response, **RESPONSE Indication**, and shall lead to the final state;

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

- 2) the second is the indication of an error, **RESPONSE\_ERROR Indication**, and shall lead to the final state.

### 3.5.4.7.2 Provider Side

Figure 3-13 shows the provider side state chart for the INVOKE pattern:

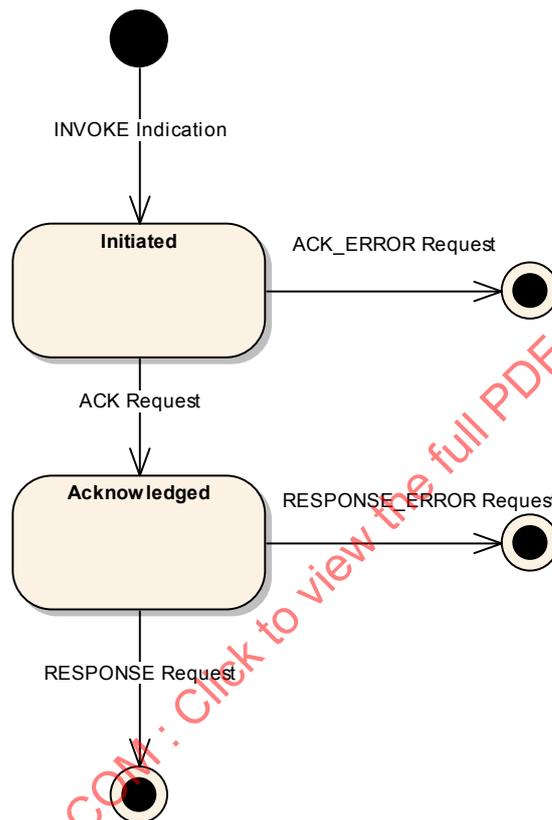

**Figure 3-13: INVOKE Provider State Chart**

- a) The initial transition is triggered by the primitive **INVOKE Indication** and shall lead to the **Initiated State**.
- b) There are two possible transitions from the **Initiated State**:
- 1) the first is the transmission of an acknowledgement, **ACK Request**, and shall lead to the **Acknowledged State**;
  - 2) the second is the transmission of an error, **ACK\_ERROR Request**, and shall lead to the final state.
- c) There are two possible transitions from the **Acknowledged State**:
- 1) the first is the transmission of a response, **RESPONSE Request**, and shall lead to the final state;

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

- 2) the second is the transmission of an error, **RESPONSE\_ERROR Request**, and shall lead to the final state.

### 3.5.4.8 Requests and Indications

#### 3.5.4.8.1 INVOKE

##### 3.5.4.8.1.1 Function

- a) The **INVOKE Request** primitive shall be used by the consumer application to initiate an INVOKE Interaction.
- b) The **INVOKE Indication** primitive shall be used by the provider MAL to deliver an **INVOKE Message** to a provider and initiate an INVOKE Interaction.

##### 3.5.4.8.1.2 Semantics

**INVOKE Request** and **INVOKE Indication** shall provide parameters as follows:

(INVOKE Message Header, INVOKE Message Body, QoS properties)

##### 3.5.4.8.1.3 When Generated

- a) An **INVOKE Request** may be generated by the consumer application at any time.
- b) An **INVOKE Indication** shall be generated by the provider MAL upon reception of an **INVOKE Message**, once checked via the Access Control interface, from a consumer.

##### 3.5.4.8.1.4 Effect on Reception

- a) Reception of an **INVOKE Request** shall, once checked via the Access Control interface, cause the consumer MAL to initiate an INVOKE Interaction by transmitting an **INVOKE Message** to the provider.
- b) The consumer MAL shall enter the **Initiated State**.
- c) On reception of an **INVOKE Indication** by the provider, the provider MAL shall enter the **Initiated State**.
- d) The provider shall then start processing the operation at this point.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

### 3.5.4.8.1.5 Message Header

- a) For the **INVOKE Message** the message header fields shall be as defined in 3.4 except for the fields in table 3-15.
- b) The contents of the Message Body, as specified in the operation template, shall immediately follow the message header.

**Table 3-15: INVOKE Message Header Fields**

Field	Value
URI From	Consumer URI
Authentication Id	Consumer Authentication Identifier
URI To	Provider URI
Interaction Type	INVOKE
Interaction Stage	1
Transaction Id	Provided by consumer MAL

### 3.5.4.8.2 ACK

#### 3.5.4.8.2.1 Function

- a) The **ACK Request** primitive shall be used by the provider application to acknowledge an INVOKE Interaction.
- b) The **ACK Indication** primitive shall be used by the consumer MAL to deliver an **ACK Message** to a consumer.

#### 3.5.4.8.2.2 Semantics

**ACK Request** and **ACK Indication** shall provide parameters as follows:

(ACK Message Header, ACK Message Body, QoS properties)

#### 3.5.4.8.2.3 When Generated

- a) An **ACK Request** shall be used by the provider application with the provider MAL in the **Initiated State** to acknowledge the INVOKE Interaction.
- b) An **ACK Indication** shall be generated by the consumer MAL in the **Initiated State** upon reception of an **ACK Message**, once checked via the Access Control interface, from a provider.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

#### 3.5.4.8.2.4 Effect on Reception

- a) Reception of an **ACK Request** shall, once checked via the Access Control interface, cause the provider MAL to transmit the supplied acknowledgement as an **ACK Message** to the consumer.
- b) A provider MAL in the **Initiated State** shall enter the **Acknowledged State**.
- c) On reception of an **ACK Indication** by the consumer, the consumer MAL shall enter the **Acknowledged State**.

#### 3.5.4.8.2.5 Message Header

- a) For the **ACK Message** the message header fields shall be as defined in 3.4 except for the fields in table 3-16.
- b) The contents of the Message Body, as specified in the operation template, shall immediately follow the message header.

**Table 3-16: Invoke ACK Message Header Fields**

Field	Value
URI From	Provider URI
Authentication Id	Provider Authentication Identifier
URI To	Consumer URI
Interaction Type	INVOKE
Interaction Stage	2
Transaction Id	Transaction Id from initial message

#### 3.5.4.8.3 ACK\_ERROR

##### 3.5.4.8.3.1 Function

- a) The **ACK\_ERROR Request** primitive shall be used by the provider application to end an INVOKE Interaction with an error.
- b) The **ACK\_ERROR Indication** primitive shall be used by the consumer MAL to deliver an **ACK\_ERROR Message** to a consumer.

##### 3.5.4.8.3.2 Semantics

**ACK\_ERROR Request** and **ACK\_ERROR Indication** shall provide parameters as follows:

(ACK\_ERROR Message Header, Error Number, Extra Information, QoS properties)

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER**3.5.4.8.3.3 When Generated**

- a) **ACK\_ERROR Request** shall be used by the provider application with the provider MAL in the **Initiated State** to transmit an error.
- b) An **ACK\_ERROR Indication** shall be generated by the consumer MAL in the **Initiated State** upon one of two events:
  - 1) the reception of an **ACK\_ERROR Message**, once checked via the Access Control interface, from a provider;
  - 2) an error raised by the local communication layer.

**3.5.4.8.3.4 Effect on Reception**

- a) Reception of an **ACK\_ERROR Request** shall, once checked via the Access Control interface, cause the provider MAL to transmit an **ACK\_ERROR Message** to the consumer.
- b) The pattern shall end at this point for the provider.
- c) On reception of an **ACK\_ERROR Indication** a consumer shall end the interaction with an error.

**3.5.4.8.3.5 Message Header**

- a) For the **ACK\_ERROR Message** the message header fields shall be the same as for the **ACK Message** except for the 'Is Error Message' field which is set to TRUE.
- b) The Error information shall immediately follow the message header.

**3.5.4.8.4 RESPONSE****3.5.4.8.4.1 Function**

- a) The **RESPONSE Request** primitive shall be used by the provider application to transmit a response to an INVOKE Interaction.
- b) The **RESPONSE Indication** primitive shall be used by the consumer MAL to deliver a **RESPONSE Message** to a consumer.

**3.5.4.8.4.2 Semantics**

**RESPONSE Request** and **RESPONSE Indication** shall provide parameters as follows:

(RESPONSE Message Header, RESPONSE Message Body, QoS properties)

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

#### 3.5.4.8.4.3 When Generated

- a) A **RESPONSE Request** shall be used by the provider application with the provider MAL in the **Acknowledged State** to transmit a final response to an INVOKE interaction.
- b) A **RESPONSE Indication** shall be generated by the consumer MAL in the **Acknowledged State** upon reception of a **RESPONSE Message**, once checked via the Access Control interface, from a provider.

#### 3.5.4.8.4.4 Effect on Reception

- a) Reception of a **RESPONSE Request** shall, once checked via the Access Control interface, cause the provider MAL to transmit the supplied response as a **RESPONSE Message** to the consumer.
- b) The pattern shall end at this point for the provider.
- c) On reception of a **RESPONSE Indication** a consumer shall end the INVOKE Interaction with success.

#### 3.5.4.8.4.5 Message Header

- a) For the **RESPONSE Message** the message header fields shall be as defined in 3.4 except for the fields in table 3-17.
- b) The contents of the Message Body, as specified in the operation template, shall immediately follow the message header.

**Table 3-17: Invoke RESPONSE Message Header Fields**

Field	Value
URI From	Provider URI
Authentication Id	Provider Authentication Identifier
URI To	Consumer URI
Interaction Type	INVOKE
Interaction Stage	3
Transaction Id	Transaction Id from initial message

#### 3.5.4.8.5 RESPONSE\_ERROR

##### 3.5.4.8.5.1 Function

- a) The **RESPONSE\_ERROR Request** primitive shall be used by the provider application to end an INVOKE Interaction with an error.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

- b) The **RESPONSE\_ERROR Indication** primitive shall be used by the consumer MAL to deliver a **RESPONSE\_ERROR Message** to a consumer.

#### 3.5.4.8.5.2 Semantics

**RESPONSE\_ERROR Request** and **RESPONSE\_ERROR Indication** shall provide parameters as follows:

(RESPONSE\_ERROR Message Header, Error Number, Extra Information, QoS properties)

#### 3.5.4.8.5.3 When Generated

- a) A **RESPONSE\_ERROR Request** shall be used by the provider application with the provider MAL in the **Acknowledged State** to transmit an error.
- b) A **RESPONSE\_ERROR Indication** shall be generated by the consumer MAL in the **Acknowledged State** upon one of two events:
  - 1) the reception of a **RESPONSE\_ERROR Message**, once checked via the Access Control interface, from a provider;
  - 2) an error raised by the local communication layer.

#### 3.5.4.8.5.4 Effect on Reception

- a) Reception of a **RESPONSE\_ERROR Request** shall, once checked via the Access Control interface, cause the provider MAL to transmit a **RESPONSE\_ERROR Message** to the consumer.
- b) The pattern shall end at this point for the provider.
- c) On reception of a **RESPONSE\_ERROR Indication** a consumer shall end the interaction with an error.

#### 3.5.4.8.5.5 Message Header

- a) For the **RESPONSE\_ERROR Message** the message header fields shall be the same as for the **RESPONSE Message** except for the 'Is Error Message' field which is set to TRUE.
- b) The Error information shall immediately follow the message header.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

### 3.5.4.9 Example

The following example shows a simple example service that contains a single INVOKE operation. The operation sends a TestBody structure and returns a TestAck acknowledgment structure followed by a TestResponse structure:

Operation Identifier	testInvoke	
Interaction Pattern	INVOKE	
Pattern Sequence	Message	Body Type
IN	INVOKE	TestBody
OUT	ACK	TestAck
OUT	RESPONSE	TestResponse

The TestBody structure is defined in 3.5.1.9 and the TestResponse structure is defined in 3.5.3.9. The TestAck structure is defined below:

Name	TestAck		
Extends	Composite		
Short Form Part	Example Only		
Field	Type	Nullable	Comment
AckId	Identifier	Yes	Example Identifier item

This corresponds to the following message being transmitted:

Message Header															Test Body			
URI From	Auth Id	URI To	Timestamp	QoS	Priority	Domain	Zone	Session	Interaction	Stage	Trans Id	Area	Service	Operation	Version	Is Error	First Item	Second Item
Consumer	Op A	Provider		BEST	1	A.B.C	GROUND	LIVE	INVOKE	1	1236	Example	Example	testInvoke	1	FALSE	Hello	1234

And corresponds to the following acknowledgement being returned:

Message Header															Test Ack		
URI From	Auth Id	URI To	Timestamp	QoS	Priority	Domain	Zone	Session	Interaction	Stage	Trans Id	Area	Service	Operation	Version	Is Error	Ack Id
Provider	SC X	Consumer		BEST	1	A.B.C	GROUND	LIVE	INVOKE	2	1236	Example	Example	testInvoke	1	FALSE	1234

And finally corresponds to the following response being returned:

Message Header															Test Response			
URI From	Auth Id	URI To	Timestamp	QoS	Priority	Domain	Zone	Session	Interaction	Stage	Trans Id	Area	Service	Operation	Version	Is Error	Rspn Item	Rspn Field
Provider	SC X	Consumer		BEST	1	A.B.C	GROUND	LIVE	INVOKE	3	1236	Example	Example	testInvoke	1	FALSE	True	31.0

NOTE – An actual service specification, rather than the example given here, would fully specify the meaning of, and required values of, all structures used by the service.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

### 3.5.5 PROGRESS INTERACTION PATTERN

#### 3.5.5.1 Overview

The PROGRESS pattern extends the INVOKE pattern to add a set of mandatory progress updates of the request message (figure 3-14). This allows the operation to confirm the receipt of the request before proceeding to process the request and also to show progress of the operation.

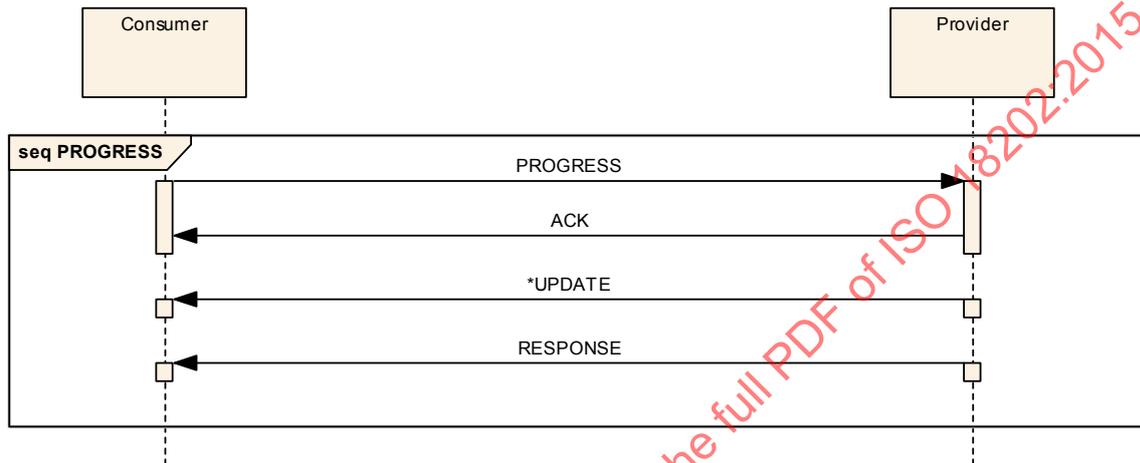


Figure 3-14: PROGRESS Interaction Pattern Message Sequence

#### 3.5.5.2 Description

The PROGRESS pattern extends the INVOKE pattern with the addition of a set of mandatory progress messages. The type of progress messages and their number is defined by the service and not by the pattern.


#### 3.5.5.3 Usage

The PROGRESS pattern is expected to be used when there is a significant or indeterminate amount of time taken to process the request and produce the data response, and where monitoring of the progress of the operation is required or the data response is to be returned in blocks.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

### 3.5.5.4 Error Handling

The PROGRESS pattern can report failure in three distinct ways:

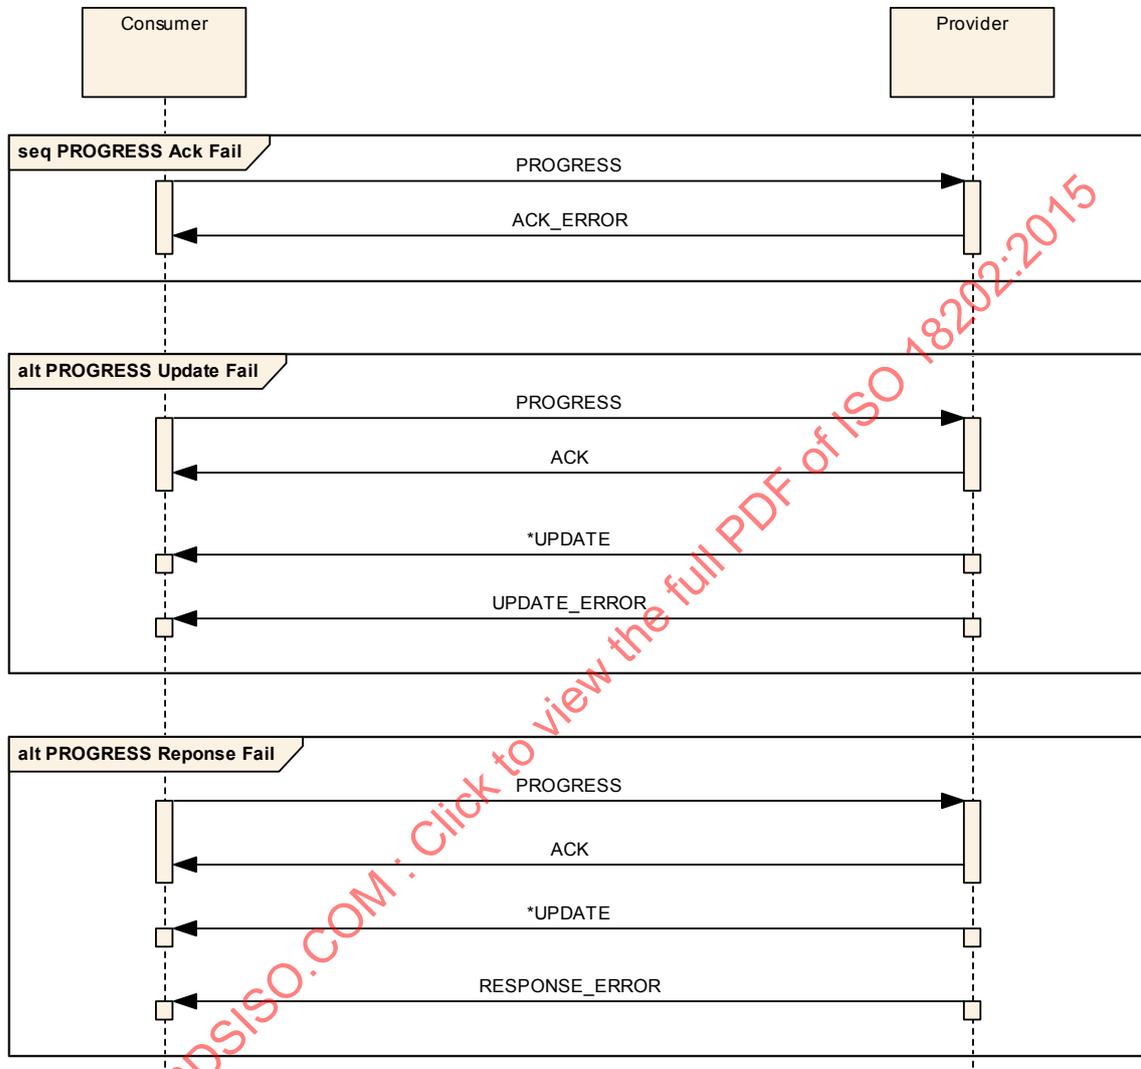

**Figure 3-15: PROGRESS Interaction Pattern Error Sequence**

- The acknowledgement may be replaced with an error message (see section 5) shown in the first sequence in figure 3-15.
- An error may be generated during the processing of the body of the operation, after the initial acknowledgement is sent, as shown in the second sequence in figure 3-15 and replaces any of the progress updates.
- An error may be generated after the updates and replace the final response as shown in the third sequence in figure 3-15.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

- d) After an error message is sent, no further messages shall be generated as part of the pattern.

### 3.5.5.5 Operation Template

The PROGRESS template is similar to the INVOKE pattern template but adds a progress update message:

**Table 3-18: PROGRESS Operation Template**

Operation Identifier	<<Operation name>>	
Interaction Pattern	PROGRESS	
Pattern Sequence	Message	Body Type
IN	PROGRESS	<<Request type>>
OUT	ACK	<<Ack type>>
OUT	UPDATE	<<Update value type>>
OUT	RESPONSE	<<Response type>>

### 3.5.5.6 Primitives

**Table 3-19: PROGRESS Primitive List**


Primitive
PROGRESS
ACK
ACK_ERROR
UPDATE
UPDATE_ERROR
RESPONSE
RESPONSE_ERROR

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

### 3.5.5.7 State Charts

#### 3.5.5.7.1 Consumer Side

Figure 3-16 shows the consumer side state chart for the PROGRESS pattern:

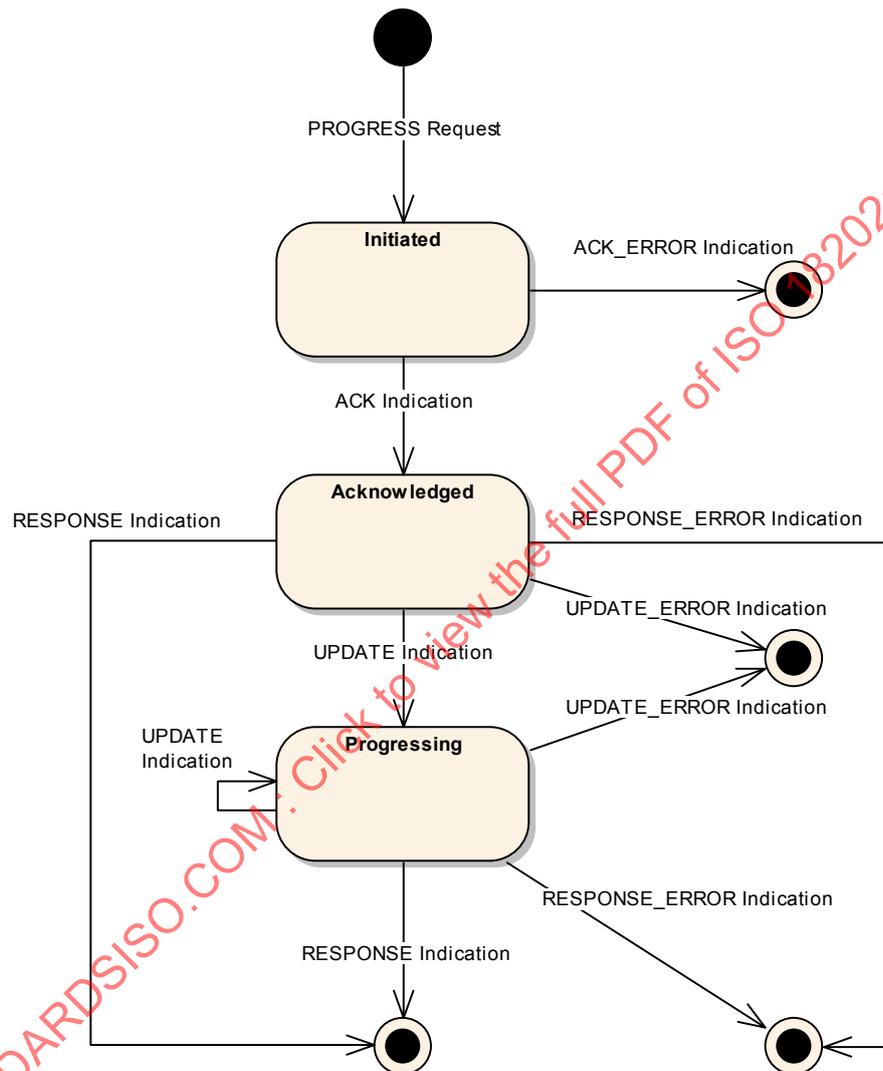

**Figure 3-16: PROGRESS Consumer State Chart**

- a) The initial transition is triggered by the primitive **PROGRESS Request** and shall lead to the **Initiated State**.
- b) There are two possible transitions from the **Initiated State**:
  - 1) the first is the indication of an acknowledgement, **ACK Indication**, and shall lead to the **Acknowledged State**;


CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

- 2) the second is the indication of an error, **ACK\_ERROR Indication**, and shall lead to the final state.
- c) There are four possible transitions from the **Acknowledged State**:
- 1) the first is the indication of an update, **UPDATE Indication**, and shall lead to the **Progressing State**;
  - 2) the second is the indication of an error in generating an initial update, **UPDATE\_ERROR Indication**, and shall lead to the final state;
  - 3) the third is the indication of a response, **RESPONSE Indication**, and shall lead to the final state;
  - 4) the fourth is the indication of an error in generating the response, **RESPONSE\_ERROR Indication**, and shall lead to the final state.
- d) There are four possible transitions from the **Progressing State**:
- 1) the first is the indication of another update, **UPDATE Indication**, and shall lead back to the **Progressing State**;
  - 2) the second is the indication of an error in generating an update, **UPDATE\_ERROR Indication**, and shall lead to the final state;
  - 3) the third is the indication of a response, **RESPONSE Indication**, and shall lead to the final state;
  - 4) the fourth is the indication of an error in generating the response, **RESPONSE\_ERROR Indication**, and shall lead to the final state.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

### 3.5.5.7.2 Provider Side

Figure 3-17 shows the provider side state chart for the PROGRESS pattern:

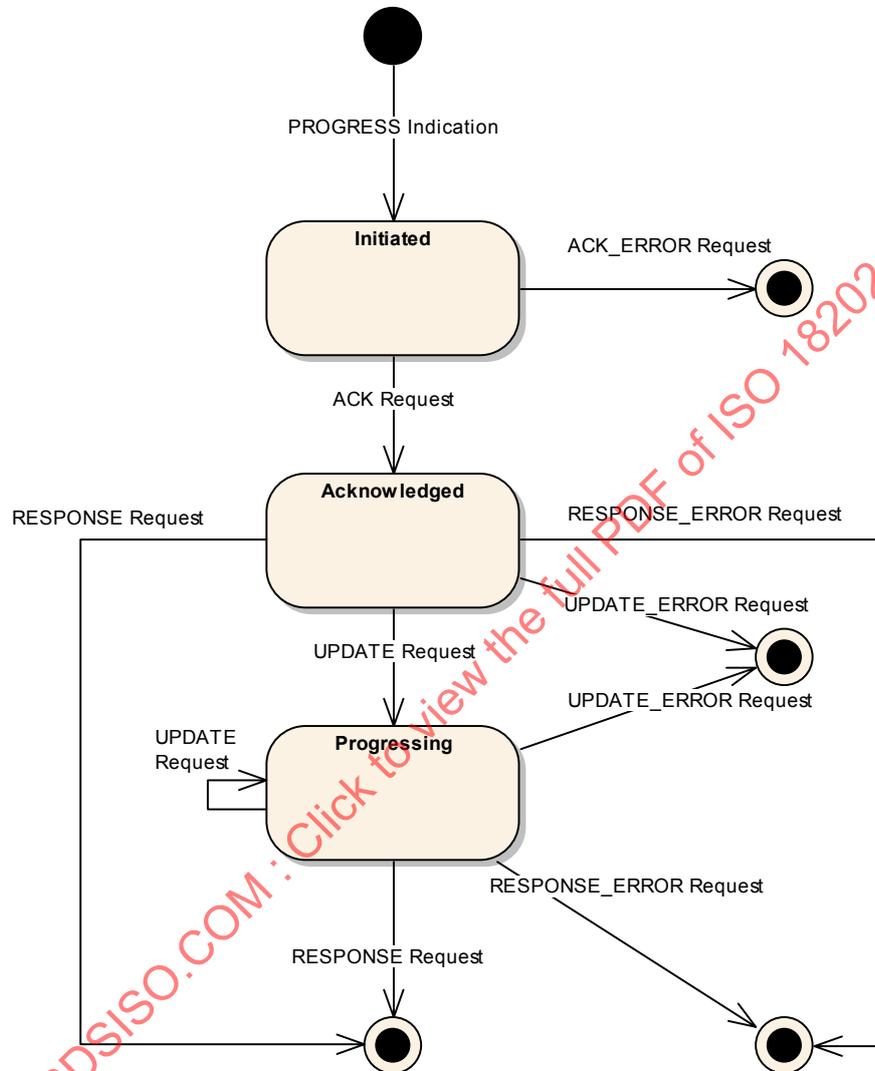

**Figure 3-17: PROGRESS Provider State Chart**

- a) The initial transition is triggered by the primitive **PROGRESS Indication** and shall lead to the **Initiated State**.
- b) There are two possible transitions from the **Initiated State**:
  - 1) the first is the transmission of an acknowledgement, **ACK Request**, and shall lead to the **Acknowledged State**;
  - 2) the second is the transmission of an error, **ACK\_ERROR Request**, and shall lead to the final state.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

- c) There are four possible transitions from the **Acknowledged State**:
- 1) the first is the transmission of an update, **UPDATE Request**, and shall lead to the **Progressing State**;
  - 2) the second is the transmission of an error in generating an initial update, **UPDATE\_ERROR Request**, and shall lead to the final state;
  - 3) the third is the transmission of a response, **RESPONSE Request**, and shall lead to the final state;
  - 4) the fourth is the transmission of an error in generating the response, **RESPONSE\_ERROR Request**, and shall lead to the final state.
- d) There are four possible transitions from the **Progressing State**:
- 1) the first is the transmission of another update, **UPDATE Request**, and shall lead back to the **Progressing State**;
  - 2) the second is the transmission of an error in generating an update, **UPDATE\_ERROR Request**, and shall lead to the final state;
  - 3) the third is the transmission of a response, **RESPONSE Request**, and shall lead to the final state;
  - 4) the fourth is the transmission of an error in generating the response, **RESPONSE\_ERROR Request**, and shall lead to the final state.

### 3.5.5.8 Requests and Indications

#### 3.5.5.8.1 PROGRESS

##### 3.5.5.8.1.1 Function

- a) The **PROGRESS Request** primitive shall be used by the consumer application to initiate a PROGRESS Interaction.
- b) The **PROGRESS Indication** primitive shall be used by the provider MAL to deliver a **PROGRESS Message** to a provider and initiate a PROGRESS Interaction.

##### 3.5.5.8.1.2 Semantics

**PROGRESS Request** and **PROGRESS Indication** shall provide parameters as follows:

(PROGRESS Message Header, PROGRESS Message Body, QoS properties)

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER**3.5.5.8.1.3 When Generated**

- a) A **PROGRESS Request** may be generated by the consumer application at any time.
- b) A **PROGRESS Indication** shall be generated by the provider MAL upon reception of a **PROGRESS Message**, once checked via the Access Control interface, from a consumer.

**3.5.5.8.1.4 Effect on Reception**

- a) Reception of a **PROGRESS Request** shall, once checked via the Access Control interface, cause the consumer MAL to initiate a **PROGRESS Interaction** by transmitting a **PROGRESS Message** to the provider.
- b) The consumer MAL shall enter the **Initiated State**.
- c) On reception of a **PROGRESS Indication** by a provider, the provider MAL shall enter the **Initiated State**.
- d) The provider shall then start processing the operation at this point.

**3.5.5.8.1.5 Message Header**

- a) For the **PROGRESS Message** the message header fields shall be as defined in 3.4 except for the fields in table 3-20.
- b) The contents of the Message Body, as specified in the operation template, shall immediately follow the message header.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

**Table 3-20: PROGRESS Message Header Fields**

Field	Value
URI From	Consumer URI
Authentication Id	Consumer Authentication Identifier
URI To	Provider URI
Interaction Type	PROGRESS
Interaction Stage	1
Transaction Id	Provided by consumer MAL

### 3.5.5.8.2 ACK

#### 3.5.5.8.2.1 Function

- a) The **ACK Request** primitive shall be used by the provider application to acknowledge a PROGRESS Interaction.
- b) The **ACK Indication** primitive shall be used by the consumer MAL to deliver an **ACK Message** to a consumer.

#### 3.5.5.8.2.2 Semantics

**ACK Request** and **ACK Indication** shall provide parameters as follows:

(ACK Message Header, ACK Message Body, QoS properties)

#### 3.5.5.8.2.3 When Generated

- a) An **ACK Request** shall be used by the provider application with the provider MAL in the **Initiated State** to acknowledge a PROGRESS Interaction.
- b) An **ACK Indication** shall be generated by the consumer MAL in the **Initiated State** upon reception of an **ACK Message**, once checked via the Access Control interface, from a provider.

#### 3.5.5.8.2.4 Effect on Reception

- a) Reception of an **ACK Request** shall, once checked via the Access Control interface, cause the provider MAL to transmit the supplied acknowledgement as an **ACK Message** to the consumer.
- b) A provider MAL in the **Initiated State** shall enter the **Acknowledged State**.
- c) On reception of an **ACK Indication** by the consumer, the consumer MAL shall enter the **Acknowledged State**.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

### 3.5.5.8.2.5 Message Header

- a) For the **ACK Message** the message header fields shall be as defined in 3.4 except for the fields in table 3-21.
- b) The contents of the Message Body, as specified in the operation template, shall immediately follow the message header.

**Table 3-21: Progress ACK Message Header Fields**

Field	Value
URI From	Provider URI
Authentication Id	Provider Authentication Identifier
URI To	Consumer URI
Interaction Type	PROGRESS
Interaction Stage	2
Transaction Id	Transaction Id from initial message

### 3.5.5.8.3 ACK\_ERROR

#### 3.5.5.8.3.1 Function

- a) The **ACK\_ERROR Request** primitive shall be used by the provider application to end a PROGRESS Interaction with an error.
- b) The **ACK\_ERROR Indication** primitive shall be used by the consumer MAL to deliver an **ACK\_ERROR Message** to a consumer.

#### 3.5.5.8.3.2 Semantics

**ACK\_ERROR Request** and **ACK\_ERROR Indication** shall provide parameters as follows:

(ACK\_ERROR Message Header, Error Number, Extra Information, QoS properties)

#### 3.5.5.8.3.3 When Generated

- a) An **ACK\_ERROR Request** shall be used by the provider application with the provider MAL in the **Initiated State** to transmit an error.
- b) An **ACK\_ERROR Indication** shall be generated by the consumer MAL in the **Initiated State** upon one of two events:
  - 1) the reception of an **ACK\_ERROR Message**, once checked via the Access Control interface, from a provider;

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

- 2) an error raised by the local communication layer.

**3.5.5.8.3.4 Effect on Reception**

- a) Reception of an **ACK\_ERROR Request** shall, once checked via the Access Control interface, cause the provider MAL to transmit an **ACK\_ERROR Message** to the consumer.
- b) The pattern shall end at this point for the provider.
- c) On reception of an **ACK\_ERROR Indication** a consumer shall end the interaction with an error.

**3.5.5.8.3.5 Message Header**

- a) For the **ACK\_ERROR Message** the message header fields shall be the same as for the **ACK Message** except for the 'Is Error Message' field which is set to TRUE.
- b) The Error information shall immediately follow the message header.

**3.5.5.8.4 UPDATE****3.5.5.8.4.1 Function**

- a) The **UPDATE Request** primitive shall be used by the provider application to transmit an update during a PROGRESS Interaction.
- b) The **UPDATE Indication** primitive shall be used by the consumer MAL to deliver an **UPDATE Message** to a consumer.

**3.5.5.8.4.2 Semantics**

**UPDATE Request** and **UPDATE Indication** shall provide parameters as follows:

(UPDATE Message Header, UPDATE Message Body, QoS properties)

**3.5.5.8.4.3 When Generated**

- a) An **UPDATE Request** shall be used by the provider application with the provider MAL in either the **Acknowledged State** or **Progressing State** to transmit an update to a PROGRESS interaction.
- b) An **UPDATE Indication** shall be generated by the consumer MAL in either the **Acknowledged State** or the **Progressing State** upon reception of an **UPDATE Message**, once checked via the Access Control interface, from a provider.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

#### 3.5.5.8.4.4 Effect on Reception

- a) Reception of an **UPDATE Request** shall, once checked via the Access Control interface, cause the provider MAL to transmit the supplied update as an **UPDATE Message** to the consumer.
- b) A provider MAL in the **Acknowledged State** shall enter the **Progressing State**.
- c) On reception of an **UPDATE Indication** by the consumer, the consumer MAL in the **Acknowledged State** shall enter the **Progressing State**.

#### 3.5.5.8.4.5 Message Header

- a) For the **UPDATE Message**, of which there may be several, the message header fields shall be as defined in 3.4 except for the fields in table 3-22.
- b) The contents of the Message Body, as specified in the operation template, shall immediately follow the message header.

**Table 3-22: Progress UPDATE Message Header Fields**

Field	Value
URI From	Provider URI
Authentication Id	Provider Authentication Identifier
URI To	Consumer URI
Interaction Type	PROGRESS
Interaction Stage	3
Transaction Id	Transaction Id from initial message

#### 3.5.5.8.5 UPDATE\_ERROR

##### 3.5.5.8.5.1 Function

- a) The **UPDATE\_ERROR Request** primitive shall be used by the provider application to end a PROGRESS Interaction with an error.
- b) The **UPDATE\_ERROR Indication** primitive shall be used by the consumer MAL to deliver an **UPDATE\_ERROR Message** to a consumer.

##### 3.5.5.8.5.2 Semantics

**UPDATE\_ERROR Request** and **UPDATE\_ERROR Indication** shall provide parameters as follows:

(UPDATE\_ERROR Message Header, Error Number, Extra Information, QoS properties)

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER**3.5.5.8.5.3 When Generated**

- a) An **UPDATE\_ERROR Request** shall be used by the provider application with the provider MAL in either the **Acknowledged State** or the **Progressing State** to transmit an error.
- b) An **UPDATE\_ERROR Indication** shall be generated by the consumer MAL in either the **Acknowledged State** or the **Progressing State** upon one of two events:
  - 1) the reception of an **UPDATE\_ERROR Message**, once checked via the Access Control interface, from a provider;
  - 2) an error raised by the local communication layer.

**3.5.5.8.5.4 Effect on Reception**

- a) Reception of an **UPDATE\_ERROR Request** shall, once checked via the Access Control interface, cause the provider MAL to transmit an **UPDATE\_ERROR Message** to the consumer.
- b) The pattern shall end at this point for the provider.
- c) On reception of an **UPDATE\_ERROR Indication** a consumer shall end the interaction with an error.

**3.5.5.8.5.5 Message Header**

- a) For the **UPDATE\_ERROR Message** the message header fields shall be the same as for the **UPDATE Message** except for the 'Is Error Message' field which is set to TRUE.
- b) The Error information shall immediately follow the message header.

**3.5.5.8.6 RESPONSE****3.5.5.8.6.1 Function**

- a) The **RESPONSE Request** primitive shall be used by the provider application to transmit a response to a PROGRESS Interaction.
- b) The **RESPONSE Indication** primitive shall be used by the consumer MAL to deliver a **RESPONSE Message** to a consumer.

**3.5.5.8.6.2 Semantics**

**RESPONSE Request** and **RESPONSE Indication** shall provide parameters as follows:

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

(RESPONSE Message Header, RESPONSE Message Body, QoS properties)

**3.5.5.8.6.3 When Generated**

- a) A **RESPONSE Request** shall be used by the provider application with the provider MAL in either the **Acknowledged State** or **Progressing State** to transmit a final response to a PROGRESS interaction.
- b) A **RESPONSE Indication** shall be generated by the consumer MAL in either the **Acknowledged State** or the **Progressing State** upon reception of a **RESPONSE Message**, once checked via the Access Control interface, from a provider.

**3.5.5.8.6.4 Effect on Reception**

- a) Reception of a **RESPONSE Request** shall, once checked via the Access Control interface, cause the provider MAL to transmit the supplied response as a **RESPONSE Message** to the consumer.
- b) The pattern shall end at this point for the provider.
- c) On reception of a **RESPONSE Indication** a consumer shall end the PROGRESS Interaction with success.

**3.5.5.8.6.5 Message Header**

- a) For the **RESPONSE Message** the message header fields shall be as defined in 3.4 except for the fields in table 3-23.
- b) The contents of the Message Body, as specified in the operation template, shall immediately follow the message header.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

**Table 3-23: Progress RESPONSE Message Header Fields**

Field	Value
URI From	Provider URI
Authentication Id	Provider Authentication Identifier
URI To	Consumer URI
Interaction Type	PROGRESS
Interaction Stage	4
Transaction Id	Transaction Id from initial message

### 3.5.5.8.7 RESPONSE\_ERROR

#### 3.5.5.8.7.1 Function

- a) The **RESPONSE\_ERROR Request** primitive shall be used by the provider application to end a PROGRESS Interaction with an error.
- b) The **RESPONSE\_ERROR Indication** primitive shall be used by the consumer MAL to deliver a **RESPONSE\_ERROR Message** to a consumer.

#### 3.5.5.8.7.2 Semantics

**RESPONSE\_ERROR Request** and **RESPONSE\_ERROR Indication** shall provide parameters as follows:

(RESPONSE\_ERROR Message Header, Error Number, Extra Information, QoS properties)

#### 3.5.5.8.7.3 When Generated

- a) A **RESPONSE\_ERROR Request** shall be used by the provider application with the provider MAL in either the **Acknowledged State** or **Progressing State** to transmit an error.
- b) A **RESPONSE\_ERROR Indication** shall be generated by the consumer MAL in either the **Acknowledged State** or the **Progressing State** upon one of two events:
  - 1) the reception of a **RESPONSE\_ERROR Message**, once checked via the Access Control interface, from a provider;
  - 2) an error raised by the local communication layer.

#### 3.5.5.8.7.4 Effect on Reception

- a) Reception of a **RESPONSE\_ERROR Request** shall, once checked via the Access Control interface, cause the provider MAL to transmit a **RESPONSE\_ERROR Message** to the consumer.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

- b) The pattern shall end at this point for the provider.
- c) On reception of a **RESPONSE\_ERROR Indication** a consumer shall end the interaction with an error.

#### 3.5.5.8.7.5 Message Header

- a) For the **RESPONSE\_ERROR Message** the message header fields shall be the same as for the **RESPONSE Message** except for the 'Is Error Message' field which is set to TRUE.
- b) The Error information shall immediately follow the message header.

#### 3.5.5.9 Example

The following example shows a simple example service that contains a single PROGRESS operation. The operation sends a TestBody structure, which is acknowledged with a TestAck structure, reports progress with a TestProgress structure, and returns a TestResponse structure:

Operation Identifier	testProgress	
Interaction Pattern	PROGRESS	
Pattern Sequence	Message	Body Type
IN	PROGRESS	TestBody
OUT	ACK	TestAck
OUT	UPDATE	TestProgress
OUT	RESPONSE	TestResponse

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

The TestBody structure is defined in 3.5.1.9, TestAck structure is defined in 3.5.4.9, and the TestResponse structure is defined in 3.5.3.9. The TestProgress structure is defined below:

Name	TestProgress		
Extends	Composite		
Short Form Part	Example Only		
Field	Type	Nullable	Comment
RspnStage	Integer	Yes	Example Integer item

This corresponds to the following message being transmitted:

Message Header																Test Body		
URI From	Auth Id	URI To	Timestamp	Domain	QoS	Priority	Zone	Session	Interaction	Stage	Trans Id	Area	Service	Operation	Version	Is Error	First Item	Second Item
Consumer	Op A	Provider		A.B.C	BEST	1	GROUND	LIVE	PROGRESS	1	1237	Example	Example	testProg	1	FALSE	Hello	1234

And corresponds to the following acknowledgement being returned:

Message Header																Test Ack	
URI From	Auth Id	URI To	Timestamp	Domain	QoS	Priority	Zone	Session	Interaction	Stage	Trans Id	Area	Service	Operation	Version	Is Error	Ack Id
Provider	SC X	Consumer		A.B.C	BEST	1	GROUND	LIVE	PROGRESS	2	1237	Example	Example	testProg	1	FALSE	1234

Progress is reported using the following message; in this example two stages are reported:

Message Header																Test Progress	
URI From	Auth Id	URI To	Timestamp	Domain	QoS	Priority	Zone	Session	Interaction	Stage	Trans Id	Area	Service	Operation	Version	Is Error	Rspn Stage
Provider	SC X	Consumer		A.B.C	BEST	1	GROUND	LIVE	PROGRESS	3	1237	Example	Example	testProg	1	FALSE	1

Message Header																Test Progress	
URI From	Auth Id	URI To	Timestamp	Domain	QoS	Priority	Zone	Session	Interaction	Stage	Trans Id	Area	Service	Operation	Version	Is Error	Rspn Stage
Provider	SC X	Consumer		A.B.C	BEST	1	GROUND	LIVE	PROGRESS	3	1237	Example	Example	testProg	1	FALSE	2

And finally corresponds to the following response being returned:

Message Header																Test Response		
URI From	Auth Id	URI To	Timestamp	Domain	QoS	Priority	Zone	Session	Interaction	Stage	Trans Id	Area	Service	Operation	Version	Is Error	Rspn Item	Rspn Field
Provider	SC X	Consumer		A.B.C	BEST	1	GROUND	LIVE	PROGRESS	4	1237	Example	Example	testProg	1	FALSE	True	31.0

NOTE – An actual service specification, rather than the example given here, would fully specify the meaning of, and required values of, all structures used by the service.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER


### 3.5.6 PUBLISH-SUBSCRIBE INTERACTION PATTERN

#### 3.5.6.1 Overview

The PUBLISH-SUBSCRIBE pattern provides the ability for consumers to register interest in a specific topic and receive updates from one or more providers without requiring awareness of the number of, and location of, these providers.

The basic outline of the pattern is consumers register interest by sending a subscription list; providers also register the list of entities they provide; providers publish updates; updates are then sent to registered consumers; and when no further updates are required the consumer cancels its subscription by deregistering.

The PUBLISH-SUBSCRIBE pattern can be deployed in two distinct ways, the first is where an intermediary shared message broker resides between the consumers and the providers (figure 3-18). In this deployment the shared broker permits a decoupling of the consumer from the providers, receiving the subscriptions from consumers and the updates from providers, and is responsible for dispatching the required updates to registered consumers:

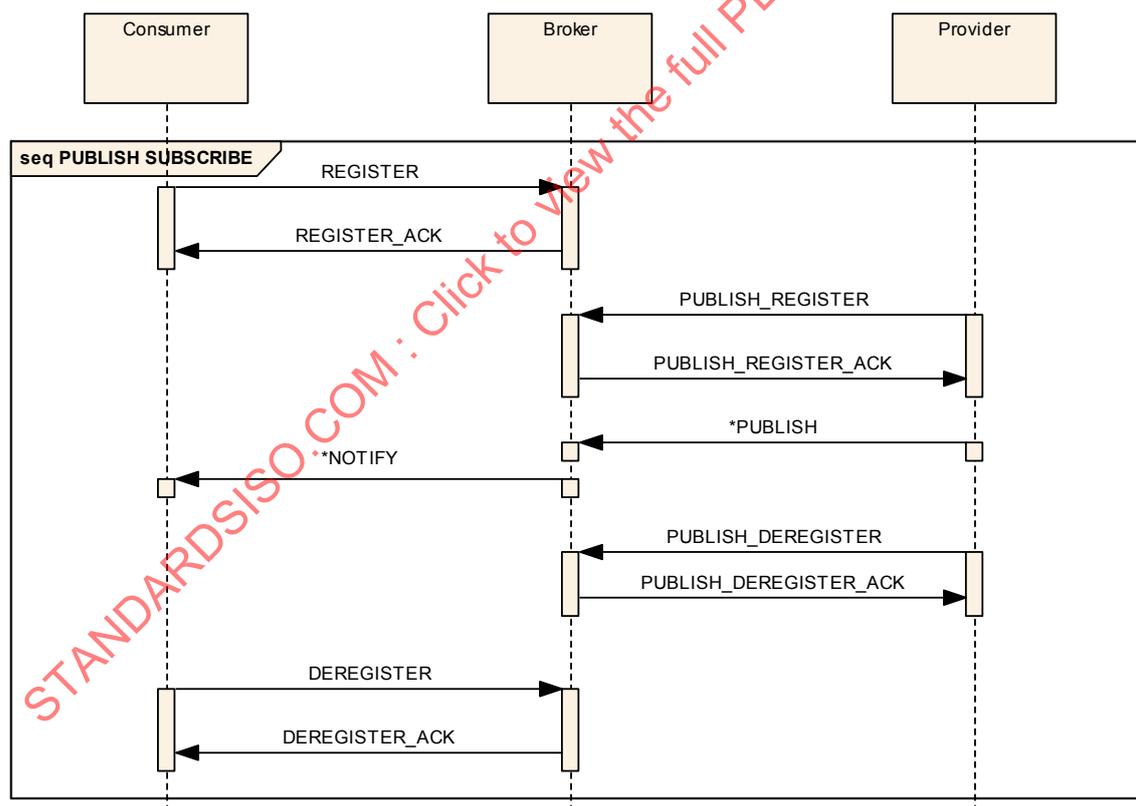

**Figure 3-18: PUBLISH-SUBSCRIBE Interaction Pattern Message Sequence**

The shared message broker manages the consumer subscription lists; the providers are not aware of what consumers there are and what entities they require. Because of this they must

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER


publish all items they are configured to generate to the broker so that it can manage the updates to the consumers.

At a later time, when updates are no longer required, the consumer can deregister for these updates from the message broker.

The broker acknowledges both the consumer and provider register/deregister operations; these are treated like normal SUBMIT messages. No acknowledgement of the publish message is provided by the broker and no acknowledgement by the consumer of the notify message is required.

The second deployment of the PUBLISH-SUBSCRIBE pattern is when there is a single update provider and the message broker is private to it. This is an example of an observe type relationship where a consumer observes some aspect of a specific provider.

In this deployment, because of the one-to-one relationship between the consumer and the provider, the functionality of the message broker does not necessarily require a separate entity. It is completely possible for the message broker logic to reside in the provider application; the provider publishes updates to itself for distribution to consumers (figure 3-19):

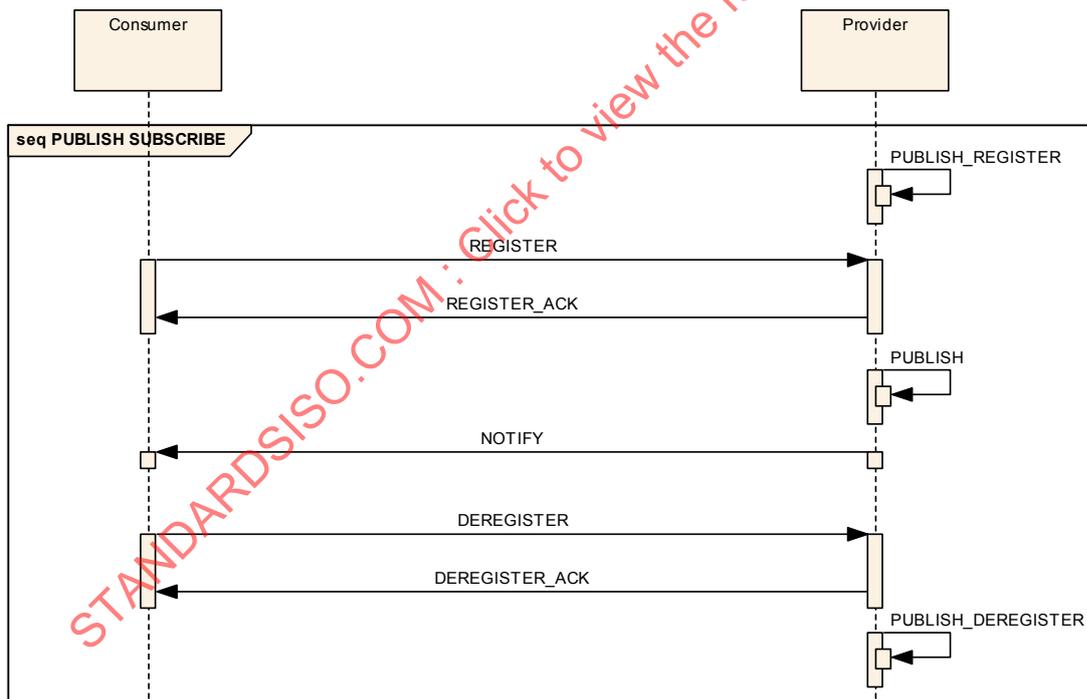

**Figure 3-19: PUBLISH-SUBSCRIBE Pattern Alternative Message Sequence**

However, because the pattern is still the same, all features of the first deployment (multiple concurrent subscription lists) are still supported.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

In terms of implementation, for both the shared or private broker pattern, there are three primary implementation designs (others may exist, however). The first is where the broker logic resides in the MAL layer, the second is where it is natively supported by the message transport technology used, and the third is where it is implemented as a standalone component external to the MAL. In all three cases the pattern of interaction is the same; it is only the physical location of the broker that changes.

### 3.5.6.2 Description

The PUBLISH-SUBSCRIBE pattern for both the consumer and provider register/deregister has a predefined pattern message structure which allows an implementation of the message broker to manage the mapping of consumers to updates and hide this complexity from Provider applications.

### 3.5.6.3 Subscriptions

A consumer informs the broker of the updates to send it by the use of subscriptions. Subscriptions are sent during the registration.

- a) A single consumer may define many subscription lists concurrently by specifying a different subscription identifier during the registration.
- b) To change the contents of a subscription list a consumer may redefine it by registering a new list with the same identifier. The consumer is not required to deregister the subscription first.
- c) For a broker the replacement of a subscription is an atomic operation; no updates shall be missed as a result of the subscription replacement operation.
- d) The URI of the consumer and the subscription identifier shall form the unique identifier of the subscription; this means that two consumers cannot share subscriptions, as they have different consumer URIs.
- e) The consumer deregister message takes a list of identifiers of the subscription lists to cancel and shall completely remove the subscriptions from the list of active subscriptions.
- f) The update rate shall be an aspect of a provider; the consumer cannot specify it.

For example, if a consumer initially registers for updates on the set (A, B, C) but at a later date requires also 'D', another register message is required to be sent with the set (A, B, C, D). The register call replaces the previous subscription list with the new list. The deregister message completely cancels the identified lists.

Another way of describing this is the register message defines an update 'report' and the deregister message clears that 'report' definition.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

NOTE – If a single subscription definition lists the same parameter more than once, only one update is sent to the consumer for that list. However, if a consumer defines two concurrent subscription lists that request the same parameters, then the consumer will receive two updates of those common parameters, one for each subscription. If this is an issue, then the consumer still has the option of maintaining a single subscription and splitting the results internally.

### 3.5.6.4 Entity Identification

The identity of an entity is composed of two parts: specific fields from the message header and an Entity Key (see 4.4.7 for the type definition):

- a) The domain, session type and name, area, service, and operation identifiers of the message header shall form the first part of the Entity identification.
- b) The network identifier shall be ignored and does not form part of the Entity identification.
- c) The Entity Key is a composite structure that contains four sub-keys and shall form the second part of the Entity identification.
- d) Entities shall not use the '\*' value for the first sub-key as this is reserved for the wildcard value (see 3.5.6.5).
- e) Entities shall not use the zero value for the second, third, and fourth sub-keys as this is reserved for the wildcard value (see 3.5.6.5).
- f) The combination of the message header fields and the Entity Key in a message shall form the complete Entity identification.

### 3.5.6.5 Subscription Matching

This subsection details the rules for subscription matching in the PUBLISH-SUBSCRIBE pattern. The subscription is matched on three aspects: the Entity Key, the optional subDomain field of the Entity Request, and the message header fields.

The following paragraphs detail the rules for Entity Key matching:

- a) A sub-key specified in the EntityKey structure shall take one of three types of value: an actual value, a NULL value, and the special wildcard value of '\*' (for the first sub-key only) or zero (for the other three sub-keys).
- b) If a sub-key contains a specific value it shall only match a sub-key that contains the same value. This includes an empty '' value for the first sub-key. The matches are case sensitive.
- c) If a sub-key contains a NULL value it shall only match a sub-key that contains NULL.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

- d) If a sub-key contains the wildcard value it shall match a sub-key that contains any value including NULL.

For example, suppose a provider is publishing a set of updates with the following keys (the dot notation is used to separate the sub-keys; all four sub-keys must be provided):

- 1) A.[null].[null].[null]
- 2) A.2.[null].[null]
- 3) A.2.3.[null]
- 4) A.2.3.4
- 5) B.[null].[null].[null]
- 6) Q.2.3.[null]

An EntityRequest using the key of 'A.[null].[null].[null]' would only match to the first update.

An EntityRequest using the key of 'A.0.[null].[null]' would only match to the first and second updates.

An EntityRequest using the key of 'A.0.0.0' would match to all but the last two updates.

An EntityRequest using the key of 'A.2.[null].[null]' would only match the second update.

An EntityRequest using the key of 'A.2.0.[null]' would only match to updates 2 and 3.

An EntityRequest using the key of '\*.2.0.[null]' would only match to updates 2, 3 and 6.

An EntityRequest using the key of 'B.0.0.0' would only match to update 5.

NOTE – The meaning of the entity key value is context-specific and must be detailed in the relevant service specification.

The following paragraphs detail the rules for message header field matching of the subscription and update message:

- e) The domain of the update message shall match the domain of the subscription message.
- f) If the subscription EntityRequest included a subDomain field, then this shall be appended to the domain of the subscription message to make the complete domain for that request.
- g) The final Identifier of the subDomain may be the wildcard character '\*'.  
The session types and names must match.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

- i) The network identifiers shall be ignored.
- j) The area identifiers must match unless the subscription specified True in the allAreas field of the EntityRequest, in which case they shall be ignored.
- k) The service identifiers must match unless the subscription specified True in the allServices field of the EntityRequest, in which case they shall be ignored.
- l) The operation identifiers must match unless the subscription specified True in the allOperations field of the EntityRequest, in which case they shall be ignored.

For example, suppose a provider is publishing a set of updates with the following domains (the dot notation is used to separate the sub-domains):

- 1) spacecraftA
- 2) spacecraftA.aocs
- 3) spacecraftA.aocs.thrustA
- 4) spacecraftA.payload
- 5) spacecraftA.payload.cameraA.tempB
- 6) spacecraftB
- 7) agency.spacecraftA

Therefore a subscription message with the domain of 'spacecraftA' and a NULL subDomain field would only match the first update.

A subscription message with the domain of 'spacecraftA' and a subDomain field set to 'aocs' would only match the second update.

A subscription message with the domain of 'spacecraftA' and a subDomain field set to 'payload.\*' would match the fourth and fifth updates.

A subscription message with the domain of 'spacecraftA' and a subDomain field set to '\*' would match updates 1 to 5.


### 3.5.6.6 Usage

The PUBLISH-SUBSCRIBE pattern provides the ability for asynchronous updates to be sent to registered consumers.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

### 3.5.6.7 Error Handling

The PUBLISH-SUBSCRIBE pattern can report failure for a consumer in two distinct ways:

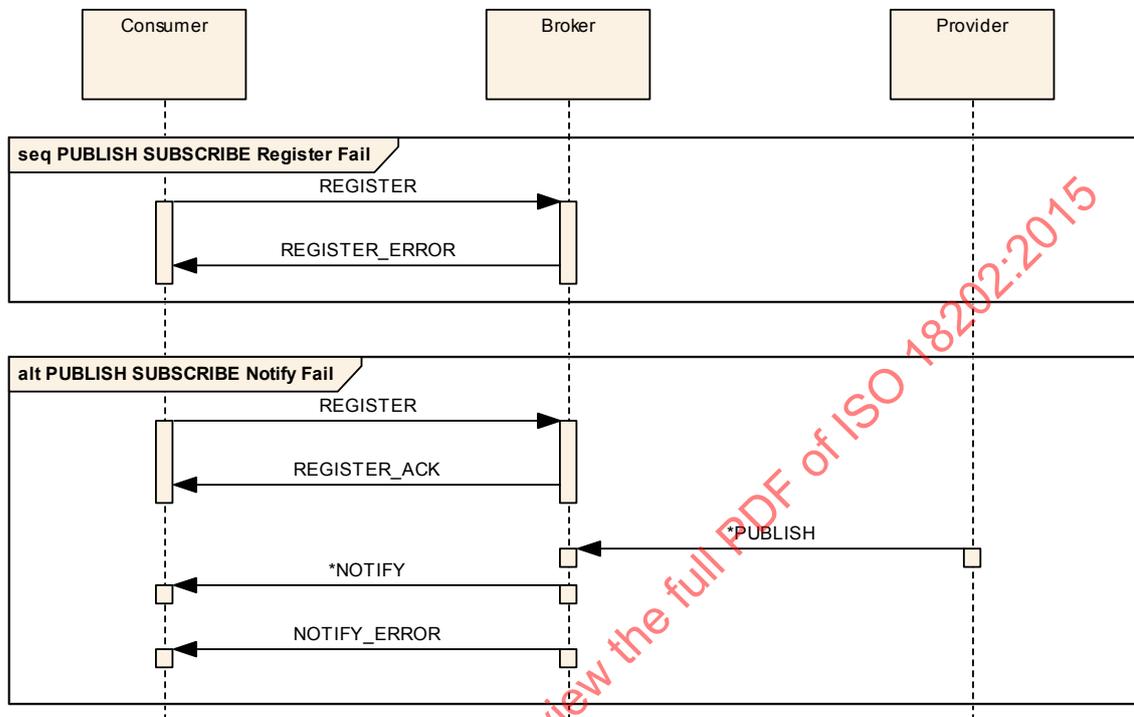


**Figure 3-20: PUBLISH-SUBSCRIBE Interaction Pattern Consumer Error Sequence**

- The register acknowledgement may be replaced with an error message (see section 5) shown in the first sequence in figure 3-20.
- A notify may be replaced by an error by the message broker shown in the second sequence in figure 3-20.
- After an error message is sent no further messages shall be transmitted to the relevant consumer as part of the pattern.

For a publisher the PUBLISH-SUBSCRIBE pattern can report failure in two distinct ways:

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

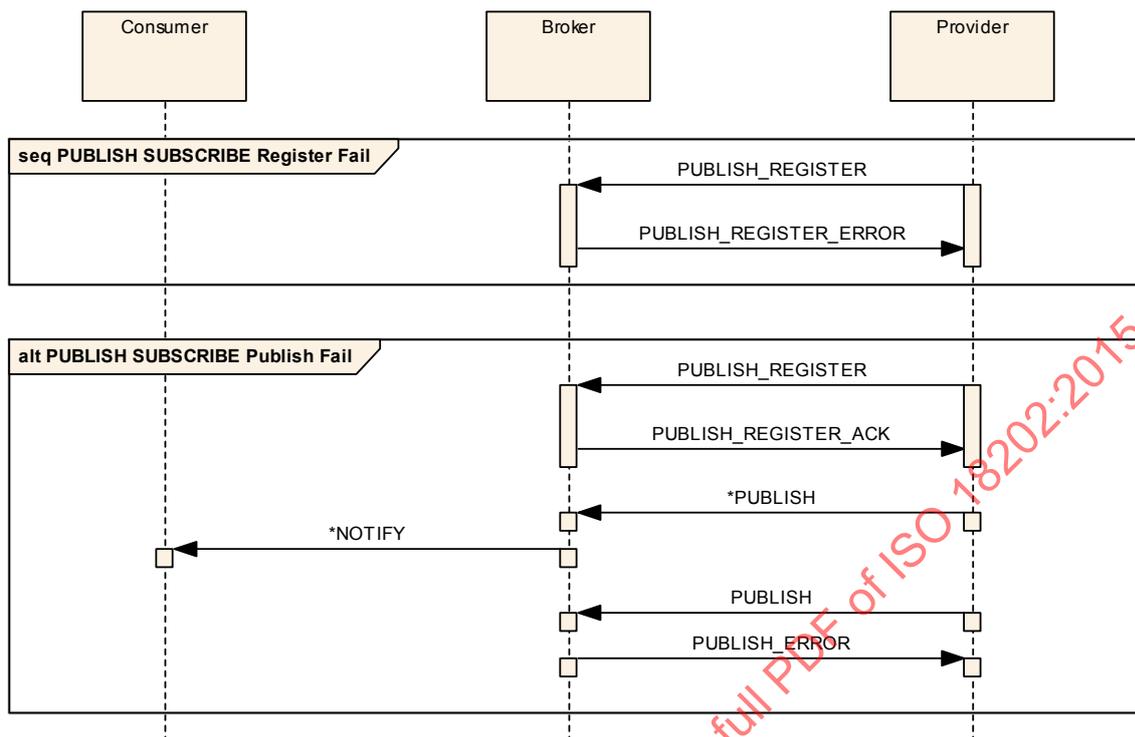

**Figure 3-21: PUBLISH-SUBSCRIBE Interaction Pattern Provider Error Sequence**

- a) The publish register acknowledgement may be replaced with an error message (see section 5) shown in the first sequence in figure 3-21.
- b) After a PUBLISH\_REGISTER\_ERROR message is sent no further messages shall be transmitted to or from the relevant publisher as part of the pattern.
- c) When an error is detected by the message broker on reception of a PUBLISH message from a provider, a PUBLISH\_ERROR message shall be sent to the provider as shown in the second sequence in figure 3-21. The error is sent asynchronously to the provider.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

### 3.5.6.8 Operation Template

The PUBLISH-SUBSCRIBE template is below:

**Table 3-24: PUBLISH-SUBSCRIBE Operation Template**

Operation Identifier	<<Operation name>>	
Interaction Pattern	PUBLISH-SUBSCRIBE	
Pattern Sequence	Message	Body Type
OUT	PUBLISH/NOTIFY	<<Update value type>>

- a) The PUBLISH/NOTIFY message shall follow the same rules for message bodies (as defined in 3.4.23.4.2.2, where the message body may be composed of several types. Subsection 3.5.6.12 provides an example of this for this interaction pattern.
- b) A single update shall require a value for each type listed in the operation template in the case where it is defined using multiple types. Subsection 3.5.6.12 provides an example of this for this interaction pattern.
- c) The update value type shall be the structure that is passed in the provider-to-broker PUBLISH and broker-to-consumer NOTIFY messages.
- d) The PUBLISH-SUBSCRIBE pattern is actually made up of consumer and provider register/deregister, publish, and notify messages, the templates of which are given below. The message directions (IN/OUT) are all from the point of view of the broker, as it is involved in all operations:

**Table 3-25: PUBLISH-SUBSCRIBE Register Operation Template**

Operation Identifier	register<< PUBLISH-SUBSCRIBE Operation Name>>	
Interaction Pattern	SUBMIT	
Pattern Sequence	Message	Body Type
IN	REGISTER	Subscription

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

**Table 3-26: PUBLISH-SUBSCRIBE Publish Register Operation Template**

Operation Identifier	publishRegister<< PUBLISH-SUBSCRIBE Operation Name>>	
Interaction Pattern	SUBMIT	
Pattern Sequence	Message	Body Type
IN	PUBLISH_REGISTER	List<EntityKey>

**Table 3-27: PUBLISH-SUBSCRIBE Publish Operation Template**

Operation Identifier	publish<< PUBLISH-SUBSCRIBE Operation Name>>	
Interaction Pattern	SEND	
Pattern Sequence	Message	Body Type
IN	PUBLISH	List<UpdateHeader> List< <<Update Value Type>> >

**Table 3-28: PUBLISH-SUBSCRIBE Publish Error Operation Template**

Operation Identifier	publishError<< PUBLISH-SUBSCRIBE Operation Name>>	
Interaction Pattern	SEND	
Pattern Sequence	Message	Body Type
OUT	PUBLISH_ERROR	UInteger Element

**Table 3-29: PUBLISH-SUBSCRIBE Notify Operation Template**

Operation Identifier	notify<< PUBLISH-SUBSCRIBE Operation Name>>	
Interaction Pattern	SEND	
Pattern Sequence	Message	Body Type
OUT	NOTIFY	Identifier List<UpdateHeader> List< <<Update Value Type>> >

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

**Table 3-30: PUBLISH-SUBSCRIBE Notify Error Operation Template**

Operation Identifier	notifyError<< PUBLISH-SUBSCRIBE Operation Name>>	
Interaction Pattern	SEND	
Pattern Sequence	Message	Body Type
OUT	NOTIFY_ERROR	UInteger Element

**Table 3-31: PUBLISH-SUBSCRIBE Deregister Operation Template**

Operation Identifier	deregister<< PUBLISH-SUBSCRIBE Method Name>>	
Interaction Pattern	SUBMIT	
Pattern Sequence	Message	Body Type
IN	DEREGISTER	List<Identifier>

**Table 3-32: PUBLISH-SUBSCRIBE Publish Deregister Operation Template**

Operation Identifier	publishDeregister<< PUBLISH-SUBSCRIBE Method Name>>	
Interaction Pattern	SUBMIT	
Pattern Sequence	Message	Body Type
IN	PUBLISH_DEREGISTER	

The contents of these messages are fixed and therefore not present in the operation template for PUBLISH-SUBSCRIBE. However, they are directly affected by the template as described below:

- a) The consumer register method takes a subscription which is composed of an identifier and a list of entity requests. The identifier shall be used by the broker to uniquely identify the subscription when combined with the consumer URI; this allows a consumer to set up several different concurrent subscriptions.
- b) Each subscription shall contain a list of individual entity requests which contain an optional sub-domain, an entity key and an indication of whether updates are required only on change (creation/modification/deletion update types) or for all updates.
- c) The provider register message contains a list of entity keys that the provider shall provide updates for.
- d) No other entity keys shall be published by that provider.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

- e) If a provider registers an entity key containing a wildcard for a sub-key then the broker shall allow the provider to publish an update with any value for that sub-key.
- f) If a provider publishes an update for an entity that it has not previously registered then the broker shall return an UNKNOWN error in a PUBLISH\_ERROR message.
- g) The extra information part of the Error message shall be an EntityKey list that contains the list of entity keys that were unknown.
- h) The list of entities allowed to be published by a provider may be replaced by another publish register message.
- i) This list shall completely replace the existing list for that provider.
- j) The provider-to-broker publish message shall match the provider register message on the session type, session name, area identifier, service identifier, and operation identifier.
- k) The provider-to-broker publish message domain shall match exactly, or be a sub-domain of (see 3.5.6.5), the domain of the provider register message.
- l) A PUBLISH message body shall contain an UpdateHeader list followed by a list of each type defined in the top-level PUBSUB template. For example, a PUBSUB operation defined using the types of [Boolean, Octet, MyComposite] will result in a PUBLISH message with the body containing [List<UpdateHeader>, List<Boolean>, List<Octet>, List<MyComposite>].
- m) For each update being published there shall be an entry in the UpdateHeader list and an entry in each update value list.
- n) The lists in the PUBLISH message shall be identically ordered so that the corresponding UpdateHeader and update values can be matched.
- o) Each UpdateHeader shall contain the timestamp of the update, the sourceURI of the provider (used to identify the source of an update when multiple providers are using a shared broker), an Enumeration denoting if it is considered a new object, an update, a modification, or an object deletion by the provider (context specific), and then the update entity key.
- p) The EntityKey of the Update shall not contain the wildcard value.
- q) Each update, as listed above, shall be one of four possible types: creation, update, modification, or deletion:
  - 1) A creation notification shall be used when a new object has been created in the provider (for example, a new parameter is now being published by a service provider).
  - 2) An update notification shall be used when an object's value has not changed but a new update of it has been generated (for example, a periodic update of a telemetry parameter).

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

- 3) A modification notification shall be used when an object's value has changed from the previously generated notification (for example, a changed telemetry value update).
- 4) A deletion notification shall be used when an object is being removed from the provider (for example, an existing parameter is no longer being published by a service provider).
- r) The broker-to-consumer NOTIFY message body shall contain a single Identifier, an UpdateHeader list followed by a list of each type defined in the top-level PUBSUB template, and hold the update set for a single subscription. For example, a PUBSUB operation defined using the types of [Boolean, Octet, MyComposite] will result in a NOTIFY message with the body containing [Identifier, List<UpdateHeader>, List<Boolean>, List<Octet>, List<MyComposite>].
- s) The single Identifier in the notify message shall contain the subscription identifier for the subscription being notified.
- t) In the NOTIFY message there shall be an update value list for each type defined in the top level PUBSUB template.
- u) For each update being notified there shall be an entry in the UpdateHeader list and an entry in the update value lists.
- v) The lists in the NOTIFY message shall be identically ordered so that the corresponding UpdateHeader and update values can be matched.
- w) The consumer deregister message shall take a list of identifiers of the active subscription lists to cancel.
- x) The provider deregister message takes no arguments. It shall completely remove the provider from the set of providers from which updates are permitted.
- y) In all cases, for consumer/provider register and deregister, the acknowledge message shall only be sent when the registration/deregistration has completed and is a confirmation that the operation has succeeded.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

## 3.5.6.9 Primitives

Table 3-33: PUBLISH-SUBSCRIBE Primitive List

Primitive
REGISTER
REGISTER_ACK
REGISTER_ERROR
PUBLISH_REGISTER
PUBLISH_REGISTER_ACK
PUBLISH_REGISTER_ERROR
PUBLISH
PUBLISH_ERROR
NOTIFY
NOTIFY_ERROR
DEREGISTER
DEREGISTER_ACK
PUBLISH_DEREGISTER
PUBLISH_DEREGISTER_ACK

## 3.5.6.10 State Charts

## 3.5.6.10.1 General

Several state charts are defined:

- one state chart on the consumer side related to the interaction between the consumer and the broker;
- one state chart on the broker side related to the interaction between the consumer and the broker;

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

- one state chart on the provider side related to the interaction between the provider and the broker;
- another state chart on the broker side related to the interaction between the provider and the broker.

3.5.6.10.2 Consumer Side

Figure 3-22 shows the consumer side state chart for the PUBLISH-SUBSCRIBE pattern:

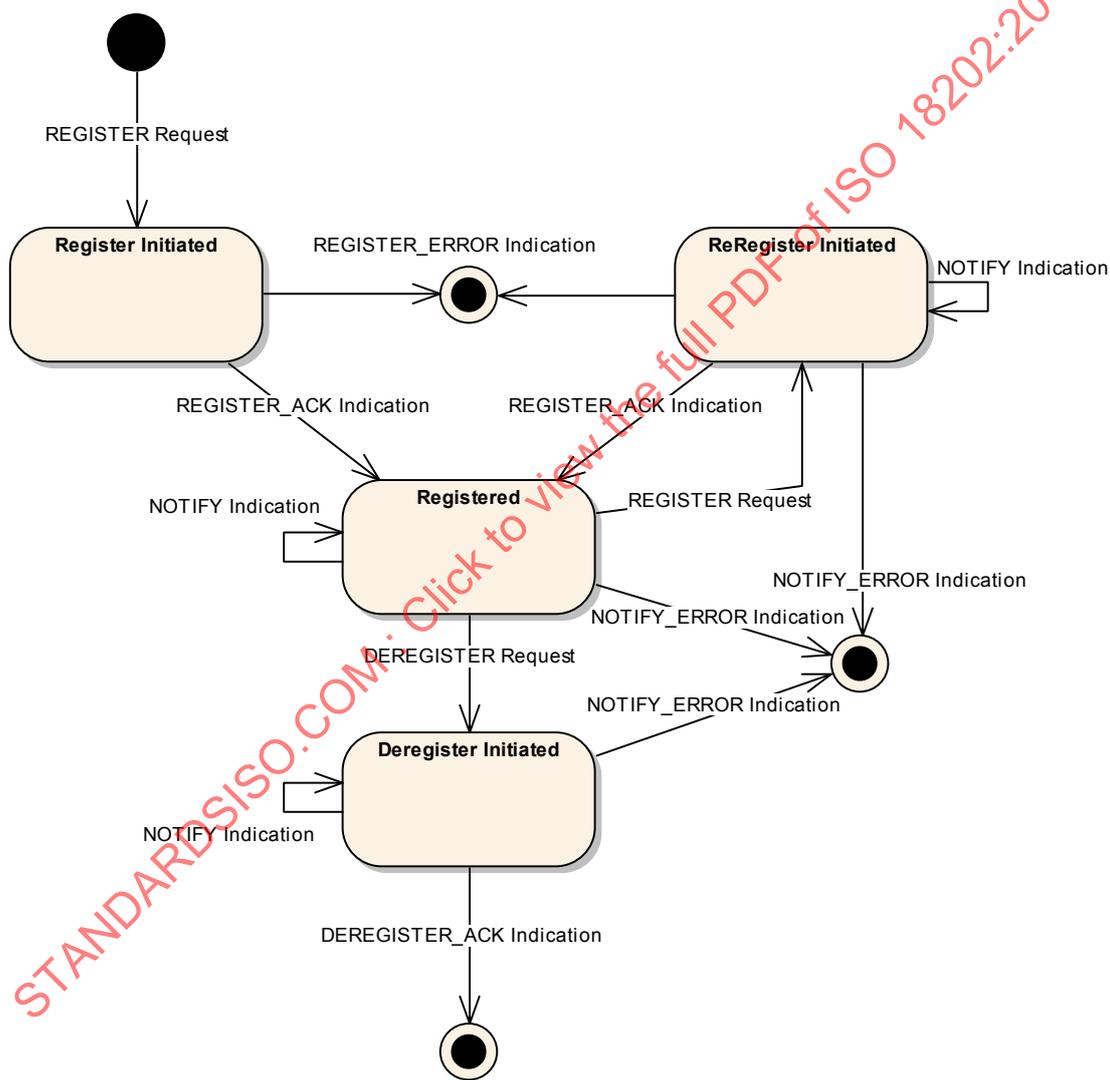


Figure 3-22: PUBLISH-SUBSCRIBE Consumer State Chart

- a) The state chart applies to a single subscription for a single consumer, the state chart shall be replicated for each consumer and for each subscription.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

- b) The transaction identifier of the initial **REGISTER Message** shall be used to identify messages that relate to one PUBLISH-SUBSCRIBE interaction to avoid race conditions.
- c) The initial transition is triggered by the primitive **REGISTER Request** and shall lead to the **Register Initiated State**.
- d) There are two possible transitions from the **Register Initiated State**:
- 1) the first is the indication of an acknowledgement, **REGISTER\_ACK Indication**, and shall lead to the **Registered State**;
  - 2) the second is the indication of an error, **REGISTER\_ERROR Indication**, and shall lead to the final state.
- e) There are four possible transitions from the **Registered State**:
- 1) the first is the indication of a notification, **NOTIFY Indication**, and shall lead back to the **Registered State**;
  - 2) the second is the indication of an error, **NOTIFY\_ERROR Indication**, and shall lead to the final state;
  - 3) the third transition shall be triggered by the primitive **DEREGISTER Request** and shall lead to the **Deregister Initiated State**;
  - 4) the fourth transition shall be triggered by the primitive **REGISTER Request** and shall lead to the **ReRegister Initiated State**.
- f) There are four possible transitions from the **ReRegistered Initiated State**:
- 1) The first is the indication of a notification, **NOTIFY Indication**, and shall lead back to the **ReRegistered Initiated State**. In this case the **NOTIFY Message** will have been sent before the **REGISTER Message** was received by the broker and therefore forms part of the previous subscription. It shall, however, be passed to the consumer application as normal.
  - 2) The second is the indication of a registration error, **REGISTER\_ERROR Indication**, and shall lead to the final state.
  - 3) The third is the indication of a notify error, **NOTIFY\_ERROR Indication**, and shall lead to the final state. In this case the **NOTIFY\_ERROR Message** will have been sent before the **REGISTER Message** was received by the broker and therefore forms part of the previous subscription. It shall, however, be passed to the consumer application as normal. The transaction identifier shall be used by the broker to ensure that the reception of the **REGISTER Message** after the **NOTIFY\_ERROR Message** was sent shall not cause the restart of the subscription.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER


- 4) The fourth transition is the indication of an acknowledgement, **REGISTER\_ACK Indication**, and shall lead to the **Registered State**.
- g) There are three possible transitions from the **Deregister Initiated State**:
  - 1) the first is the indication of a notification, **NOTIFY Indication**, and shall lead back to the **Deregister Initiated State**;
  - 2) the second is the indication of an error, **NOTIFY\_ERROR Indication**, and shall lead to the final state;
  - 3) the third transition is the indication of an acknowledgement, **DEREGISTER\_ACK Indication**, and shall lead to the final state.

STANDARDSISO.COM : Click to view the full PDF of ISO 18202:2015

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

### 3.5.6.10.3 Broker Side (Related to the Consumer)

Figure 3-23 shows the broker to consumer state chart for the PUBLISH-SUBSCRIBE pattern:

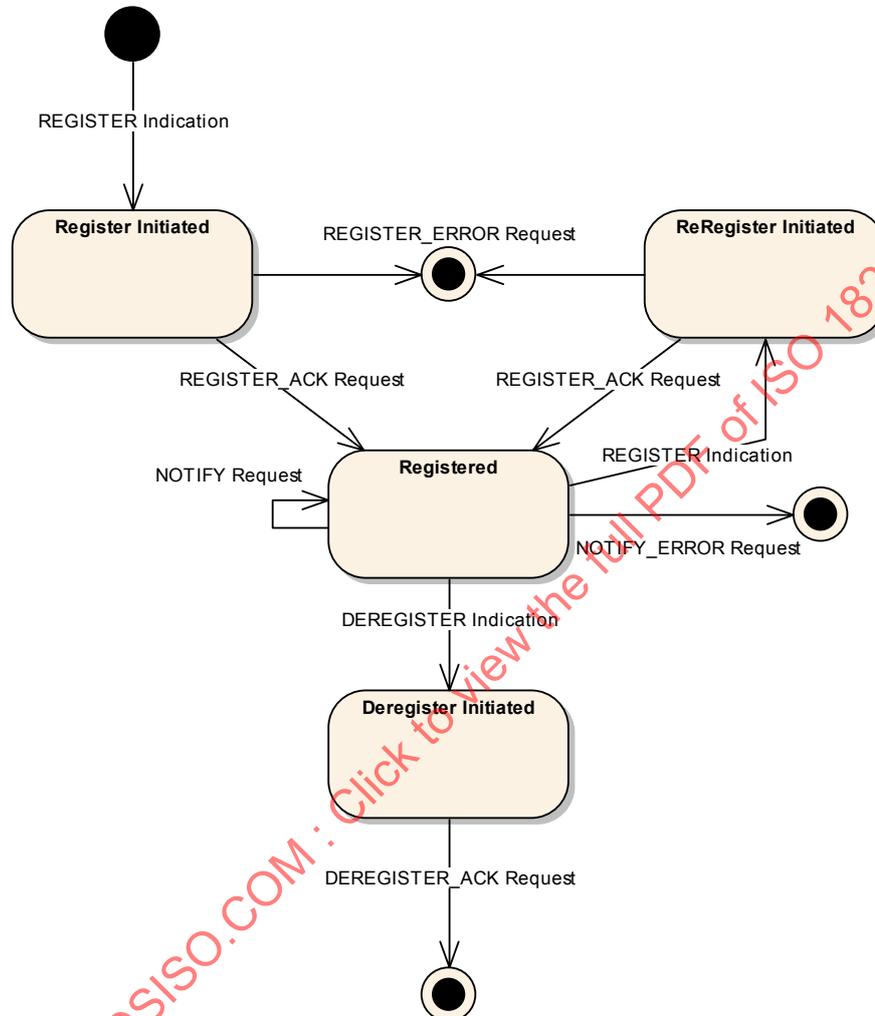

**Figure 3-23: PUBLISH-SUBSCRIBE Broker to Consumer State Chart**

- a) The state chart applies to a single subscription for a single consumer. The state chart shall be replicated for each consumer and for each subscription.
- b) The initial transition is triggered by the primitive **REGISTER Indication** and shall lead to the **Register Initiated State**.
- c) There are two possible transitions from the **Register Initiated State**:
  - 1) the first is the triggering of an acknowledgement, **REGISTER\_ACK Request**, and shall lead to the **Registered State**;


CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

- 2) the second is the triggering of an error, **REGISTER\_ERROR Request**, and shall lead to the final state.
- d) There are four possible transitions from the **Registered State**;
- 1) the first is the triggering of a notification, **NOTIFY Request**, and shall lead back to the **Registered State**;
  - 2) the second is the triggering of an error, **NOTIFY\_ERROR Request**, and shall lead to the final state;
  - 3) the third transition shall be triggered by the primitive **DEREGISTER Indication** and shall lead to the **Deregister Initiated State**;
  - 4) the fourth transition shall be triggered by the primitive **REGISTER Indication** and shall lead to the **ReRegister Initiated State**.
- e) There are two possible transitions from the **ReRegister Initiated State**:
- 1) the first is the triggering of an acknowledgement, **REGISTER\_ACK Request**, and shall lead to the **Registered State**;
  - 2) the second is the triggering of an error, **REGISTER\_ERROR Request**, and shall lead to the final state.
- f) There is only one possible transition from the **Deregister Initiated State**; it is the triggering of an acknowledgement, **DEREGISTER\_ACK Request**, and shall lead to the final state.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

### 3.5.6.10.4 Provider Side

Figure 3-24 shows the provider side state chart for the PUBLISH-SUBSCRIBE pattern:

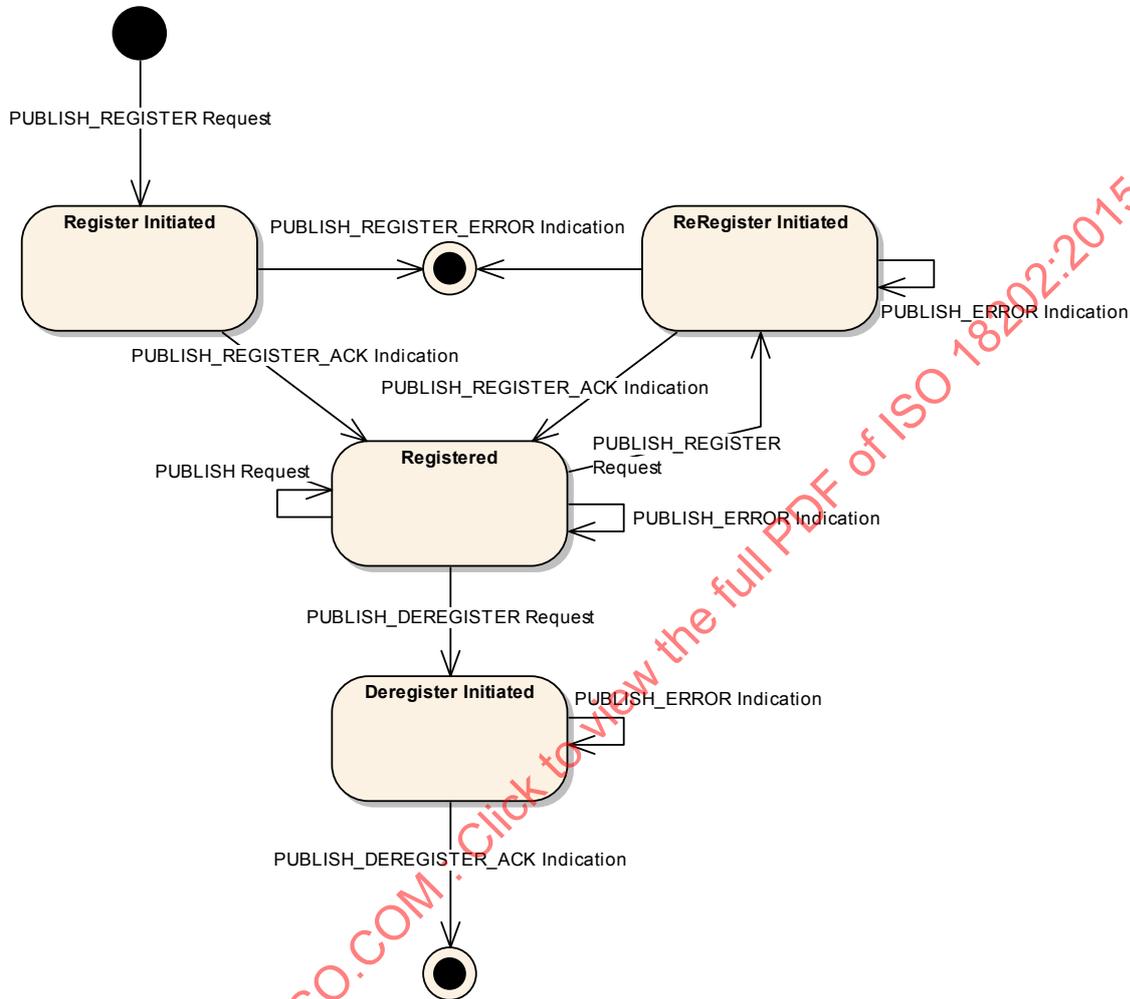

**Figure 3-24: PUBLISH-SUBSCRIBE Provider State Chart**

- a) The state chart applies to a single provider. The state chart shall be replicated for each provider.
- b) The initial transition is triggered by the primitive **PUBLISH\_REGISTER Request** and shall lead to the **Register Initiated State**.
- c) There are two possible transitions from the **Register Initiated State**:
  - 1) the first is the indication of an acknowledgement, **PUBLISH\_REGISTER\_ACK Indication**, and shall lead to the **Registered State**;
  - 2) the second is the indication of an error, **PUBLISH\_REGISTER\_ERROR Indication**, and shall lead to the final state.


CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

- d) There are four possible transitions from the **Registered State**:
- 1) the first is the triggering of a publish, **PUBLISH Request**, and shall lead back to the **Registered State**;
  - 2) the second is the indication of an error, **PUBLISH\_ERROR Indication**, and shall lead back to the **Registered State**;
  - 3) the third transition shall be triggered by the primitive **PUBLISH\_REGISTER Request** and shall lead to the **ReRegister Initiated State**;
  - 4) the fourth transition shall be triggered by the primitive **PUBLISH\_DEREGISTER Request** and shall lead to the **Deregister Initiated State**.
- e) There are three possible transitions from the **ReRegister Initiated State**:
- 1) The first is the indication of an acknowledgement, **PUBLISH\_REGISTER\_ACK Indication**, and shall lead to the **Registered State**.
  - 2) The second is the indication of a registration error, **PUBLISH\_REGISTER\_ERROR Indication**, and shall lead to the final state.
  - 3) The third is the indication of a publish error, **PUBLISH\_ERROR Indication**, and shall lead back to the **Re-Registered State**. In this case the **PUBLISH\_ERROR Message** will have been sent before the **PUBLISH\_REGISTER Message** was received by the broker and therefore forms part of the previous subscription.
- f) There are two possible transitions from the **Deregister Initiated State**:
- 1) the first is the indication of an acknowledgement, **PUBLISH\_DEREGISTER\_ACK Indication**, and shall lead to the final state;
  - 2) the second is the indication of a publish error, **PUBLISH\_ERROR Indication**, and shall lead back to the **Deregister Initiated State**.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

## 3.5.6.10.5 Broker Side (Related to the Provider)

Figure 3-25 shows the broker to provider state chart for the PUBLISH-SUBSCRIBE pattern:

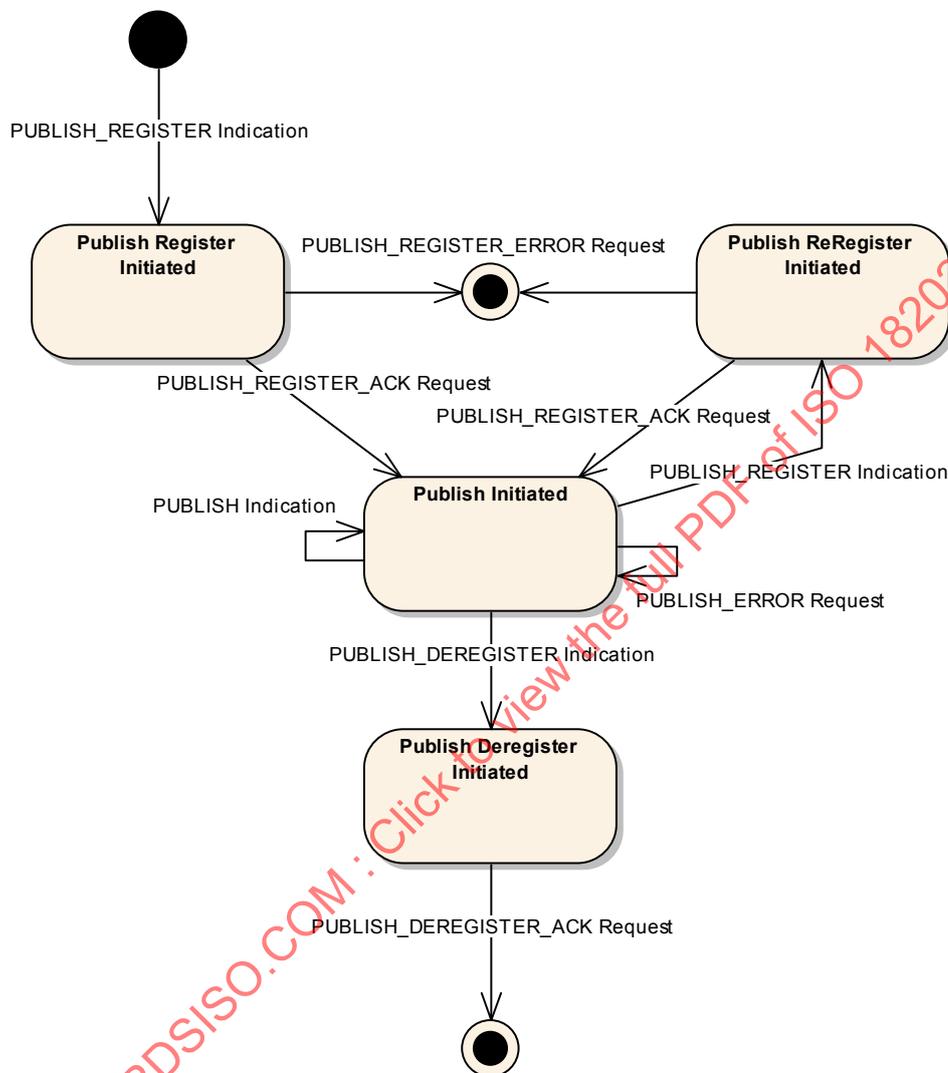

**Figure 3-25: PUBLISH-SUBSCRIBE Broker to Provider State Chart**

- a) The state chart applies to a single provider. The state chart shall be replicated for each provider.
- b) The initial transition is triggered by the primitive **PUBLISH\_REGISTER Indication** and shall lead to the **Publish Register Initiated State**.
- c) There are two possible transitions from the **Publish Register Initiated State**:
  - 1) the first is the triggering of an acknowledgement, **PUBLISH\_REGISTER\_ACK Request**, and shall lead to the **Publish Initiated State**;

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

- 2) the second is the triggering of an error, **PUBLISH\_REGISTER\_ERROR Request**, and shall lead to the final state.
- d) There are four possible transitions from the **Publish Initiated State**:
  - 1) the first is the indication of a publish, **PUBLISH Indication**, and shall lead back to the **Publish Initiated State**;
  - 2) the second is the triggering of an error, **PUBLISH\_ERROR Request**, and shall lead back to the **Publish Initiated State**
  - 3) the third transition shall be triggered by the primitive **PUBLISH\_DEREGISTER Indication** and shall lead to the **Publish Deregister Initiated State**;
  - 4) the fourth transition shall be triggered by the primitive **PUBLISH\_REGISTER Indication** and shall lead to the **Publish ReRegister Initiated State**.
- e) There are two possible transitions from the **Publish ReRegister Initiated State**:
  - 1) the first is the triggering of an acknowledgement, **PUBLISH\_REGISTER\_ACK Request**, and shall lead to the **Publish Initiated State**;
  - 2) the second is the triggering of an error, **PUBLISH\_REGISTER\_ERROR Request**, and shall lead to the final state
- f) There is only one possible transition from the **Publish Deregister Initiated State**; it is the triggering of an acknowledgement, **PUBLISH\_DEREGISTER\_ACK Request**, and shall lead to the final state.

### 3.5.6.11 Requests and Indications

#### 3.5.6.11.1 REGISTER

##### 3.5.6.11.1.1 Function

- a) The **REGISTER Request** primitive shall be used by the consumer application to initiate a PUBSUB Interaction with a subscription or to update an existing subscription for the specified subscription identifier.
- b) The **REGISTER Indication** primitive shall be used by the broker MAL to deliver a **REGISTER Message** to a broker and initiate a PUBSUB Interaction or to update an existing subscription for the specified subscription identifier.

##### 3.5.6.11.1.2 Semantics

**REGISTER Request** and **REGISTER Indication** shall provide parameters as follows:

(REGISTER Message Header, Subscription, QoS properties)

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER**3.5.6.11.1.3 When Generated**

- a) A **REGISTER Request** may be used by the consumer application at any time to start a new subscription or when the consumer MAL is in the **Registered State** to update an existing subscription.
- b) A **REGISTER Indication** shall be generated by the broker MAL for a new subscription or when the broker MAL is in the **Registered State** for existing subscriptions for that consumer upon reception of a **REGISTER Message**, once checked via the Access Control interface, from a consumer.

**3.5.6.11.1.4 Effect on Reception**

- a) Reception of a **REGISTER Request** shall, once checked via the Access Control interface, cause the consumer MAL to initiate a PUBSUB Interaction by transmitting a **REGISTER Message** to the broker for a new subscription.
- b) The consumer MAL shall enter the **Register Initiated State** in this case.
- c) If the consumer MAL is in the **Registered State**, reception of a **REGISTER Request** shall, once checked via the Access Control interface, cause the consumer MAL to update the subscription by transmitting a **REGISTER Message** to the broker.
- d) The consumer MAL shall enter the **ReRegister Initiated State** in this case.
- e) On reception of a **REGISTER Message** by the broker MAL, once the message has been checked via the Access Control interface, the broker MAL shall enter the **Register Initiated State** if this is the first message in a new PUBSUB Interaction or enter the **ReRegister Initiated State** if currently in the **Registered State** and then pass a **REGISTER Indication** to the broker.
- f) The broker shall store the subscription of the consumer or update an existing subscription from the same consumer if the subscription identifier is already used by that consumer.
- g) The broker shall start processing the subscription at this point.

**3.5.6.11.1.5 Message Header**

- a) For the **REGISTER Message** the message header fields shall be as defined in 3.4 except for the fields in table 3-34.
- b) The contents of the Subscription structure, as specified in the operation template, shall immediately follow the message header.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

**Table 3-34: REGISTER Message Header Fields**

Field	Value
URI From	Consumer URI
Authentication Id	Consumer Authentication Identifier
URI To	Broker URI
Interaction Type	PUBSUB
Interaction Stage	1
Transaction Id	Provided by consumer MAL

### 3.5.6.11.2 REGISTER\_ACK

#### 3.5.6.11.2.1 Function

- a) The **REGISTER\_ACK Request** primitive shall be used by the broker to acknowledge a PUBSUB Interaction subscription.
- b) The **REGISTER\_ACK Indication** primitive shall be used by the consumer MAL to deliver a **REGISTER\_ACK Message** to a consumer.

#### 3.5.6.11.2.2 Semantics

**REGISTER\_ACK Request** and **REGISTER\_ACK Indication** shall provide parameters as follows:

(REGISTER\_ACK Message Header, QoS properties)

#### 3.5.6.11.2.3 When Generated

- a) A **REGISTER\_ACK Request** shall be used by the broker with the broker MAL in either the **Register Initiated State** or **ReRegister Initiated State** to acknowledge the successful registration by a consumer in a PUBSUB Interaction.
- b) A **REGISTER\_ACK Indication** shall be generated by the consumer MAL in either the **Register Initiated State** or **ReRegister Initiated State** upon reception of a **REGISTER\_ACK Message**, once checked via the Access Control interface, from a broker.

#### 3.5.6.11.2.4 Effect on Reception

- a) Reception of a **REGISTER\_ACK Request** shall, once checked via the Access Control interface, cause the broker MAL to transmit the supplied acknowledgement as a **REGISTER\_ACK Message** to the consumer.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

- b) A broker MAL in the **Register Initiated State** or **ReRegister Initiated State** shall enter the **Registered State**.
- c) On reception of a **REGISTER\_ACK Message** by the consumer MAL, once the message has been checked via the Access Control interface, the consumer MAL shall enter the **Registered State** and pass a **REGISTER\_ACK Indication** to the consumer application.

### 3.5.6.11.2.5 Message Header

For the **REGISTER\_ACK Message** the message header fields shall be as defined in 3.4 except for the fields in table 3-35.

**Table 3-35: REGISTER\_ACK Message Header Fields**

Field	Value
URI From	Broker URI
Authentication Id	Broker Authentication Identifier
URI To	Consumer URI
QoSlevel	QoS level from first REGISTER message
Priority	Priority from first REGISTER message
Interaction Type	PUBSUB
Interaction Stage	2
Transaction Id	Transaction Id from initial message

### 3.5.6.11.3 REGISTER\_ERROR

#### 3.5.6.11.3.1 Function

- a) The **REGISTER\_ERROR Request** primitive shall be used by the broker to reject a subscription request and end a PUBSUB Interaction with an error.
- b) The **REGISTER\_ERROR Indication** primitive shall be used by the consumer MAL to deliver a **REGISTER\_ERROR Message** to a consumer.

#### 3.5.6.11.3.2 Semantics

**REGISTER\_ERROR Request** and **REGISTER\_ERROR Indication** shall provide parameters as follows:

(REGISTER\_ERROR Message Header, Error Number, Extra Information, QoS properties)

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER**3.5.6.11.3.3 When Generated**

- a) A **REGISTER\_ERROR Request** shall be used by the broker with the broker MAL in either the **Register Initiated State** or **ReRegister Initiated State** to reject a register request.
- b) The broker may reject the register attempt for one of the following reasons:
  - 1) More subscriptions than the broker can support shall cause a TOO\_MANY error to be sent. The extra information field of the error contains an Integer which provides the maximum number of subscriptions supported.
  - 2) Shutdown, the broker is shutting down. A SHUTDOWN error message shall be returned.
  - 3) Internal error, the broker has experienced an internal error. An INTERNAL error message shall be returned.
  - 4) UNKNOWN shall not be generated for subscriptions that identify keys that have not been currently registered by a publisher. This is because the consumer cannot know what entities are currently provided and which providers are currently registered.
- c) A **REGISTER\_ERROR Indication** shall be generated by the consumer MAL in either the **Register Initiated State** or **ReRegister Initiated State** upon one of two events:
  - 1) the reception of a **REGISTER\_ERROR Message**, once checked via the Access Control interface, from a broker;
  - 2) an error raised by the local communication layer.

**3.5.6.11.3.4 Effect on Reception**

- a) Reception of a **REGISTER\_ERROR Request** shall, once checked via the Access Control interface, cause the broker MAL to transmit a **REGISTER\_ERROR Message** to the consumer.
- b) The pattern shall end at this point for the broker.
- c) On reception of a **REGISTER\_ERROR Message** by the consumer MAL, once the message has been checked via the Access Control interface, the consumer MAL shall end the interaction by passing the error to the consumer application.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER**3.5.6.11.3.5 Message Header**

- a) For the **REGISTER\_ERROR Message** the message header fields shall be the same as for the **REGISTER\_ACK Message** except for the 'Is Error Message' field which is set to TRUE.
- b) The Error information shall immediately follow the message header.

**3.5.6.11.4 PUBLISH\_REGISTER****3.5.6.11.4.1 Function**

- a) The **PUBLISH\_REGISTER Request** primitive shall be used by the provider application to initiate a PUBSUB Interaction with the list of entities being published or to update an existing list.
- b) The **PUBLISH\_REGISTER Indication** primitive shall be used by the broker MAL to deliver a **PUBLISH\_REGISTER Message** to a broker and initiate a PUBSUB Interaction or to update an existing publish list if one exists for the specified provider.

**3.5.6.11.4.2 Semantics**

**PUBLISH\_REGISTER Request** and **PUBLISH\_REGISTER Indication** shall provide parameters as follows:

(PUBLISH\_REGISTER Message Header, List<EntityKey>, QoS properties)

**3.5.6.11.4.3 When Generated**

- a) A **PUBLISH\_REGISTER Request** may be generated by the provider application at any time to start a publishing session or when the provider MAL is already in the **Registered State** to update an existing publish list.
- b) A **PUBLISH\_REGISTER Indication** shall be generated by the broker MAL if a new publisher is detected or in the **Publish Registered State** for the provider upon reception of a **PUBLISH\_REGISTER Message**, once checked via the Access Control interface, from a provider.

**3.5.6.11.4.4 Effect on Reception**

- a) Reception of a **PUBLISH\_REGISTER Request** shall, once checked via the Access Control interface, cause the provider MAL to initiate a PUBSUB Interaction by transmitting a **PUBLISH\_REGISTER Message** to the broker.
- b) The provider MAL shall enter the **Register Initiated State** in this case.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

- c) If the provider MAL is already in the **Registered State**, reception of a **PUBLISH\_REGISTER Request** shall, once checked via the Access Control interface, cause the provider MAL to update the publishing list by transmitting a **PUBLISH\_REGISTER Message** to the broker.
- d) The provider MAL shall enter the **ReRegister Initiated State** in this case.
- e) On reception of a **PUBLISH\_REGISTER Message** by the broker MAL, once the message has been checked via the Access Control interface, the broker MAL shall enter the **Publish Register Initiated State** if this is the first message in a new PUBSUB Interaction with the provider or enter the **Publish ReRegister Initiated State** if currently in the **Publish Registered State** with that provider and then pass a **PUBLISH\_REGISTER Indication** to the broker.
- f) The broker shall store the publish list of the provider or update the existing list from the same provider.

#### 3.5.6.11.4.5 Message Header

- a) For the **PUBLISH\_REGISTER Message** the message header fields shall be as defined in 3.4 except for the fields in table 3-36.
- b) The contents of the EntityKey list, as specified in the operation template, shall immediately follow the message header.

**Table 3-36: PUBLISH\_REGISTER Message Header Fields**

Field	Value
URI From	Provider URI
Authentication Id	Provider Authentication Identifier
URI To	Broker URI
Interaction Type	PUBSUB
Interaction Stage	3
Transaction Id	Provided by provider MAL

#### 3.5.6.11.5 PUBLISH\_REGISTER\_ACK

##### 3.5.6.11.5.1 Function

- a) The **PUBLISH\_REGISTER\_ACK Request** primitive shall be used by the broker to acknowledge a PUBSUB Interaction publish list from a provider.
- b) The **PUBLISH\_REGISTER\_ACK Indication** primitive shall be used by the provider MAL to deliver a **PUBLISH\_REGISTER\_ACK Message** to a provider.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

### 3.5.6.11.5.2 Semantics

**PUBLISH\_REGISTER\_ACK Request** and **PUBLISH\_REGISTER\_ACK Indication** shall provide parameters as follows:

(PUBLISH\_REGISTER Message Header, QoS properties)

### 3.5.6.11.5.3 When Generated

- a) A **PUBLISH\_REGISTER\_ACK Request** shall be used by the broker with the broker MAL in either the **Publish Register Initiated State** or **Publish ReRegister Initiated State** to acknowledge the successful registration by a provider in a PUBSUB Interaction.
- b) A **PUBLISH\_REGISTER\_ACK Indication** shall be generated by the provider MAL in either the **Register Initiated State** or **ReRegister Initiated State** upon reception of a **PUBLISH\_REGISTER\_ACK Message**, once checked via the Access Control interface, from a broker.

### 3.5.6.11.5.4 Effect on Reception

- a) Reception of a **PUBLISH\_REGISTER\_ACK Request** shall, once checked via the Access Control interface, cause the broker MAL to transmit the supplied acknowledgement as a **PUBLISH\_REGISTER\_ACK Message** to the provider.
- b) A broker MAL in the **Publish Register Initiated State** or **Publish ReRegister Initiated State** shall then enter the **Registered State**.
- c) On reception of a **PUBLISH\_REGISTER\_ACK Message** by the provider MAL, once the message has been checked via the Access Control interface, the provider MAL shall enter the **Registered State** and pass a **PUBLISH\_REGISTER\_ACK Indication** to the provider application.

### 3.5.6.11.5.5 Message Header

For the **PUBLISH\_REGISTER\_ACK Message** the message header fields shall be as defined in 3.4 except for the fields in table 3-37.

**Table 3-37: PUBLISH\_REGISTER\_ACK Message Header Fields**

Field	Value
URI From	Broker URI
Authentication Id	Broker Authentication Identifier

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

URI To	Provider URI
QoSLevel	QoS level from first PUBLISH_REGISTER message
Priority	Priority from first PUBLISH_REGISTER message
Interaction Type	PUBSUB
Interaction Stage	4
Transaction Id	Transaction Id from provider register message

### 3.5.6.11.6 PUBLISH\_REGISTER\_ERROR

#### 3.5.6.11.6.1 Function

- a) The **PUBLISH\_REGISTER\_ERROR Request** primitive shall be used by the broker to reject a publish registration request from a provider and end a PUBSUB Interaction with an error.
- b) The **PUBLISH\_REGISTER\_ERROR Indication** primitive shall be used by the provider MAL to deliver a **PUBLISH\_REGISTER\_ERROR Message** to a provider.

#### 3.5.6.11.6.2 Semantics

**PUBLISH\_REGISTER\_ERROR Request** and **PUBLISH\_REGISTER\_ERROR Indication** shall provide parameters as follows:

(PUBLISH\_REGISTER\_ERROR Message Header, Error Number, Extra Information, QoS properties)

#### 3.5.6.11.6.3 When Generated

- a) A **PUBLISH\_REGISTER\_ERROR Request** shall be used by the broker with the broker MAL in either the **Publish Register Initiated State** or **Publish ReRegister Initiated State** to reject a register request.
- b) The broker may reject the register attempt for one of the following reasons:
  - 1) More providers than the broker can support shall cause a TOO\_MANY error to be sent. The extra information field of the error contains an Integer which provides the maximum number of providers supported.
  - 2) Shutdown, the broker is shutting down. A SHUTDOWN error message shall be returned.
  - 3) Internal error, the broker has experienced an internal error. An INTERNAL error message shall be returned.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

- c) A **PUBLISH\_REGISTER\_ERROR Indication** shall be generated by the provider MAL in either the **Register Initiated State** or **ReRegister Initiated State** upon one of two events:
- 1) the reception of a **PUBLISH\_REGISTER\_ERROR Message**, once checked via the Access Control interface, from a broker;
  - 2) an error raised by the local communication layer.

**3.5.6.11.6.4 Effect on Reception**

- a) Reception of a **PUBLISH\_REGISTER\_ERROR Request** shall, once checked via the Access Control interface, cause the broker MAL to transmit a **PUBLISH\_REGISTER\_ERROR Message** to the provider.
- b) The pattern shall end at this point for the broker.
- c) On reception of a **PUBLISH\_REGISTER\_ERROR Message** by the provider MAL, once the message has been checked via the Access Control interface, the provider MAL shall end the interaction by passing the error indication to the provider application.

**3.5.6.11.6.5 Message Header**

- a) For the **PUBLISH\_REGISTER\_ERROR Message** the message header fields shall be the same as for the **PUBLISH\_REGISTER\_ACK Message** except for the 'Is Error Message' field which is set to TRUE.
- b) The Error information structure shall immediately follow the message header.

**3.5.6.11.7 PUBLISH****3.5.6.11.7.1 Function**

- a) The **PUBLISH Request** primitive shall be used by the provider to publish a list of entity updates.
- b) The **PUBLISH Indication** primitive shall be used by the broker MAL to deliver a **PUBLISH Message** to a broker.

**3.5.6.11.7.2 Semantics**

**PUBLISH Request** and **PUBLISH Indication** shall provide parameters as follows:

(PUBLISH Message Header, List<UpdateHeader>,

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

List< <<Update Value Type>> >, ... List< <<Update Value Type N>> >, QoS properties)

### 3.5.6.11.7.3 When Generated

- a) A **PUBLISH Request** shall be used by the provider with the provider MAL in the **Registered State** to publish a list of entity updates.
- b) A **PUBLISH Indication** shall be generated by the broker MAL in the **Publish Initiated State** upon reception of a **PUBLISH Message**, once checked via the Access Control interface, from a provider.

### 3.5.6.11.7.4 Effect on Reception

- a) Reception of a **PUBLISH Request** shall, once checked via the Access Control interface, cause the provider MAL to transmit the supplied update list as a **PUBLISH Message** to the broker.
- b) On reception of a **PUBLISH Message** by the broker MAL, once the message has been checked via the Access Control interface, the broker MAL shall pass a **PUBLISH Indication** to the broker application.
- c) The broker application shall match the Updates in the list to the subscriptions of registered consumers that are in the **Registered State** using the match rules in 3.5.6.5.
- d) The matched updates shall be transmitted to the relevant consumers by the broker using a **NOTIFY Request**.

### 3.5.6.11.7.5 Message Header

- a) For the **PUBLISH Message** the message header fields shall be as defined in 3.4 except for the fields in table 3-38.
- b) The contents of the message body, as specified in the operation template, shall immediately follow the message header.
- c) The transaction identifier shall be the same as in the initial publish register message. If several register requests have been sent (without any deregister requests in between), the transaction identifier of the first request shall be used.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER**Table 3-38: PUBLISH Message Header Fields**

Field	Value
URI From	Provider URI
Authentication Id	Provider Authentication Identifier
URI To	Broker URI
Interaction Type	PUBSUB
Interaction Stage	5
Transaction Id	Transaction Id from provider register message

**3.5.6.11.8 PUBLISH\_ERROR****3.5.6.11.8.1 Function**

- a) The **PUBLISH\_ERROR Request** primitive shall be used by the broker to reject a publish request from a provider.
- b) The **PUBLISH\_ERROR Indication** primitive shall be used by the provider MAL to deliver a **PUBLISH\_ERROR Message** to a provider.

**3.5.6.11.8.2 Semantics**

**PUBLISH\_ERROR Request** and **PUBLISH\_ERROR Indication** shall provide parameters as follows:

(PUBLISH\_ERROR Message Header, Error Number, Extra Information, QoS properties)

**3.5.6.11.8.3 When Generated**

- a) A **PUBLISH\_ERROR Request** shall be used by the broker with the broker MAL in the **Publish Initiated State** to reject a publish request.
- b) The broker may reject the publish attempt for one of the following reasons:
  - 1) Unknown provider: a provider has not previously registered for publishing. An INCORRECT\_STATE error message shall be returned.
  - 2) Unknown Entity: a provider has attempted to publish a previously unregistered Entity. An UNKNOWN error shall be returned in this case; the extra information field of the error contains an EntityKey list which contains the list of unknown EntityKeys.
  - 3) Shutdown: the broker is shutting down. A SHUTDOWN error message shall be returned.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

- 4) Internal error: the broker has experienced an internal error. An INTERNAL error message shall be returned.
- c) Communications/Encoding/Access Control errors shall be returned to a provider using this error message. This allows a provider to receive notification of underlying errors without the publishing overhead of acknowledging each **PUBLISH Message**.
- d) A **PUBLISH\_ERROR Indication** shall be generated by the provider MAL in either the **ReRegister Initiated State**, **Registered State** or **Deregister Initiated State** upon one of two events:
  - 1) the reception of a **PUBLISH\_ERROR Message**, once checked via the Access Control interface, from a broker;
  - 2) an error raised by the local communication layer.

#### 3.5.6.11.8.4 Effect on Reception

- a) Reception of a **PUBLISH\_ERROR Request** shall, once checked via the Access Control interface, cause the broker MAL to transmit a **PUBLISH\_ERROR Message** to the provider.
- b) On reception of a **PUBLISH\_ERROR Message** by the provider MAL, once the message has been checked via the Access Control interface, the provider MAL shall pass the error indication to the provider application.

#### 3.5.6.11.8.5 Message Header

- a) For the **PUBLISH\_ERROR Message** the message header fields shall be the same as for the **PUBLISH Message** except for the fields in table 3-39.
- b) In the case where an error is being return without a previous PUBLISH\_REGISTER message, the QoSlevel, Priority, and Transaction Identifier shall be taken from the PUBLISH message.
- c) The Error information shall immediately follow the message header.

**Table 3-39: PUBLISH\_ERROR Message Header Fields**

Field	Value
URI From	Broker URI
Authentication Id	Broker Authentication Identifier

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

URI To	Provider URI
QoSlevel	QoS level from first PUBLISH_REGISTER message
Priority	Priority from first PUBLISH_REGISTER message
Is Error Message	TRUE

### 3.5.6.11.9 NOTIFY

#### 3.5.6.11.9.1 Function

- a) The **NOTIFY Request** primitive shall be used by the broker to transmit a list of entity updates to a consumer.
- b) The **NOTIFY Indication** primitive shall be used by the consumer MAL to deliver a **NOTIFY Message** to a consumer.

#### 3.5.6.11.9.2 Semantics

**NOTIFY Request** and **NOTIFY Indication** shall provide parameters as follows:

(NOTIFY Message Header, Identifier, List<UpdateHeader>,

List< <<Update Value Type>> >, ... List< <<Update Value Type N>> >, QoS properties)

#### 3.5.6.11.9.3 When Generated

- a) A **NOTIFY Request** shall be used by the broker with the broker MAL in the **Registered State** to transmit a list of entity updates from a provider **PUBLISH Message** to a consumer.
- b) A **NOTIFY Indication** shall be generated by the consumer MAL in either the **ReRegister Initiated State**, **Registered State** or **Deregister Initiated State** upon reception of a **NOTIFY Message**, once checked via the Access Control interface, from a broker.

#### 3.5.6.11.9.4 Effect on Reception

- a) Reception of a **NOTIFY Request** shall, once checked via the Access Control interface, cause the broker MAL to transmit the supplied subscription update list as a **NOTIFY Message** to the consumer.
- b) On reception of a **NOTIFY Message** by the consumer MAL, once the message has been checked via the Access Control interface, the consumer MAL shall pass a **NOTIFY Indication** to the consumer application.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

### 3.5.6.11.9.5 Message Header

- a) For the **NOTIFY Message** the message header fields shall be as defined in 3.4 except for the fields in table 3-40.
- b) The contents of the subscription update, as specified in the operation template, shall immediately follow the message header.
- c) The transaction identifier shall be the same as in the initial register message that created the first subscription. If several register requests have been sent for the same subscription (without any deregister requests in between), the transaction identifier of the first request shall be used.

**Table 3-40: NOTIFY Message Header Fields**

Field	Value
URI From	Broker URI
Authentication Id	Broker Authentication Identifier
URI To	Consumer URI
QoSlevel	QoS level from first REGISTER message
Priority	Priority from first REGISTER message
Interaction Type	PUBSUB
Interaction Stage	6
Transaction Id	Transaction Id from consumer register message

### 3.5.6.11.10 NOTIFY\_ERROR

#### 3.5.6.11.10.1 Function

- a) The **NOTIFY\_ERROR Request** primitive shall be used by the broker to inform a consumer of an error and end a PUBSUB Interaction.
- b) The **NOTIFY\_ERROR Indication** primitive shall be used by the consumer MAL to deliver a **NOTIFY\_ERROR Message** to a consumer.

#### 3.5.6.11.10.2 Semantics

**NOTIFY\_ERROR Request** and **NOTIFY\_ERROR Indication** shall provide parameters as follows:

(NOTIFY\_ERROR Message Header, Error Number, Extra Information, QoS properties)

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER**3.5.6.11.10.3 When Generated**

- a) A **NOTIFY\_ERROR Request** shall be used by the broker with the broker MAL in the **Registered State** to inform a consumer of an error.
- b) The broker may send an error for one of the following reasons:
  - 1) Shutdown: the broker is shutting down. A SHUTDOWN error message shall be returned.
  - 2) Internal error: the broker has experienced an internal error. An INTERNAL error message shall be returned.
- c) A **NOTIFY\_ERROR Indication** shall be generated by the consumer MAL in either the **ReRegister Initiated State**, **Registered State** or **Deregister Initiated State** upon one of two events:
  - 1) the reception of a **NOTIFY\_ERROR Message**, once checked via the Access Control interface, from a broker;
  - 2) an error raised by the local communication layer.

**3.5.6.11.10.4 Effect on Reception**

- a) Reception of a **NOTIFY\_ERROR Request** shall, once checked via the Access Control interface, cause the broker MAL to transmit a **NOTIFY\_ERROR Message** to the consumer.
- b) The pattern shall end at this point for the broker.
- c) On reception of a **NOTIFY\_ERROR Message** by the consumer MAL, once the message has been checked via the Access Control interface, the consumer MAL shall end the interaction by passing the error to the consumer application.

**3.5.6.11.10.5 Message Header**

- a) For the **NOTIFY\_ERROR Message** the message header fields shall be the same as for the **NOTIFY Message** except for the 'Is Error Message' field which is set to TRUE.
- b) The Error information shall immediately follow the message header.

**3.5.6.11.11 DEREGISTER****3.5.6.11.11.1 Function**

- a) The **DEREGISTER Request** primitive shall be used by the consumer to end subscriptions for the specified subscription identifiers.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

- b) The **DEREGISTER Indication** primitive shall be used by the broker MAL to deliver a **DEREGISTER Message** to a broker and end existing subscriptions for the specified subscription identifiers.

#### 3.5.6.11.11.2 Semantics

**DEREGISTER Request** and **DEREGISTER Indication** shall provide parameters as follows:

(DEREGISTER Message Header, List<Identifier>, QoS properties)

#### 3.5.6.11.11.3 When Generated

- a) A **DEREGISTER Request** shall be used by the consumer application with the consumer MAL in the **Registered State** at any time to end a subscription.
- b) A **DEREGISTER Indication** shall be generated by the broker MAL in the **Registered State** upon reception of a **DEREGISTER Message**, once checked via the Access Control interface, from a consumer.

#### 3.5.6.11.11.4 Effect on Reception

- a) Reception of a **DEREGISTER Request** shall, once checked via the Access Control interface, cause the consumer MAL in the **Registered State** to end the set of subscriptions by transmitting a **DEREGISTER Message** to the broker.
- b) The consumer MAL shall enter the **Deregister Initiated State** for each identified subscription.
- c) On reception of a **DEREGISTER Message** by the broker MAL, once the message has been checked via the Access Control interface, the broker MAL shall enter the **Deregister Initiated State** for each of the identified subscriptions and pass a **DEREGISTER Indication** to the broker.
- d) The broker shall then remove the specified subscriptions of the consumer.

#### 3.5.6.11.11.5 Message Header

- a) For the **DEREGISTER Message** the message header fields shall be as defined in 3.4 except for the fields in table 3-41.
- b) The contents of the subscription Identifier list, as specified in the operation template, shall immediately follow the message header.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

**Table 3-41: DEREGISTER Message Header Fields**

Field	Value
URI From	Consumer URI
Authentication Id	Consumer Authentication Identifier
URI To	Broker URI
Interaction Type	PUBSUB
Interaction Stage	7
Transaction Id	Provided by consumer MAL

### 3.5.6.11.12 DEREGISTER\_ACK

#### 3.5.6.11.12.1 Function

- a) The **DEREGISTER\_ACK Request** primitive shall be used by the broker to acknowledge the termination of a PUBSUB Interaction subscription by the consumer.
- b) The **DEREGISTER\_ACK Indication** primitive shall be used by the consumer MAL to deliver a **DEREGISTER\_ACK Message** to a consumer.

#### 3.5.6.11.12.2 Semantics

**DEREGISTER\_ACK Request** and **DEREGISTER\_ACK Indication** shall provide parameters as follows:

(DEREGISTER\_ACK Message Header, QoS properties)

#### 3.5.6.11.12.3 When Generated

- a) A **DEREGISTER\_ACK Request** shall be used by the broker with a broker MAL in the **Deregister Initiated State** to acknowledge the successful deregistration by a consumer of a set of subscriptions in a PUBSUB Interaction.
- b) A **DEREGISTER\_ACK Indication** shall be generated by the consumer MAL in the **Deregister Initiated State** upon reception of a **DEREGISTER\_ACK Message**, once checked via the Access Control interface, from a broker.

#### 3.5.6.11.12.4 Effect on Reception

- a) Reception of a **DEREGISTER\_ACK Request** shall, once checked via the Access Control interface, cause the broker MAL to transmit a **DEREGISTER\_ACK Message** to the consumer.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

- b) The interaction shall end at this point for the broker for each of the identified subscriptions.
- c) On reception of a **DEREGISTER\_ACK Message** by the consumer MAL in the **Deregister Initiated State**, once the message has been checked via the Access Control interface, the consumer MAL shall pass the **DEREGISTER\_ACK Indication** to the consumer application.
- d) The interaction shall end here for the consumer for the set of subscriptions in the initiating **DEREGISTER Message**.

STANDARDSISO.COM : Click to view the full PDF of ISO 18202:2015

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

### 3.5.6.11.12.5 Message Header

For the **DEREGISTER\_ACK Message** the message header fields shall be as defined in 3.4 except for the fields in table 3-42.

**Table 3-42: DEREGISTER\_ACK Message Header Fields**

Field	Value
URI From	Broker URI
Authentication Id	Broker Authentication Identifier
URI To	Consumer URI
QoSlevel	QoS level from first REGISTER message
Priority	Priority from first REGISTER message
Interaction Type	PUBSUB
Interaction Stage	8
Transaction Id	Transaction Id from initial message

### 3.5.6.11.13 PUBLISH\_DEREGISTER

#### 3.5.6.11.13.1 Function

- a) The **PUBLISH\_DEREGISTER Request** primitive shall be used by the provider to end a PUBSUB Interaction.
- b) The **PUBLISH\_DEREGISTER Indication** primitive shall be used by the broker MAL to deliver a **PUBLISH\_DEREGISTER Message** to a broker and end a PUBSUB Interaction for the specified provider.

#### 3.5.6.11.13.2 Semantics

**PUBLISH\_DEREGISTER Request** and **PUBLISH\_DEREGISTER Indication** shall provide parameters as follows:

(PUBLISH\_DEREGISTER Message Header, QoS properties)

#### 3.5.6.11.13.3 When Generated

- a) A **PUBLISH\_DEREGISTER Request** shall be used by the provider application with the provider MAL in the **Registered State** to end the interaction.
- b) A **PUBLISH\_DEREGISTER Indication** shall be generated by the broker MAL in the **Publish Initiated State** upon reception of a **PUBLISH\_DEREGISTER Message**, once checked via the Access Control interface, from a provider.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

#### 3.5.6.11.13.4 Effect on Reception

- a) Reception of a **PUBLISH\_DEREGISTER Request** shall, once checked via the Access Control interface, cause the provider MAL in the **Registered State** to request the end of the interaction by transmitting a **PUBLISH\_DEREGISTER Message** to the broker.
- b) The provider MAL shall enter the **Deregister Initiated State**.
- c) On reception of a **PUBLISH\_DEREGISTER Message** by the broker MAL, once the message has been checked via the Access Control interface, the broker MAL shall enter the **Publish Deregister Initiated State**.
- d) The broker shall then remove the provider from the list of allowed publishers.

#### 3.5.6.11.13.5 Message Header

For the **PUBLISH\_DEREGISTER Message** the message header fields shall be as defined in 3.4 except for the fields in table 3-43.

**Table 3-43: PUBLISH\_DEREGISTER Message Header Fields**

Field	Value
URI From	Provider URI
Authentication Id	Provider Authentication Identifier
URI To	Broker URI
Interaction Type	PUBSUB
Interaction Stage	9
Transaction Id	Provided by provider MAL

#### 3.5.6.11.14 PUBLISH\_DEREGISTER\_ACK

##### 3.5.6.11.14.1 Function

- a) The **PUBLISH\_DEREGISTER\_ACK Request** primitive shall be used by the broker to acknowledge the termination of a PUBSUB Interaction by the provider.
- b) The **PUBLISH\_DEREGISTER\_ACK Indication** primitive shall be used by the provider MAL to deliver a **PUBLISH\_DEREGISTER\_ACK Message** to a provider.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER**3.5.6.11.14.2 Semantics**

**PUBLISH\_DEREGISTER\_ACK Request** and **PUBLISH\_DEREGISTER\_ACK Indication** shall provide parameters as follows:

(PUBLISH\_DEREGISTER\_ACK Message Header, QoS properties)

**3.5.6.11.14.3 When Generated**

- a) A **PUBLISH\_DEREGISTER\_ACK Request** shall be used by the broker with the broker MAL in the **Publish Deregister Initiated State** to acknowledge the successful deregistration by a provider in a PUBSUB Interaction.
- b) A **PUBLISH\_DEREGISTER\_ACK Indication** shall be generated by the provider MAL in the **Deregister Initiated State** upon reception of a **PUBLISH\_DEREGISTER\_ACK Message**, once checked via the Access Control interface, from a broker.

**3.5.6.11.14.4 Effect on Reception**

- a) Reception of a **PUBLISH\_DEREGISTER\_ACK Request** shall, once checked via the Access Control interface, cause the broker MAL to transmit the supplied acknowledgement as a **PUBLISH\_DEREGISTER\_ACK Message** to the provider.
- b) The interaction shall end at this point for the broker.
- c) On reception of a **PUBLISH\_DEREGISTER\_ACK Message** by the provider MAL in the **Deregister Initiated State**, once the message has been checked via the Access Control interface, the provider MAL shall pass the **PUBLISH\_DEREGISTER\_ACK Indication** to the provider application.
- d) The interaction shall end here for the provider.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

### 3.5.6.11.14.5 Message Header

For the **PUBLISH\_DEREGISTER\_ACK Message** the message header fields shall be as defined in 3.4 except for the fields in table 3-44.

**Table 3-44: PUBLISH\_DEREGISTER\_ACK Message Header Fields**

Field	Value
URI From	Broker URI
Authentication Id	Broker Authentication Identifier
URI To	Provider URI
QoSlevel	QoS level from first PUBLISH_REGISTER message
Priority	Priority from first PUBLISH_REGISTER message
Interaction Type	PUBSUB
Interaction Stage	10
Transaction Id	Transaction Id from provider deregister message

### 3.5.6.12 Example

The following example shows a simple example service that contains a single PUBLISH-SUBSCRIBE operation:

Operation Identifier	testPubSub	
Interaction Pattern	PUBLISH-SUBSCRIBE	
Pattern Sequence	Message	Body Type
OUT	PUBLISH/NOTIFY	Boolean Integer TestNotify

The TestNotify structure is defined below:

Name	TestNotify		
Extends	Composite		
Short Form Part	Example Only		
Field	Type	Nullable	Comment
time	Time	Yes	Example Time item
value	Integer	Yes	Example Integer item

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

To register for this PUBLISH-SUBSCRIBE pattern, a consumer shall send the following message:

Message Header																
URI From	Auth Id	URI To	Timestamp	QoS	Priority	Domain	Zone	Session	Interaction	Stage	Trans Id	Area	Service	Operation	Version	Is Error
Consumer	Op A	Broker		BEST	1	A.B.C	GROUND	LIVE	PUBSUB	1	1238	Example	Example	testPubSub	1	FALSE

Subscription																			
Subscription Id	List<EntityRequest>																		
	List count	EntityRequest								EntityRequest									
		List<EntityKey>								Only On Change	List<EntityKey>								Only On Change
		EntityKey									EntityKey								
		List count	1st	2nd	3rd	4th	List count	1st	2nd		3rd	4th							
Sub 123	2	1	A	2	0	0	0	0	False	1	A	3	0	0	0	True			

It contains a standard pattern body for the register message. This shall result in the following acknowledgement message being sent:

Message Header																
URI From	Auth Id	URI To	Timestamp	QoS	Priority	Domain	Zone	Session	Interaction	Stage	Trans Id	Area	Service	Operation	Version	Is Error
Broker	BR Q	Consumer		BEST	1	A.B.C	GROUND	LIVE	PUBSUB	2	1238	Example	Example	testPubSub	1	FALSE

To publish an update on this topic a previously registered provider would send the following message to the message broker. In this example two updates are being generated at the same time:

Message Header																
URI From	Auth Id	URI To	Timestamp	QoS	Priority	Domain	Zone	Session	Interaction	Stage	Trans Id	Area	Service	Operation	Version	Is Error
Provider	SC X	Broker		BEST	1	A.B.C	GROUND	LIVE	PUBSUB	5		Example	Example	testPubSub	1	FALSE


List<UpdateHeader>																
List count	UpdateHeader								UpdateHeader							
	Time stamp	Source URI	Update Type	EntityKey				Time stamp	Source URI	Update Type	EntityKey					
				1st	2nd	3rd	4th				1st	2nd	3rd	4th		
				1st	2nd	3rd	4th				1st	2nd	3rd	4th		
2		SC X	Update	A	2	1	2		SC X	Update	A	4	1	2		

List<Boolean>				List<Integer>				List<TestNotify>				
List count	Boolean	Boolean		List count	Integer	Integer		List count	Test Notify		Test Notify	
	Boolean	Boolean			Integer	Integer			Time	Value	Time	Value
2	False	True		2	33	44		2	Today, 09:30	1234	Today, 09:30	8888


CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

When an update is required the following notify message will be sent from the message broker to the consumer:

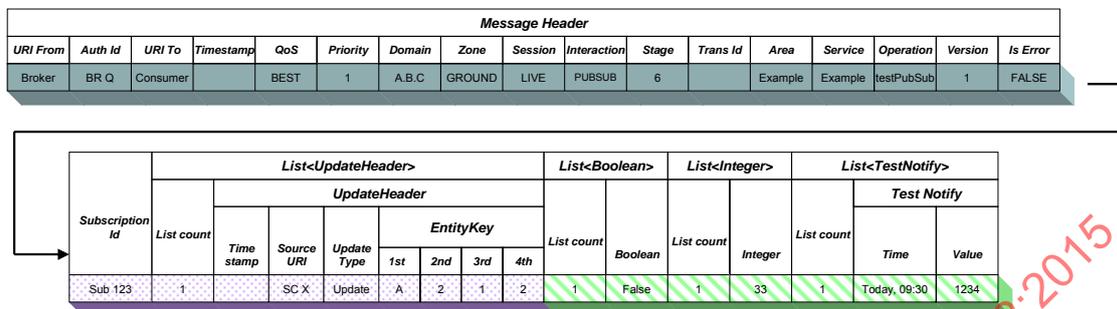

No acknowledgment of the notify message shall be sent by the consumer.

When the consumer wants to deregister, the following message would be sent:



Which would result in the following acknowledgment being received:



NOTE – An actual service specification, rather than the example given here, would fully specify the meaning of, and required values of, all structures used by the service.


CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

### 3.6 ACCESS CONTROL INTERFACE

#### 3.6.1 CHECK MESSAGE INTERACTION

##### 3.6.1.1 Overview

The CHECK pattern is similar to the REQUEST Interaction Pattern: a MAL Message is passed in and the Access Control component responds with a return MAL message (figure 3-26). No acknowledgement other than the response is sent.

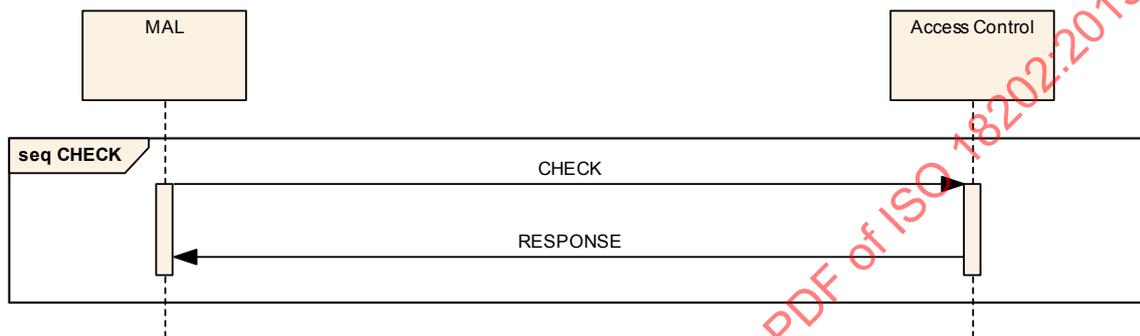

**Figure 3-26: CHECK Access Control Pattern Message Sequence**

##### 3.6.1.2 Description

The CHECK pattern provides a simple request/response message exchange that is used by a MAL implementation to perform Access Control.

NOTE – It is not expected that this pattern will be implemented via a message transport, as it is expected to be implemented as a local API used by the MAL. It is shown here as a pattern for consistency.

##### 3.6.1.3 Usage

- a) The CHECK pattern shall be used only by the MAL for the checking of incoming and outgoing messages. It is not used by any other component.
- b) A compliant MAL implementation shall follow the sequences defined in sections 4 and 5 of reference [1] for interacting with an access control component.
- c) A broker in a Publish Subscribe pattern shall also submit any NOTIFY and PUBLISH Messages to its Access Control component.
- d) Access to sensitive data distributed via the PUBSUB pattern shall be filtered at this point if required.

NOTE – For the restriction of sensitive data it is legitimate for a broker to integrate the CHECK logic into the subscription matching logic.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

3.6.1.4 Error Handling

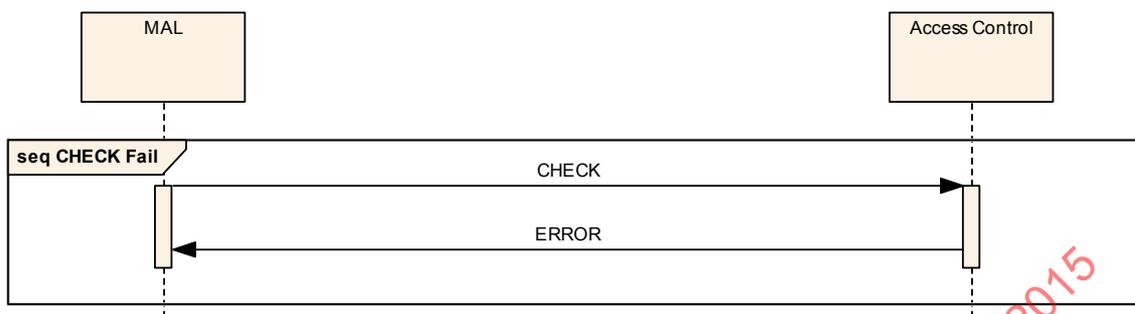


Figure 3-27: CHECK Access Control Pattern Error Sequence

- a) The response shall be replaced with an error message (see section 5) if an error occurs during the processing of the operation (figure 3-27).
- b) Either the response or the error message shall be returned but never both.

3.6.1.5 Operation Template

The CHECK pattern template is below:

Table 3-45: CHECK Operation Template

Interaction Pattern	CHECK	
Pattern Sequence	Message	Body Type
IN	CHECK	MAL message
OUT	RESPONSE	MAL message

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

### 3.6.1.6 Primitives

The pattern is not an abstract interface that provides interoperability. However, it is a function that is required by the MAL.

**Table 3-46: CHECK Primitive List**

Primitive
CHECK
RESPONSE
ERROR

### 3.6.1.7 State Charts

No state charts are provided for this pattern. The MAL shall initiate the pattern using the CHECK primitive and shall block until either the Response or Error Indication is received.

### 3.6.1.8 Requests and Indications

#### 3.6.1.8.1 CHECK

##### 3.6.1.8.1.1 Function

The **CHECK Request** primitive shall be used by the MAL to initiate a CHECK Interaction.

##### 3.6.1.8.1.2 Semantics

**CHECK Request** shall provide parameters as follows:

(MAL Message, QoS properties)

##### 3.6.1.8.1.3 When Generated

- a) **CHECK Request** shall be generated by the MAL after reception of a message from either the application or from a transport.
- b) It is implementation and deployment specific what checks an implementation of the Access Control component shall perform upon reception of a **CHECK Request**.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER**3.6.1.8.2 RESPONSE****3.6.1.8.2.1 Function**

The **RESPONSE Indication** primitive shall be used by the Access Control component to deliver a **RESPONSE Message** to the MAL.

**3.6.1.8.2.2 Semantics**

**RESPONSE Indication** shall provide parameters as follows:

(MAL Message, QoS properties)

**3.6.1.8.2.3 When Generated**

**RESPONSE Indication** shall be generated upon reception of a **RESPONSE Message** from the Access Control component.

**3.6.1.8.2.4 Effect on Reception**

- a) On reception of a **RESPONSE Indication** the MAL shall end the interaction pattern with success.
- b) The returned message shall then be used by the MAL from that point onwards.

**3.6.1.8.3 ERROR****3.6.1.8.3.1 Function**

The **ERROR Indication** primitive shall be used by the Access Control component to end a CHECK Interaction with an error.

**3.6.1.8.3.2 Semantics**

**ERROR Indication** shall provide parameters as follows:

(Error Number, Extra Information, QoS properties)

**3.6.1.8.3.3 When Generated**

- a) An **ERROR Indication** shall be generated upon reception of an **ERROR Message** from the Access Control component.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

- b) The Access Control component shall return `AUTHENTICATION_FAIL` if the supplied message fails authentication checks. These checks are implementation and deployment specific.
- c) The Access Control component shall return `AUTHORISATION_FAIL` if the authenticated supplied message fails authorisation checks. These checks are implementation and deployment specific.

**3.6.1.8.3.4 Effect on Reception**

- a) On reception of an **ERROR Indication** the MAL shall end the interaction with an error.
- b) If the Access Control error is to be transmitted to another MAL then the resultant error message shall not be passed to the Access Control component as it originated from that.
- c) The behaviour of the MAL from this point onwards is defined in reference [1].

**3.7 TRANSPORT INTERFACE****3.7.1 GENERAL**

This subsection defines the abstract interface that a Transport layer provides to the MAL. It specifies what facilities must be made available to a compliant MAL and also the required behaviour of the Transport.

The specification of this for a particular technology is called a Transport Specification. It defines the mapping from the abstract MAL data structures into a specific and unambiguous encoding of the messages for that specific data transport. (For further information on this, see reference [1].)

- a) A Transport Specification shall list, for each supported QoS, the MAL errors it may raise.
- b) A Transport Specification shall define, for each supported QoS, the conditions which trigger the raising of the listed MAL errors.
- c) A Transport Specification shall define, for each supported QoS, the QoS properties it supports.
- d) A Transport Specification shall define, for each supported QoS, the effect the QoS properties have on its behaviour.
- e) A Transport Specification shall define, for each supported QoS, the message timeout behaviour.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

- f) If Transport Specification supports the QUEUED QoS, then it shall define its behaviour in terms of message persistence and purging.

### 3.7.2 SUPPORTEDQOS INTERACTION

#### 3.7.2.1 Overview

The SUPPORTEDQOS pattern is similar to the REQUEST Interaction Pattern. No acknowledgement other than the response is sent (figure 3-28).

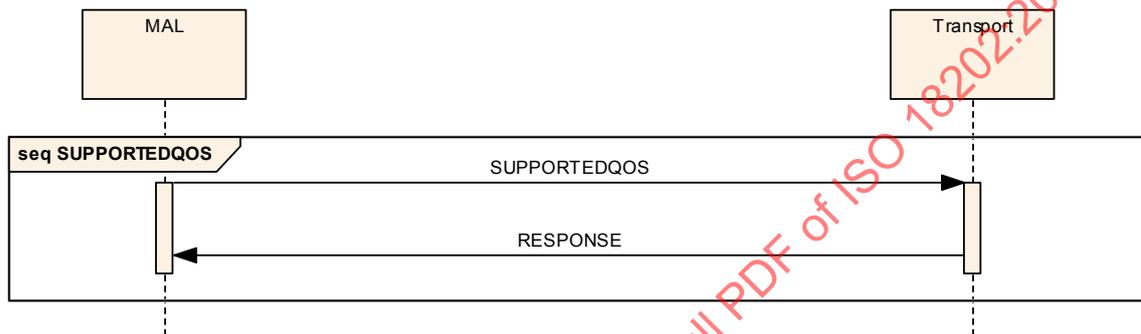


Figure 3-28: SUPPORTEDQOS Transport Pattern Message Sequence

#### 3.7.2.2 Description

The SUPPORTEDQOS pattern provides a simple request/response message exchange that is used by a MAL implementation to determine which QoS levels are supported by a specific Transport layer implementation.

NOTE – It is not expected that this pattern will be implemented via a message, as it is expected to be implemented as a local API used by the MAL to access the Transport layer. It is shown here as a pattern for consistency.

#### 3.7.2.3 Usage

The SUPPORTEDQOS pattern shall be used only by the MAL for the checking of supported QoS levels. It is not used by any other component.

#### 3.7.2.4 Error Handling

No Errors shall be raised.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

### 3.7.2.5 Operation Template

The SUPPORTEDQOS pattern template is below:

**Table 3-47: SUPPORTEDQOS Operation Template**

Interaction Pattern	SUPPORTEDQOS	
Pattern Sequence	Message	Body Type
IN	SUPPORTEDQOS	QoSLevel
OUT	RESPONSE	Boolean

### 3.7.2.6 Primitives

The pattern is not an abstract interface that provides interoperability. However, it is a function that is required by the MAL.

**Table 3-48: SUPPORTEDQOS Primitive List**

Primitive
SUPPORTEDQOS
RESPONSE

### 3.7.2.7 State Charts

No state charts are provided for this pattern. The MAL shall initiate the pattern using the initial primitive and shall block until a response is received.

### 3.7.2.8 Requests and Indications

#### 3.7.2.8.1 SUPPORTEDQOS

##### 3.7.2.8.1.1 Function

The **SUPPORTEDQOS Request** primitive shall be used by the MAL to determine if a Transport supports a specific QoS level.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER**3.7.2.8.1.2 Semantics**

**SUPPORTEDQOS Request** shall provide parameters as follows:

(QoSLevel)

**3.7.2.8.1.3 When Generated**

**SUPPORTEDQOS Request** shall be generated by the MAL when first interacting with a specific Transport.

**3.7.2.8.1.4 Effect on Reception**

Reception of a **SUPPORTEDQOS Request** shall result in a return of a **RESPONSE Indication**.

**3.7.2.8.2 RESPONSE****3.7.2.8.2.1 Function**

- a) The **RESPONSE Indication** primitive shall be used by a Transport layer to deliver the response to a **SUPPORTEDQOS Request** to the MAL.
- b) If the Transport supports the QoS level it shall return 'True' in the indication, 'False' otherwise.

**3.7.2.8.2.2 Semantics**

**RESPONSE Indication** shall provide parameters as follows:

(Boolean)

**3.7.2.8.2.3 When Generated**

**RESPONSE Indication** shall be generated by the Transport layer in response to a **SUPPORTEDQOS Request**.

**3.7.2.8.2.4 Effect on Reception**


The effect on reception of a **RESPONSE Indication** by the MAL is MAL implementation specific.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

### 3.7.3 SUPPORTEDIP INTERACTION

#### 3.7.3.1 Overview

The SUPPORTEDIP pattern is similar to the REQUEST Interaction Pattern. No acknowledgement other than the response is sent (figure 3-29).

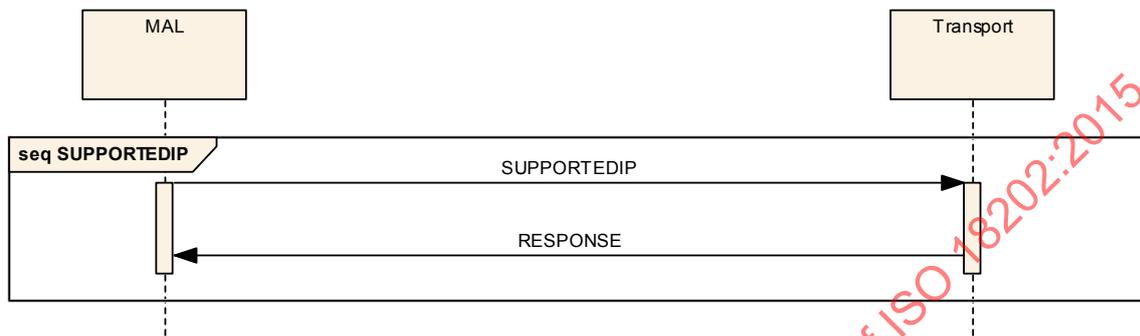

**Figure 3-29: SUPPORTEDIP Transport Pattern Message Sequence**

#### 3.7.3.2 Description

The SUPPORTEDIP pattern provides a simple request/response message exchange that is used by a MAL implementation to determine which MAL Interaction Patterns are supported by a specific Transport layer implementation.

NOTE – It is not expected that this pattern will be implemented via a message, as it is expected to be implemented as a local API used by the MAL to access the Transport layer. It is shown here as a pattern for consistency.

#### 3.7.3.3 Usage

The SUPPORTEDIP pattern is only used by the MAL for the checking of supported interaction patterns. It is not expected to be used by any other component.

#### 3.7.3.4 Error Handling

No Errors shall be raised.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

### 3.7.3.5 Operation Template

The SUPPORTEDIP pattern template is below:

**Table 3-49: SUPPORTEDIP Operation Template**

Interaction Pattern	SUPPORTEDIP	
Pattern Sequence	Message	Body Type
IN	SUPPORTEDIP	InteractionType
OUT	RESPONSE	Boolean

### 3.7.3.6 Primitives

The pattern is not an abstract interface that provides interoperability. However, it is a function that is required by the MAL.

**Table 3-50: SUPPORTEDIP Primitive List**

Primitive
SUPPORTEDIP
RESPONSE

### 3.7.3.7 State Charts

No state charts are provided for this pattern. The MAL shall initiate the pattern using the initial primitive and block until a response is received.

### 3.7.3.8 Requests and Indications

#### 3.7.3.8.1 SUPPORTEDIP

##### 3.7.3.8.1.1 Function

The **SUPPORTEDIP Request** primitive shall be used by the MAL to determine if a Transport supports a specific interaction pattern.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER**3.7.3.8.1.2 Semantics**

**SUPPORTEDIP Request** shall provide parameters as follows:

(InteractionType)

**3.7.3.8.1.3 When Generated**

**SUPPORTEDIP Request** is generated by the MAL when first interacting with a specific Transport.

**3.7.3.8.1.4 Effect on Reception**

Reception of a **SUPPORTEDIP Request** shall result in a return of a **RESPONSE Indication**.

**3.7.3.8.2 RESPONSE****3.7.3.8.2.1 Function**

- a) The **RESPONSE Indication** primitive shall be used to deliver the response to a **SUPPORTEDIP Request** to the MAL.
- b) If the Transport supports the interaction pattern it shall return 'True' in the indication, 'False' otherwise.
- c) It is expected that Transports shall return 'True' for interaction patterns SEND, SUBMIT, REQUEST, INVOKE, and PROGRESS, as these do not require any special processing by the Transport layer.
- d) Transports shall only return 'True' for support of the PUBLISH-SUBSCRIBE interaction pattern if they support the broker aspect natively.

**3.7.3.8.2.2 Semantics**

**RESPONSE Indication** shall provide parameters as follows:

(Boolean)

**3.7.3.8.2.3 When Generated**

**RESPONSE Indication** shall be generated by the Transport layer in response to a **SUPPORTEDIP Request**.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER


### 3.7.3.8.2.4 Effect on Reception

On reception of a **RESPONSE Indication** with the 'False' value for the PUBLISH-SUBSCRIBE pattern, the MAL shall implement the PUBLISH-SUBSCRIBE pattern internally.

## 3.7.4 TRANSMIT INTERACTION

### 3.7.4.1 Overview

The TRANSMIT pattern (figure 3-30) is similar to the SUBMIT Interaction Pattern.

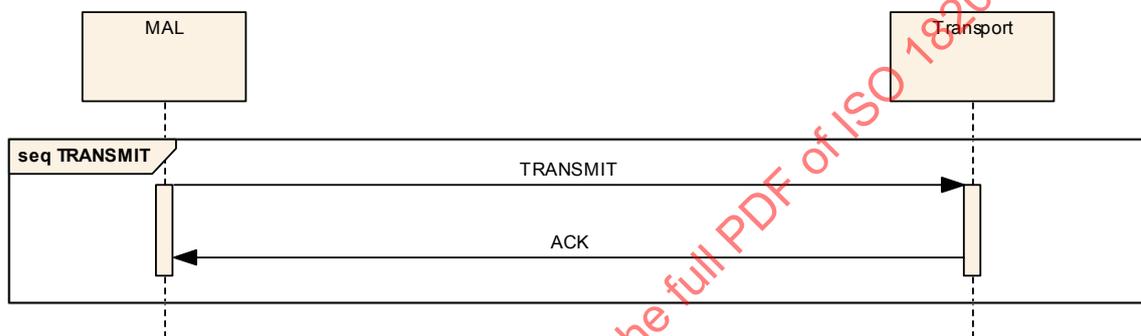

**Figure 3-30: TRANSMIT Transport Pattern Message Sequence**

### 3.7.4.2 Description

The TRANSMIT pattern provides a simple transmit/acknowledgement message exchange that is used by a MAL implementation to pass MAL messages to the Transport layer for transmission.

NOTE – It is not expected that this pattern will be implemented via a message, as it is expected to be implemented as a local API used by the MAL to access the Transport layer. It is shown here as a pattern for consistency.

### 3.7.4.3 Usage

The TRANSMIT pattern is only expected to be used by the MAL for the transmission of MAL Messages. It not expected be used by any other component.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

3.7.4.4 Error Handling

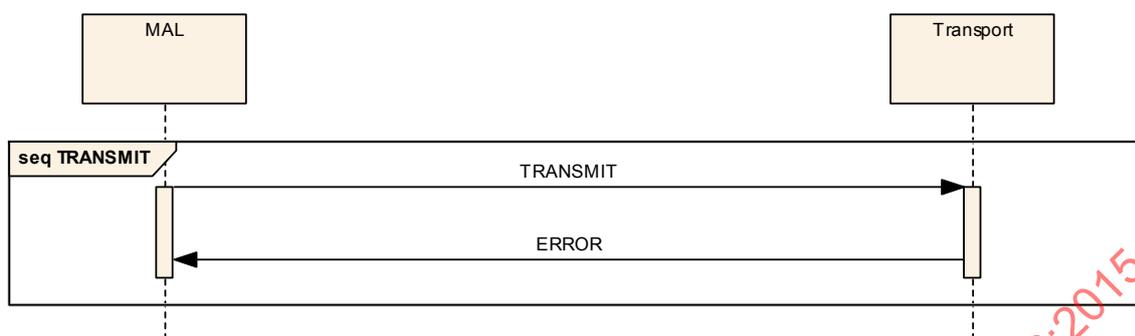


Figure 3-31: TRANSMIT Transport Pattern Error Sequence

- a) The acknowledgement shall be replaced with an error message (see section 5) if an error occurs during the processing of the operation (figure 3-31).
- b) Either the acknowledgement or the error message shall be returned but never both.

3.7.4.5 Operation Template

The TRANSMIT pattern template is below:

Table 3-51: TRANSMIT Operation Template

Interaction Pattern	TRANSMIT	
Pattern Sequence	Message	Body Type
IN	TRANSMIT	MAL Message
OUT	ACK	

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

### 3.7.4.6 Primitives

The pattern is not an abstract interface that provides interoperability. However, it is a function that is required by the MAL.

**Table 3-52: TRANSMIT Primitive List**

Primitive
TRANSMIT
ACK
ERROR

### 3.7.4.7 State Charts

No state charts are provided for this pattern. The MAL shall initiate the pattern using the initial primitive and block until a response is received.

### 3.7.4.8 Requests and Indications

#### 3.7.4.8.1 TRANSMIT

##### 3.7.4.8.1.1 Function

The **TRANSMIT Request** primitive shall be used by the MAL to pass a MAL Message to the Transport layer for transmission.

##### 3.7.4.8.1.2 Semantics

**TRANSMIT Request** shall provide parameters as follows:

(MAL Message, QoS properties)

##### 3.7.4.8.1.3 When Generated

**TRANSMIT Request** shall be generated by the MAL when using the Transport layer to transmit messages.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER**3.7.4.8.1.4 Effect on Reception**

- a) On reception of a **TRANSMIT Request** a Transport layer shall return an **ACK Indication** if the transmission of the message is successful as far as can be determined initially by the Transport.
- b) The determination of success is Transport specific. For example, for a message broker-based transport, this may mean successful transmission to the local broker.

**3.7.4.8.2 ACK****3.7.4.8.2.1 Function**

The **ACK Indication** primitive shall be used by the Transport layer to indicate to the MAL a successful transmission of a message in response to a **TRANSMIT Request**.

**3.7.4.8.2.2 Semantics**

**ACK Indication** does not use any parameters.

**3.7.4.8.2.3 When Generated**

An **ACK Indication** shall be generated by the Transport layer in response to a **TRANSMIT Request** when the request was successful.

**3.7.4.8.2.4 Effect on Reception**

The effect on reception of an **ACK Indication** by the MAL is defined in reference [1].

**3.7.4.8.3 ERROR****3.7.4.8.3.1 Function**

The **ERROR Indication** primitive shall be used by the Transport layer to deliver a transmission failure **ERROR Message** to the MAL.

**3.7.4.8.3.2 Semantics**

**ERROR Indication** shall provide parameters as follows:

(**ERROR Message Header**, **Error Number**, **Extra Information**, **QoS properties**)

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

### 3.7.4.8.3.3 When Generated

An **ERROR Indication** shall be generated by the Transport layer if there is an error during transmission.


### 3.7.4.8.3.4 Effect on Reception

The effect on reception of an **ERROR Indication** by the MAL is defined in reference [1].

## 3.7.5 TRANSMITMULTIPLE INTERACTION

### 3.7.5.1 Overview

The TRANSMITMULTIPLE pattern (figure 3-32) is similar to the SUBMIT Interaction Pattern.

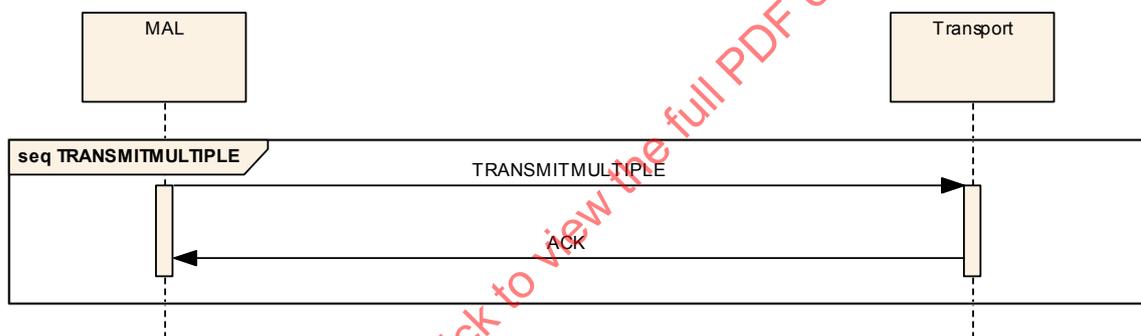

**Figure 3-32: TRANSMITMULTIPLE Transport Pattern Message Sequence**

### 3.7.5.2 Description

The TRANSMITMULTIPLE pattern provides a simple transmit/acknowledgement message exchange that is used by a MAL implementation to pass a set of MAL messages to the Transport layer for transmission.

**NOTE** It is not expected that this pattern will be implemented via a message, as it is expected to be implemented as a local API used by the MAL to access the Transport layer. It is shown here as a pattern for consistency.

### 3.7.5.3 Usage

The TRANSMITMULTIPLE pattern is only expected to be used by the MAL for the transmission of MAL Messages. It is not expected to be used by any other component.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

3.7.5.4 Error Handling

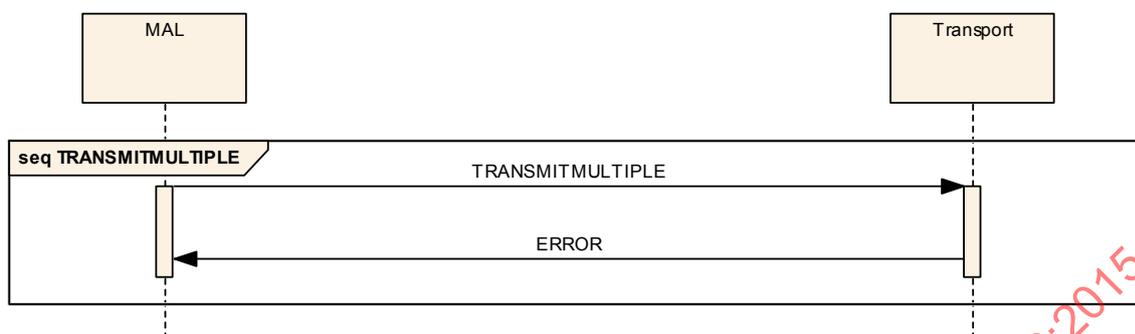


Figure 3-33: TRANSMITMULTIPLE Transport Pattern Error Sequence

- a) The acknowledgement shall be replaced with an error message (see section 5) if an error occurs during the processing of the operation (figure 3-33).
- b) Either the acknowledgement or the error message shall be returned but never both.

3.7.5.5 Operation Template

The TRANSMITMULTIPLE pattern template is below:

Table 3-53: TRANSMITMULTIPLE Operation Template

Interaction Pattern	TRANSMITMULTIPLE	
Pattern Sequence	Message	Body Type
IN	TRANSMITMULTIPLE	MAL Message List
OUT	ACK	

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER

### 3.7.5.6 Primitives

The pattern is not an abstract interface that provides interoperability. However, it is a function that is required by the MAL.

**Table 3-54: TRANSMITMULTIPLE Primitive List**

Primitive
TRANSMITMULTIPLE
ACK
ERROR

### 3.7.5.7 State Charts

No state charts are provided for this pattern. The MAL shall initiate the pattern using the initial primitive and block until a response is received.

### 3.7.5.8 Requests and Indications

#### 3.7.5.8.1 TRANSMITMULTIPLE

##### 3.7.5.8.1.1 Function

The **TRANSMITMULTIPLE Request** primitive shall be used by the MAL to pass a list of MAL Messages to the Transport layer for transmission.

##### 3.7.5.8.1.2 Semantics

**TRANSMITMULTIPLE Request** shall provide parameters as follows:

List of (MAL Message, QoS properties)

##### 3.7.5.8.1.3 When Generated

- a) A **TRANSMITMULTIPLE Request** shall be generated by the MAL when using the Transport layer to transmit messages.
- b) The pattern may be used when using a MAL-level broker for a Publish/Subscribe Notify message, i.e., one Notify for each consumer.

CCSDS RECOMMENDED STANDARD FOR  
MISSION OPERATIONS MESSAGE ABSTRACTION LAYER**3.7.5.8.1.4 Effect on Reception**

- a) On reception of a **TRANSMITMULTIPLE Request** a Transport layer shall return an **ACK Indication** if the transmission of the messages are all successful as far as can be determined initially.
- b) The determination of success shall be Transport specific. For example, for a message broker-based transport, this may mean successful transmission to the local broker.

**3.7.5.8.2 ACK****3.7.5.8.2.1 Function**

The **ACK Indication** primitive shall be used by the Transport layer to indicate to the MAL a successful transmission of a list of messages in response to a **TRANSMITMULTIPLE Request**.

**3.7.5.8.2.2 Semantics**

**ACK Indication** does not use any parameters.

**3.7.5.8.2.3 When Generated**

An **ACK Indication** shall be generated by the Transport layer in response to a **TRANSMITMULTIPLE Request** when the request was successful.

**3.7.5.8.2.4 Effect on Reception**

The effect on reception of an **ACK Indication** by the MAL shall be as defined for the TRANSMIT pattern **ACK Indication**.

**3.7.5.8.3 ERROR****3.7.5.8.3.1 Function**

The **ERROR Indication** primitive shall be used by the Transport layer to deliver a transmission failure **ERROR Message** to the MAL.

**3.7.5.8.3.2 Semantics**

**ERROR Indication** shall provide parameters as follows:

List of (ERROR Message Header, Error Number, Extra Information, QoS properties)