

---

---

**Space data and information transfer  
systems — Spacecraft onboard interface  
services — RFID-based inventory  
management systems**

*Systèmes de transfert des informations et données spatiales —  
Services d'interfaces à bord des véhicules spatiaux — Systèmes de  
gestion des stocks basés sur la radiofréquence (RFID)*

STANDARDSISO.COM : Click to view the PDF of ISO 18382:2013



STANDARDSISO.COM : Click to view the full PDF of ISO 18382:2013



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2013

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2. [www.iso.org/directives](http://www.iso.org/directives)

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received. [www.iso.org/patents](http://www.iso.org/patents)

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

ISO 18382 was prepared by the Consultative Committee for Space Data Systems (CCSDS) (as CCSDS 881.0-M-1, May 2012) and was adopted (without modifications except those stated in Clause 2 of this International Standard) by Technical Committee ISO/TC 20, *Aircraft and space vehicles*, Subcommittee SC 13, *Space data and information transfer systems*.

[STANDARDSISO.COM](https://standardsiso.com) : Click to view the full PDF of ISO 18382:2013

# Space data and information transfer systems — Spacecraft onboard interface services — RFID-based inventory management systems

## 1 Scope

This International Standard provides recommended practices for the utilization of Radio Frequency Identification (RFID) protocol and communication standards in support of inventory management activities associated with space missions.

The recommended practices contained in this International Standard enable member agencies to select the best option(s) available for interoperable RFID-based communications in the support of inventory management applications. The specification of a Recommended Practice facilitates interoperable communications and forms the foundation for cross-support of communication systems between separate member space agencies.

This International Standard is targeted towards passive (unpowered) RFID tags transmitting in the 860 MHz – 960 MHz Ultra High Frequency (UHF) radio band. The recommended practices are applicable to both terrestrial (ground-based) and space-based automated inventory management systems utilizing only passive RFID tags.

Active RFID systems and utilization of RFID tags for precision asset localization are not covered in this International Standard.

The scope and field of application are furthermore detailed in subclause 1.3 of the enclosed CCSDS publication.

## 2 Requirements

Requirements are the technical recommendations made in the following publication (reproduced on the following pages), which is adopted as an International Standard:

CCSDS 881.0-M-1, May 2012, Spacecraft onboard interface services — RFID-based inventory management systems.

For the purposes of international standardization, the modifications outlined below shall apply to the specific clauses and paragraphs of publication CCSDS 881.0-M-1.

## 3 Revision of publication CCSDS 881.0-M-1

It has been agreed with the Consultative Committee for Space Data Systems that Subcommittee ISO/TC 20/SC 13 will be consulted in the event of any revision or amendment of publication CCSDS 881.0-M-1. To this end, NASA will act as a liaison body between CCSDS and ISO.

(Blank page)

STANDARDSISO.COM : Click to view the full PDF of ISO 18382:2013

## Recommendation for Space Data System Practices

# SPACECRAFT ONBOARD INTERFACE SERVICES— RFID-BASED INVENTORY MANAGEMENT SYSTEMS

**RECOMMENDED PRACTICE**

**CCSDS 881.0-M-1**

**MAGENTA BOOK**

**May 2012**

(Blank page)

STANDARDSISO.COM : Click to view the full PDF of ISO 18382:2013

## AUTHORITY

Issue:	Recommended Practice, Issue 1
Date:	May 2012
Location:	Washington, DC, USA

This document has been approved for publication by the Management Council of the Consultative Committee for Space Data Systems (CCSDS) and represents the consensus technical agreement of the participating CCSDS Member Agencies. The procedure for review and authorization of CCSDS documents is detailed in *Organization and Processes for the Consultative Committee for Space Data Systems* (CCSDS A02.1-Y-3), and the record of Agency participation in the authorization of this document can be obtained from the CCSDS Secretariat at the address below.

This document is published and maintained by:

CCSDS Secretariat  
Space Communications and Navigation Office, 7L70  
Space Operations Mission Directorate  
NASA Headquarters  
Washington, DC 20546-0001, USA

## STATEMENT OF INTENT

The Consultative Committee for Space Data Systems (CCSDS) is an organization officially established by the management of its members. The Committee meets periodically to address data systems problems that are common to all participants, and to formulate sound technical solutions to these problems. Inasmuch as participation in the CCSDS is completely voluntary, the results of Committee actions are termed **Recommendations** and are not in themselves considered binding on any Agency.

CCSDS Recommendations take two forms: **Recommended Standards** that are prescriptive and are the formal vehicles by which CCSDS Agencies create the standards that specify how elements of their space mission support infrastructure shall operate and interoperate with others; and **Recommended Practices** that are more descriptive in nature and are intended to provide general guidance about how to approach a particular problem associated with space mission support. This **Recommended Practice** is issued by, and represents the consensus of, the CCSDS members. Endorsement of this **Recommended Practice** is entirely voluntary and does not imply a commitment by any Agency or organization to implement its recommendations in a prescriptive sense.

No later than five years from its date of issuance, this **Recommended Practice** will be reviewed by the CCSDS to determine whether it should: (1) remain in effect without change; (2) be changed to reflect the impact of new technologies, new requirements, or new directions; or (3) be retired or canceled.

In those instances when a new version of a **Recommended Practice** is issued, existing CCSDS-related member Practices and implementations are not negated or deemed to be non-CCSDS compatible. It is the responsibility of each member to determine when such Practices or implementations are to be modified. Each member is, however, strongly encouraged to direct planning for its new Practices and implementations towards the later version of the Recommended Practice.

## FOREWORD

This document is, as of the date of publication, the consensus result of the best practices for inventory management systems utilizing wireless communications in support of space missions.

Through the process of normal evolution, it is expected that expansion, deletion, or modification of this document may occur. This Recommended Practice is therefore subject to CCSDS document management and change control procedures, which are defined in the *Organization and Processes for the Consultative Committee for Space Data Systems* (CCSDS A02.1-Y-3). Current versions of CCSDS documents are maintained at the CCSDS Web site:

<http://www.ccsds.org/>

Questions relating to the contents or status of this document should be addressed to the CCSDS Secretariat at the address indicated on page i.

STANDARDSISO.COM : Click to view the full PDF of ISO 18382:2013

At time of publication, the active Member and Observer Agencies of the CCSDS were:

#### Member Agencies

- Agenzia Spaziale Italiana (ASI)/Italy.
- Canadian Space Agency (CSA)/Canada.
- Centre National d'Etudes Spatiales (CNES)/France.
- China National Space Administration (CNSA)/People's Republic of China.
- Deutsches Zentrum für Luft- und Raumfahrt e.V. (DLR)/Germany.
- European Space Agency (ESA)/Europe.
- Federal Space Agency (FSA)/Russian Federation.
- Instituto Nacional de Pesquisas Espaciais (INPE)/Brazil.
- Japan Aerospace Exploration Agency (JAXA)/Japan.
- National Aeronautics and Space Administration (NASA)/USA.
- UK Space Agency/United Kingdom.

#### Observer Agencies

- Austrian Space Agency (ASA)/Austria.
- Belgian Federal Science Policy Office (BFSPO)/Belgium.
- Central Research Institute of Machine Building (TsNIIMash)/Russian Federation.
- China Satellite Launch and Tracking Control General, Beijing Institute of Tracking and Telecommunications Technology (CLTC/BITTT)/China.
- Chinese Academy of Sciences (CAS)/China.
- Chinese Academy of Space Technology (CAST)/China.
- Commonwealth Scientific and Industrial Research Organization (CSIRO)/Australia.
- CSIR Satellite Applications Centre (CSIR)/Republic of South Africa.
- Danish National Space Center (DNSC)/Denmark.
- Departamento de Ciência e Tecnologia Aeroespacial (DCTA)/Brazil.
- European Organization for the Exploitation of Meteorological Satellites (EUMETSAT)/Europe.
- European Telecommunications Satellite Organization (EUTELSAT)/Europe.
- Geo-Informatics and Space Technology Development Agency (GISTDA)/Thailand.
- Hellenic National Space Committee (HNSC)/Greece.
- Indian Space Research Organization (ISRO)/India.
- Institute of Space Research (IKI)/Russian Federation.
- KFKI Research Institute for Particle & Nuclear Physics (KFKI)/Hungary.
- Korea Aerospace Research Institute (KARI)/Korea.
- Ministry of Communications (MOC)/Israel.
- National Institute of Information and Communications Technology (NICT)/Japan.
- National Oceanic and Atmospheric Administration (NOAA)/USA.
- National Space Agency of the Republic of Kazakhstan (NSARK)/Kazakhstan.
- National Space Organization (NSPO)/Chinese Taipei.
- Naval Center for Space Technology (NCST)/USA.
- Scientific and Technological Research Council of Turkey (TUBITAK)/Turkey.
- Space and Upper Atmosphere Research Commission (SUPARCO)/Pakistan.
- Swedish Space Corporation (SSC)/Sweden.

- United States Geological Survey (USGS)/USA.

STANDARDSISO.COM : Click to view the full PDF of ISO 18382:2013

**DOCUMENT CONTROL**

<b>Document</b>	<b>Title</b>	<b>Date</b>	<b>Status</b>
CCSDS 881.0-M-1	Spacecraft Onboard Interface Services—RFID-Based Inventory Management Systems, Recommended Practice, Issue 1	May 2012	Current issue

STANDARDSISO.COM : Click to view the full PDF of ISO 18382:2013

## CONTENTS

<u>Section</u>	<u>Page</u>
<b>1 INTRODUCTION.....</b>	<b>1-1</b>
1.1 PURPOSE.....	1-1
1.2 SCOPE.....	1-1
1.3 APPLICABILITY .....	1-1
1.4 RATIONALE.....	1-1
1.5 DOCUMENT STRUCTURE .....	1-2
1.6 CONVENTIONS .....	1-2
1.7 REFERENCES .....	1-3
<b>2 OVERVIEW .....</b>	<b>2-1</b>
2.1 GENERAL.....	2-1
2.2 RATIONALE AND BENEFITS.....	2-1
2.3 RFID NOMENCLATURE AND DEFINITIONS.....	2-2
2.4 RF TRANSMISSION CHARACTERISTICS.....	2-2
2.5 RFID STANDARDS .....	2-4
2.6 EVOLUTION OF THE BOOK .....	2-6
<b>3 RFID-BASED INVENTORY MANAGEMENT RECOMMENDED PRACTICE. 3-1</b>	
3.1 OVERVIEW .....	3-1
3.2 RECOMMENDED PRACTICE.....	3-1
<b>ANNEX A SECURITY CONSIDERATIONS (INFORMATIVE) .....</b>	<b>A-1</b>
<b>ANNEX B CONFORMANCE AND INTEROPERABILITY (INFORMATIVE).....</b>	<b>B-1</b>
<b>ANNEX C RFID INVENTORY MANAGEMENT (INFORMATIVE) .....</b>	<b>C-1</b>
<b>ANNEX D INFORMATIVE REFERENCES (INFORMATIVE) .....</b>	<b>D-1</b>
<b>ANNEX E GLOSSARY AND ABBREVIATIONS (INFORMATIVE) .....</b>	<b>E-1</b>
<b>ANNEX F ITU INDUSTRIAL, SCIENTIFIC, AND MEDICAL (ISM) BANDS (INFORMATIVE) .....</b>	<b>F-1</b>
<b>ANNEX G UHF REGIONAL SPECTRUM UTILIZATION (INFORMATIVE).....</b>	<b>G-1</b>
 <u>Figure</u>	
C-1 RFID Enclosure .....	C-9

**CONTENTS (continued)**

<u>Table</u>	<u>Page</u>
2-1 RFID Tag Classifications.....	2-2
2-2 RFID Performance Characteristics in LF/HF/UHF Frequency Bands.....	2-3
2-3 Summary of RFID Standards for Item Management with Frequency Bands .....	2-4
2-4 Regional Regulatory Status for Using RFID in the UHF Spectrum .....	2-5
C-1 'Quick-look' Table for Space-Related RFID Use Cases .....	C-2
C-2 Applications Representative of EPCglobal Class 1 Gen-2 Configurations.....	C-5
C-3 Typical Operating Parameters for Handheld Reader Audit Use (Class 1 Gen-2).....	C-7
C-4 Typical Operating Parameters for Handheld Reader Used to Locate Tagged Items (Class 1 Gen-2) .....	C-8
C-5 Typical Operating Parameters for RFID Enclosures (Class 1 Gen-2) .....	C-9
C-6 Typical Operating Parameters for Portal-Based Readers (Class 1 Gen-2) .....	C-10
F-1 ITU Industrial, Scientific, and Medical RF Bands.....	F-1
G-1 UHF Frequency Plan for North America.....	G-1
G-2 UHF Frequency Plan for Europe .....	G-1
G-3 UHF Frequency Plan for China .....	G-2
G-4 UHF Default Frequency Plan for China .....	G-2
G-5 UHF Frequency Plan for Japan.....	G-2

STANDARDSISO.COM : Click to view the full PDF of ISO 18382:2013

## 1 INTRODUCTION

### 1.1 PURPOSE

This document provides recommended practices for the utilization of Radio Frequency Identification (RFID) protocol and communication standards in support of inventory management activities associated with space missions. Relevant technical background information can be found in *Wireless Network Communications Overview for Space Mission Operations* (reference [D4]).

The recommended practices contained in this report enable member agencies to select the best option(s) available for interoperable RFID-based communications in the support of inventory management applications. The specification of a Recommended Practice facilitates interoperable communications and forms the foundation for cross-support of communication systems between separate member space agencies.

### 1.2 SCOPE

This Recommended Practice is targeted towards passive (unpowered) RFID tags transmitting in the 860 MHz – 960 MHz Ultra High Frequency (UHF) radio band. The recommended practices are applicable to both terrestrial (ground-based) and space-based automated inventory management systems utilizing only passive RFID tags.

Active RFID systems and utilization of RFID tags for precision asset localization are not covered in this Recommended Practice.

### 1.3 APPLICABILITY

This Recommended Practice specifies protocols that enable interoperable wireless inventory management systems that utilize RFID technologies.

NOTE – Inclusion of any specific wireless technology does not constitute any endorsement, expressed or implied, by the authors of this Recommended Practice or the agencies that supported the composition of this Recommended Practice.

### 1.4 RATIONALE

From an engineering standpoint, mission managers, along with engineers and developers, are faced with a plethora of wireless communication choices, both standards-based and proprietary. A CCSDS RFID-based inventory management system Recommended Practice provides guidance in the selection of systems necessary to achieve interoperable communications in support of automated inventory management.

## 1.5 DOCUMENT STRUCTURE

Section 2 provides an informational overview of the rationale and benefits of spacecraft onboard wireless inventory management technologies for use in space operations. Included are an overview and comparison of the International Organization for Standardization (ISO) and the Electronic Product Code, known as EPCglobal, standards for RFID inventory management systems. EPCglobal is a joint venture between GS1 (formerly known as EAN International) and GS1 US (formerly the Uniform Code Council, Inc.). It is an organization set up to achieve worldwide adoption and standardization of Electronic Product Code (EPC) technology.

Section 3 provides a normative description for recommended practices and applicable standards relating to RFID portal-based readers and RFID hand-held readers.

Annex A provides an overview of security concerns pertaining to RFID-based inventory management systems.

Annex B discusses conformance and interoperability.

Annex C provides use cases and application profiles for RFID inventory management.

Annex D is a list of informative references.

Annex E is a glossary of abbreviations and terms used in this document.

Annex F provides a table of frequency ranges for ITU Industrial, Scientific, and Medical RF Bands.

Annex G identifies UHF spectrum utilization for major regions.

## 1.6 CONVENTIONS

### 1.6.1 NOMENCLATURE

The following conventions apply for the normative specifications in this Recommended Practice:

- a) the words 'shall' and 'must' imply a binding and verifiable specification;
- b) the word 'should' implies an optional, but desirable, specification;
- c) the word 'may' implies an optional specification;
- d) the words 'is', 'are', and 'will' imply statements of fact.

NOTE – These conventions do not imply constraints on diction in text that is clearly informative in nature.

## 1.6.2 INFORMATIVE TEXT

In the normative section of this document (section 3), informative text is set off from the normative specifications either in notes or under one of the following subsection headings:

- Overview;
- Background;
- Rationale;
- Discussion.

## 1.7 REFERENCES

The following publications contain provisions which, through reference in this text, constitute provisions of this document. At the time of publication, the editions indicated were valid. All publications are subject to revision, and users of this document are encouraged to investigate the possibility of applying the most recent editions of the publications indicated below. The CCSDS Secretariat maintains a register of currently valid CCSDS publications.

- [1] *EPC™ Radio-Frequency Identity Protocols—Class-1 Generation-2 UHF RFID Protocol for Communications at 860 MHz - 960 MHz*. Version 1.2.0. Specification for RFID Air Interface. Brussels: GS1, October 2008.<sup>1</sup>
- [2] *Information Technology—Radio Frequency Identification for Item Management—Part 6: Parameters for Air Interface Communications at 860 MHz to 960 MHz*. International Standard, ISO/IEC 18000-6:2010. 2nd ed. Geneva: ISO, 2010.

---

<sup>1</sup> For this issue of this Recommended Practice, only the cited edition applies.

(Blank page)

STANDARDSISO.COM : Click to view the full PDF of ISO 18382:2013

## 2 OVERVIEW

### 2.1 GENERAL

This section provides an overview of important practical issues associated with the utilization of RFID technologies in support of inventory management systems for space missions. The following subsections present an overview of:

- rationale and benefits of RFID for space-mission inventory management;
- basic RFID nomenclature and operation;
- important applicable protocol and transmission standards;
- RF spectrum planning notes; and
- the scope of interoperability to be achieved by adherence to recommended practices specified.

The goal of specifying an RFID standard is to enable engineering projects to utilize interoperable communication protocols, potentially in agency cross-support scenarios, that are standards-based.

### 2.2 RATIONALE AND BENEFITS

Inventory management is a critical function in many aspects of space operations, in both flight and ground segments. On the ground, thousands of controlled components and assemblies are stored in bond rooms across multiple centers and space agencies. These inventories are tightly controlled, typically using manual processes such as paper tags on individual items or small collections of identical items, such as small bags with screws.

Other ground operations also require complex inventories, including tracking all laboratory and office equipment with significant value.

Inventory management for flight applications entails an even greater degree of control, as improperly substituted items and early depletion of certain items can be catastrophic. Most short duration missions do not involve restocking, so resupply logistics are non-existent, but initial stocking and tracking of inventories is nonetheless quite important. For most long duration missions, resupply efforts are inherently complex, expensive, and infrequent.

The utilization of RFID tagging improves inventory visibility, leading to increased situational (inventory level) awareness, a decrease in resupply mission cost, and improvement in resupply mission efficiency.

## 2.3 RFID NOMENCLATURE AND DEFINITIONS

An RFID system consists of readers (also termed interrogators) and tags.

An RFID reader transmits information to an RFID tag by modulating an RF signal in a defined portion of the radio spectrum. Passive RFID tags receive both energy and information from the reader-transmitted RF signal, while active RFID tags provide their own power for radio transmission. Passive RFID tags respond to the reader-originated signal by modulating the reflection coefficient of their antenna in a technique termed 'backscatter' to provide an encoded informational response to the reader. See table 2-1 for standard RFID tag classifications. Each RFID tag is designed to a specific protocol. The protocol defines how the tag will communicate to the outside world. Built within the protocol are features such as security (data encryption, lock abilities, etc.) and anti-collision algorithms.

**Table 2-1: RFID Tag Classifications**

Class	Class Name	Tag Functionality
1	Strictly Passive Surface Acoustic Wave (SAW) RFID Tags	Purely passive, containing neither a battery nor an IC chip
2	Passive IC-Based RFID Tags	Passive; incident RF energy rectified to power an IC
3	Semi-Passive Tags	Onboard battery powers some functions, but RF signal is typically backscattered from incident field
4	Active Tags	Battery-powered, longer range

The performance characteristics of tag and reader devices may vary drastically because of application factors as well as the particulars of the RF air interface (frequency, modulation, multiple access scheme, etc.). Of key concern is the matching of the various performance characteristics to the user application (reference [D5]).

## 2.4 RF TRANSMISSION CHARACTERISTICS

There are several different versions of RFID that operate at different radio frequencies. The choice of frequency is dependent on the requirements of the application. Four primary frequency bands that have been allocated for RFID use include (see table 2-2 for associated transmission characteristics):

- a) **Low Frequency** (125/134 KHz) – LF: Most commonly used for access control and asset tracking;

## RECOMMENDED PRACTICE FOR RFID-BASED INVENTORY MANAGEMENT SYSTEMS

- b) **High Frequency** (13.56 MHz) – HF: Used where medium data rate and read ranges are required;
- c) **Ultra High Frequency** (860 MHz to 960 MHz) – UHF;
- d) **Microwave Frequency** (> 1 GHz).

**Table 2-2: RFID Performance Characteristics in LF/HF/UHF Frequency Bands**

Characteristics / Frequency	125 - 150 kHz (LF)	13.56 MHz (HF)	860 - 960 MHz (UHF)	2.45 GHz (microwave)
Antenna technology	Air coil or ferrite coil	Typically printed	Multiple	Multiple
Typical read range	< 0.5 m	1.5 m	> 5 m	> 5 m
Typical data transfer rate	< 1 kbps	25 kbps	>128 kbps	>128 kbps
Characteristics	Short-range, low data transfer rate, some penetration of water and thin metal	Higher read range, low-to-moderate data rates, attenuated by water and metals	Long range, high data transfer rate, strongly attenuated by water and metals	Long range, high data transfer rate, strongly attenuated by water and metals
Metal influence (Approximate skin depth in mm for Aluminum)	0.2 mm	20 $\mu$ m	3 $\mu$ m	2 $\mu$ m

The choice of operational frequency has important design impacts for practical RFID use. Engineering properties of higher frequency (e.g., UHF) tags include:

- a) smaller tag antennas, typically the largest physical tag component;
- b) less diffraction / increased shadowing;
- c) shallower penetration of lossy and conductive media;
- d) higher implementation cost;
- e) potential for spatial diversity.

While lower frequency (e.g., LF) RFID system properties include:

- a) larger antennas;
- b) greater diffraction / decreased shadowing;
- c) lower implementation cost;
- d) spatial diversity limited by long wavelengths.

Since UHF can cover dock or door portals up to 3 meters wide, it has gained widespread industry support as the choice bandwidth for inventory tracking applications including pallets and cases. For item-level applications, the read range requirements are often just as long. For some item-level tagging applications, however, it can become difficult to place tags in positions to avoid liquids and metals.

## 2.5 RFID STANDARDS

ISO and EPCglobal represent two of the more recognized RFID standardization efforts.

From a pragmatic perspective both ISO and EPCglobal strive to produce an RFID communication and data exchange standard to enable interoperability of multi-vendor systems. Historically, communication protocol standards have almost exclusively been the domain of IEEE and ISO. The Electronic Product Code (EPC) is not an international standard approved by ISO. However, EPC has significant traction because of the familiar UPC bar codes and member clout of the EPCglobal consortium. An important observation is that the EPC deals with more than just how tags and readers communicate: EPCglobal has established and maintains network standards to govern how EPC data is shared among companies and other organizations.

**Table 2-3: Summary of RFID Standards for Item Management with Frequency Bands**

Frequency Band	LF 125/134.2 kHz	HF 13.36 MHz	HF 433 MHz	UHF 860-960 MHz	UHF 2.45 GHz
ISO	ISO 18000-2A ISO 18000-2B	ISO 18000-3	ISO 18000-7	ISO 18000-6A ISO 18000-6B ISO 18000-6C	ISO 18000-4
EPCglobal				Class 0 Class 1 Class 1 Gen 2	

RFID standards have been established for the HF (13.65 MHz), UHF (860-960 MHz), and Industrial, Scientific, and Medical (ISM—2.45 GHz) bands by the International Organization for Standardization under the ISO 18000 series as shown in table 2-3. For the UHF frequency band that includes the popular 860-960 MHz ISM spectrum, ISO standard 18000-6 is the governing standard. The 18000-6 standard details the parameters for how interrogators send and receive data from UHF tags. It also specifies the frequencies and channels to be used, as well as bandwidth, channel utilization, frequency-hopping specifications, and other technical details. The two earlier amendments (A and B) to the 18000-6 protocols describe specific data-encoding schemes.

## RECOMMENDED PRACTICE FOR RFID-BASED INVENTORY MANAGEMENT SYSTEMS

The UHF standard ISO 18000-6 has been widely adopted by industry and has evolved in practice to a working system that has been made into an augmented standard by EPCglobal, termed ‘Class 1, Generation-2’, or ‘Class 1 Gen-2’; this augmentation has been fed back into the ISO standard to become ISO 18000-6 mode C. The Class 1 Gen-2 air interface standard establishes a single UHF (860-960 MHz) specification that addresses UHF spectrum regulations in differing terrestrial regions. Thus the EPCglobal Class 1 Gen-2 document has become the de-facto standard for inventory management in UHF using RFID. This process is also underway for the HF band, currently governed by ISO 18000-3.

The EPCglobal Class 1 Gen-2 is one of the most rapidly growing standards with substantial industrial deployments worldwide (see reference [1]). Interrogators operate somewhere within the 860-960 MHz band, whereas tags are required to operate over that full range. European readers typically operate in the lower part of that band, whereas U.S. readers operate in the upper part. EPC Class 1 Gen-2 utilizes passive, IC-based RFID tags. Range has been reported historically as less than 3.3 meters, although at the time of this publication, ranges in the vicinity of 6.6 meters or more are not uncommon with moderate gain (e.g., 8 dBi) interrogator antennas and approximately 1W transmit power. The EPC Class 1 Gen-2 specification forecasts future classes with advanced features such as sensor capabilities, tag-to-tag communications, and ad hoc networking.

Table 2-4 summarizes the regional (terrestrial) regulatory status for using RFID in the UHF spectrum (reference [D1]). A status of ‘OK’ implies regulations are in place or will be in place shortly; a status of ‘I/P’ implies appropriate regulations are in progress—as of August 2010—and should be completed as of August 2011. See annex G for regional UHF channel allocations covering primary international RF spectrum allocation policies.

**Table 2-4: Regional Regulatory Status for Using RFID in the UHF Spectrum<sup>2</sup>**

Region	Status	Frequency	Power	Protocol Technique
China	OK	840.5-844.5	2W erp	FHSS
		920.5-924.5 MHz	2W erp	FHSS
Europe	OK	865.6-867.6 MHz	2W erp	No longer use LBT* ETSI EN 302 208
Japan	OK	952-954 MHz	4W eirp	LBT (note)
North America	OK	902-928 MHz	4W eirp	FHSS
Russia	I/P	865.6-867.6 MHz	2W erp	LBT* ETSI EN 302 208

<sup>2</sup> Source: reference [D1].

NOTE – LBT: Listen Before Talk (see reference [D2] for more information regarding LBT protocol).

## 2.6 EVOLUTION OF THE BOOK

This Recommended Practice addresses only RFID tag and reader interoperability in the UHF (860-960 MHz) frequency band. As space-related applications arise that cannot be fulfilled based on the recommendations of this Recommended Practice, evolution of this book will be considered. Methods to extend or adapt previous recommendations will be considered with preference over adoption of new standards, providing the resulting performance and cost are advantageous relative to those associated with adoption of one or more new standards.

STANDARDSISO.COM : Click to view the full PDF of ISO 18382:2013

### 3 RFID-BASED INVENTORY MANAGEMENT RECOMMENDED PRACTICE

#### 3.1 OVERVIEW

This section presents the recommended practice of utilizing the ISO 18000-6C/EPCglobal Class 1 Gen-2 RFID communication standard for PHY/MAC interoperability. Annex C provides additional information, discussion, and application profiles associated with the recommended practice.

The recommended practice pertains to RFID systems that provide stored data only, as opposed to sensor telemetry. Applications are considered where no direct active-tag power is required, which necessitates short-range communication and Interrogator-Talk-First (ITF) protocols. (See reference [D4] for supporting technical background.)

#### 3.2 RECOMMENDED PRACTICE

##### 3.2.1 EPCGLOBAL CLASS 1 GENERATION-2 UHF RFID PROTOCOL

For onboard spacecraft or internal-vehicle inventory management via wireless RFID, the air interface standard shall be the EPCglobal Class 1 Generation-2 UHF RFID Protocol for communications at 860 MHz – 960 MHz (references [1] and [2]).

#### NOTES

- 1 In 2006, ISO approved the EPC Class 1 Gen-2 standard as an amendment to its 18000-6 standard, as ISO 18000-6C.
- 2 Level of interoperability: Specific applications may necessitate greater interoperability at the Application Layer than is provided by the recommended practice. For maximum Application Layer interoperability the utilization of the Low Level Reader Protocol (LLRP) described in C2 is recommended.

##### 3.2.2 RESTRICTIONS/HAZARDS

###### 3.2.2.1 Explosive Environments

Caution should be exercised with respect to compliance with governing regulations for RF transmissions, particularly in potentially explosive environments.

###### 3.2.2.2 RF Exposure

Also, due consideration should be given to avoid RF exposure that exceeds limits established by the local governing regulations.

### 3.2.2.3 RF Scattering

Consideration should be given to scattering environments characterized by small confines with highly conductive perimeters within which resonances can result in increased field levels.

NOTE – Commercially available readers based on EPCglobal C1 Gen-2 typically transmit up to one Watt RF power.

STANDARDSISO.COM : Click to view the full PDF of ISO 18382:2013

## ANNEX A

### SECURITY CONSIDERATIONS

#### (INFORMATIVE)

#### A1 INTRODUCTION

RFID technology is evolving rapidly, and along with the potential benefits, there are also associated certain risks. An RFID system typically comprises an RF subsystem in addition to more traditional data networks and databases, possibly in the form of an enterprise or inter-enterprise architecture. The risks and controls discussed herein focus on those that are unique to RFID technology as opposed to general information technology. Risks and controls associated with conventional network security are considered beyond the scope of this document. Much of the security terminology and description of risks and controls in this annex is adopted from reference [D10]. The reader is referred to reference [D10] for more in-depth treatment. The intent of this annex is to summarize and discuss the primary security concerns as applied to the management and tracking of space-based inventories.

#### A2 RFID RISKS

##### A2.1 GENERAL

Identification of risks and applicable controls presented herein are taken in large part from reference [D10], in which RFID risks are categorized as business process risks, business intelligence risks, privacy risks, and externality risks. These risks are summarized below, with some discussion on the relevance to the applications served by this book. Following summarization of the risks, controls intended to mitigate risks are discussed.

##### A2.2 BUSINESS RISK

Business process risk pertains to the threat to the business operations, for which RFID technology was intended to serve, when the technology is compromised. The severity of the risk depends, in part, on the criticality of the underlying business mission and its dependence upon RFID technology, and the presence and robustness of a backup system (continuity planning) should the RFID technology fail. The physical environment of the RFID technology and the existence of adversaries are also factors that characterize the business process risk.

Typically, missions involving human spaceflight are highly dependent upon adherence to timelines. Estimates of the monetary values of crew time are usually quite high. Thus minimizing time associated with conducting inventories is likely more critical for space operations than for most terrestrial business operations. Furthermore, once the crew and

ground operations personnel become accustomed to the timesavings afforded by RFID technology, less crew time will be allocated for conducting inventories. In this case, an unanticipated failure of the RFID system is likely to have significant impact on the crew schedules.

Science missions are also likely to build dependencies on RFID technology. If the crew is unable to locate items required for an experiment, thus delaying its execution, ground controllers often have to spend considerable resources rescheduling crew activities. The loss of science sample identities could also have costly impacts. Samples with lost or damaged tags could result in extreme losses if an experiment has to be repeated or is abandoned. Thus a substantial collapse of a space-based RFID inventory system could have considerable consequences on a mission. An inability to quickly locate critical on-board equipment could entail even more severe ramifications. For all of the reasons stated, a backup plan in the event of RFID failures should be established.

For space applications of RFID, the physical environment is typically a risk requiring mitigation. Exposure to extreme environments can include temperatures, vacuum, and ionizing radiation.

### A2.3 BUSINESS INTELLIGENCE RISK

Business intelligence risk is typically associated with the loss of sensitive information to adversaries of the organization deploying RFID. The attributes of RFID technology that render it a valuable tool, that is, the independence from line-of-sight for automated identification capture and the ability to interrogate tags remotely, provide opportunities for espionage. Such information can be exploited in near-term exploits such as *targeting*, in which an adversary remotely identifies items worth stealing (reference [D10]). Or, monitored tag interrogations can permit data accumulation over an extended time by adversaries in order to discern business practices or proprietary methods, such as dependence on a specific type of item or combination of ingredients.

Factors affecting business intelligence risks include (reference [D10]): the existence of adversaries, the relevance of information available to the adversary, and the location of RFID components. Of paramount importance is the type of data stored on the tag; that is, whether the tag stores identifiers or indices into a database or actual information such as personal records or sensor data.

Although business intelligence risks do not seem as relevant to space-based inventory management as business process risks, there are some examples of such risks. For example, some space-based experiments produce data that is considered sensitive or proprietary to a sponsoring commercial or academic institution. Similarly, ingredients or equipment used to enact such an experiment might be considered sensitive or proprietary. Furthermore, as joint agency-commercial space endeavors continue to increase, these types of risks will also require greater consideration. Thus when these types of items are tracked with RFID systems, associated risks should be gauged and mitigated by proper controls when necessary.

## RECOMMENDED PRACTICE FOR RFID-BASED INVENTORY MANAGEMENT SYSTEMS

Adversarial threats, whether to business process or business intelligence, are more likely to occur on the ground than on the vehicle. Possibilities of damage, both intentional and accidental, to tagged items during transport should be considered. Adversaries seeking publicity or action against a government or agency might try to kill or reprogram tags. Tag commands issued by airport or shipping crews could likewise impact item tags without intent. Adversarial threats could also occur with the downlink of tag data in spacecraft telemetry if the link is not properly secured, or if unencrypted data is disseminated beyond the authorized receivers.

#### A2.4 PRIVACY RISK

Privacy risks pertain to information gleaned from tags that are in some way associated with an individual. For example, information might be read from a tagged prescription bottle that reveals a medical condition associated with the carrier. Consequences can be legal action for violation of privacy laws or a consumer or constituent backlash when it is perceived that a trust is breached, even when no laws were broken. Typically, personal information is segregated as 'personally identifiable' or 'non-personally identifiable' according to whether the subject information is sufficient to designate or contact a specific individual. Laws in many countries regulate how personally identifiable information is managed. The type of data stored on the tags is again a major factor in the level of risk.

For applications served by this document, it is likely that the privacy risks are largely or wholly oriented to the crew. Care must be exercised to ensure that RFID data associated with specific crewmembers is available only to individuals authorized to receive that data. For example, tagged medical samples are likely to be subject to laws protecting privacy. As with business process and business intelligence, privacy must be safeguarded when certain RFID data is downlinked or disseminated, or when returned science sample tags carry data subject to privacy laws.

#### A2.5 EXTERNALITY RISK

Externality risks describe the inadvertent undesirable effects of an RFID system on other systems. The main externality risk for the RF subsystem is hazards resulting from electromagnetic radiation, which could range from adverse health effects to ignition of a combustible material (reference [D10]). The reader is referred to 3.2.2 'Restrictions/Hazards'. Commercial RFID tags often are manufactured from low-cost materials and rely on low-cost adhesives in order for viability of the technology. Out-gassing of these materials constitutes an externality risk relevant to confines with closed-loop ventilation, such as spacecraft.

### A3 RFID SECURITY CONTROLS

This subsection describes security controls to mitigate risks described above. As in the preceding subsection, treatment pertains to the RFID subsystem, and security controls

associated with general IT are considered out of scope. As in reference [D10], controls are categorized as belonging to management, operational, and technical. These are summarized briefly below, along with considerations pertaining especially to space-based RFID systems.

Management controls involve the oversight of the security of the RFID system, including the enactment and enforcement of policies involving RFID security. Management controls include RFID usage policy, IT security policies, agreements with external organizations, and minimization of sensitive data stored on tags (reference [D10]).

Operational controls regulate the daily use of RFID systems, and include personnel limitation on physical access to RFID systems, placement to reduce electromagnetic interference and radio frequency interference, regulation of the RF component thermal environment, destruction of tags that have served their function, and proper training of personnel. A redundant inventory tracking method is considered an important operational control for most space-based inventory applications.

Separation of duties is an operational control in which no single individual has sole oversight over an entire RFID system, or a significant subsection thereof. This mitigates risks associated with disgruntled employees as well as risks stemming from human error.

Other operational controls include proper training of personnel, proper use of labels and notices, proper disposal of tags, and non-revealing identifier formats.

Technical RFID security controls include those that (reference [D10]):

- a) provide authentication and integrity services to RFID components and transactions;
- b) protect RF communication between reader and tag; and
- c) protect the integrity of the tag data.

Authentication and integrity services are typically more limited for RFID subsystems than general IT because of tight restrictions on the tag with respect to power consumption and memory capacity, especially for passive tag RFID subsystems. The most common techniques for the RFID subsystems are passwords, keyed Hash Message Authentication Codes (HMAC), and digital signatures. Primary objectives of the authentication technology can include:

- a) prevention of unauthorized reading from or writing to a tag;
- b) detection of tag cloning; and
- c) tag data integrity protection.

A summary of these methods, including strengths and weaknesses, is included in reference [D10]. At the time of this publication release, only password authentication is practical for the recommended practice of section 3. The ISO 18000-6C/EPCglobal Class 1 Gen-2 RFID communication standard provides for separate 32-bit *kill* and *access* passwords. The *kill* password irrevocably terminates all functionality of the tag. It can only be invoked if

## RECOMMENDED PRACTICE FOR RFID-BASED INVENTORY MANAGEMENT SYSTEMS

a non-zero password is set and presented prior to issuance of the command. If an access password is set, it must be presented to the tag in order to lock or alter any of the tag's memory banks, including identification, password, and user memory banks. It is also required for the *permalock* command, which permanently locks the memory banks.

Use of password authentication is highly recommended, as intentional or unintentional impairment or destruction of tags might otherwise result. However, assigning arbitrarily unique passwords to each tag is typically impractical.

A number of technical controls can provide security for the RF communication to the tag, including cover-coding, data encryption, shielding, frequency designation, and selective (e.g., periodic or event-driven) use of RF subsystems. Summarizations of these controls are provided in (reference [D10]). For most space-based RFID systems, the RF reader-tag communication link enjoys a high degree of isolation and shielding from adversarial threats once launched. Technologies such as RFID enclosures provide additional degrees of shielding.

Tag data protection controls include tag memory access control, encrypting tag data, the *kill* feature, and tamper protection. Tags that are *frangible*, typically implemented by antennas that are destroyed when a tag is removed from an item, provide tamper protection.

Radio Frequency Identification Systems (RFIS) systems engineers should thoroughly assess all risks and provide mitigation required to reduce the risks to acceptable levels. Table 5-1 in reference [D10] provides a convenient table listing controls and the risks that they mitigate.

(Blank page)

STANDARDSISO.COM : Click to view the full PDF of ISO 18382:2013

## ANNEX B

### CONFORMANCE AND INTEROPERABILITY

#### (INFORMATIVE)

##### B1 GENERAL

The ISO 18000-6C / EPCglobal Class-1 Gen-2 protocol specification is a CCSDS adopted (recommended practice) open standard. A substantial benefit of the EPCglobal specification is the significant interoperability afforded by multi-vendor commercial uptake. The EPCglobal hardware and software certification programs enable this RFID-based interoperability. EPCglobal Class 1 Gen-2 Certification Test documents and requirements are available at reference [D13]. The interoperability and conformance documents are organized into three categories:

- a) hardware conformance requirements;
- b) hardware interoperability requirements;
- c) software conformance requirements.

##### B2 SCOPE OF INTEROPERABILITY AND COEXISTENCE

The goal of this Recommended Practice is to provide a specification that enables cross-agency interoperability between RFID readers (e.g., portals, hand-held scanners) and RFID tags. Adherence to the Recommended Practice does not guarantee coexistence (i.e., non-interference) of multiple RFID readers that interact with overlapping or nearby tag populations. This Recommended Practice provides guidance with respect to achieving coexistence between multiple RFID readers and tag populations.

NOTE – The level of interoperability provided by the ISO 18000-6C (EPCglobal Class 1 Gen-2) is the ability to communicate with compliant devices at the Physical (PHY—RF data transmission) and Medium Access Control (MAC—transmission framing) layers. This is commonly referred to as PHY/MAC interoperability. Importantly, while ISO 18000-6C provides PHY/MAC layer interoperability, this does **not** imply automatic Application Layer interoperability.

It should be noted that the ISO 18000-6C (EPCglobal Class 1 Gen-2) has optional features that facilitate ‘multi-interrogator’ or ‘dense interrogator’ usage, that is, scenarios involving multiple interrogators with potential overlapping fields of view. These features are achieved by spectrally displacing the tag response from the interrogating signal, thereby reducing the likelihood that one interrogator will interfere with tag responses to a second interrogator. Such features which are optional within the ISO 18000-6C / EPCglobal Class 1 Gen-2 protocol are also considered optional with respect to the recommended practice herein.

### B3 INTEROPERABILITY

Interoperability in the RFID context is defined as the ability of two or more systems or devices to exchange information utilizing a common protocol. The GS1 EPCglobal Interoperability Certification builds on the GS1 EPCglobal hardware and software conformance testing: devices participating in the interoperability testing must use components that are certified for compliance. The GS1 EPCglobal Interoperability Testing (reference [D11]) demonstrates the ability of different compliance-certified products to work with other compliance-certified products.

### B4 CONFORMANCE

The GS1 EPCglobal Conformance Testing (reference [D11]) verifies that EPC hardware and software comply with the GS1 EPCglobal standards. Conformance is an enabler of interoperability, but being strictly conformant does not guarantee interoperability. It is important to note that there are typically multiple levels of conformance associated with a standard's specification. Pragmatically, there are many business cases where it makes sense to implement only a portion (a subset) of a standard. Hence, in such a case conformance is with regard to the subset of the standard implemented and testing is pared accordingly.

#### NOTES

- 1 CAUTION: As with all radio frequency communication, test results are influenced by the surrounding RF environment.
- 2 CAUTION: EPCglobal conformance only requires *one* mode of many available modes to work on a reader or tag. In other words, when an interoperability test is run, only tags of a *specific* mode are tested against readers that also support the *specific* mode, not arbitrary tags versus arbitrary readers. To have a conformance certification, readers and tags do not need to support more than one mode. Therefore an arbitrary EPCglobal UHF Class 1 Gen 2 conforming reader may not operate with an arbitrary conforming tag. At an application level, separate entities (e.g., space agencies) that are operating together would have to at least agree on modes to interoperate.
- 3 CAUTION: EPCglobal conformance is regional based. Both North American conformance and European conformance are addressed in the EPCglobal conformance documents. A reader and/or tag only needs to support a single (one) region to be considered conforming and/or, after tests, interoperable. Users must agree on regional choices to be 'interoperable'.
- 4 CAUTION: Conformance testing is at 'suitable' range, which is never specified; the test range is adjusted until there is a 0 dBm signal received at the tag. There is nothing in the conformance testing, interoperability testing, or standard, to ensure a given minimum range performance.

## RECOMMENDED PRACTICE FOR RFID-BASED INVENTORY MANAGEMENT SYSTEMS

- 5 CAUTION: Specific applications may necessitate greater interoperability at the Application Layer than is provided by the recommended practice. For maximum Application Layer interoperability the utilization of the Low Level Reader Protocol, LLRP, described in C2 is recommended.

STANDARDSISO.COM : Click to view the full PDF of ISO 18382:2013

(Blank page)

STANDARDSISO.COM : Click to view the full PDF of ISO 18382:2013

## ANNEX C

### RFID INVENTORY MANAGEMENT

#### (INFORMATIVE)

##### C1 OVERVIEW

This annex presents typical use cases for the recommended practice of utilizing the ISO 18000-6C/EPCglobal Class 1 Gen-2 RFID communication standard for PHY/MAC interoperability. Application profiles are included for the specific cases of:

- a) handheld RFID reader for inventory audits;
- b) handheld RFID reader for localizing objects;
- c) RFID enclosures for inventory audits;
- d) portal-based RFID reader.

##### C2 APPLICATION LAYER SUPPORT—LOW-LEVEL READER PROTOCOL

Low-Level Reader Protocol (LLRP) is an Application Layer protocol standard ratified by EPCglobal in April 2007 (see references [D3] and [D12]). It is a specification for the communication interface between the reader and its controlling hardware or software. While adoption of the EPCglobal Class 1 Gen-2 UHF air interface protocol does not require adoption of the LLRP for the Application Layer protocol, it does provide a convenient and complete Application Layer control of the air interface protocol. It also enables third-party extensions to be added, such that third-party add-ons to the EPCglobal Class 1 Gen-2 protocol are accessible through an extended LLRP-based Application Layer. The complete protocol description, necessary to generate LLRP messages, has been implemented in a number of open-source toolkits available in a variety of programming languages (C, C++, Java, Perl, C# and .NET) making implementation of the protocol on Linux, Windows, and other standard hardware platforms straightforward. Since this is the Application Layer protocol adopted by EPCglobal for use with its Class 1 Gen-2 protocol, it represents the best entry point for high-level control of the Class 1 Gen-2 protocol across a wide range of possible RFID devices based on the Class 1 Gen-2 standard.

Some LLRP parameters are referenced in this document, particularly in describing typical settings with respect to application profiles. Typically, the functionalities associated with these parameters are evident by their names, and they are useful in conveying reader configurations even when LLRP is not being utilized as the Application Layer protocol.

### C3 TYPICAL USE-CASES

Table C-1 summarizes several common areas of application, or use-case scenarios that can leverage RFID technology to enable or facilitate automated inventory management systems for space missions. General detail regarding these use cases can be found in reference [D4]. Specific applications relating to some of these use cases can be found in C5.

**Table C-1: ‘Quick-look’ Table for Space-Related RFID Use Cases**

Ground supply chain logistics (flight equipment and components)	Provide inventory management tracking for ground and flight articles utilized to support an agency activity or mission
Space vehicle supply transfers	High-accuracy tracking of supplies transferred from one vehicle to another
Equipment/consumables inventory audits	Provide automated inventory management and consumable/equipment supply levels
Localize equipment and consumables	Provide consumable/equipment localization to minimize crew-associated tasks
Pharmaceuticals supply maintenance	Provide automated inventory, localization and expiration date management for pharmaceuticals
Parts identification and association	Provide immediate recognition of a multitude of parts and association to pertinent database(s)
Science sample inventory	Provide ‘bag and tag’ capabilities to accurately identify science sample inventory and acquisition location
Disposables tracking	Provide automated inventory item decrementation

### C4 GENERAL CONSIDERATIONS TO PROMOTE COEXISTENCE AND INTEROPERABILITY

#### C4.1 GENERAL

Use of the EPCglobal Class 1 Gen-2 standard provides a communication protocol that enables compliant RFID interrogators and tags to function. A number of interrogator and tag characteristics, particularly relating to spectrum usage and channelization, are deferred by EPCglobal Class 1 Gen-2 to regional regulations. In addition, the standard provides a number of features that are considered optional. Some of these optional provisions determine how well the RFID system will work in an environment in which multiple EPCglobal Class 1 Gen-2 readers are operating, i.e., a multi-interrogator or dense-interrogator environment. Various spectrum constraints and possible requirements for a multi-interrogator environment will vary according to the specific application, so options provided by EPCglobal Class 1 Gen-2 are also considered optional with respect to the recommendations provided herein. Some discussion on these options is contained herein.

## C4.2 FREQUENCY HOPPING SPREAD SPECTRUM

Frequency Hopping Spread Spectrum (FHSS) should be utilized in accordance with one of the established plans (see reference [1]).

NOTE – FHSS minimizes interference by transmitting within a number of channels in a pseudo-random fashion. For EPCglobal Class 1 Gen-2 systems, FHSS is commonly utilized where regulations have allocated a large amount of bandwidth (reference [D5]). This has typically, but not exclusively, been the band from 902 to 928 MHz.

## C4.3 SESSIONS

To enhance interoperability, readers that might be interrogating a common tag population should use different sessions.

### NOTES

- 1 A 'session' is defined as a single instance of state information maintained on a tag to carry out the inventory process in communication with a reader. Gen 2 tags provide for up to four sessions, which allows the tag to participate in inventory with more than one reader at a time, in a time-interleaved fashion.
- 2 Use of sessions permits multiple readers to interrogate a common tag population. For each of four sessions (S0-S3), tags have an *inventoried* flag that can be toggled between *A* or *B*. The flags are used by the interrogator to determine whether a specific tag has already been inventoried within a given session.

The sessions (S0-S3) should also be selected according to application since the *inventoried* flags for specific sessions are characterized by different persistence intervals and reset policies.

NOTE – For example, the inventoried flag persistence is specified for conditions in which the tag is powered and unpowered (see reference [1]). The long persistence times associated with S2 and S3 render these sessions useful for reading tag populations that are relatively stationary. Session S0 has no persistence when the tag is not energized.

## C4.4 TAGPOPULATION AND TAGTRANSITTIME

*TagPopulation* and *TagTransitTime* are LLRP input parameters (see references [D3] and [D12]) to the reader's singulation algorithm for establishing  $Q$ , a variable, which determines how long a tag waits before responding to an interrogator query. Specifically,  $Q$  is defined as the slot count parameter. Tags select a pseudo-random number between 0 and  $2^Q - 1$ , decrement the number when instructed by the interrogator, and reply to the interrogator upon reaching 0.

*TagPopulation* should represent the maximum expected number of tags in the reader's range at one time. *TagTransitTime* specifies the time in milliseconds that a tag would remain within the reader's field-of-view. It should be noted that the EPCglobal Class 1 Gen-2 standard does not specify the variables *TagPopulation* and *TagTransitTime*; i.e., these parameters are LLRP specific, and hence a reader that is not LLRP-based might not accept these variables.

Implementations that allow some provisions for the setting of  $Q$  are preferred, as unsuitable levels of  $Q$  can result in slow read rates or excessive collisions.

#### **C4.5 LISTEN BEFORE TALK**

Listen Before Talk (LBT) protocols require the transmitter to sense whether the transmission channel is occupied prior to transmitting. It has typically been applied where spectrum allocation is insufficient for FHSS. LBT tends to be less efficient than FHSS because of the time required for the interrogator to determine channel usage. Both FHSS and LBT can fail when the allocated band becomes sufficiently saturated (reference [D5]), although FHSS tends to degrade more gracefully.

#### **C4.6 ETSI '4-CHANNEL' PLAN**

The European Telecommunications Institute (ETSI) '4-channel' plan is based on the ETSI standard EN 302 208 (references [D6] and [D7]) and provides for an unlimited number of readers operating in four transmit channels. The tags respond within other channels in the allocated band.

#### **C4.7 INTERROGATOR MODE SELECTION**

Interrogators can be certified for operation in single-, multiple-, and dense-interrogator modes, henceforth referred to by SI, MI, and DI modes, respectively. The modes are characterized by the prescribed channelized signaling and associated transmit masks. Comparison of functionality for different inventory management applications using different modes has not been extensively tested at the time of this release.

### **C5 APPLICATION PROFILES**

#### **C5.1 INTRODUCTION**

##### **C5.1.1 General**

An application profile is an explicit listing of typical reader configuration settings that might be suitable for a class of use cases or applications. Table C-2 below lists four such application profiles and is followed by detailed descriptions of each. Settings suggested

under application profiles have been tested in specific scenarios that match the stated application.

Some capabilities offered by the EPCglobal Class 1 Gen-2 standard are governed by low-level parameters. Interrogators offered by third-party providers do not always provide access to those parameters, but instead provide indirect access through higher-level parameters. An example is the EPCglobal Class 1 Gen-2 variable  $Q$  as defined above.

**Table C-2: Generic Applications Representative of EPCglobal Class 1 Gen-2 Infrastructure**

Handheld (mobile) reader for inventory audits
Handheld (mobile) reader physical item searches
RFID enclosure
Portal-based reader

NOTE – It is strongly recommended that the system configuration and EPCglobal Class 1 Gen-2 settings be tested thoroughly for any specific implementation in a relevant scattering environment.

### C5.1.2 Handheld (Mobile) Reader for Inventory Audits

Because of the mobility of the handheld reader, potential RF interference or hazards associated with RF transmission should be considered when using this device.

NOTE – ‘Hazard’ or ‘RFI’ location tags can be used as landmarks that result in a warning issued to the user.

Use of sessions S2 or S3 is recommended provided that the inventory is largely stationary.

NOTE – Consideration should be given to potential conflicting sessions because of the mobility of the handheld reader. The longer persistence associated with the inventoried flags in these sessions prevents tags from repeatedly responding and possibly obscuring other tags.

In the inventory audit application, the handheld, or mobile, RFID reader is used to inventory collections of tagged items in containers or on shelves. The user points the handheld antenna in the general direction of the tagged items. In order to enhance the mobility of these devices, the handheld antennas are small and are thus typically characterized with very low directivity, so precision pointing is not required. Although the reader does not require visible line of sight to the tags, tags shielded by a metallic enclosure are not likely to be read by the handheld reader unless there is sufficient electromagnetic leakage into the enclosure.

Higher read accuracies are obtained by scanning the reader antenna around the container or collection of tagged items. For this reason, it is preferable that the user has access to all sides of the container. This practice is facilitated when the tagged items are in a mobile carrier such as the Cargo Transfer Bag (CTB) used on the International Space Station. For zero-G environments, the container can be allowed to slowly rotate on an axis while the user holds the interrogator antenna in a fixed position.

In order to create an unambiguous association between read tags and a particular container, it is necessary that the items in the container and any external tags be sufficiently isolated. This can be problematic, particularly in environments supporting high degrees of scattering. RFID enclosures can be used to circumvent this problem.

Tagged items can be partitioned, or filtered, through use of the *Select* command based on tag session inventory flags, EPC, Tag ID, or user memory banks. This can accelerate inventory audits, and enhance multi-reader interoperability, by requesting only specific subsets of tags to respond. Selection can be made according to identification fields or memory contents.

**Reader transmit power and antenna:** The RF transmit power required for this concept of operation is typically 0.5 to 1.0 Watts. Lower transmit power can be used, but read accuracy is typically reduced. Both linear and circular polarization antennas are used with handheld readers. Handheld reader antennas with circular polarization eliminate the need for the user to scan the item with multiple orientations of the reader antenna. However, assuming use of linearly polarized tag antennas, which is typical, there is an associated performance reduction on the order of 6 dB in the signal-to-noise ratio at the receiver. Use of a linearly polarized antenna can avoid this performance loss, provided that the user scans the tagged items with a sufficient number of orientations to avoid comparable, or worse, polarization loss. For example, if the user scans at two orthogonal angles, the worst polarization loss would be roughly equivalent to the polarization loss associated with use of the circularly polarized antenna in conjunction with linearly polarized tag antennas.

Table C-3 summarizes typical configuration parameters for the Class 1 Gen-2 RFID reader and tag protocol.

**Table C-3: Typical Operating Parameters for Handheld Reader Audit Use  
(Class 1 Gen-2)**

Parameter	Typical Value
<b>Mode Index (LLRP)</b>	Dense Interrogator Settings (LLRP Mode Index 4) (note)
<b>Antenna Gain</b>	Typically low gain (< 2 dBi)
<b>Transmit power</b>	Typically 15 dBm to 30 dBm
<b>Antenna Polarization</b>	Linear or circular
<b>Channel</b>	FHSS according to plan (see reference [1])
<b>Session</b>	S2 or S3 for audits
<b>Tag Population (LLRP)</b>	60 (typical for ISS CTBs)
<b>Tag Transit Time (ms) (LLRP)</b>	2000 (note)
NOTE – Additional testing recommended.	

## C5.2 APPLICATION PROFILE—HANDHELD (MOBILE) READER FOR OBJECT LOCALIZATION

Because of the mobility of the handheld reader, potential RF interference or hazards associated with RF transmission should be considered when using this device.

NOTE – ‘Hazard’ or ‘RFI’ location tags can be used as landmarks that result in a warning issued to the user.

Circular antenna polarization is recommended because of the time required for the user to cover search areas with two or more orientations.

NOTE – Switched or synthesized linear is potentially a suitable alternative, although at the first release of this publication, such a feature does not exist ‘off-the-shelf’.

At the time of this publication, session S1 is recommended for this application because of the short persistence times.

NOTE – Additional testing is required to confirm this. Other approaches to assure rapid, continual tag responses are possible, including

- a) selection of a unique tag followed by an interrogator *NAK* (no acknowledge) command;
- b) *Select* command to reset the inventoried flag(s); and
- c) successive query commands in which the target is toggled between *A* and *B*.

Tag population should be reduced, via the *Select* command, to the minimal set required in order to minimize the response time and hence accelerate the localization.

NOTE – This set might be a single item, or it could represent a class of items.

In this search application, the handheld, or mobile, RFID reader is used to locate missing items. It is presumed in this application that the user will employ tag partitioning, possibly to a unique tag ID, or perhaps to a class of items; e.g., on ISS a user might be interested in restricting the search to drink pouches. Table C-4 summarizes typical configuration parameters for the Class 1 Gen-2 RFID handheld reader.

Localization is enabled by a small degree of reader antenna directionality (typically a little less than hemispherical) and limited operational range. In addition, the range can be decreased to facilitate localization by reducing the transmit power. Tests indicate that restricting transmit power is typically required when searching in confined spaces that are highly reflective, since, in these scenarios, multipath can cause the apparent direction of arrival associated with tag responses to be misleading. Another approach to searching based on a mobile interrogator is to monitor the signal strength received from the sought tag.

**Table C-4: Typical Operating Parameters for Handheld Reader Used to Locate Tagged Items (Class 1 Gen-2)**

Parameter	Typical Value
<b>Mode Index (LLRP)</b>	Dense Interrogator Settings (LLRP Mode Index 4) (note)
<b>Antenna Gain</b>	Typically low gain (< 3 dBi)
<b>Transmit power</b>	Variable 15 dBm to 30 dBm
<b>Antenna Polarization</b>	Circular or possibly switched linear
<b>Channel</b>	FHSS according to plan (see reference [1])
<b>Session</b>	S1
<b>Tag Population (LLRP)</b>	1-60
<b>Tag Transit Time (ms) (LLRP)</b>	500 (note)
NOTE – Additional testing recommended.	

### C5.3 APPLICATION PROFILE—RFID ENCLOSURES

In RFID enclosure application, mobile or fixed readers interrogate tags inside of a conductive enclosure (figure C-1).

NOTE – The enclosure should have sufficient shielding effectiveness in the EPCglobal band that only internal tags are read.

This characteristic results in some significant advantages for this class of applications. First, because the fields are confined, higher read accuracies can be obtained with the RFID enclosures compared to scanning with a handheld reader or portal reader. Second, the location of interrogated tags is known with a high degree of certainty if the shielding

effectiveness is sufficient. Third, potential RFI threats posed by the RFID reader are eliminated or greatly reduced. Fourth, coexistence of multiple users is enhanced because of containment of RF energy. Typically, the RFID enclosure will be triggered upon closure of all openings or lids.

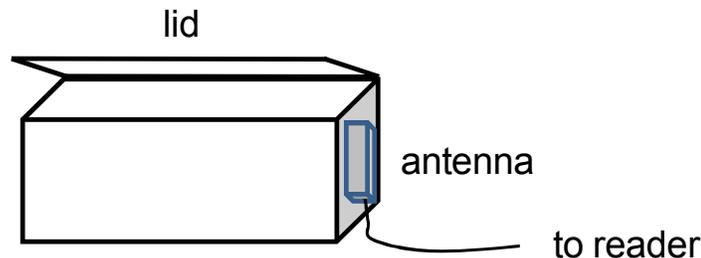


Figure C-1: RFID Enclosure

Table C-5: Typical Operating Parameters for RFID Enclosures (Class 1 Gen-2)

Parameter	Typical Value
Mode Index (LLRP)	Further testing required
Antenna Gain	Low
Transmit power	15 dBm to 33 dBm
Antenna Polarization	Linear or circular
Channel	Further testing required
Session	S2 or S3
Tag Population (LLRP)	80 or more (further testing required)
Tag Transit Time (ms) (LLRP)	2,000

#### C5.4 APPLICATION PROFILE—PORTAL-BASED READER

Portal configurations should be tested in situ, as local scattering environments can greatly affect performance.

NOTE Some commercial systems have recommended locations for portal antennas, and new portal technologies are entering the market frequently, including switched and synthesized polarizations.

Linear polarization is not recommended unless sufficient polarization diversity is provided because of the often random orientations of tags with respect to the fixed portal antennas.

RFID portals are used to track tagged items moving through established areas of coverage that are also referred to as the reader's field of view. Such coverage areas are often established in the vicinity of doorways in order to capture migration of items. Compared to interrogation with handheld readers or RFID enclosures, the range requirement between the

interrogator antennas and tagged items is often greater. Furthermore, unintended scatterers, such as people, are often within the coverage area. These characteristics often render portal item-level interrogation less accurate than handheld- or enclosure-based interrogation, particularly for item-level interrogation with dense packing. Portal interrogation above item level (e.g., box, palette, or ‘ziplock’ levels) can be effective with read accuracies exceeding 90 percent (references [D8] and [D9]).

**Table C-6: Typical Operating Parameters for Portal-Based Readers (Class 1 Gen-2)**

Parameter	Typical Value
<b>Mode Index (LLRP)</b>	Dense Interrogator Settings (LLRP Mode Index 4) (note)
<b>Antenna Gain</b>	Medium to High
<b>Transmit power</b>	30 dBm
<b>Antenna Polarization</b>	Circular or multi-linear
<b>Channel</b>	FHSS according to plan (see reference [1])
<b>Session</b>	S1
<b>Tag Population (LLRP)</b>	60 or more
<b>Tag Transit Time (ms) (LLRP)</b>	250
NOTE – Additional testing recommended.	