

---

---

**Agricultural irrigation equipment —  
Filters — Verification of filtration grade**

*Matériel agricole d'irrigation — Filtres — Vérification du grade de  
filtration*

STANDARDSISO.COM : Click to view the full PDF of ISO 18471:2015



STANDARDSISO.COM : Click to view the full PDF of ISO 18471:2015



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2015, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Ch. de Blandonnet 8 • CP 401  
CH-1214 Vernier, Geneva, Switzerland  
Tel. +41 22 749 01 11  
Fax +41 22 749 09 47  
copyright@iso.org  
www.iso.org

# Contents

	Page
Foreword .....	iv
<b>1 Scope .....</b>	<b>1</b>
<b>2 Normative references .....</b>	<b>1</b>
<b>3 Terms and definitions .....</b>	<b>1</b>
<b>4 Summary of the test method .....</b>	<b>2</b>
<b>5 CCM structure and operation .....</b>	<b>2</b>
5.1 Construction .....	2
5.1.1 Sampler (1) .....	2
5.1.2 Control unit (2) .....	2
5.2 Mode of operation .....	2
<b>6 CCM test screen characteristics .....</b>	<b>3</b>
<b>7 Accuracy of measurements .....</b>	<b>4</b>
<b>8 Test system layout .....</b>	<b>4</b>
<b>9 Test procedure .....</b>	<b>5</b>
<b>Bibliography .....</b>	<b>7</b>

STANDARDSISO.COM : Click to view the full PDF of ISO 18471:2015

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#).

The committee responsible for this document is ISO/TC 23, *Tractors and machinery for agriculture and forestry*, Subcommittee SC 18, *Irrigation and drainage equipment and systems*.

# Agricultural irrigation equipment — Filters — Verification of filtration grade

## 1 Scope

This International Standard specifies a test method for the verification of filtration grade of filters intended for operation in agricultural irrigation systems. It is intended to be used for verifying the filter manufacturer's declaration about the filtration grade of a specific filter.

This test method uses a Clogging Capacity Meter (CCM) device to compare the filtration grade of the filter under test against the filtration grade of a test filtration screen.

NOTE This test method may also be used by a filter manufacturer to determine the filtration grade.

## 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 9644, *Agricultural irrigation equipment — Pressure losses in irrigation valves — Test method*

## 3 Terms and definitions

For the purpose of this document, the following terms and definitions apply.

### 3.1

#### **filtration grade**

number, declared by the manufacturer, that represents the size of water passages in a filter and is related to its ability to stop particles

Note 1 to entry: The filtration grade is expressed in micrometres ( $\mu\text{m}$ , microns).

### 3.2

#### **clogging capacity meter**

#### **CCM**

device used for measuring the time to reach a specified pressure loss across a standard filter screen, at a constant flow rate

### 3.3

#### **aperture width**

distance between two adjacent parallel wires in a square-mesh wire cloth screen plain-weave

### 3.4

#### **mesh count**

number of apertures per unit of linear measure in a woven wire cloth or wire screen

[SOURCE: ISO 9045:1990, 3.2.8]

### 3.5

#### **flow rate**

volume of water flowing through a device per unit time

### 3.6

#### **pressure loss**

difference in pressure due to water flow between two specified points in a system or in part of a system

Note 1 to entry: It is expressed in pascals (Pa) according to ISO 80000-1, in kilopascals (kPa) or in bar.

## 4 Summary of the test method

Two CCM units, using identical test screens, are connected to the water mains, one upstream and one downstream of the filter under test.

Water at a flow rate of 10 l/min is passed through each CCM screen and the time required for each CCM to reach a predetermined pressure loss (0,5 bar) across its own screen is recorded.

The ratio between the two time periods, measured at the downstream and the upstream CCM units, is calculated. A ratio equal to or greater than five indicates that the filtration grade declared by the manufacturer is correct.

## 5 CCM structure and operation

### 5.1 Construction

The CCM device consists of two main parts (see [Figure 1](#)).

#### 5.1.1 Sampler (1)

The sampler is the part of the CCM through which water used for testing flows. It includes the following:

- **screen housing** (3), capable of being opened and closed for cleaning and for easy replacement of the **filtering screen** (4);
- **flow rate regulator** (5), accurate to  $\pm 2\%$  limiting the flow rate to 10 l/min.

#### 5.1.2 Control unit (2)

The control unit includes the following measuring instruments:

- **pressure gauge** (9) accurate to  $\pm 1\%$ , measuring up to 10 bar;
- **differential pressure gauge**, digital or analog (10) accurate to  $\pm 1\%$ ;
- **count up digital timer** (6) with a resolution of 0,01 min, preferably starting automatically when the pressure reaches a pre-determined level;
- **timer start switch** (12);
- **timer reset button** (11), setting the timer back to zero;
- **tubes** (7 and 8) connecting the control unit to the sampler. Pressure tap construction shall be in accordance with ISO 9644.


### 5.2 Mode of operation

**5.2.1** Insert a “sealed” screen, same as that used for testing but that is covered and sealed by a thin plastic film into the screen housing. Apply an inlet pressure of  $(1^{+0,2})$  bar. Make certain that no water is emerging from the CCM outlet.

5.2.2 Replace the “sealed” screen with a CCM test screen, having filtration grade equal to that declared by the manufacturer of the filter under test.

5.2.3 Set the timer to zero by pressing the reset button.

5.2.4 To begin the test, open the water inlet to the sampler and activate the timer start switch.

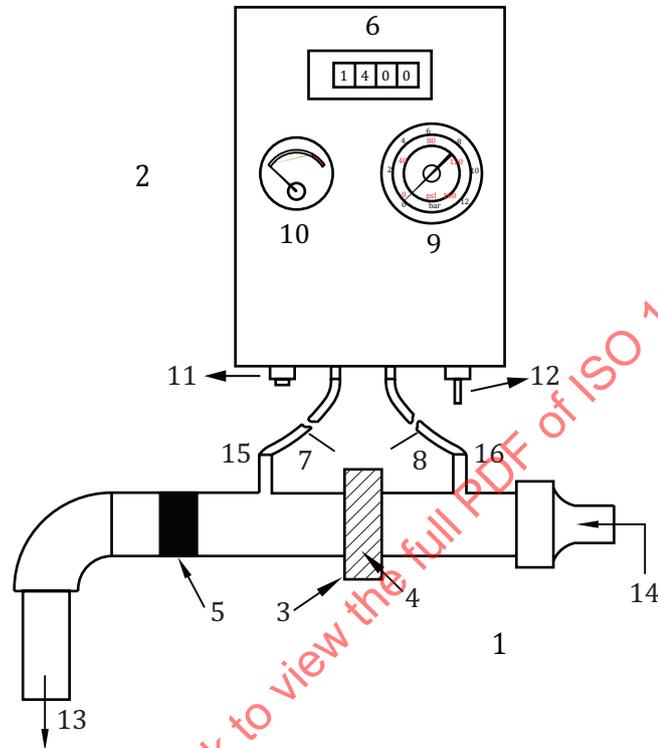

**Key**

- |   |                        |    |                             |
|---|------------------------|----|-----------------------------|
| 1 | sampler                | 9  | pressure gauge              |
| 2 | control unit           | 10 | differential pressure gauge |
| 3 | screen housing         | 11 | timer reset button          |
| 4 | filtering screen       | 12 | timer start switch          |
| 5 | flow rate regulator    | 13 | water outflow               |
| 6 | count up digital timer | 14 | water inflow                |
| 7 | pressure tube          | 15 | low pressure                |
| 8 | pressure tube          | 16 | high pressure               |

**Figure 1 — CCM schematic construction**

**6 CCM test screen characteristics**

The screens used in the CCM shall be made of 316 stainless steel and have plain weave of square mesh with the characteristics specified in [Table 1](#).

Table 1 — CCM test filter screens characteristics

Aperture width <sup>a</sup> µm (micron)	Mesh count <sup>a</sup> apertures/in	Wire diameter mm
60	250	0,04
80	200	0,05
100	140	0,08
120	120	0,09
140	100	0,11
150	120	0,065
165	105	0,076
180	94	0,09
200	88	0,09
250	62	0,16
300	50	0,20

<sup>a</sup> In case of a discrepancy between **Aperture width** and **Mesh count** data, the **Aperture width** takes precedence.

## 7 Accuracy of measurements

- **Pressure** shall be measured with an accuracy of  $\pm 1$  %.
- **Pressure loss** shall be measured with an accuracy of  $\pm 1$  %, using a differential pressure gauge.
- **Flow rate** shall be measured with an accuracy of  $\pm 2$  %.
- At the beginning of the test (see 9.2), the flow rate shall not deviate by more than  $\pm 2$  % from the required flow rate.
- The difference in flow rate between the two CCM devices in the test system shall not exceed 4 %.

## 8 Test system layout

Prepare the test system as per [Figure 2](#).

