
**Geographic information — Observations
and measurements**

Information géographique — Observations et mesures

STANDARDSISO.COM : Click to view the full PDF of ISO 19156:2011



STANDARDSISO.COM : Click to view the full PDF of ISO 19156:2011



COPYRIGHT PROTECTED DOCUMENT

© ISO 2011

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Conformance	1
2.1 Overview	1
2.2 Conformance classes related to Application Schemas including Observations and Measurements	1
3 Normative references	2
4 Terms and definitions	3
5 Abbreviated terms and notation	5
5.1 Abbreviated terms	5
5.2 Schema language	5
5.3 Model element names	6
6 Dependencies	6
7 Fundamental characteristics of observations	6
7.1 The context for observations	6
7.2 Observation schema	8
7.3 Use of the observation model	15
8 Specialized observations	15
8.1 Classification of observation by result type	15
8.2 Observations whose result is constant	16
8.3 Observations whose result varies	17
9 Fundamental characteristics of sampling features	19
9.1 The context for sampling	19
9.2 Sampling Schema	20
10 Spatial sampling features	24
10.1 The context for spatial sampling features	24
10.2 Spatial sampling feature schema	24
10.3 Decomposition of extensive sampling features for observations	26
10.4 Common names for sampling features (informative)	26
11 Specimens	27
11.1 The context for specimens	27
11.2 Specimen schema	27
Annex A (normative) Abstract Test Suite	30
Annex B (informative) Mapping O&M terminology to common usage	35
Annex C (normative) Utility classes	38
Annex D (informative) Best practices in use of the observation and sampling models	40
Bibliography	46

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 19156 was prepared by Technical Committee ISO/TC 211, *Geographic information/Geomatics*, in collaboration with the Open Geospatial Consortium, Inc. (OGC).

STANDARDSISO.COM : Click to view the full PDF of ISO 19156:2011

Introduction

This International Standard arises from work originally undertaken through the Open Geospatial Consortium's Sensor Web Enablement (SWE) activity. SWE is concerned with establishing interfaces and protocols that will enable a "Sensor Web" through which applications and services will be able to access sensors of all types, and observations generated by them, over the Web. SWE has defined, prototyped and tested several components needed for a Sensor Web, namely:

- Sensor Model Language (SensorML).
- Observations & Measurements (O&M).
- Sensor Observation Service (SOS).
- Sensor Planning Service (SPS).
- Sensor Alert Service (SAS).

This International Standard specifies the Observations and Measurements schema, including a schema for sampling features.

The content presented here derives from an earlier version published by Open Geospatial Consortium as OGC 07-022r1, *Observations and Measurements — Part 1 — Observation schema* and OGC 07-002r3, *Observations and Measurements — Part 2 — Sampling Features*. A technical note describing the changes from the earlier version is available from the Open Geospatial Consortium (see <http://www.opengeospatial.org/standards/om>).

STANDARDSISO.COM : Click to view the full text of ISO 19156:2011

STANDARDSISO.COM : Click to view the full PDF of ISO 19156:2017

Geographic information — Observations and measurements

1 Scope

This International Standard defines a conceptual schema for observations, and for features involved in sampling when making observations. These provide models for the exchange of information describing observation acts and their results, both within and between different scientific and technical communities.

Observations commonly involve sampling of an ultimate feature-of-interest. This International Standard defines a common set of sampling feature types classified primarily by topological dimension, as well as samples for ex-situ observations. The schema includes relationships between sampling features (sub-sampling, derived samples).

This International Standard concerns only externally visible interfaces and places no restriction on the underlying implementations other than what is needed to satisfy the interface specifications in the actual situation.

2 Conformance

2.1 Overview

Clauses 7 to 11 of this International Standard use the Unified Modeling Language (UML) to present conceptual schemas for describing Observations. These schemas define conceptual classes that

- a) may be considered to comprise a cross-domain application schema, or
- b) may be used in application schemas, profiles and implementation specifications.

This flexibility is controlled by a set of UML types that can be implemented in a variety of manners. Use of alternative names that are more familiar in a particular application is acceptable, provided that there is a one-to-one mapping to classes and properties in this International Standard.

The UML model in this International Standard defines conceptual classes; various software systems define implementation classes or data structures. All of these reference the same information content. The same name may be used in implementations as in the model, so that types defined in the UML model may be used directly in application schemas.

Annex A defines a set of conformance tests that will support applications whose requirements range from the minimum necessary to define data structures to full object implementation.

2.2 Conformance classes related to Application Schemas including Observations and Measurements

The conformance rules for Application Schemas in general are described in ISO 19109:2005. Application Schemas also claiming conformance to this International Standard shall also conform to the rules specified in Clauses 7 to 11 and pass all relevant test cases of the Abstract Test Suite in Annex A.

Depending on the characteristics of an Application Schema, 18 conformance classes are distinguished. Table 1 lists these classes and the corresponding subclause of the Abstract Test Suite.

Table 1 — Conformance classes related to Application Schemas including Observations and Measurements

Conformance class	Subclause
Generic observation interchange	A.1.1
Measurement interchange	A.1.1, A.1.2
Category observation interchange	A.1.1, A.1.3
Count observation interchange	A.1.1, A.1.4
Truth observation interchange	A.1.1, A.1.5
Temporal observation interchange	A.1.1, A.1.6
Geometry observation interchange	A.1.1, A.1.7
Complex observation interchange	A.1.1, A.1.8
Discrete coverage observation interchange	A.1.1, A.1.9
Point coverage observation interchange	A.1.1, A.1.10
Time series observation interchange	A.1.1, A.1.11
Sampling feature interchange	A.2.1, A.2.2
Spatial sampling feature interchange	A.2.1 to A.2.3
Sampling point interchange	A.2.1 to A.2.4
Sampling curve interchange	A.2.1 to A.2.3, A.2.5
Sampling surface interchange	A.2.1 to A.2.3, A.2.6
Sampling solid interchange	A.2.1 to A.2.3, A.2.7
Specimen interchange	A.2.1 to A.2.3, A.2.8

3 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 19101:2002, *Geographic information — Reference model*

ISO/TS 19103:2005, *Geographic information — Conceptual schema language*

ISO 19107:2003, *Geographic information — Spatial schema*

ISO 19108:2002, *Geographic information — Temporal schema*

ISO 19109:2005, *Geographic information — Rules for application schema*

ISO 19111:2007, *Geographic information — Spatial referencing by coordinates*

ISO 19115:2003, *Geographic information — Metadata*

ISO 19115:2003/Cor.1:2006, *Geographic information — Metadata — Technical Corrigendum 1*

ISO 19123:2005, *Geographic information — Schema for coverage geometry and functions*

ISO 19136:2007, *Geographic information — Geography Markup Language (GML)*

ISO/IEC 19501:2005, *Information technology — Open Distributed Processing — Unified Modeling Language (UML) Version 1.4.2*

ISO 19157:—¹⁾, *Geographic information — Data quality*

1) To be published.

4 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

4.1

application schema

conceptual schema for data required by one or more applications

[ISO 19101:2002, definition 4.2]

4.2

coverage

feature that acts as a function to return **values** from its range for any direct position within its spatial, temporal or spatiotemporal domain

[ISO 19123:2005, definition 4.17]

4.3

data type

specification of a **value** domain with operations allowed on values in this domain

[ISO/TS 19103:2005, definition 4.1.5]

EXAMPLE Integer, Real, Boolean, String, Date (conversion of a date into a series of codes).

NOTE Data types include primitive predefined types and user-definable types. All instances of a data type lack identity.

4.4

domain feature

feature of a type defined within a particular application domain

NOTE This may be contrasted with **observations** and **sampling features**, which are features of types defined for cross-domain purposes.

4.5

ex-situ

referring to the study, maintenance or conservation of a specimen or population away from its natural surroundings

NOTE Opposite of *in-situ*.

4.6

feature

abstraction of real-world phenomena

[ISO 19101:2002, definition 4.11]

NOTE A feature may occur as a type or an instance. In this International Standard, feature instance is meant unless otherwise specified.

4.7

feature type

class of **features** having common characteristics

4.8

measurand

particular quantity subject to **measurement**

[ISO/TS 19138:2006, definition 4.5]

NOTE Specialization of observable **property type**.

4.9

measure

value described using a numeric amount with a scale or using a scalar reference system

[ISO 19136:2007, definition 4.1.41]

4.10

measurement

set of operations having the object of determining the **value** of a quantity

[ISO/TS 19101-2:2008, definition 4.20]

4.11

observation

act of measuring or otherwise determining the **value** of a **property**

4.12

observation procedure

method, algorithm or instrument, or system of these, which may be used in making an **observation**

4.13

observation protocol

combination of a sampling strategy and an **observation procedure** used in making an **observation**

4.14

observation result

estimate of the **value** of a **property** determined through a known observation procedure

4.15

property

facet or attribute of an object referenced by a name

[ISO 19143:2010, definition 4.21]

EXAMPLE Abby's car has the colour red, where "colour red" is a property of the car.

4.16

property type

characteristic of a **feature type**

EXAMPLE Cars (a feature type) all have a characteristic colour, where "colour" is a property type.

NOTE 1 The **value** for an instance of an observable property type can be estimated through an act of **observation**.

NOTE 2 In chemistry-related applications, the term "determinand" or "analyte" is often used.

NOTE 3 Adapted from ISO 19109:2005.

4.17

sampling feature

feature which is involved in making **observations** concerning a **domain feature**

EXAMPLE Station, transect, section or specimen.

NOTE A sampling feature is an artefact of the observational strategy, and has no significance independent of the observational campaign.

4.18**value**

element of a type domain

[ISO/IEC 19501:2005]

NOTE 1 A value considers a possible state of an object within a class or type (domain).

NOTE 2 A data value is an instance of a **datatype**, a value without identity.

NOTE 3 A value can use one of a variety of scales including nominal, ordinal, ratio and interval, spatial and temporal. Primitive datatypes can be combined to form aggregate datatypes with aggregate values, including vectors, tensors and images.

5 Abbreviated terms and notation**5.1 Abbreviated terms**

GFM	General Feature Model
GML	Geography Markup Language
O&M	Observations and Measurements
OGC	Open Geospatial Consortium
SensorML	Sensor Model Language
SOS	Sensor Observation Service
SWE	Sensor Web Enablement
UML	Unified Modeling Language
XML	Extensible Markup Language
1-D	One Dimensional
2-D	Two Dimensional
3-D	Three Dimensional

5.2 Schema language

The conceptual schema specified in this International Standard is in accordance with the Unified Modelling Language (UML) ISO/IEC 19501, following the guidance of ISO/TS 19103.

The UML is conformant with the profile described in ISO 19136:2007, Annex E. Use of this restricted idiom supports direct transformation into a GML Application Schema. ISO 19136 introduces some additional stereotypes. In particular «FeatureType» implies that a class is an instance of the «metaclass» GF_FeatureType (ISO 19109), and therefore represents a feature type.

The prose explanation of the model uses the term “property” to refer to both class attributes and association roles. This is consistent with the General Feature Model described in ISO 19109. In the context of properties, the term “value” refers to either a literal (for attributes whose type is simple), or to an instance of the class providing the type of the attribute or target of the association. Within the explanation, the property names (property types) are sometimes used as natural language words where this assists in constructing a readable text.

5.3 Model element names

This International Standard specifies a model for observations using terminology that is based on current practice in a variety of scientific and technical disciplines. It is designed to apply across disciplines, so the best or “most neutral” term has been used in naming the classes, attributes and associations provided. The terminology does not, however, correspond precisely with any single discipline. As an aid to implementors, a mapping from the element names specified in this International Standard to common terminology in some application domains is provided in Annex B.

6 Dependencies

Some model elements used in the schema described in Clauses 7 to 11 are defined in other International Standards. By convention within ISO/TC 211, names of UML classes, with the exception of basic data type classes, include a two or three letter prefix that identifies the International Standard and the UML package in which the class is defined. Table 2 lists the standards and packages in which UML classes used in this International Standard have been defined. UML classes defined in this International Standard have the prefix of CVT, GFI, OM and SF. The prefix GFI is used for classes defined in this International Standard, but which are associated with the GF package in ISO 19109. The prefix CVT is used for classes defined in this International Standard, but which are associated with the CV package in ISO 19123:2005.

Table 2 — Sources of UML classes

Prefix	International Standard	Package
CVT	This International Standard (Annex C)	Temporal coverage
CV	ISO 19123:2005	Coverage
GFI	This International Standard (Annex C)	General Feature Model general instance
DQ	ISO 19115:2003	Data Quality
GF	ISO 19109:2005	General Feature Model
GM	ISO 19107:2003	Geometry
LI	ISO 19115:2003, ISO 19115:2003/Cor.1:2006	Data Quality
MD	ISO 19115:2003/Cor.1:2006	Metadata Entity
OM	This International Standard	Observations and Measurements
SC	ISO 19111:2007	Coordinate reference systems
SF	This International Standard	Sampling features
TM	ISO 19108:2002	Temporal Schema

7 Fundamental characteristics of observations

7.1 The context for observations

7.1.1 Property evaluation

Properties of a feature fall into two basic categories:

- a) Value (e.g. name, price, legal boundary) assigned by some authority. These are exact.
- b) Value (e.g. height, classification, colour) determined by application of an observation procedure. These are estimates, with a finite error associated with the value.

The observation error typically has a systematic component, which is similar for all estimates made using the same procedure, and a random component, associated with the particular application instance of the observation procedure. If potential errors in a property value are important in the context of a data analysis or

processing application, then the details of the act of observation which provided the estimate of the value are required.

7.1.2 Observation

An observation is an act associated with a discrete time instant or period through which a number, term or other symbol is assigned to a phenomenon [2]. It involves application of a specified procedure, such as a sensor, instrument, algorithm or process chain. The procedure may be applied *in-situ*, remotely, or *ex-situ* with respect to the sampling location. The result of an observation is an estimate of the value of a property of some feature. Use of a common model allows observation data using different procedures to be combined unambiguously.

The observation itself is also a feature, since it has properties and identity.

Observation details are important for data discovery and for data quality estimation.

The observation could be considered to carry “property-level” instance metadata, which complements the dataset-level and feature-level metadata that have been conventionally considered (e.g. ISO 19115).

NOTE ISO 19115-2:2009 provides MI_Event, which plays a similar role to OM_Observation in the context of image capture.

7.1.3 Observation properties

An observation results in a value being assigned to a phenomenon. The phenomenon is a property of a feature, the latter being the feature-of-interest of the observation. The observation uses a procedure, which is often an instrument or sensor [1][2], but may be a process chain, human observer, an algorithm, a computation or simulator. The key idea is that the observation result is an estimate of the value of some property of the feature-of-interest, and the other observation properties provide context or metadata to support evaluation, interpretation and use of the result.

The relationship between the properties of an observation and those of its feature-of-interest is key to the semantics of the model. This is further elaborated in D.3.

7.1.4 Observation location

The principal location of interest is usually associated with the ultimate feature-of-interest.

However, the location of the feature-of-interest may not be trivially available. For example: in remote sensing applications, a complex processing chain is required to geolocate the scene or swath; in feature-detection applications the initial observation may be made on a scene, but the entity to be detected, which is the ultimate feature-of-interest, occupies some location within it. The distinction between the proximate and ultimate feature-of-interest is a key consideration in these cases.

Other locations appear in various scenarios. Sub-sampling at locations within the feature-of-interest may occur. The procedure may involve a sensor located remotely from the ultimate feature-of-interest (e.g. remote sensing; or where specimens are removed from their sampling location and observations made *ex-situ*). Furthermore, the location of the feature-of-interest may be time-dependent.

The model is generic. The geospatial location of the feature-of-interest may be of little or no interest for some observations (e.g. live specimens, observations made on non-located things like chemical species).

For these reasons, a generic Observation class does not have an inherent location property. Relevant location information should be provided by the feature-of-interest, or by the observation procedure, according to the specific scenario.

NOTE In contrast to spatial properties, some temporal properties are associated directly with an observation (7.2.2.2; 7.2.2.3). This is a consequence of the fact that an observation is a kind of ‘event’ so its temporal characteristics are fundamental, rather than incidental.

7.1.5 Result types

Observation results may have many datatypes, including primitive types like category or measure, but also more complex types such as time, location and geometry. Complex results are obtained when the observed property requires multiple components for its encoding. Furthermore, if the property varies on the feature-of-interest, then the result is a coverage, whose domain extent is the extent of the feature. In a physical realization, the result will typically be sampled discretely on the domain, and may be represented as a discrete coverage.

The result type may be used as a basis for defining specialized observation types.

7.1.6 Measurements

In conventional measurement theory (e.g. [1][5][10][11][19]) the term “measurement” is used. However, a distinction between measurement and category-observation has been adopted in more recent work [2][12][21] so the term “observation” is used here for the general concept. “Measurement” may be reserved for cases where the result is a numerical quantity.

7.2 Observation schema

7.2.1 Packaging

The observation schema is organized in one package containing eleven leaf packages corresponding to the conformance classes defined in 2.2, with dependencies on several other packages from International Standards covering geographic information, on the General Feature Instance package (C.2) and the Temporal Coverage package (C.3). The inter-package dependencies are shown in Figure 1. The core observation package is documented in this subclause. The specialized observations are documented in Clause 8.

STANDARDSISO.COM : Click to view the full PDF of ISO 19156:2011

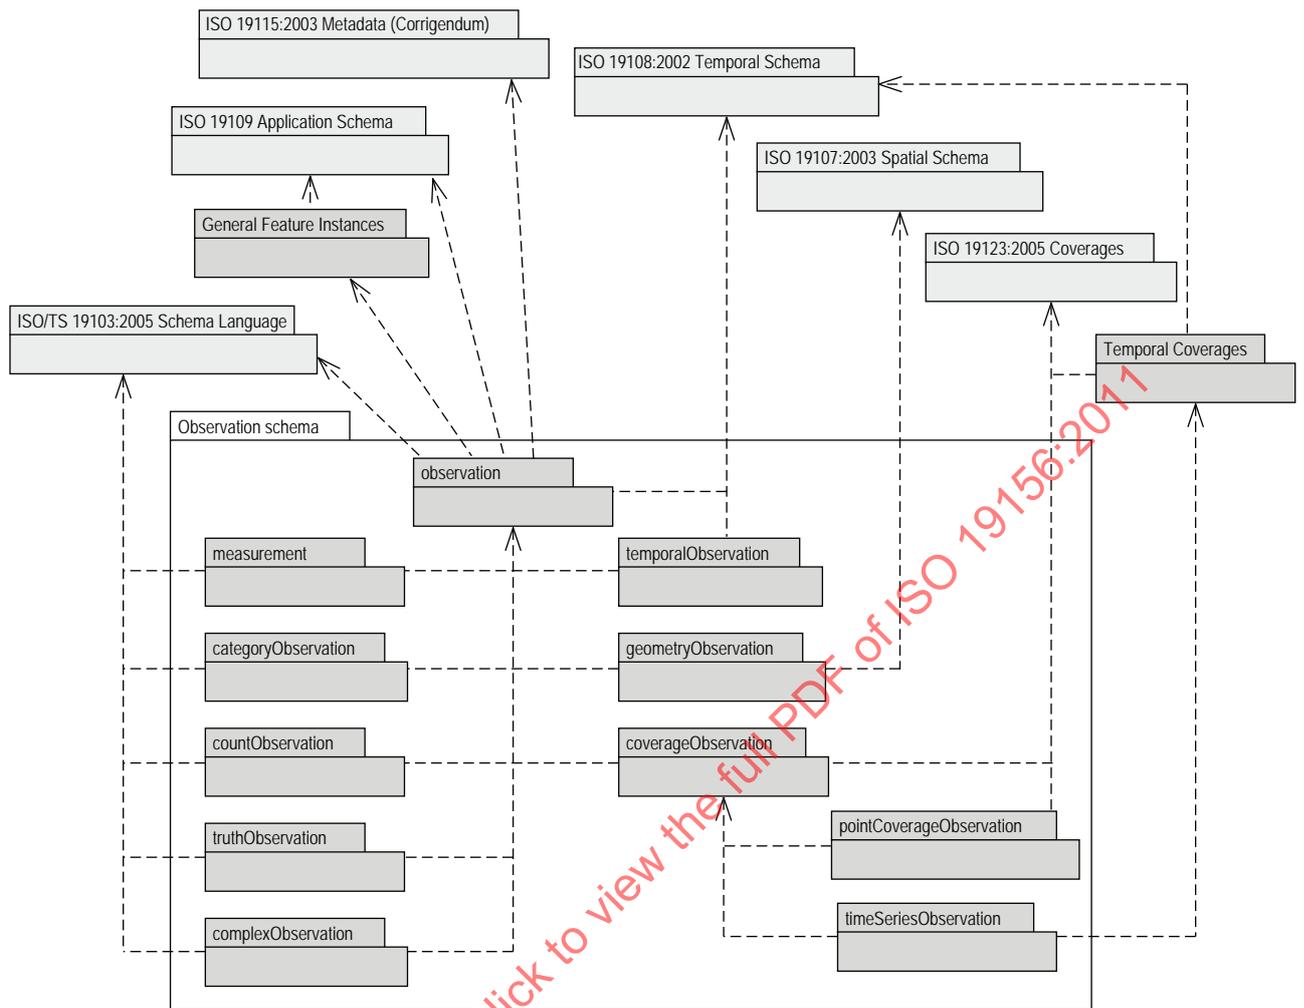


Figure 1 — Package dependencies of the observation schema

7.2.2 OM_Observation

7.2.2.1 General

The class *OM_Observation* (Figure 2) is an instance of the «metaclass» *GF_FeatureType* (ISO 19109), which therefore represents a feature type. *OM_Observation* shall support five attributes and six associations, and shall be subject to four constraints.

7.2.2.4 validTime

If present, the attribute *validTime:TM_Period* shall describe the time period during which the result is intended to be used.

NOTE This attribute is commonly required in forecasting applications.

7.2.2.5 parameter

If present, the attributes *parameter:NamedValue* shall describe an arbitrary event-specific parameter. This might be an environmental parameter, an instrument setting or input, or an event-specific sampling parameter that is not tightly bound to either the feature-of-interest (7.2.2.7) or to the observation procedure (7.2.2.10). To avoid ambiguity, there shall be no more than one parameter with the same name.

NOTE Parameters that are tightly bound to the procedure can be recorded as part of the procedure description.

In some contexts, the *Observation::procedure* (7.2.2.10) is a generic or standard procedure, rather than an event-specific process. In this context, parameters bound to the observation act, such as instrument settings, calibrations or inputs, local position, detection limits, asset identifier, operator, may augment the description of a standard procedure.

EXAMPLE A time sequence of observations of water quality in a well might be made at variable depths within the well. While these can be associated with specimens taken from the well at this depth as the features-of-interest, a more common approach is to identify the well itself as the feature-of-interest and add a "samplingDepth" parameter to the observation (Figure 3). The sampling depth is of secondary interest compared to the temporal variation of water quality at the site.

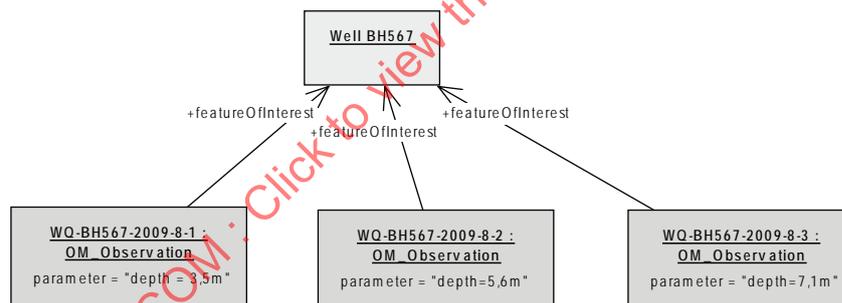


Figure 3 — (Example) Observation instances in the same well at different depths, described using the 'parameter' attribute

7.2.2.6 resultQuality

If present, the attributes *resultQuality:DQ_Element* shall describe the quality of the result (7.2.2.9). This instance-specific description complements the description of the observation procedure (7.2.2.10), which provides information concerning the quality of all observations using this procedure. The quality of a result may be assessed following the procedures in ISO 19157. Multiple measures may be provided.

7.2.2.7 Domain

The association *Domain* shall link the *OM_Observation* to the *GFI_Feature* (C.2.1) that is the subject of the observation and carries the observed property. This feature has the role *featureOfInterest* with respect to the observation. This feature is the real-world object whose properties are under observation, or is a feature intended to sample the real-world object, as described in Clause 9 of this International Standard. An observation instance serves as a *propertyValueProvider* for its feature-of-interest.

7.2.2.8 Phenomenon

The association *Phenomenon* shall link the OM_Observation to the GF_PropertyType for which the OM_Observation:result (7.2.2.9) provides an estimate of its value. The property type has the role *observedProperty* with respect to the observation.

The observed property shall be a phenomenon associated with the feature-of-interest.

An observed property may be, but need not be, modelled as a property (in the sense of the General Feature Model) in a formal application schema that defines the type of the feature-of-interest.

An instance of GF_PropertyType shall describe a property that is either assignable or observable (7.1.2), such as “temperature”, “height”, “colour”, “material”. A property type may be an operation or function such as a spatiotemporal coverage. Property-type definitions may be organized into a hierarchy or ontology and managed in a register and catalogued to support discovery functions. The observed property supports semantic or thematic classification of observations, which is useful for discovery and data fusion.

NOTE In general, the value of a specific observedProperty can be associated with different feature types in different observations, thus allowing the results of observations made in different projects or campaigns, and even from different disciplines, to be combined when required. A property-type register used in observations is most useful if each property type is not tied to a single feature type, or if equivalence relationships between similar property types from different feature types are provided.

7.2.2.9 Range

The association *Range* shall link the OM_Observation to the value generated by the procedure. The value has the role *result* with respect to the observation. The type of the result is shown as “Any”, since it may represent the value of any feature property.

NOTE 1 OGC SWE Common ^[20] provides a model suitable for describing many kinds of observation results.

The type of the observation result shall be consistent with the observed property, and the scale or scope for the value shall be consistent with the quantity or category type. If the observed property (7.2.2.8) is a spatial operation or function, the type of the result may be a coverage.

NOTE 2 In some contexts, particularly in earth and environmental sciences, the term “observation” is used to refer to the *result* itself.

7.2.2.10 ProcessUsed

The association *ProcessUsed* shall link the OM_Observation to the OM_Process (7.2.3) used to generate the result. The process has the role *procedure* with respect to the observation. A process might be responsible for more than one *generatedObservation*.

The OM_Process shall be suitable for the observed property. As a corollary, details of the observed property are constrained by the procedure used.

EXAMPLE Observed radiance wavelength is determined by the response characteristics of the sensor.

A description of the observation procedure provides or implies an indication of the reliability or quality of the observation result.

7.2.2.11 Metadata

If present, the association *Metadata* shall link the OM_Observation to descriptive metadata.

7.2.2.12 Constraints — Consistency with domain model

The type of the feature-of-interest is defined in an application schema (ISO 19109). This may be part of a domain model, or may be from a cross-domain model, such as Sampling Features (Clause 9). The feature type

defines its set of properties. For consistency, the feature-of-interest shall carry the observed property as part of the definition of its type (e.g. Figure 4).

EXAMPLE A feature type “Pallet” might be defined as having the attribute “mass” of type “Measure”. An observation providing the value of this property shall have observedProperty=“mass”, the result shall be of the type “Measure” and the scale (unit of measure) shall be suitable for mass measurements.

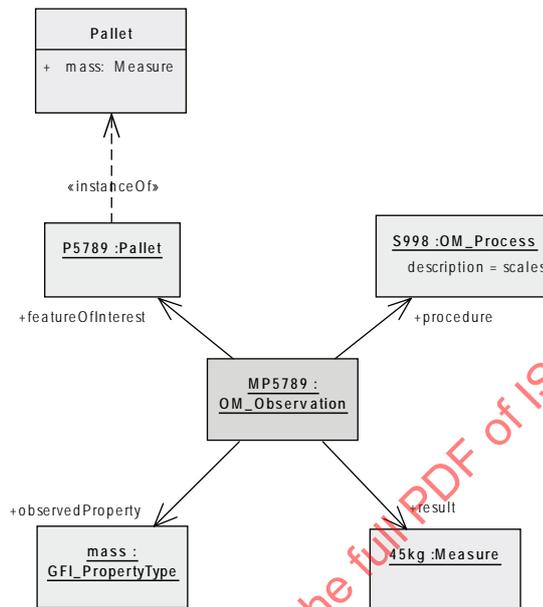


Figure 4 — (Example) An observation with consistent properties: the observed property (mass) is a phenomenon associated with the type of the feature-of-interest (Pallet) and the procedure and result type are also suitable

In the case of a feature property with internal structure (e.g. feature associations), the observed property may be of one component, or of a subset of elements, of the complete feature property. Hence, the observed property might not appear directly as a first-order property in the type definition for the feature-of-interest, but shall appear within the structure of the feature type definition at some level (e.g. Figure 5).

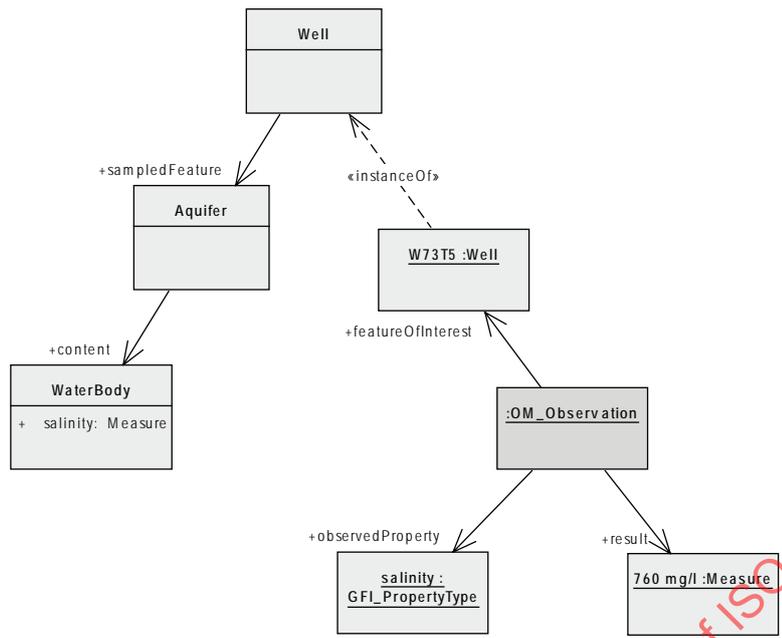


Figure 5 — (Example) An observation where the observed property is not a direct member of the type of the feature-of-interest

Other consistency constraints are that

- the procedure shall be suitable for the observed property, and
- the result type shall be consistent with the observed property (e.g. Figure 4).

7.2.3 OM_Process

The class OM_Process (Figure 2) is an instance of the «metaclass» GF_FeatureType (ISO 19109), which therefore represents a feature type. OM_Process is abstract, and has no attributes, operations or associations. It serves as the base class for observation processes. The purpose of an observation process is to generate an observation result. An instance of OM_Process is often an instrument or sensor, but may be a human observer, a simulator, or a process or algorithm applied to more primitive results used as inputs.

NOTE ISO 19115-2 provides MI_Instrument, LE_Processing and LE_Algorithm, which could all be modelled as specializations of OM_Process. OGC SensorML [16] provides a model which is suitable for many observation procedures.

7.2.4 ObservationContext

7.2.4.1 General

Some observations depend on other observations to provide a context which is important, sometimes essential, in understanding the result. These dependencies are stronger than mere spatiotemporal coincidences, requiring explicit representation. If present, the association class *ObservationContext* (Figure 2) shall link an OM_Observation to another OM_Observation, with the role name relatedObservation for the target. It shall support one attribute.

EXAMPLES Some examples include the conditions associated with experimental replicates (e.g. experimental plots and treatments used), biotic factors (e.g. ecological community), interactions among features (e.g. predator-prey), or other temporary relationships occurring at the time of observation that are not inherent to the observed features themselves (i.e. they change over time), or the related observation may provide input to a process that generates a new result.

This association complements the Intention association (9.2.2.1, 9.2.2.4) which describes relationships between a sampling feature and domain features.

7.2.4.2 role

The attribute *role:GenericName* shall describe the relationship of the target OM_Observation to the source OM_Observation.

7.2.5 NamedValue

7.2.5.1 General

The class *NamedValue* provides for a generic soft-typed parameter value. *NamedValue* shall support two attributes.

7.2.5.2 name

The attribute *name:GenericName* shall indicate the meaning of the named value. Its value should be taken from a well-governed source if possible.

EXAMPLE When used as the value of an Observation::parameter, the name might take values like 'procedureOperator', 'detectionLimit', 'amplifierGain', 'samplingDepth'.

7.2.5.3 value

The attribute *value:Any* shall provide the value. The type "Any" should be substituted by a suitable concrete type, such as CI_ResponsibleParty or Measure.

7.3 Use of the observation model

The Observation model takes a data-user-centric viewpoint, emphasizing the semantics of the feature-of-interest and its properties. This contrasts with Sensor-oriented models, which take a process- and thus provider-centric viewpoint.

An observation is a property-value-provider for a feature-of-interest. Aside from the result, the details of the observation event are primarily of interest in applications where an evaluation of errors in the estimate of the value of a property is of concern. The Observation could be considered to carry "property-level" instance metadata, complementing the dataset-level and feature-level metadata that have been conventionally considered (e.g. ISO 19115).

Additional discussion of the application of the observation and sampling models, and nuances within these, is provided in Annex D.

8 Specialized observations

8.1 Classification of observation by result type

The observation result type shall be suitable for the observed property. The observation type may be classified by the type of the result. Two groups of specialized observations may be distinguished:

- a) Observations whose result is a constant or static value: observations for which the result of a single observation may be either single-valued or multi-valued, but, if there are multiple values, those values do not vary with either spatial position or time during the duration of the observation.
- b) Observations whose result varies within the scope of the feature-of-interest: observations for which the result of a single observation contains multiple values that vary with either spatial position, time, or both, during the duration of the observation.

8.2 Observations whose result is constant

8.2.1 General

Where a property of the feature-of-interest is spatially and temporally invariant during the period of an observation, the corresponding observation result is a scalar (e.g. mass, length, temperature), or a record whose components correspond to a thematic decomposition of the observed property (e.g. bands of a spectrum, components of a wind-velocity vector, components of a stress tensor, elements of a geometry). Where a standard model for the observed property is available, this may be used for the result (e.g. observations of position, shape, or time should use GM_Object and TM_Object).

8.2.2 Taxonomy of observation types whose result is constant

Observation types with results that are internally invariant with respect to space or time are in the Specialized Observation package and are shown in Figure 6.

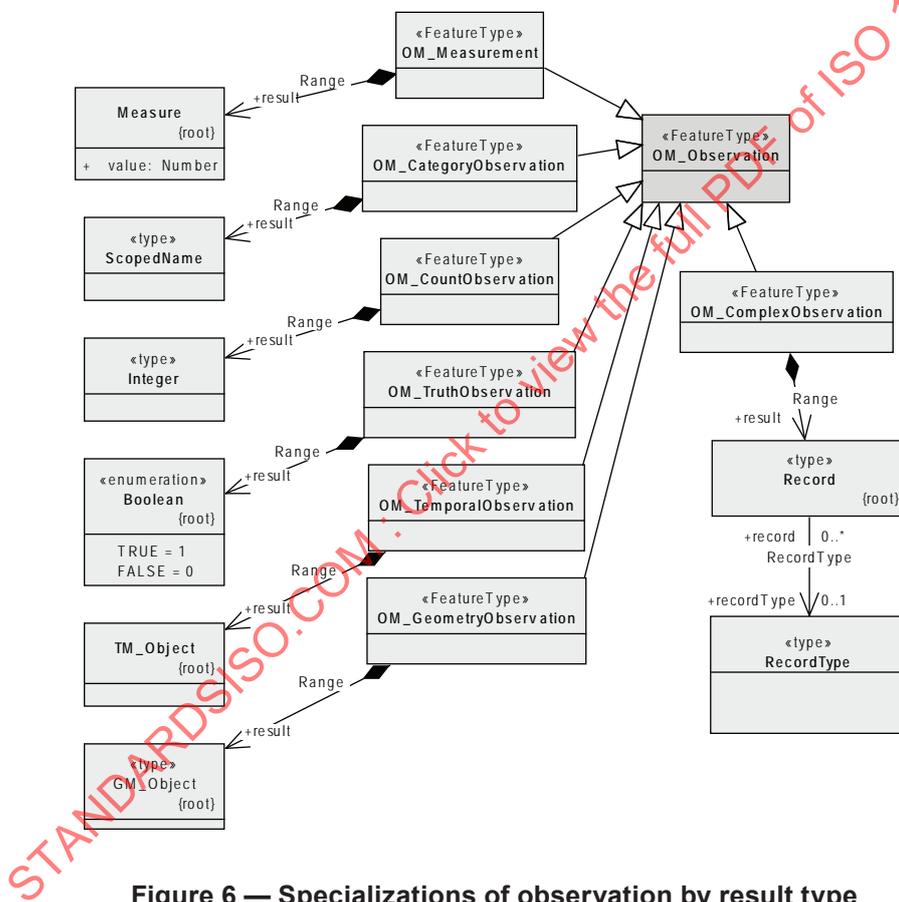


Figure 6 — Specializations of observation by result type

The classes Measure, ScopedName, Integer, Boolean, Record and RecordType are defined in ISO/TS 19103, TM_Object in ISO 19108 and GM_Object in ISO 19107.

For each specialized observation class, the target of the association named 'Range' with the role-name 'result' shall be redefined as indicated in Figure 6 and Table 3.

Table 3 — Result types for specialized observations

Specialized observation class	Result type	Example
OM_Measurement	Measure	A measurement of “mass” (property type) of “the seventh banana” (feature-of-interest) using the “kitchen scales” (procedure) had the result “150 g”.
OM_CategoryObservation	ScopedName	A category observation of the “taxon” (property type) of “specimen 123” (feature-of-interest) by “Amy Bachrach” (procedure) had the result “Eucalyptus caesia” (from the Flora of Australia).
OM_CountObservation	Integer	A count observation of “the number of votes cast” (property type) at “the municipal election” (feature-of-interest) using the “electronic voting machine tally” (procedure) had the result “3542”.
OM_TruthObservation	Boolean	A truth observation of “presence” (property type) of “intruder” (feature-of-interest) using the “CCTV” (procedure) had the result “false”.
OM_TemporalObservation	TM_Object	A temporal observation of “duration” (property type) for “Usain Bolt 100m dash” (feature-of-interest) using the “stop watch” (procedure) had the result “9,6 s”. ^a
OM_GeometryObservation	GM_Object	A geometry observation of “perimeter” (property type) for “plot 987” (feature-of-interest) using the “field survey GHJ” (procedure) had the result “(... description of polygon ...)”.
OM_ComplexObservation	Record (ISO/TS 19103:2005)	A complex observation of “major element composition” (property type) for “specimen h8j” (feature-of-interest) using the “ICPMS” (procedure) had the result “(... array of element proportions ...)”.

^a If the observedProperty of a temporal observation is ‘occurrence time’ then the value of the result will generally be the same as the value of the phenomenonTime.

8.3 Observations whose result varies

8.3.1 General

Where the type of a feature allows for a property that is dependent on some parameter, then the value of the property is a *function* of this parameter.

EXAMPLE 1 The length of a rail varies with temperature.

If the variation is temporal or spatial, then the function is a *coverage* (CV_Coverage — ISO 19123:2005) whose domain extent is the spatiotemporal extent of the feature. The value of a corresponding observation result shall therefore be a function or coverage, respectively. In practice, the observation will *sample* the relevant axis of the target feature, so the observation result is usually represented as a *discrete* function or coverage (CV_DiscreteCoverage).

The target feature may have many observations made on it using different sampling regimes, so the sampling regime is associated with the act of observation, rather than being inherent in the feature-of-interest. This may be accommodated by the decomposition of the domain geometry (i.e. the CV_DomainObject elements) in the observation *result*. The decomposition of the domain geometry in the result provides an intrinsic element of the overall observation protocol.

NOTE The sampling regime may also be accommodated by multiple observations on a complex of sampling features (9.2.3).

EXAMPLE 2 The colour of a scene varies with position. The result of an observation of the property “colour” of the scene is a coverage. Each domain element is a pixel whose index allows the spatial location within the scene to be obtained.

EXAMPLE 3 Many properties of an observation well vary along its length, including rock type, orientation, permeability, etc. These are conventionally encoded as "logs", with different sampling regimes. Each well-log is a coverage whose domain is the curve describing the shape of the well. The domain is sampled with elements whose location is described in terms of 1-D position measured along the well axis.

A simple case concerns sampling a property at points on an extensive feature. The observation result is a set of point-value pairs (CV_PointValuePair — ISO 19123:2005).

EXAMPLE 4 Temperature might be sampled using an array of weather stations. The temperature field of the region covered by the array can be represented as a discrete point coverage, whose domain-elements correspond to the station locations.

An important case concerns monitoring a time-varying property of a persistent feature by sampling at discrete points in time. The observation result is a set of time-value pairs (either CV_PointValuePair, in which the point geometry uses a temporal reference system, or CVT_TimeInstantValuePair — C.3.2).

EXAMPLE 5 An air- or water-quality monitoring station observes properties such as ozone, turbidity, etc. The instantaneous value is a scalar concentration or index value. However, the value is time-dependent. The value can be expressed as a coverage whose domain is the period of interest. This is usually described as a time series, which is a discrete time coverage.

The feature-of-interest may be naturally structured into elements, such as a road network composed of road segments, or a state composed of administrative areas at a finer scale, or a farm composed of fields. Observation of a property of these features may capture its variation as a function of the sub-features. In these cases, the standard members of the target feature are responsible for decomposition of the domain geometry.

8.3.2 Taxonomy of coverage observation types

Observation types with variable results are shown in Figure 7.

For each specialized observation class whose result varies, the target of the association named 'Range' with the role-name 'result' shall be redefined as indicated in Figure 7 and Table 4.

Table 4 — Result types for specialized observations

Specialized observation class	Result type
OM_DiscreteCoverageObservation	CV_DiscreteCoverage
OM_DiscretePointCoverageObservation	CV_DiscretePointCoverage
OM_DiscreteTimeSeriesObservation	CVT_DiscreteTimeInstantCoverage (C.3.1)

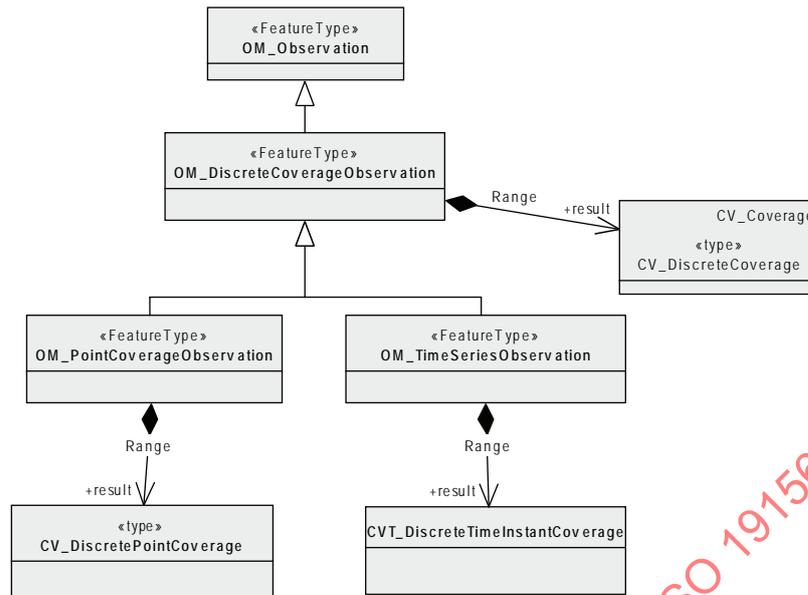


Figure 7 — Specialization of observations with coverage-valued results

9 Fundamental characteristics of sampling features

9.1 The context for sampling

9.1.1 Proximate vs. ultimate feature-of-interest

9.1.1.1 Introduction

The observation model maps the result of the application of a procedure to a subject, which plays the role of feature-of-interest of the observation (Clause 7). However, the proximate feature-of-interest of an observation may not be the ultimate domain-specific feature whose properties are of interest in the investigation of which the observation is a part. There are two circumstances that can lead to this:

- the observation does not obtain values for the whole of a domain feature;
- the observation procedure obtains values for properties that are not characteristic of the type of the ultimate feature.

Furthermore, in some practical situations, both differences apply.

9.1.1.2 Proximate feature-of-interest embodies a sample design

For various reasons, the domain feature may not be fully accessible. In such circumstances, the procedure for estimating the value of a property of the domain feature involves sampling in representative locations. Then the procedure for transforming a property value observed on the sample to an estimate of the property on the ultimate feature-of-interest depends on the sample design.

EXAMPLE 1 The chemistry of water in an underground aquifer is sampled at one or more positions in a well or bore.

EXAMPLE 2 The magnetic field of the earth is sampled at positions along a flight-line.

EXAMPLE 3 The structure of a rock mass is observed on a cross-section exposed in a river bank.

9.1.1.3 Observed property is a proxy

The procedure for obtaining values of the property of interest may be indirect, relying on direct observation of a more convenient parameter which is a proxy for the property of interest. Application of an algorithm or processing chain obtains an estimate of the ultimate property of interest.

The observation model requires that the feature-of-interest of the initial observation be of a type that carries the observed property within its properties. Thus, if the proxy property is not a member of the ultimate feature-of-interest, a proxy feature with a suitable model shall be involved.

EXAMPLE A remote sensing observation might obtain the reflectance colour, when the investigation is actually interested in vegetation type and quality. The feature which contains reflectance colour is a scene or swath, while the feature carrying vegetation properties is a parcel or tract.

9.1.1.4 Combination

These variations may be combined if exhaustive observation of the domain feature is impractical, and direct measurement is of a proxy property.

EXAMPLE For certain styles of mineralization, the gold concentration of rocks in a region might be estimated through measurement of a related element (e.g. copper), in a specimen of gravel collected from a stream that drains part of the region. The gravel samples the rocks in the catchment of the stream, i.e. in the stream bed and upslope.

9.1.2 Role of sampling features

Sampling features are artefacts of an observational strategy, and have no significant function outside of their role in the observation process. The physical characteristics of the features themselves are of little interest, except perhaps to the manager of a sampling campaign.

EXAMPLE A "station" is essentially an identifiable locality where a sensor system or procedure may be deployed and an observation made. In the context of the observation model, it connotes the "world in the vicinity of the station", so the observed properties relate to the physical medium at the station, and not to any physical artefact such as a mooring, buoy, benchmark, monument, well, etc.

NOTE A transient sampling feature, such as a ships-track or flight-line, might be identified and described, but is unlikely to be revisited exactly.

A sampling feature is intended to sample some feature-of-interest in an application domain. However, in some cases the identity, and even the exact type, of the sampled feature may not be known when observations are made using the sampling features.

9.1.3 Classification of sampling features

A small number of sampling patterns are common across disciplines in observational science. These provide a basis for processing and portrayal tools which are similar across domains, and depend particularly on the geometry of the sample design. Common names for sampling features include specimen, station, profile, transect, path, swath and scene. Spatial sampling is classified primarily by the topological dimension. The generic characteristics of sampling features are defined in this clause; spatial samples of various dimensions are defined in Clause 10; and specimens in Clause 11.

9.2 Sampling Schema

9.2.1 Packaging

The sampling schema is organized in one package containing seven leaf packages corresponding to the conformance classes defined in 2.2, with dependencies on the observation schema (Clause 7), the general feature instance package (C.2), and on several other packages from International Standards covering geographic information. The inter-package dependencies are shown in Figure 8. The core sampling feature package is documented in this clause. The spatial sampling feature packages are documented in Clause 10 and the specimen package in Clause 11.

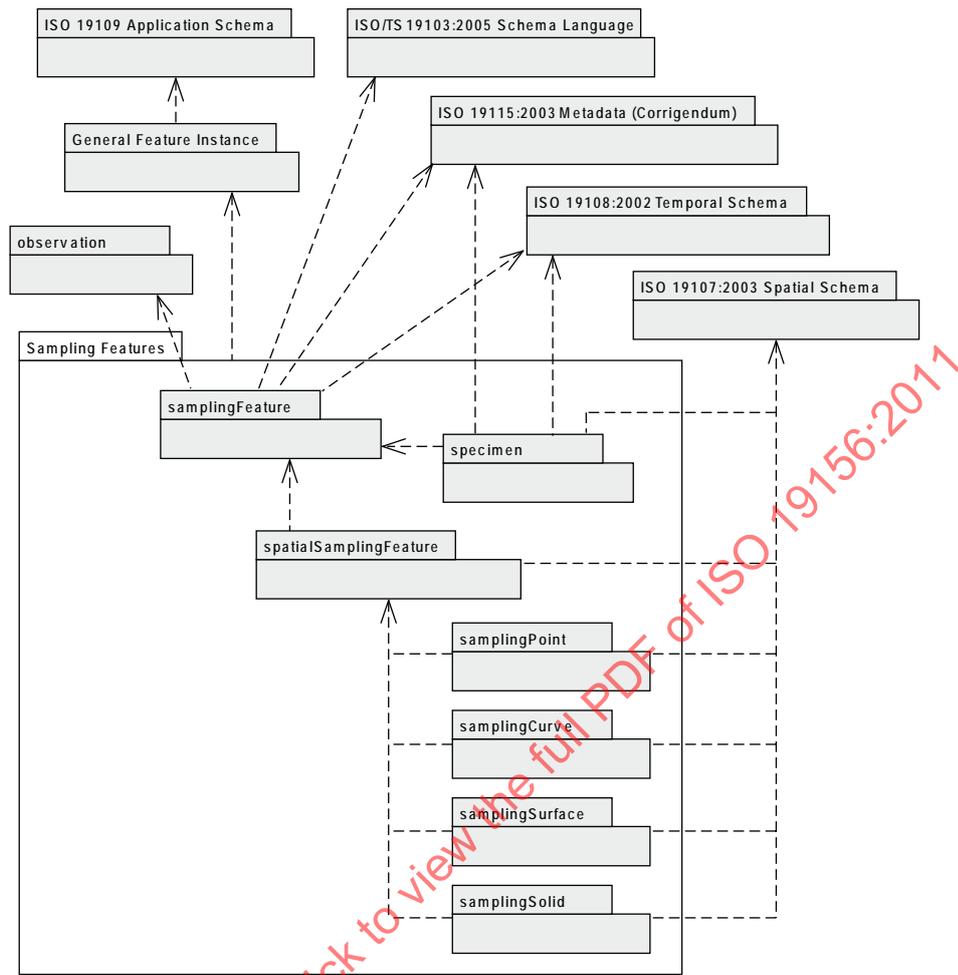


Figure 8 — Package dependencies of the sampling feature schema

9.2.2 SF_SamplingFeature

9.2.2.1 General

The abstract class *SF_SamplingFeature* (Figure 9) is an instance of the «metaclass» *GF_FeatureType* (ISO 19109), which therefore represents a feature type. *SF_SamplingFeature* shall support two attributes and three associations, and shall be subject to one constraint.

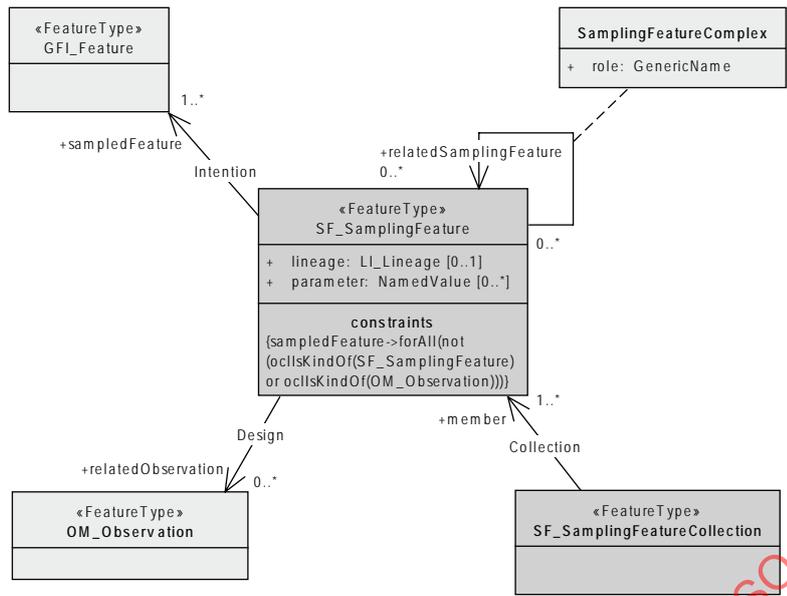


Figure 9 — Sampling feature core

9.2.2.2 parameter

If present, the attribute *parameter:NamedValue* shall describe an arbitrary parameter associated with the SF_SamplingFeature. This might be a parameter that qualifies the interaction with the sampled feature, or an environmental parameter associated with the sampling process.


9.2.2.3 lineage

If present, the attribute *lineage:LI_Lineage* shall describe the history and provenance of the SF_SamplingFeature. This might include information relating to the handling of the specimen, or details of the survey procedure of a spatial sampling feature.

9.2.2.4 Intention

A sampling feature is established in order to make observations concerning some domain feature. The association *Intention* shall link the SF_SamplingFeature to the feature which the sampling feature was designed to sample. The target of this association has the role *sampledFeature* with respect to the sampling feature, and shall not be a sampling feature or observation. It is usually a real-world feature from an application domain (Figures 5 and 10).

EXAMPLE A profile typically samples a water- or atmospheric-column; a well samples the water in an aquifer; a tissue specimen samples a part of an organism.

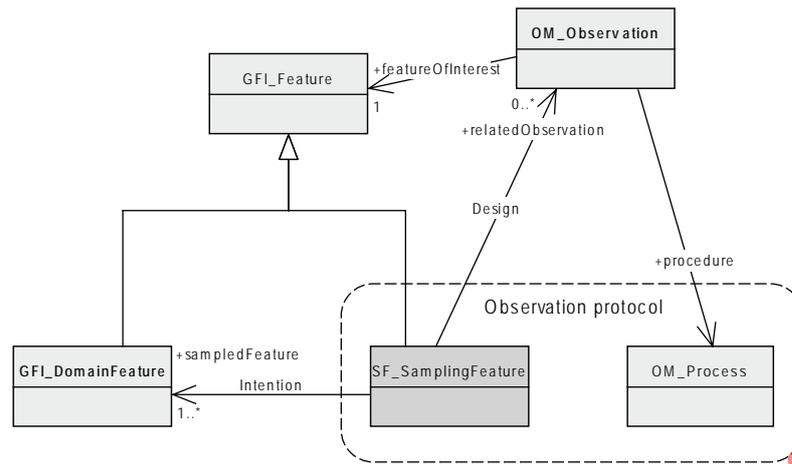

**Figure 10 — (Informative) Relationship between sampling and domain features
(Each may appear as the feature-of-interest. If a sampling feature is involved, it samples a feature of a type defined in an application schema.)**

NOTE 1 The sampling feature, together with the observation procedure, describes the observation protocol.

NOTE 2 GFI_DomainFeature is informative only. It stands for all feature types that are not observations or sampling features.

9.2.2.5 Design

Sampling features are distinctive compared with other features from application domains by having navigable associations to observations. If present, the association *Design* shall link the SF_SamplingFeature to an OM_Observation that was made utilizing the sampling feature, and the description of the sampling feature provides an intrinsic element of the observation protocol, along with the observation procedure (7.2.2) and the decomposition of the domain geometry in the case of a coverage-valued result (8.3). The OM_Observation has the role *relatedObservation* with respect to the sampling feature. Multiple observations may be made on a single sampling feature.

9.2.2.6 Constraint

A constraint on OM_Observation is that its observed property is a member property of the feature-of-interest either directly or transitively. Where the feature-of-interest of an observation is a sampling feature, the observed property shall be a member of the sampling feature or of the sampled feature.

Where the identity or type of the sampled feature is not known prior to processing the observation result, the constraint cannot be enforced immediately.

9.2.3 SamplingFeatureComplex

9.2.3.1 General

Sampling features are frequently related to each other, as parts of complexes, through sub-sampling, and in other ways. If present, the association class SamplingFeatureComplex (Figure 9) shall link an SF_SamplingFeature to another SF_SamplingFeature. It shall support one attribute.

EXAMPLE Sampling points are often located along a sampling curve; specimens are usually obtained from a sampling point; pixels are part of a scene; stations are often part of an array.

This association complements the Intention association which describes relationships between a sampling feature and domain features.

9.2.3.2 role

The attribute *role:GenericName* shall describe the relationship of the target *SF_SamplingFeature* to the source *SF_SamplingFeature*.

9.2.4 SF_SamplingFeatureCollection

9.2.4.1 General

The class *SF_SamplingFeatureCollection* (Figure 9) is an instance of the «metaclass» *GF_FeatureType* (ISO 19109), which therefore represents a feature type. *SF_SamplingFeatureCollection* shall support one association.

9.2.4.2 Collection

The association *Collection* shall link an *SF_SamplingFeatureCollection* to member *SF_SamplingFeatures*.

10 Spatial sampling features

10.1 The context for spatial sampling features

When observations are made to estimate properties of a geospatial feature, in particular where the value of a property varies within the scope of the feature, a spatial sampling feature is used. Depending on accessibility and on the nature of the expected property variation, the sampling feature may be extensive in one, two or three spatial dimensions. Processing and visualization methods are often dependent on the topological dimension of the sampling manifold, so this provides a natural classification system for sampling features.

This classification follows common practice in focussing on conventional spatial dimensions. Properties observed on sampling features may be time-dependent, but the temporal axis does not generally contribute to the classification of sampling feature classes. Sampling feature identity is usually less time-dependent than the property value.

10.2 Spatial sampling feature schema

10.2.1 SF_SpatialSamplingFeature

10.2.1.1 General

The class *SF_SpatialSamplingFeature* (Figure 11) is an instance of the «metaclass» *GF_FeatureType* (ISO 19109), which therefore represents a feature type. *SF_SpatialSamplingFeature* shall support one attribute and two associations.

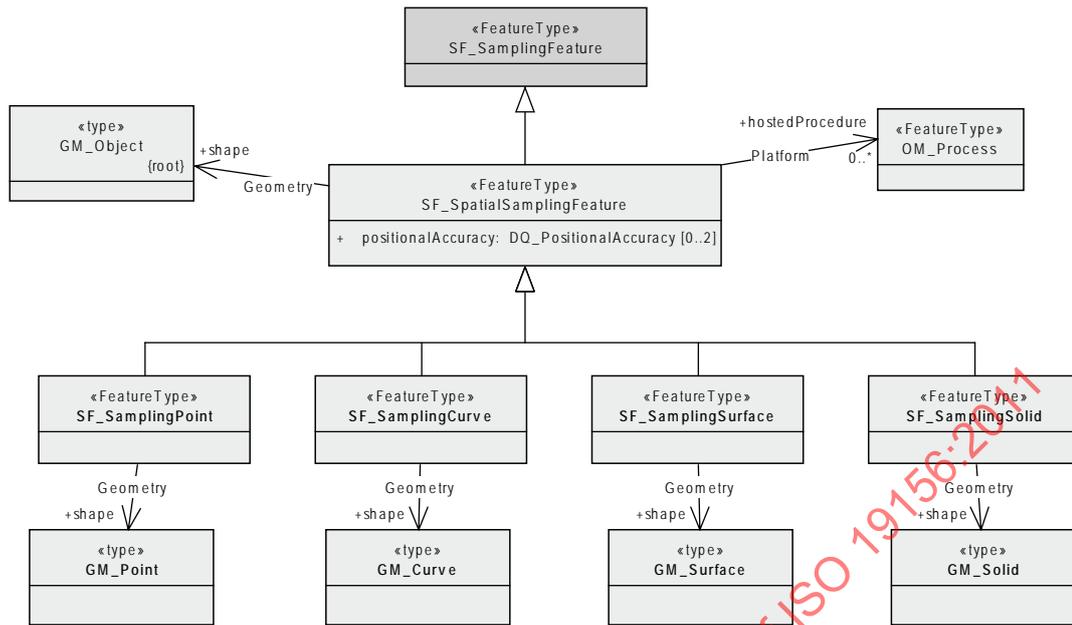


Figure 11 — Spatial sampling features

10.2.1.2 positionalAccuracy

Positioning metadata is commonly associated with sampling features defined in the context of field surveys. If present, *positionalAccuracy:DQ_PositionalAccuracy* shall describe the accuracy of the positioning of the sampling feature. Up to two instances of the attribute support the independent description of horizontal and vertical accuracy.

10.2.1.3 Geometry

The association *Geometry* shall link an *SF_SpatialSamplingFeature* to a *GM_Object* that describes its shape.

10.2.1.4 Platform

A common role for a spatial sampling feature is to host instruments or procedures deployed repetitively or permanently. If present, the association *Platform* shall link the *SF_SpatialSamplingFeature* to an *OM_Process* deployed at it. The *OM_Process* has the role *hostedProcedure* with respect to the sampling feature.

10.2.2 Taxonomy of spatial sampling features

Concrete spatial sampling feature classes shall be distinguished on the basis of the type of the shape property, as shown in Figure 11 and Table 5.

Table 5 — Shape types for specialized spatial sampling features

Specialized spatial sampling feature	Shape type
SF_SamplingPoint	GM_Point
SF_SamplingCurve	GM_Curve
SF_SamplingSurface	GM_Surface
SF_SamplingSolid	GM_Solid

The specialization of sampling features follows common practice in focussing on conventional spatial dimensions. Properties observed on sampling features may be time-dependent, but the temporal axis does

not generally contribute to the classification of sampling feature classes. Sampling feature identity is usually less time-dependent than property value.

10.3 Decomposition of extensive sampling features for observations

The shape of a spatially extensive sampling feature (sampling-curve, -surface or -solid) defines a manifold within which a varying property may be characterized, and hence within which subsampling may be undertaken. The shape provides a complete sampling domain, but does not specify any particular decomposition. Sub-sampling may be described using related sampling features, or as domain elements (such as a segment in a 1-D curve; grid-cell, pixel or TIN triangle in 2-D; tetrahedron or block in 3-D) of a discrete coverage representation of the variation of a property within the sampling feature. The shape of the sampling feature is the context for domain decomposition. Where spatial sampling is involved, then both the sampling feature shape and its discretization as described in the domain of the coverage that comprises the observation result are required to describe the overall observation protocol.

EXAMPLE 1 Logs of different properties along a well or borehole might use different intervals, and sub-samples might be either spatially instantaneous, or averaged in some way over an interval. The position of the samples can be conveniently described in terms of offsets in a linear coordinate reference system that is defined by the shape of the well axis.

Time-dependent properties may be observed if a sampling feature is temporally persistent.

EXAMPLE 2 The temperature of the atmosphere at a weather station varies as a function of time.

Properties observed using a sampling feature may depend on non-spatiotemporal axes.

EXAMPLE 3 The density of a specimen varies as a function of temperature.

10.4 Common names for sampling features (informative)

Some common names for sampling features used in various application domains include Borehole, Flightline, Interval, Lidar Cloud, Map Horizon, Microscope Slide, Mine Level, Mine, Observation Well, Profile, Pulp, Quadrat, Scene, Section, ShipsTrack, Spot, Station, Swath, Trajectory, Traverse, etc. These are mapped to the standard sampling feature classes in Figure 12. Note that these mappings are informative, and may not match some applications.

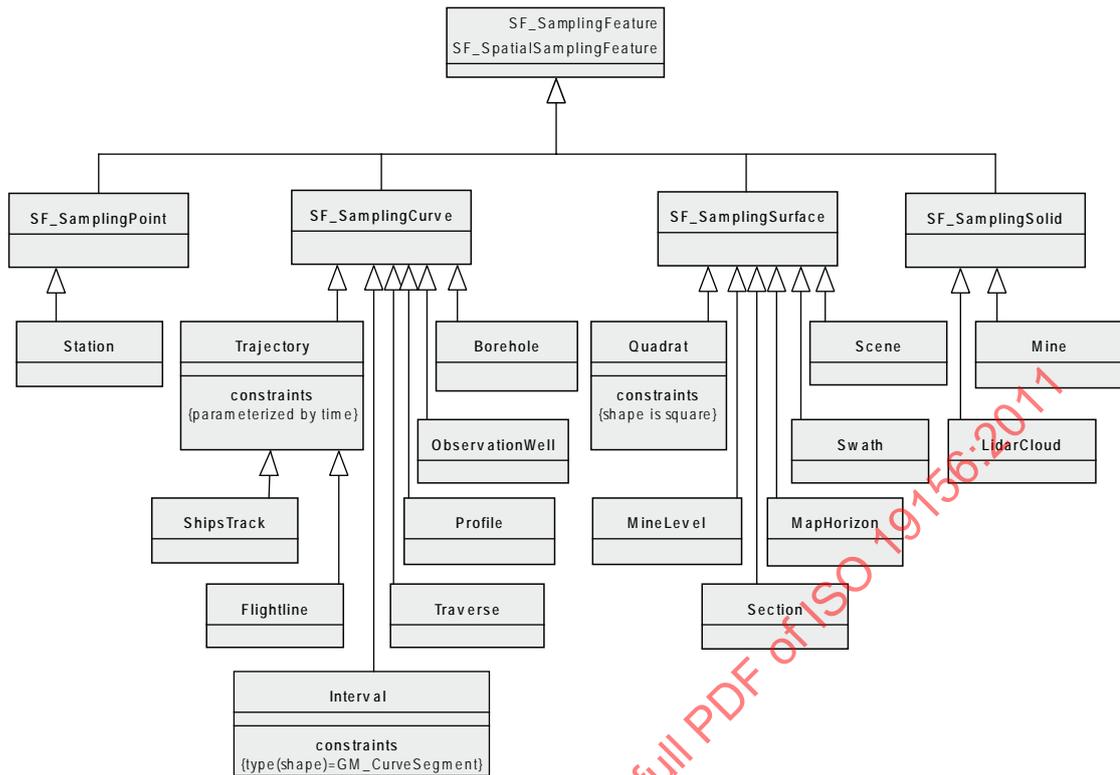


Figure 12 — (Informative) Common terms for spatially extensive sampling features (i.e. the classes whose names are unprefix)

11 Specimens

11.1 The context for specimens

A Specimen is a physical sample, obtained for observation(s) normally carried out *ex-situ*, sometimes in a laboratory.

11.2 Specimen schema

11.2.1 SF_Specimen

11.2.1.1 General

The class *SF_Specimen* (Figure 13) is a specialized *SF_SamplingFeature*. The *SF_Specimen* shall support seven attributes and one association.

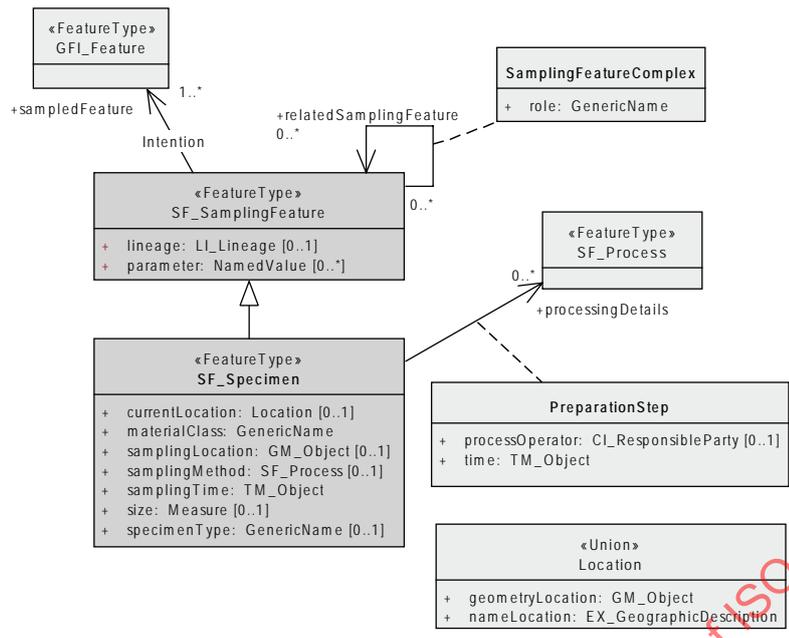


Figure 13 — Specimen model

11.2.1.2 materialClass

The attribute *materialClass:GenericName* shall provide a basic classification of the material type of the specimen.

EXAMPLE Soil, water, rock, aqueous, liquid, tissue, vegetation, food.

11.2.1.3 samplingTime

The attribute *samplingTime:TM_Object* shall record when the specimen was retrieved from the sampled feature.

11.2.1.4 samplingLocation

If present, the attribute *samplingLocation:GM_Object* shall describe the location from where the specimen was obtained.

NOTE Where a specimen has a relatedSamplingFeature whose location provides an unambiguous location then this attribute is not required. However, if the specific sampling location within the sampledFeature is important, then this attribute supports its description.

11.2.1.5 samplingMethod

If present, the attribute *samplingMethod:SF_Process* shall describe the method used to obtain the specimen from its sampledFeature.

11.2.1.6 currentLocation

If present, the attribute *currentLocation:Location* shall describe the location of a physical specimen. This may be a storage location, such as a shelf in a warehouse or a drawer in a museum.

NOTE If a specimen no longer exists, for example, it was destroyed in connection with an observation act, then the currentLocation should be omitted or carry a suitable null indicator.

11.2.1.7 specimenType

If present, the attribute *specimenType:GenericName* shall describe the basic form of the specimen.

EXAMPLE Polished section; core; pulp; solution.

11.2.1.8 size

If present, the attribute *size:Measure* shall describe a physical extent of the specimen. This may be length, mass, volume, etc., as appropriate for the specimen instance and its material class.

11.2.2 PreparationStep

11.2.2.1 General

In many applications, specimen preparation procedures are applied to the material prior to its use in an observation. The class *PreparationStep* (Figure 13) shall link an SF_Specimen to an SF_Process that describes a phase of the specimen preparation. It shall support two attributes.

11.2.2.2 time

The attribute *time:TM_Object* shall describe the time that the SF_Process was applied to the SF_Specimen. It supports ordering of preparation steps.

11.2.2.3 processOperator

If present, the attribute *processOperator:CI_ResponsibleParty* shall describe the operator of the process involved in the preparation step.

11.2.3 SF_Process

The class SF_Process (Figure 13) is an instance of the «metaclass» GF_FeatureType (ISO 19109), which therefore represents a feature type. The SF_Process is abstract, and has no attributes, operations or associations. It serves as the base class for processes associated with the design and preparation of sampling features. The purpose of a sampling process is to generate or transform a sampling feature.

11.2.4 Location

11.2.4.1 General

Location (Figure 13) is a union class (choice) that shall support two attributes.

11.2.4.2 geometryLocation

The attribute *geometryLocation:GM_Object* shall select a geometric representation of the location.

11.2.4.3 nameLocation

The attribute *nameLocation:EX_GeographicDescription* shall select a description of the location using text or an identifier.

Annex A (normative)

Abstract Test Suite

A.1 Abstract tests for observation interchange

A.1.1 Observation interchange

The observation interchange test consists of the following:

- a) Test Purpose: Verify that an interchange schema correctly implements the mandatory attributes, associations and constraints of OM_Observation.
- b) Test Method: Inspect the documentation of the interchange schema.
- c) Reference: ISO 19156, Clause 7.
- d) Test Type: Capability.

A.1.2 Measurement interchange

The measurement interchange test consists of the following:

- a) Test Purpose: Verify that an interchange schema correctly implements the mandatory attributes, associations and constraints of OM_Measurement.
- b) Test Method: Inspect the documentation of the interchange schema.
- c) Reference: ISO 19156, 8.2.2.
- d) Test Type: Capability.

A.1.3 Category observation interchange

The category observation interchange test consists of the following:

- a) Test Purpose: Verify that an interchange schema correctly implements the mandatory attributes, associations and constraints of OM_CategoryObservation.
- b) Test Method: Inspect the documentation of the interchange schema.
- c) Reference: ISO 19156, 8.2.2.
- d) Test Type: Capability.

A.1.4 Count observation interchange

The count observation interchange test consists of the following:

- a) Test Purpose: Verify that an interchange schema correctly implements the mandatory attributes, associations and constraints of OM_CountObservation.
- b) Test Method: Inspect the documentation of the interchange schema.
- c) Reference: ISO 19156, 8.2.2.
- d) Test Type: Capability.

A.1.5 Truth observation interchange

The truth observation interchange test consists of the following:

- a) Test Purpose: Verify that an interchange schema correctly implements the mandatory attributes, associations and constraints of OM_TruthObservation.
- b) Test Method: Inspect the documentation of the interchange schema.
- c) Reference: ISO 19156, 8.2.2.
- d) Test Type: Capability.

A.1.6 Temporal observation interchange

The temporal observation interchange test consists of the following:

- a) Test Purpose: Verify that an interchange schema correctly implements the mandatory attributes, associations and constraints of OM_TemporalObservation.
- b) Test Method: Inspect the documentation of the interchange schema.
- c) Reference: ISO 19156, 8.2.2.
- d) Test Type: Capability.

A.1.7 Geometry observation interchange

The geometry observation interchange test consists of the following:

- a) Test Purpose: Verify that an interchange schema correctly implements the mandatory attributes, associations and constraints of OM_GeometryObservation.
- b) Test Method: Inspect the documentation of the interchange schema.
- c) Reference: ISO 19156, 8.2.2.
- d) Test Type: Capability.

A.1.8 Complex observation interchange

The complex observation interchange test consists of the following:

- a) Test Purpose: Verify that an interchange schema correctly implements the mandatory attributes, associations and constraints of OM_ComplexObservation.
- b) Test Method: Inspect the documentation of the interchange schema.
- c) Reference: ISO 19156, 8.2.2.
- d) Test Type: Capability.

A.1.9 Discrete coverage observation interchange

The discrete coverage observation interchange test consists of the following:

- a) Test Purpose: Verify that an interchange schema correctly implements the mandatory attributes, associations and constraints of OM_DiscreteCoverageObservation.
- b) Test Method: Inspect the documentation of the interchange schema.
- c) Reference: ISO 19156, 8.3.2.
- d) Test Type: Capability.

A.1.10 Point coverage observation interchange

The point coverage observation interchange test consists of the following:

- a) Test Purpose: Verify that an interchange schema correctly implements the mandatory attributes, associations and constraints of OM_PointCoverageObservation.
- b) Test Method: Inspect the documentation of the interchange schema.
- c) Reference: ISO 19156, 8.3.2.
- d) Test Type: Capability.

A.1.11 Time series observation interchange

The time series observation interchange test consists of the following:

- a) Test Purpose: Verify that an interchange schema correctly implements the mandatory attributes, associations and constraints of OM_TimeSeriesObservation.
- b) Test Method: Inspect the documentation of the interchange schema.
- c) Reference: ISO 19156, 8.3.2.
- d) Test Type: Capability.

A.2 Abstract tests for sampling feature interchange

A.2.1 Sampling feature interchange

The sampling feature interchange test consists of the following:

- a) Test Purpose: Verify that an interchange schema correctly implements the mandatory attributes, associations and constraints of a concrete subclass of SF_SamplingFeature.
- b) Test Method: Inspect the documentation of the interchange schema.
- c) Reference: ISO 19156, Clauses 9, 10 and 11.
- d) Test Type: Capability.

A.2.2 Sampling feature collection interchange

The sampling feature collection interchange test consists of the following:

- a) Test Purpose: Verify that an interchange schema correctly implements the mandatory attributes, associations and constraints of SF_SamplingFeatureCollection.
- b) Test Method: Inspect the documentation of the interchange schema.
- c) Reference: ISO 19156, 9.2.4.
- d) Test Type: Capability.

A.2.3 Spatial sampling feature interchange

The spatial sampling feature interchange test consists of the following:

- a) Test Purpose: Verify that an interchange schema correctly implements the mandatory attributes, associations and constraints of a concrete subclass of SF_SpatialSamplingFeature.
- b) Test Method: Inspect the documentation of the interchange schema.

- c) Reference: ISO 19156, 10.2.
- d) Test Type: Capability.

A.2.4 Sampling point interchange

The sampling point interchange test consists of the following:

- a) Test Purpose: Verify that an interchange schema correctly implements the mandatory attributes, associations and constraints of SF_SamplingPoint.
- b) Test Method: Inspect the documentation of the interchange schema.
- c) Reference: ISO 19156, 10.2.2.
- d) Test Type: Capability.

A.2.5 Sampling curve interchange

The sampling curve interchange test consists of the following:

- a) Test Purpose: Verify that an interchange schema correctly implements the mandatory attributes, associations and constraints of SF_SamplingCurve.
- b) Test Method: Inspect the documentation of the interchange schema.
- c) Reference: ISO 19156, 10.2.2.
- d) Test Type: Capability.

A.2.6 Sampling surface interchange

The sampling surface interchange test consists of the following:

- a) Test Purpose: Verify that an interchange schema correctly implements the mandatory attributes, associations and constraints of SF_SamplingSurface.
- b) Test Method: Inspect the documentation of the interchange schema.
- c) Reference: ISO 19156, 10.2.2.
- d) Test Type: Capability.

A.2.7 Sampling solid interchange

The sampling solid interchange test consists of the following:

- a) Test Purpose: Verify that an interchange schema correctly implements the mandatory attributes, associations and constraints of SF_SamplingSolid.
- b) Test Method: Inspect the documentation of the interchange schema.
- c) Reference: ISO 19156, 10.2.2.
- d) Test Type: Capability.

A.2.8 Specimen interchange

The specimen interchange test consists of the following:

- a) Test Purpose: Verify that an interchange schema correctly implements the mandatory attributes, associations and constraints of SF_Specimen.

ISO 19156:2011(E)

- b) Test Method: Inspect the documentation of the interchange schema.
- c) Reference: ISO 19156, 11.2.
- d) Test Type: Capability.

STANDARDSISO.COM : Click to view the full PDF of ISO 19156:2011

Annex B (informative)

Mapping O&M terminology to common usage

B.1 Introduction

This International Standard defines terminology in support of a generic, cross-domain model for observations and measurements. Terms are taken from a variety of disciplines. The terms are used within the model in a consistent manner, but in order to achieve internal consistency, this varies from how the same terms are used in some application domains. In order to assist in the correct application of the model across domains, this annex provides a mapping from observations and measurements (O&M) terminology to some domain vocabularies.

B.2 Mappings

B.2.1 Earth observations

Table B.1 — Earth Observations (EO)

O&M	EO	Example
Observation::result	Observation value, measurement value, observation	35 µg/m ³
Observation::procedure	Method, sensor	ASTER, U.S. EPA Federal Reference Method for PM _{2.5}
Observation::observedProperty	Parameter, variable	Reflectance, Particulate Matter 2.5
Observation::featureOfInterest:SamplingSurface	2-D swath or scene	Sampling grid
SamplingSurface:sampledFeature	Earth surface	—
Observation::featureOfInterest:SamplingSolid	3-D sampling space	Sampling grid
SamplingSolid::sampledFeature	Media (air, water, ...), Global Change Master Directory "Topic"	Troposphere

B.2.2 Metrology

Table B.2 — Metrology

O&M	Metrology	Example: mass measurement
Observation::result	Value	35 mg
Observation::procedure	Instrument	Balance
Observation::observedProperty	Measurand	Mass

B.2.3 Earth science simulations

Table B.3 — Earth science simulations

O&M	Earth science
Observation::result	A model or field
Observation::observedProperty	Variable, parameter
Observation::featureofInterest:SamplingFeature	Section, swath, volume, grid
Observation::featureofInterest:SamplingFeature::sampledFeature (i.e. the ultimate or 'domain' feature-of-interest)	Atmosphere, ocean, solid earth
Observation::procedure	Earth process simulator
Observation::phenomenonTime	Future date (forecasts), past date (hindcasts)
Observation::resultTime	Simulator execution date
Observation::validTime	Period when result is intended to be used

B.2.4 Assay/Chemistry

Table B.4 — Assay/Chemistry

O&M	Geochemistry
Observation::featureOfInterest:Specimen	Sample
Specimen::sampledFeature:GeologicUnit	Ore body, Geologic Unit
Specimen::relatedSamplingFeature:Specimen	Pulp, separation
Specimen::materialClass	Whole-rock, mineral
Specimen::processingDetails	Sample preparation process
Specimen::samplingMethod	Sample collection process
Specimen::samplingLocation	Sample collection location
Specimen::size	Mass, length
Specimen::currentLocation	Store location
Specimen::samplingTime	Sample collection date
Observation::phenomenonTime	Sample collection date
Observation::resultTime	Analysis date
Observation::result	Analysis
Observation::observedProperty	Analyte
Observation::procedure	Instrument, analytical process

B.2.5 Field observations in geology

Table B.5 — Geology field observations

O&M	Geology
Observation::featureOfInterest:SamplingFeatureCollection	Outcrop
SamplingFeatureCollection::relatedSamplingFeature:SamplingPoint	Location of structure observation
SamplingPoint::sampledFeature:GeologicUnit	Geologic Unit
Observation::phenomenonTime	Outcrop visit date
Observation::observedProperty	Strike and dip, lithology, alteration state, etc.
SamplingFeatureCollection::relatedSamplingFeature:Specimen	Rock sample
Specimen::sampledFeature:GeologicUnit	Ore body, Geologic Unit

STANDARDSISO.COM : Click to view the full PDF of ISO 19156:2011