
**Industrial automation systems and
integration — Service interface for testing
applications —**

**Part 1:
Overview**

*Systemes d'automatisation industrielle et integration — Interface de
service pour contrôler les applications —*

Partie 1: Vue d'ensemble



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 20242-1:2005

© ISO 2005

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

1	Scope	1
2	Terms and definitions	1
3	Abbreviations	2
4	Service interface concept	3
4.1	General	3
4.2	Platform adapter	4
4.2.1	Features	4
4.2.2	Device communication aspects	4
4.3	Device driver	5
4.3.1	Features	5
4.3.2	Device communication aspects	5
4.4	Device capability description	5
4.4.1	Features	5
4.4.2	Modules	6
4.4.3	Interfaces	6
4.4.4	Communication objects	7
4.4.5	Behaviour of virtual devices	7
4.5	Coordinator	7
Annex A (informative)	Use case for ISO 20242	9
A.1	Activities of users	9
A.2	Activities of vendors	9
A.3	Further activities	9
Annex B (informative)	State diagram for virtual devices	10
Annex C (informative)	Cascading of device drivers	11

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 20242-1 was prepared by Technical Committee ISO/TC 184, *Industrial automation systems and integration*, Subcommittee SC 5, *Architecture, communications and integration frameworks*.

In addition to this part, ISO 20242 is envisaged to consist of several more parts dealing with:

- Resource management service interface;
- Virtual device service interface;
- Device capability profile template;
- Application program service interface;
- Conformance test methods, criteria and reports.

Introduction

The motivation for this International Standard stems from international automotive industries and their suppliers to facilitate the integration of automation and measurement devices, and other peripheral components for this purpose, into computer based applications. It defines rules for the construction of device drivers and their behaviour in the context of an automation and/or measurement application.

The main goal of ISO 20242 is to provide users with:

- independence from the computer operating system;
- independence from the device connection technology (device interface/network);
- independence from device suppliers;
- the ability to certify device drivers with connected devices and their behaviour in the context of a given computer platform;
- independence from the technological device development in the future.

ISO 20242 will not involve the development of new device families or the use of special interface technologies (networks). It encapsulates a device and its communication interface to make it compatible with other devices of that kind for a given application.

STANDARDSISO.COM : Click to view the full PDF of ISO 20242-1:2005

[STANDARDSISO.COM](https://standardsiso.com) : Click to view the full PDF of ISO 2042-1:2005

Industrial automation systems and integration — Service interface for testing applications —

Part 1: Overview

1 Scope

This part of ISO 20242 provides an overview of the particularities of this International Standard and its use in the computer aided testing environment.

2 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

2.1

application program

resource designed to help users perform a specific task

NOTE In this International Standard, an application program does any task necessary to run a computer-aided test station running, with the special requirement that communication with peripheral devices is done.

2.2

application program service interface

interface to communicate with a coordinator

NOTE This will be specified in another part of ISO 20242.

2.3

communication object

existing object which may be accessed with a communication function to read or write a value

2.4

coordinator

program with a specified interface to handle the access of an application program to one or more device drivers and to manage real-time application aspects, synchronization and events

2.5

device capability description

text file containing information about the capabilities of virtual devices in a defined format (i.e. structure, syntax)

NOTE This will be specified in another part of ISO 20242.

2.6

device driver

program with an ISO 20242-specified interface containing service functions that call the platform adapter to access physical devices

2.7

interface

<device capability description> keyword identifying a class for the description of device functions

NOTE A device function inside the device driver is an instance of such an interface.

2.8

interface driver

program handling the data transfer via a peripheral interface

2.9

module

ISO 20242-defined keyword, identifying a class for the description of virtual devices

NOTE A virtual device inside the device driver is an instance of a module.

2.10

platform adapter

program with an ISO 20242-specified interface, encapsulating the computer hardware and its periphery and providing services to communicate with connected devices and to use other resources of the computer operating system

2.11

resource management service interface

set of ISO 20242-specified service functions to communicate with a platform adapter

2.12

virtual device

representation of one or more physical devices and/or stand-alone program entities to provide an unambiguous view on the resources of a communication interface

2.13

virtual device service interface

set of ISO 20242-specified service functions to communicate with a virtual device

NOTE These service functions use the Resource Management Service Interface (platform adapter) to access physical devices and/or provide the needed capabilities by contained software tasks.

3 Abbreviations

APSI	Application Program Service Interface
ASCII	American Standard Code for Information Interchange
CAQ	Computer Aided Quality Assurance
CAT	Computer Aided Testing
CIM	Computer Integrated Manufacturing
CORBA	Common Object Request Broker Architecture
DCD	Device Capability Description
DCPT	Device Capability Profile Template
OOP	Object-Oriented Programming
PA	Platform Adapter
PDU	Protocol Data Unit
RMSI	Resource Management Service Interface
XML	eXtensible Markup Language
VD	Virtual Device
VDSI	Virtual Device Service Interface

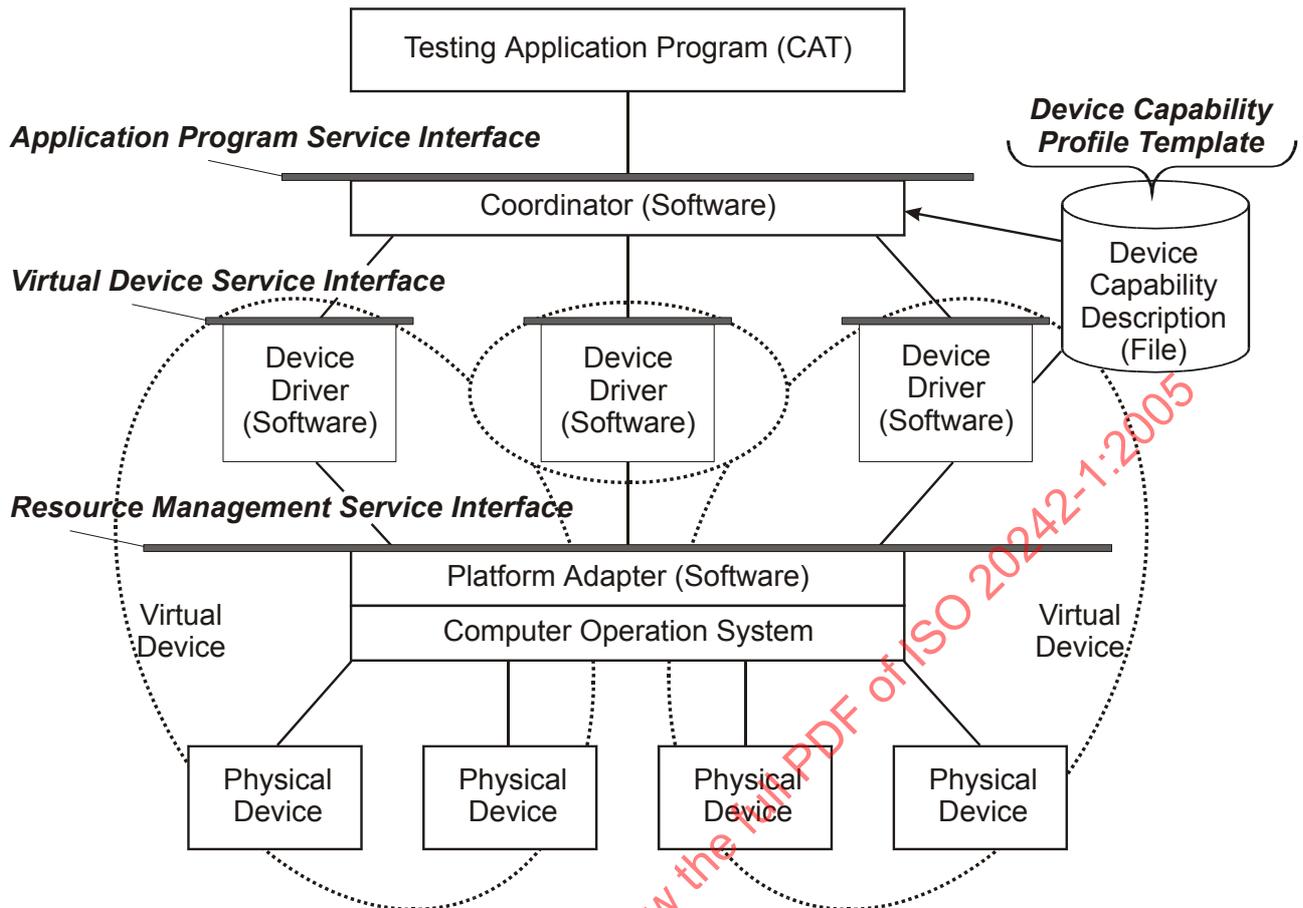


Figure 1 — Service interfaces defined in ISO 20242

4 Service interface concept

4.1 General

An essential function of an ongoing manufacturing operation is its quality assurance to make sure that high quality is designed into the product and that the manufacturing operation produces the desired quality. For control of this quality, test stations are implemented which may be part of the manufacturing process itself or are stand-alone systems. The computer is an extremely effective tool to control test stations, monitor performance of processes, collect and evaluate data, and issue quality reports.

The use of computers in test stations is called Computer-Aided Testing (CAT), which falls under the Computer-Aided Quality Control (CAQ) heading in the Computer Integrated Manufacturing (CIM) terminology. Test stations use measurement and automation devices to acquire data and to control test scenarios (see Figure 1).

The application programs on computers in CAT communicate with automation and measurement devices via interfaces. This part of ISO 20242 defines the Application Program Service Interface (APSI) that contains a list of defined services to access any number of device drivers with included virtual devices.

Device drivers are software modules with another interface defined by this part of ISO 20242, the Virtual Device Service Interface (VDSI). They present the capabilities of peripheral devices and optional software resources inside the driver via virtual devices. The structure of virtual devices and their status regarding communication is captured by a device capability description (DCD). For the creation of the DCD, which is an ASCII file, this part of ISO 20242 defines the Device Capability Profile Template (DCPT).

The computer hardware and the operating system, i.e the platform, is covered by the Resource Management Service Interface (RMSI) that allows a testing application to be platform-independent. A platform adapter (PA) handles the data transfer with peripheral devices and the access to operating system resources.

4.2 Platform adapter

4.2.1 Features

The platform adapter (see Figure 2) is a software module that covers the peripheral interfaces and the operating system resources of a computer and presents them via the Resource Management Service Interface (RMSI). Thus the device driver, which is the user of the RMSI, does not depend on a specific operating system or on specific peripheral interface drivers. If an operating system does not provide the needed resources, a platform adapter will add capabilities.

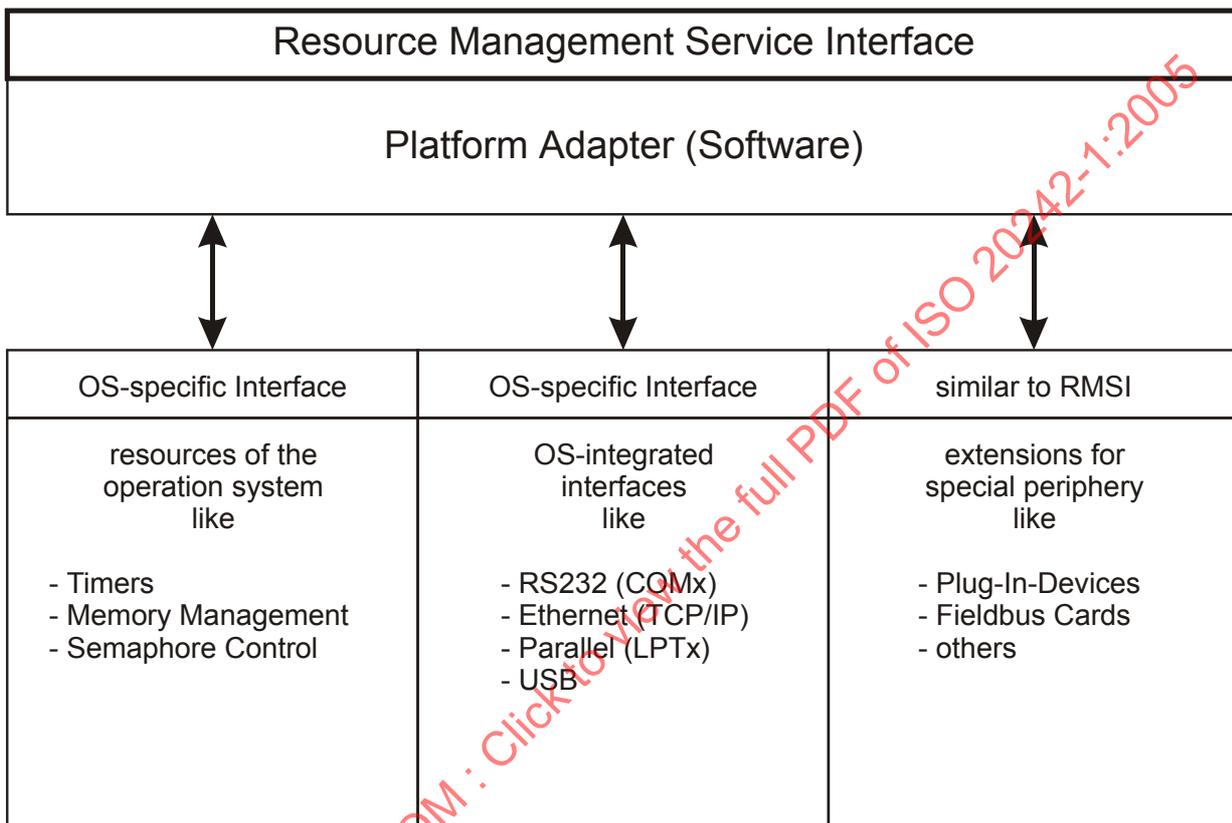


Figure 2 — Access to peripheral interfaces and to resources of the operating system

Extensions are dynamically loadable communication resources that are not available with the operating system. Their interface is the same as RMSI, so the platform adapter only has to route user access from RMSI to the extensions. Some special services of RMSI handle the loading and unloading of extensions.

4.2.2 Device communication aspects

The platform adapter uses the resources of the operating system and/or extensions for the data transfer to physical devices. It depends on the type of interface, which communication layer is presented by the RMSI. This may be the transport layer for typical peripheral interfaces of a computer. But if a platform adapter provides special communication protocols it may present higher layers.

For the communication via fieldbus the protocol procedures in most cases are located on a plug-in-board. It may depend on the resources of the plug-in-board, which communication layer is presented by the platform adapter.

The communication attributes of a platform adapter service are defined by the type name of the interface. ISO 20242 defines a few names for typical computer integrated periphery. If different platform adapters on different operating systems and/or with different extensions use the same type name, the related services will have the same behaviour. For the use of RMSI it makes no difference whether a communication protocol is handled within the platform adapter or within an extension.

4.3 Device driver

4.3.1 Features

The device driver is a program which submits access to communication objects of virtual devices. There is no automatic communication with real devices on such an access, because virtual devices and real devices are not directly mapped (see Figure 3).

Virtual devices are defined from the needs of the testing application. The application requires functionalities that may be presented by one or more physical devices. The functionalities are grouped according to virtual devices that may belong to

- a dedicated physical device,
- a number of physical devices,
- a part of a physical device, or
- a software module inside the device driver or inside a Platform adapter extension.

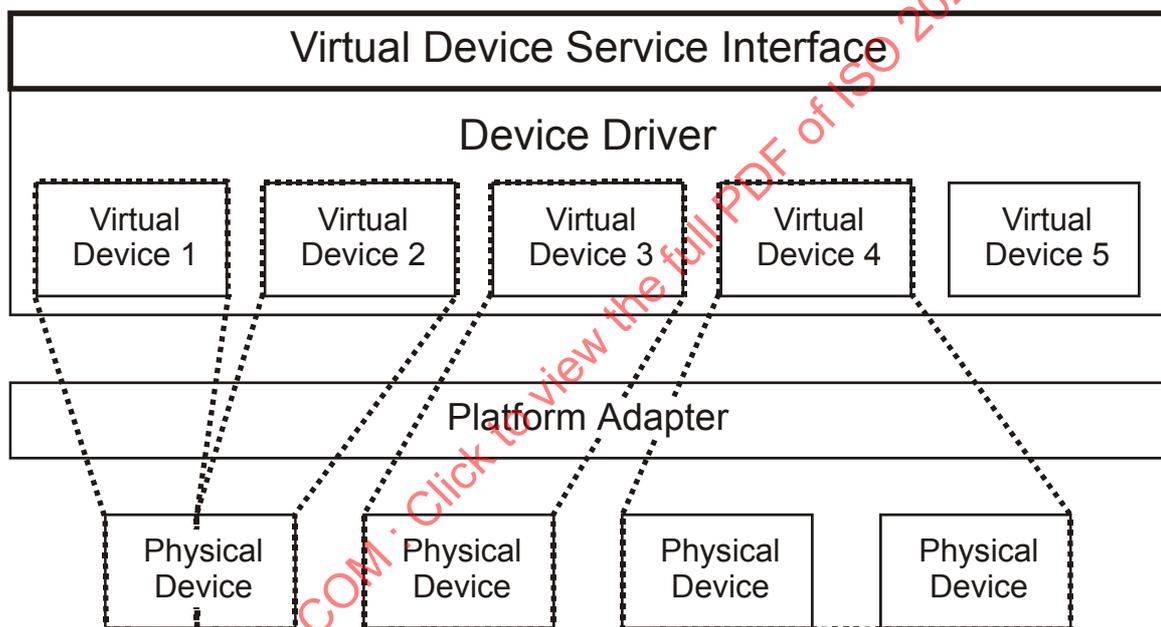


Figure 3 — Mapping of Virtual Devices

4.3.2 Device communication aspects

The real communication, consisting of PDU generators and interpreters in several layers of a communication stack, is not seen by the user of the Virtual Device Service Interface (VDSI). The communication is handled inside the device driver. The communication effort depends on the communication layer presented by the RMSI and the communication demands of the physical devices.

4.4 Device capability description

4.4.1 Features

The device capability description is a file containing ASCII text to describe the structure and behaviour of virtual devices. The syntax and semantics are described with the Device Capability Profile Template (DCPT) that also contains rules for the behaviour of virtual devices related to the use of the VDSI.

Virtual devices (see Figure 4) are built from device functions that characterize the devices' capabilities. Device functions contain communication objects for data exchange and/or executable programs, called operations, for more complex, completed device activities.

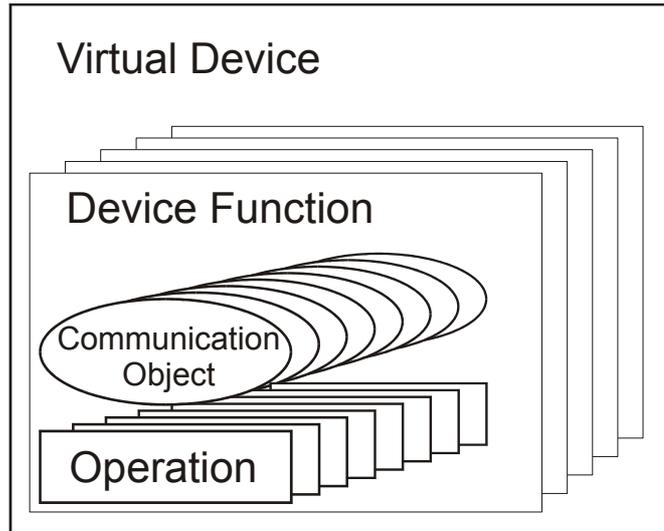


Figure 4 — Internal structure of Virtual Devices

4.4.2 Modules

If more virtual devices of the same kind are used, it is not necessary to describe each of the virtual devices. To handle this, the DCPT defines modules, which are used like classes in object-oriented programming (OOP). VDSI provides a service to instantiate a module, which is creating a virtual device.

It depends on the physical resources, i.e. the number of connected physical devices and the management resources of the device driver and the platform adapter, how many instances of a module can be built.

4.4.3 Interfaces

The class model is also used for device functions by interfaces. The instance of an interface is a device function. VDSI provides a service for the instantiation.

An interface is identified explicitly by a number given with the device capability description. The instantiation of an interface provides a handle to identify the device function.

An interface contains the elements Create Parameters, Parameters, Attributes and Operations (see Figure 5) with the following meaning:

- a) **Create Parameters** — This defines an invariable configuration of the device function (e.g. the type of a signal filter). In OOP terminology, these are parameters for the constructor;
- b) **Parameters** — A parameter can influence the behaviour of a device function (e.g. the frequency limit of a signal filter). Parameters may only be changed while setting up the device function;
- c) **Attributes** — Attributes are the input and/or output data (process data) of a device function (e.g. the input and output connection of a signal filter). Attributes may be accessed at any time they exist;
- d) **Operations** — Operations are provided for more complex completed device activities (procedures). Operations may have start parameters and results.

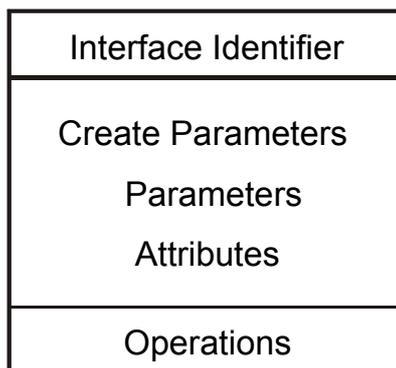


Figure 5 — Elements of interfaces

4.4.4 Communication objects

Parameters and attributes are communication objects. For data access, the VDSI defines services. But these services may not be used before a communication object is prepared with another service. So a testing application may create only the communication objects which are really needed.

4.4.5 Behaviour of virtual devices

After instantiation, virtual devices have specific operating states (see Annex B).

4.5 Coordinator

The coordinator (see Figure 6) is a program that handles the following procedures:

- a) Controlling of run time features — The coordinator manages CPU resources (multi-tasking, multi-threading, etc.);
- b) Organizing event handling — Events are caused by asynchronous communication and by unsolicited access of the device driver (to present new values or to retrieve regulating variables);
- c) Synchronizing different device drivers — The application may access combinations of values (structures) from different device drivers;
- d) Multiplexing for several concurrent running device drivers — The testing application may access process data via device drivers and physical devices of different vendors;
- e) Interpreting the device capability description and instantiating virtual devices, device functions and communication objects.

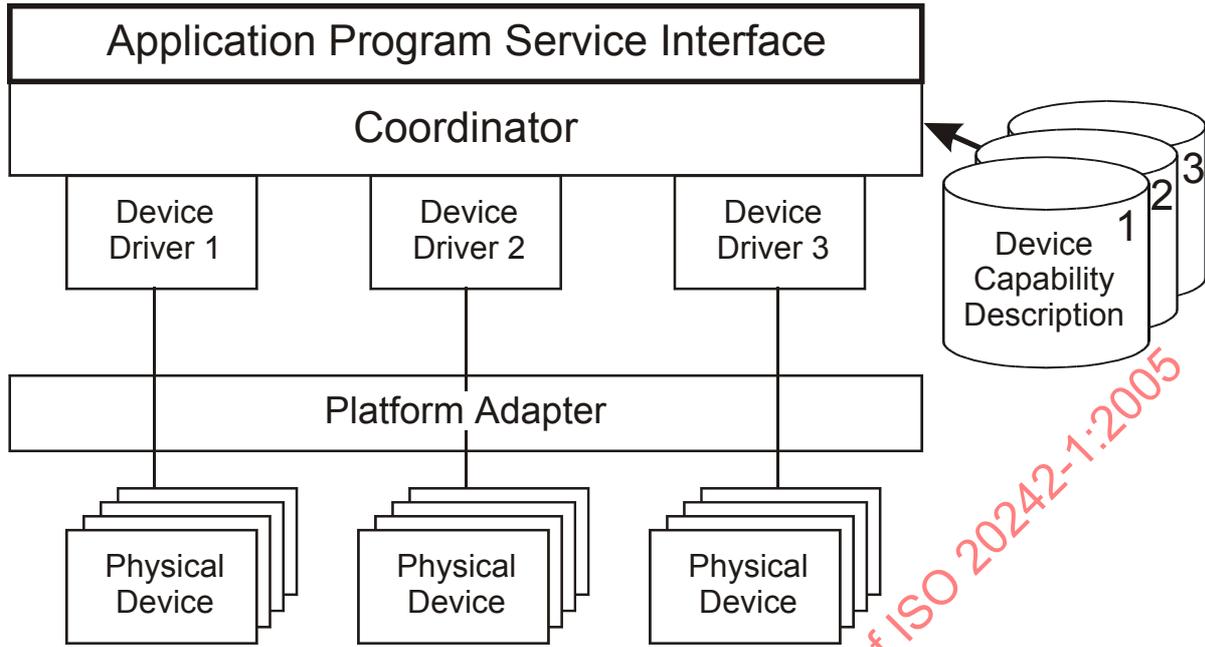


Figure 6 – Coordinator handling different device drivers

The testing application accesses communication objects inside the coordinator via the Application Program Service Interface (APSI). The assignment of these communication objects to the device drivers or even to physical devices is not relevant for the testing application.

STANDARDSISO.COM : Click to view the full PDF of ISO 20242-1:2005