
Air cargo — Restraint slings —
Part 2:
Utilization requirements and
recommendations and lashing
calculations

Fret aérien — Élingues d'arrimage —

*Partie 2: Partie 2: Exigences et recommandations d'utilisation et
calculs d'arrimage*

STANDARDSISO.COM : Click to view the full PDF of ISO 20291-2:2021



STANDARDSISO.COM : Click to view the full PDF of ISO 20291-2:2021



COPYRIGHT PROTECTED DOCUMENT

© ISO 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword.....	iv
Introduction.....	v
1 Scope.....	1
2 Normative references.....	1
3 Terms and definitions.....	2
4 General requirements.....	4
5 Specific requirements.....	5
6 Rejection criteria.....	7
7 Inspection.....	7
8 Operator's responsibilities.....	8
Bibliography.....	9

STANDARDSISO.COM : Click to view the full PDF of ISO 20291-2:2021

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 20, *Aircraft and space vehicles*, Subcommittee SC 9, *Air cargo and ground equipment*.

A list of all parts in the ISO 20291 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

This document specifies utilization requirements and recommendations and the principles to be used in tie-down/lashing strength calculations when using air cargo restraint slings on board civil transport aircraft.

Throughout this document, the minimum essential criteria are identified by use of the key word "shall". Recommended criteria are identified by use of the key word "should" and, while not mandatory, are considered of primary importance in providing safe air cargo restraint sling assemblies. Deviation from the recommended criteria should only occur after careful consideration and thorough service evaluation have shown that alternate methods can be used to provide an equivalent level of safety.

The requirements of this document are expressed in the applicable SI units, with approximate converted values in inch-pound units between brackets for convenience in countries using that system.

Sling or cable assemblies made of steel wire rope are intended to be used in lieu of cargo restraint straps meeting the requirements of ISO 16049-1, where straps inherent elongation under tension appears inadvisable for a given tie-down arrangement. Typical examples of loads where substitution of cables for straps throughout a given tie-down arrangement can be advisable are those for which even limited movement during flight can be hazardous, such as heavy vehicles, aircraft engine stands, helicopters, machinery.

On the date of publication of this document, no airworthiness approval procedure by Civil Aviation Authorities is applicable to restraint slings. Their use for cargo restraint, however, remains subject to the requirements of the approved aircraft type or sub-type Weight and Balance Manual.

The use of chains or other rigid devices for tie-down onto civil transport aircraft floor tracks is not covered in this document; it is not recommended due to the possibility of generating excessive stresses in the aircraft structure and is allowable only where explicitly approved in aircraft's authority approved Weight and Balance Manual.

[STANDARDSISO.COM](https://standardsiso.com) : Click to view the full PDF of ISO 20291-2:2021

Air cargo — Restraint slings —

Part 2:

Utilization requirements and recommendations and lashing calculations

1 Scope

1.1 This document provides general utilization requirements and recommendations and calculation methods adequate to guarantee the effectiveness and ultimate strength of tie-down/lashing arrangements performed to restrain cargo on board civil transport aircraft during flight, including the following:

- a) cargo loaded and tied down onto airworthiness approved air cargo pallets, themselves restrained into aircraft lower deck or main deck or upper deck cargo systems meeting the restraint requirements of air cargo pallets approved in accordance with ISO 8097 (NAS 3610) or ISO 21100, or
- b) additional tie-down on aircraft structure when necessitated by pallet maximum gross mass or centre of gravity limits, or
- c) non-unitized individual pieces of cargo, or pieces of cargo placed onto an unrestrained pallet (floating pallet) into either lower deck, main deck or upper deck containerized cargo compartments of an aircraft,

when using for this purpose restraint slings (wire rope cables) specified in ISO 20291-1.

1.2 Restraint slings as specified in this document can also be used for permanent or semi-permanent attachment of a special purpose device, such as aircraft engine transport stand (see ISO 11241), horse stall (see ISO 9469), automobile transport device (see ISO 8268) or other, whether or not airworthiness approved, onto an aircraft pallet.

1.3 This document applies to cargo tie-down/lashing arrangements using exclusively air cargo restraint slings conforming to ISO 20291-1.

NOTE Where tie-down is performed onto aircraft structure as per [1.1](#) b) or c), additional restrictions can be stated in the aircraft's authority approved Weight and Balance Manual.

1.4 This document specifies industry recognized means of complying with airworthiness authorities general regulations applicable to load securing on board civil transport aircraft (see 14 CFR Part 25 and EASA CS-25, CCAR-25 or Japanese Airworthiness Standard Part 3), and aircraft manufacturers authority approved Weight and Balance Manuals for each aircraft type as specified therein.

1.5 The wire rope slings in this document are intended exclusively for restraint purposes on board aircraft and are not intended to be used as lifting slings for handling or any other purpose.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 20291-2:2021(E)

ISO 8097, *Aircraft — Minimum airworthiness requirements and test conditions for certified air cargo unit load device*¹⁾

ISO 9788, *Air cargo — Double stud tie-down fittings — Design and testing requirements*

ISO 10254, *Air cargo and ground equipment — Vocabulary*

ISO 16049-2, *Air cargo equipment — Restraint straps — Part 2: Utilization requirements and recommendations and lashing calculations*

ISO 20291-1:2021, *Air cargo — Restraint slings — Part 1: Design and testing*

ISO 21100, *Air cargo unit load devices — Performance requirements and test parameters*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 10254 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

3.1 tie-down lashing

fact of restraining cargo movements in relation to an aircraft's structure, throughout the range of relative accelerations resulting from the allowable *flight envelope* (3.3), by means of an appropriate use of a number of elementary tie-down devices against each direction of restraint

[SOURCE: ISO 16049-2:2020, 3.1]

3.2 tie-down arrangement

geometric layout of an assembly of elementary *tie-down* (3.1) devices affixed and tensioned around a piece of cargo in order to ensure its tie-down against each direction of restraint

[SOURCE: ISO 16049-2:2020, 3.2]

3.3 flight envelope

<for a given aircraft type or sub-type> set of allowable values for accelerations which can be encountered during flight in the various directions relative to the aircraft's structure, as determined during the aircraft certification flight testing and certified by the airworthiness authority within the aircraft's type certificate

[SOURCE: ISO 16049-2:2020, 3.3]

3.4 limit load

LL
maximum load to be expected in service as a result of the certified allowable *flight envelope* (3.3) of the aircraft

Note 1 to entry: See 14 CFR Part 25 and CS-25, paragraph 25,301(a).

Note 2 to entry: It is two thirds of the *ultimate load* (3.5).

1) Endorsement of NAS 3610 revision 10, TSO/ETSO/CTSO/JTSO C-90c.

[SOURCE: ISO 16049-2:2020, 3.4, modified — The abbreviated term "LL" has been removed; Note 1 to entry has been added.]

3.5 ultimate load

UL

limit load (3.4) multiplied by a safety factor of 1,5

Note 1 to entry: See 14 CFR Part 25 and CS-25, paragraph 25, 303.

Note 2 to entry: It is used for the calculation of cargo *tie-down arrangements* (3.2), based on the ultimate load factors defined in the airworthiness authority approved Weight and Balance Manual, in each direction of restraint, throughout the certified *flight envelope* (3.3) of the aircraft type.

[SOURCE: ISO 16049-2:2020, 3.5, modified — The abbreviated term "UL" has been removed; in Note 1 to entry, references to CCAR-25 and JAS Part 3 have been removed.]

3.6 fore

direction of restraint, relative to the aircraft structure, determined parallel to the aircraft centreline towards the direction of flight

[SOURCE: ISO 16049-2:2020, 3.6]

3.7 aft

direction of restraint, relative to the aircraft structure, determined opposed to the aircraft centreline towards the direction of flight

[SOURCE: ISO 16049-2:2020, 3.7]

3.8 side

direction of restraint, relative to the aircraft structure, determined perpendicular to the aircraft centreline and parallel to its floor, left-hand or right-hand

[SOURCE: ISO 16049-2:2020, 3.8]

3.9 upward

upward direction relative to the aircraft structure

[SOURCE: ISO 16049-2:2020, 3.9]

3.10 load factor

acceleration, expressed as multiples of the standard acceleration of gravity ($g = 9,80665 \text{ m.s}^{-2}$), in each direction of restraint [*fore* (3.6), *aft* (3.7), *sides* (3.8), *upward* (3.9)], that will result in limit or ultimate, as is the case, forces on the *tie-down arrangement* (3.2) proportional to the mass of the piece of cargo being restrained

Note 1 to entry: The load factors are provided by the Airworthiness Authority approved Weight and Balance Manual for an aircraft type or sub-type.

Note 2 to entry: The load factors may be limit or ultimate.

[SOURCE: ISO 16049-2:2020, 3.10]

3.11

strap

restraint strap assembly

basic *tie-down* (3.1) unit consisting of flat woven textile webbing (one fixed end and one adjustable end), one tensioning device and two end *fittings* (3.12), used for restraint of cargo on board civil transport aircraft

Note 1 to entry: See ISO 16049-1 for description, design criteria and testing requirements.

[SOURCE: ISO 16049-2:2020, 3.11, modified — "restraint strap assembly" has been changed to an admitted term.]

3.12

fitting

tie-down fitting

basic piece of hardware, either single stud (see ISO 7166) or double stud (see ISO 9788), with an omnidirectional capability, allowing to attach *straps* (3.11) or other elementary *tie-down* (3.1) units to the floor tracks or tie-down receptacles of an aircraft's structure or the edge tracks of an air cargo pallet

Note 1 to entry: Tie-down fittings used in conjunction with restraint slings are double stud (ISO 9788) and include an attachment ring.

[SOURCE: ISO 16049-2:2020, 3.12, modified — "fitting" has been added as a preferred term; a new Note 1 to entry has replaced the original one.]

3.13

floating pallet

air cargo pallet, or equivalent flat support device, located onto an aircraft's cargo compartment rollerized conveyor but not restrained by the cargo system, the pallet and its load constituting "non-unitized" cargo and being restrained by a set of *straps* (3.11) attached to aircraft structural points

3.14

competent person

designated person, suitably trained, qualified by knowledge and practical experience and with the necessary instructions to enable the required tests and examinations to be carried out

Note 1 to entry: A competent person can be suitably trained in accordance with ISO 9001:2015, 7.2 or equivalent pertinent industry training and proficiency standards.

Note 2 to entry: See 4.1 for the operating instructions.

4 General requirements

4.1 Operating instructions for the use of cargo restraint slings, established by the aircraft operator under control of his overseeing Civil Aviation Authority, shall take into account the general airworthiness requirements and the applicable aircraft Weight and Balance Manuals, and should incorporate the requirements of this document, or equivalent industry standards (see Bibliography).

4.2 In addition, operating instructions for restraint slings attachment to edge tracks of a certified air cargo pallet meeting the requirements of ISO 8097 (NAS 3610) or ISO 21100 shall take into account the general requirements of their appropriate configuration drawing(s) as to tie-down points locations and load capabilities.

Compatibility of pallet tracks with a 22,25 kN (5 000 lbf) ultimate load on ISO 9788 double stud tie-down fittings is guaranteed by pallet airworthiness approval in reference to ISO 21100:2017, 4.10.3, which requires this capability. Earlier pallet approvals under ISO 8097 (NAS 3610) or ISO 21100:2014 did not explicitly require it, so that it is recommended to verify it by tests on a sample pallet of the model concerned. SAE AS 36102 provides the appropriate testing method.

4.3 Actual tie-down/lashing on aircraft in accordance with these instructions shall be performed and checked exclusively by a competent person (see [Clause 8](#)).


4.4 When designing and performing tie-down arrangements using cargo restraint slings, the general requirements of ISO 16049-2 are entirely applicable, and shall be strictly complied with, except when superseded by sling specific requirements given in [Clause 5](#). This particularly includes:

- combination of elements of different strength (ISO 16049-2:2020, 4.6);
- only one type of restraint device in the same direction, i.e. forward, aft, upward, right-hand side or left-hand side (ISO 16049-2:2020, 4.7);
- symmetrical tie-down arrangement (ISO 16049-2:2020, 4.8);
- use of a fitting for restraint in different directions (ISO 16049-2:2020, 4.9);
- restraints passing around the load (ISO 16049-2:2020, 4.10) ^{2) 3)};
- upward restraint symmetry vs load C of G (ISO 16049-2:2020, 4.11);
- minimum possible angle with the direction of restraint (ISO 16049-2:2020, 4.12);
- 50 cm (20 in)⁴⁾ minimum spacing in the same direction of restraint (ISO 16049-2:2020, 4.13);
- restraints equal tightening (ISO 16049-2:2020, 4.14);
- avoiding contact with sharp edges or protecting against them ²⁾ (ISO 16049-2:2020, 4.15);
- anti-sliding protection (ISO 16049-2:2020, 4.16) ²⁾.

4.5 Tie-down/lashing calculations shall be performed in accordance with ISO 16049-2:2020, 6.1 and 6.2, taking into account aircraft's Weight and Balance Manual. When performing tie-down onto aircraft structural points, ISO 16049-2:2020, 6.3 is not applicable; and a detailed calculation sheet, taking into account the actual angles, shall be prepared.

5 Specific requirements

5.1 The use of cargo restraint slings is justified in specific circumstances by their elongation under load (1 % typical magnitude) being significantly less than that of textile straps (10 % typical magnitude), themselves less than the overall deformation of a net (50 % typical magnitude under ultimate load). See [Figure 1](#) for illustration.

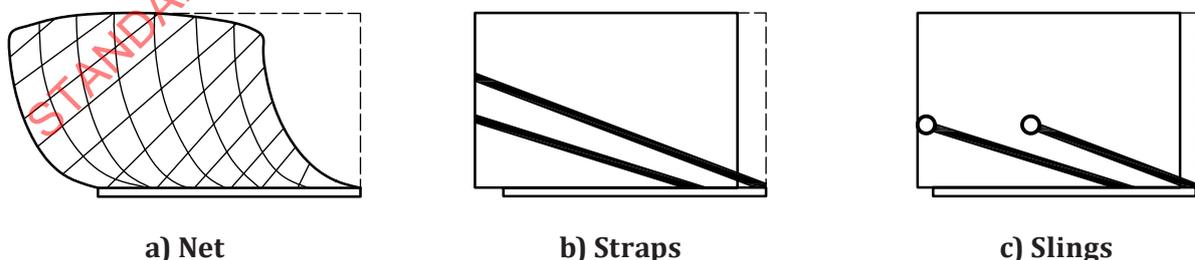

NOTE Illustrative only, no scale.

Figure 1 — Relative deformations under load

2) Only allowed for type 'B' fixed length extensions fitted with optional protection tubing, see [5.6](#).

3) This can be reduced to a minimum of 40 cm (16 in) on ISO 21100 size codes G and R pallets, exclusively.

4) Corresponding to ISO 4171.

5.2 Accordingly, slings should be considered for restraint instead of straps primarily when a load movement during flight can potentially result in a hazard to the aircraft, particularly for heavy or very heavy loads or non CLS restrained pallets tied down to aircraft structure, or when the load itself is fragile (e.g. helicopter), or close to the maximum aircraft loading envelope.

Due to different elongation which would result in overloading, slings shall never be mixed with straps in the same direction of restraint (see ISO 16049-2:2020, 4.7).

5.3 Tie-down arrangements shall use restraint slings with a minimum rated ultimate strength of 22,25 kN (5 000 lbf), tested in accordance with ISO 20291-1, of either:

- a) type A: adjustable length sling, including a tensioning device, or
- b) type B: fixed length extension, to be used in conjunction with a type A sling.


In either case, it shall be checked that each sling and extension bears the manufacturing tag (see ISO 20291-1:2021, Clause 7 and Figure 6) confirming it was type tested and guaranteeing the ultimate load strength achieved.

Higher strength slings may be used, but only up to a 22,25 kN (5 000 lbf) ultimate load on either a pallet track or a civil transport aircraft's structural tie-down receptacles, which are at most so rated and will dictate the strength of the assembly. Certain types of military freighter aircraft can accept tie-down slings with a rated ultimate strength of 44,5 kN (10 000 lbf) or more, which are not dealt with in this document.

The use of general purpose (e.g. trucking, lifting, construction, sea shipping) slings or other cables is not permitted for aircraft restraint.

5.4 A typical sling restraint can therefore include an adjustable length sling attached end to end with a fixed length extension. Attachment of the adjustable unit to the fixed length extension shall be either:

- by a hook with retainer engaging the eye of the adjacent sling, or
- between eyes by an intermediate ring or shackle of appropriate [minimum 22,25 kN (5 000 lbf)] tested strength rating. See examples in [Figure 2](#).

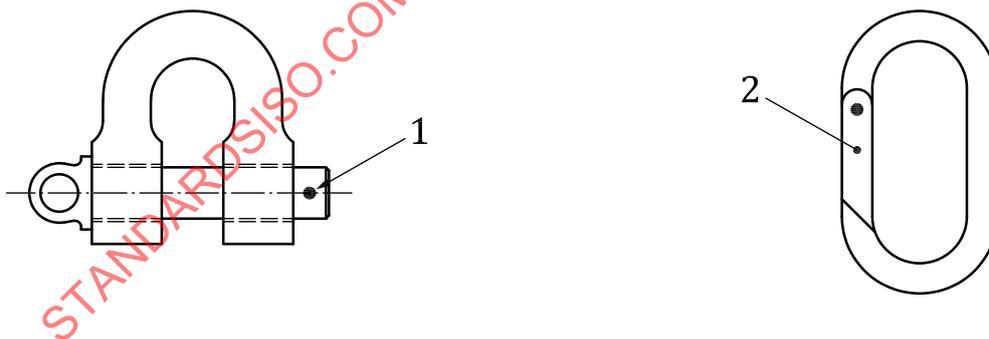

- Key**
- 1 closure pin
 - 2 retainer (latch)

Figure 2 — Examples of shackle and ring

5.5 Attachment to the pallet track or aircraft tie-down receptacle shall be through an ISO 9788 marked double stud tie-down fitting, in order to guarantee the 22,25 kN (5 000 lbf) assembly's ultimate load. The fitting can either be part of the sling, or separate and attached to it.

5.6 Contrary to textile straps and in deviation from ISO 16049-2:2020, 4.10, unprotected type A slings or type B sling extensions may not be passed around or over a load: cable wires are thin, highly sensitive to being bent at an angle, and broken individual wires reduce the overall tensile strength of the sling.

It is recommended only type B sling extensions fitted with an optional (see ISO 20291-1:2021, 4.2.6) protection tubing be, where unavoidable (i.e., when no proper attachment point exists on the load), used around or over a load same as textile straps, thus be accounted twice for tie-down calculation. But even in this case, utmost care shall be taken that any such slings passing over or around the piece of cargo do not come in contact with sharp or cutting edges of the load capable of cutting into the sling's protection, and it shall be visually checked that wire rope bending is not excessive nor results in individual wires within the protection being deformed or broken.

5.7 Care shall also be taken to engage and check any closed retaining or latching hardware, such as crank, lever or similar actuator of a type A adjustable sling's tension mechanism, hook, ring, or shackle.

For personnel safety, caution shall be exercised whenever releasing the tension mechanism of a type A adjustable sling, due to the risk of sharp recoil from the crank or lever when opened under tension.

6 Rejection criteria

6.1 Allowable damage limits shall be provided in the operating instructions and complied with. The following rejection criteria are a guide for developing operators (carriers) procedures, whenever restraint of a load is ensured by means of air cargo restraint slings.

6.2 A restraint sling is considered unserviceable and shall be scrapped or sent for repair if one of the following criteria is met:

- a) oil, grease or other deposit on the wire rope which allows it to slip inside the tensioning mechanism while or after it is actuated;
- b) missing wire rope ferrule or eye thimble (see ISO 20291-1:2021, Figure 2);
- c) broken wire strands, or frayed, twisted or otherwise apparently damaged wire rope;
- d) hook, fitting or tensioning mechanism damaged or with a missing part.

7 Inspection

7.1 An inspection of any completed tie-down arrangement after its finalization shall be conducted by an appropriately trained person prior to release of a pallet for loading aboard an aircraft.

7.2 This inspection shall verify conformity of the completed tie-down with this document as well as ISO 16049-2. It should be recorded and signed by the responsible person.

7.3 A second inspection shall be conducted by qualified ramp personnel immediately prior to loading into the aircraft to verify that ramp transportation did not result in load shifting nor partial release of the slings or their tension or attachment devices.

7.4 Inspections shall verify all slings are sufficiently and approximately equally tensioned. A practical way to assess it is pulling each sling at 90° from its direction of restraint: a correctly tensioned sling should not move away by hand pull more than a finger's width.

8 Operator's responsibilities

8.1 Flight safety depends on the effectiveness and dependability of cargo securing aboard aircraft. Accordingly, it is essential that operators (carriers), as required by Civil Aviation regulations, fully meet their responsibilities as follow:

8.1.1 An operator (carrier) should ensure that procurement of tie-down slings used aboard its aircraft be based on the design criteria and meets the testing, marking and quality control requirements of ISO 20291-1, and data records concerning restraint equipment approval be duly kept.

8.1.2 An operator (carrier) shall develop and distribute to all concerned tie-down operating instructions in accordance with 4.1, based on methodology provided by this document or equivalent (see Bibliography) industry recommendations.

8.1.3 An operator (carrier) shall take all necessary steps to ensure his operating instructions are fully understood and applied by a suitably trained competent person or under his direct supervision. These steps should include, but may not be limited to, such actions as:

- a) establishing and implementing initial and recurrent training programs to ensure the instructions are understood and practiced by a sufficient number of competent persons throughout the organization and subcontractors;
- b) establishing and implementing procedures to guarantee an aircraft will not be dispatched with tied-down cargo unless the tie-down arrangement has been inspected and found satisfactory by a competent person;
- c) establishing and implementing quality assurance programs applicable to cargo tie-down, meeting the requirements of carriers internal evaluation programs (FAA Advisory Circular 120-59 or European EU-OPS 1.035) or, for non-airline subcontractors and handling agencies, ISO 9001 or an equivalent pertinent quality assurance program standard. These quality assurance programs shall include the requirements in 8.2 and 8.3.

8.2 In addition, any significant incident, in flight or on the ground at or prior to aircraft loading, related to improper cargo tie-down should be subject to carrier quality control department investigation, in order to be analysed and for corrective action to be taken to avoid its reoccurrence.

8.3 Any occurrence of partial or complete cargo release from slings restraints during flight shall be immediately reported to carrier's quality control department to be investigated as a flight safety occurrence, possibly to be reported to overseeing authority.