

---

---

**Petroleum and related products —  
Determination of the flammability  
characteristics of fluids in contact with  
hot surfaces — Manifold ignition test**

*Pétrole et produits connexes — Détermination des caractéristiques  
d'inflammabilité de fluides au contact de surfaces chaudes — Essai  
d'inflammation sur métal chaud*

STANDARDSISO.COM : Click to view the PDF file ISO 20823:2003



**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 20823:2003

© ISO 2003

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 20823 was prepared by Technical Committee ISO/TC 28, *Petroleum products and lubricants*.

STANDARDSISO.COM : Click to view the full PDF of ISO 20823:2003



# Petroleum and related products — Determination of the flammability characteristics of fluids in contact with hot surfaces — Manifold ignition test

**WARNING** — The use of this International Standard may involve hazardous materials, operations and equipment. This International Standard does not purport to address all of the safety problems associated with its use. It is the responsibility of the user of this International Standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.

## 1 Scope

This International Standard specifies a test method to determine the relative flammability of fluids when contacted with a hot metal surface at a fixed temperature, but it is also possible to gauge fluid ignition temperatures by adjustment of the manifold temperature.

It is primarily used to assess the resistance to ignition of fire-resistant hydraulic fluids which are, by definition, difficult to ignite.

It may be used with other types of more flammable fluids at lower surface temperatures, but this could significantly increase the hazards of this procedure.

**NOTE** The procedure given in this International Standard is specified in ISO 12922:1999, *Lubricants, industrial oils and related products (class L) — Family H (Hydraulic systems) — Specifications for categories HFAE, HFAS, HFB, HFC, HFDR and HFDU*.

## 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3170:—<sup>1)</sup>, *Petroleum liquids — Manual sampling*

## 3 Principle

A 10 ml test portion of fluid is dropped from a predetermined height and at a specified rate, onto a tube heated to 700 °C, or another temperature in a series. The resulting spray is examined for flash or burn, both on the tube and after dripping from the tube.

---

<sup>1)</sup> To be published. (Revision of ISO 3170:1988)

## 4 Reagents and materials

4.1 Steel wool

4.2 Absorbent cotton (cotton wool)

4.3 Cleaning solvent: any suitable light hydrocarbon solvent for wiping the tube.

NOTE 2,2,4-trimethylpentane, heptane or petroleum spirit boiling between 60 °C and 80 °C are suitable.

## 5 Apparatus

### 5.1 Simulated manifold test rig


#### 5.1.1 General

The rig consists of a heated simulated manifold supported in a box frame, and is illustrated in Figure 1. It shall be located in a fire-resistant enclosure with adequate ventilation to remove toxic and/or noxious combustion or decomposition products.

#### 5.1.2 Manifold support

A sheet metal box of dimensions 300 mm × 300 mm × 450 mm, open at the top and front. Holes of 78 mm nominal diameter shall be cut in the sides in such a position that the manifold is positioned and supported so that its major axis is held at an angle of 7° to the horizontal, and the centre-point of the manifold is 270 mm ± 10 mm above the surface of the drip tray or bottom of the support. The bottom of the box shall either contain a separate drip tray, or be so shaped as to contain all drips of liquid falling from the manifold.

The diameter of the holes in the box should be just sufficient to accommodate the simulated manifold (5.1.3) complete with external rod.

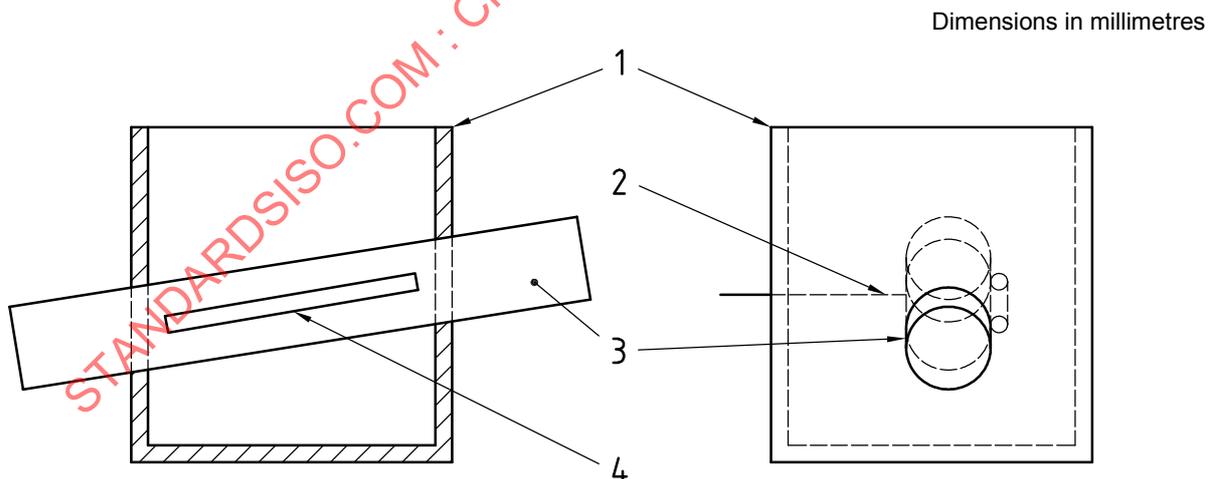

#### Key

- 1 sheet metal box 300 × 300 × 450
- 2 thermocouple
- 3 tube of corrosion-resistant steel: 75 outer diameter × 1 wall thickness × 500
- 4 rod of corrosion-resistant steel: diameter 3 × 250

Figure 1 — Simulated manifold test rig

### 5.1.3 Simulated manifold

The manifold, illustrated in Figure 2, is constructed from corrosion-resistant steel tubing of 75 mm nominal outside diameter and 1 mm wall thickness. It shall be 500 mm  $\pm$  50 mm in length. The exterior of the tube shall be sandblasted. A corrosion-resistant steel rod, 3 mm in diameter and 250 mm in length, is tack welded to the exterior surface of the tube such that the major axes are parallel, and the mid-point of the long axis of the rod corresponds to that of the tube.

### 5.1.4 Manifold heater

A heating element shall be mounted centrally within the manifold tube by means of suitable washers constructed from thermal insulation material. The element shall be capable of heating and maintaining a temperature of 700 °C  $\pm$  5 °C on the exterior surface of the manifold tube over the central portion of approximately 305 mm of the tube, whilst the enclosure ventilation (5.1.1) is switched on. The terminals to the tube heater shall be enclosed.

NOTE A rod pattern, silicon carbide type or equivalent, of 25 mm diameter and overall length 790 mm, and nominal electrical resistance 0,62  $\Omega$ , has been found suitable.

### 5.1.5 Temperature sensors


Temperature sensors shall be mounted in contact with the manifold tube surface in order to monitor the temperature close to the expected point of impact of the fluid. Each sensor shall be connected to a temperature indicator. Take care to minimize any additional radiating surfaces in the attachment of the sensor(s).

NOTE A mobile spring-loaded plate temperature sensor is preferred. If not available, three sensors located approximately 145 mm apart over the central portion of the manifold tube surface, placed to avoid fluid running off across the sensors, will be satisfactory.

## 5.2 Fluid dispenser

A device, mounted vertically above the centre-line of the manifold, that can measure 10 ml  $\pm$  0,5 ml of fluid, and dispense it at a controlled and constant rate over 50 s  $\pm$  10 s. The dispenser shall be mounted on a stand that allows measured movements horizontally along the axis of the tube and parallel to it. The height of the dispenser outlet above the surface shall be measured and recorded.

NOTE Manual use of a burette or similar device is not recommended in view of the safety hazard associated with the fluid igniting on the manifold.

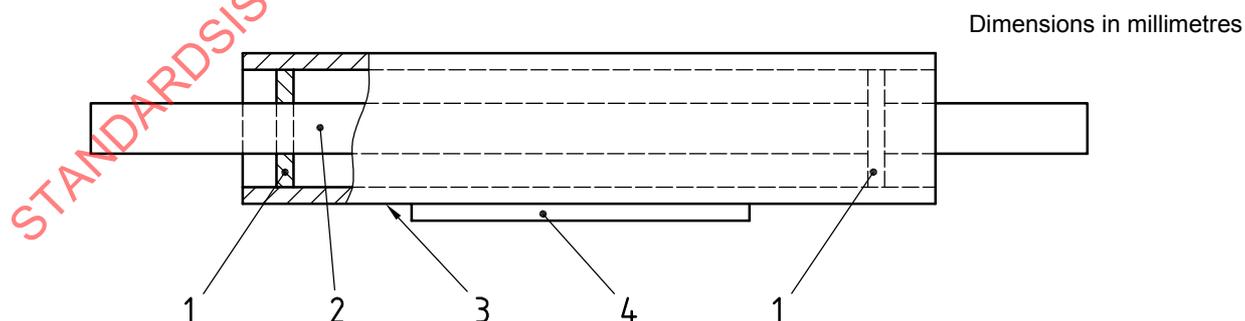

#### Key

- 1 packing to hold central element in tube
- 2 heating element
- 3 tube of corrosion-resistant steel: 75 outer diameter  $\times$  1 wall thickness  $\times$  500
- 4 rod of corrosion-resistant steel: diameter 3  $\times$  250

Figure 2 — Simulated manifold and heating element

## 6 Samples and sampling

6.1 Unless otherwise specified, samples shall be taken in accordance with the procedures specified in ISO 3170 or an equivalent national standard.

6.2 Laboratory samples shall be mixed thoroughly by shaking vigorously for 30 s before taking the test portion. The test portion shall not be filtered, but any air bubbles which may have arisen during mixing shall be allowed to escape from the fluid before testing.

## 7 Procedure

7.1 Clean the outside surface of the manifold tube, which shall be at approximately room temperature, by rubbing with steel wool (4.1), followed by lint-free absorbent cotton (4.2) moistened with cleaning solvent (4.3), and finally with dry absorbent cotton. Ensure that no metallic particles are left on the surface. If the area of contact for the three tests leading to a result is known (see 7.3 and 7.6), clean this total surface area and not between individual tests.

NOTE Cleaning of the manifold tube between tests is preferably carried out without removal from the support, but with the heating element electrically isolated or removed.

7.2 Place the tube in the manifold support (5.1.2) and mount and connect the heating element. Switch on the manifold heater (5.1.4) and allow the surface temperature to equilibrate to  $700\text{ °C} \pm 5\text{ °C}$  at the expected point of contact, as indicated by the temperature sensor(s) (5.1.5).

7.3 Mount the dispenser outlet vertically above the axis of the manifold tube and 300 mm above its surface. Fill the dispenser with a 10 ml test portion of fluid at  $20\text{ °C}$  to  $25\text{ °C}$ . If three repeat tests are to be carried out on a single cleaned tube portion, start at the lowest position on the tube and move upwards.

If a motorized dispenser is used, a larger volume of fluid may actually be added, but the equipment should be able to dispense the correct volume during the specified time period.

7.4 With the manifold tube equilibrated at  $700\text{ °C}$ , dispense the fluid onto the tube at a constant rate so that the 10 ml test portion is expelled in 40 s to 60 s. Observe the behaviour of the fluid both on the surface of the tube and as it drips from the rod into the tray below.

NOTE The means of dispenser control will depend upon dispenser type. It may help if preliminary tests establish a suitable control, such as premarking of the tip opening device.

7.5 Record any flashes or burning on the tube or when collected in the tray below.

7.6 Repeat the test twice more at the same temperature by following the procedure given in 7.2 to 7.5 at new positions on the tube, each at least 50 mm higher up the tube from the previous contact area.

7.7 If an assessment of ignition temperature is required, select the new temperature below or above  $700\text{ °C}$  as indicated from the result at that temperature, and repeat 7.1 to 7.6.

## 8 Expression of results

Report the average height, to the nearest 5 mm, of the fluid dispenser outlet above the surface of the manifold tube.

Report the result in one of the following categories:

- a) "I(T)" when the fluid flashes or burns on the tube, but does not continue to burn when collected in the tray below;