
**Performance evaluation protocol for
digital fitting systems —**

**Part 3:
Digital fitting performance - Gap**

*Protocole d'évaluation de la performance des systèmes d'habillage
virtuel —*

Partie 3: Performance de l'habillage virtuel - Écart

STANDARDSISO.COM : Click to view the full PDF of ISO 20947-3:2023



STANDARDSISO.COM : Click to view the full PDF of ISO 20947-3:2023



COPYRIGHT PROTECTED DOCUMENT

© ISO 2023

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword.....	iv
Introduction.....	v
1 Scope.....	1
2 Normative references.....	1
3 Terms and definitions.....	1
4 Functions.....	2
4.1 General.....	2
4.2 Function to measure the perimeter on the virtual cross section.....	2
4.2.1 Function to measure the perimeter on the virtual horizontal cross section.....	2
4.2.2 Function to measure the perimeter on the virtual vertical cross section (front centre).....	8
4.2.3 Function to measure the perimeter on the virtual vertical cross section (side).....	14
4.3 Function to measure the gap on the virtual cross section.....	20
4.3.1 Function to measure the gap of circumference on the virtual horizontal cross section.....	20
4.3.2 Function to measure the gap at side on the virtual vertical cross section (front).....	27
4.3.3 Function to measure the gap at centre front or centre back on the virtual vertical cross section (side).....	32
4.4 Tension map function.....	38
4.5 Garment pressure display function.....	41
4.6 Grain display function.....	44
4.7 Display function for projected cross-sectional garment view.....	47
4.7.1 General.....	47
4.7.2 Top.....	48
4.7.3 Front.....	50
4.7.4 Side.....	56
5 Quantitative evaluation of digital fitting performance - Gap based on functions and area measurements.....	61
5.1 General.....	61
5.2 Method to measure a physical gap.....	61
6 Report.....	66
Annex A (Normative) Format for report: Evaluation of a digital fitting performance.....	67
Bibliography.....	68

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 133, *Clothing sizing systems - size designation, size measurement methods and digital fittings*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

Digital fitting systems are used more frequently for evaluating the fit of garments without making actual physical patterns or physical garments. In a digital fitting system, a virtual garment is made using virtual patterns, and the fit of physical garment on a physical human body is assessed by draping a virtual garment on a virtual body or a virtual fit mannequin (fit form) model. Such system is useful for designers, manufacturers, educationalists because the system helps to improve the fit of garments and productivity.

The use of the digital fitting system, employed to evaluate the suitability of a real garments on real human body with the use of virtual garments on a virtual human body in virtual space, is growing in popularity. The system eliminates the need for physical garment production with fabric in product evaluation. Using a computer-generated virtual garment pattern, the virtual garment is created and tested on either a virtual human body or a virtual fit mannequin (fit form) model. It benefits not only those engaged in garment design but also consumers at the time of garment purchase, with better fit and wider choice of sizes in mass-produced products.

Digital fitting technology is still developing, and there is a wide range of differences in the specification and performance between digital fitting systems. This makes it difficult for users (designers, manufacturers, educationalists and retailers of garments) to select an appropriate system for their purposes.

This document evaluates gap, including garment pressure, which is an important factor in wearing comfort.

The users of this document are those users planning to install or update digital fitting systems. This document will help and provide judging criteria for selection of digital fitting system when garment designer or pattern engineer create virtual garment patterns and evaluate fitting performance to virtual fitting body.

The document should be viewed or printed in colour to clearly understand the performance evaluation as indicated in the figures.

STANDARDSISO.COM : Click to view the full PDF of ISO 20947-3:2023

Performance evaluation protocol for digital fitting systems —

Part 3: Digital fitting performance - Gap

1 Scope

This document specifies a protocol employed in evaluating the gap between the virtual garment and the virtual clone, the virtual twin or the virtual fit mannequin (fit form) model in the evaluation of the fitting performance of the virtual garment and the virtual human body.

2 Normative references

There are no normative references in this document.

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.1

digital fitting system

qualitative and/or quantitative evaluation of overall and/or specific simulation garment fit through analysis of the distribution of surface strain, gap between body and garment, tension map, cross section, surface wrinkles, garment balance, etc.

3.2

virtual garment

three-dimensional clothing in digital form that exists in virtual space

[SOURCE: ISO 20947-2:2020, 3.1.3]

3.3

virtual human body

virtual human model based on actual body dimensions used for digital fitting in the apparel industry, including information such as size, shape, cross section, body texture and skeletal structure

[SOURCE: ISO 18825-1:2016, 2.1.1.2, modified — Notes to entry removed.]

3.4

virtual fit mannequin (fit form) model

virtual model based on approved dimensions used for draping and examining silhouette and fit of a garment in a virtual space used for digital fitting

3.5

virtual cross section

closed contour extracted from the plane cutting a virtual body segment perpendicular to its main axis or the three principle axes

[SOURCE: ISO 18825-1: 2016, 2.2.2, modified — Notes to entry removed.]

3.6

gap

space between virtual garment and virtual human body or virtual fit mannequin (fit form model) which is shown in virtual cross section

Note 1 to entry: The space changes depending on the weight of the clothes or the friction between the clothes and the body.

Note 2 to entry: Space shall be expressed with difference amount of square measure or girth length between virtual cross section of virtual garment and virtual human body or virtual fit mannequin (fit form) model or it shall be expressed with gap amount between the virtual cross section of virtual garment and the virtual human body or the virtual fit mannequin (fit form) model.

3.7

garment pressure

pressure (tightness) of a garment against a virtual body or a virtual fit mannequin (fit form) model

Note 1 to entry: Pressure is affected by gravity, friction, design and material properties.

4 Functions


4.1 General

The digital fitting system has six functions as given in [4.2](#) to [4.7](#).

4.2 Function to measure the perimeter on the virtual cross section


4.2.1 Function to measure the perimeter on the virtual horizontal cross section

This function measures the perimeter of the virtual garment and the virtual fit mannequin (fit form) model from any arbitrary point on the virtual horizontal cross section. See [Figure 1](#).

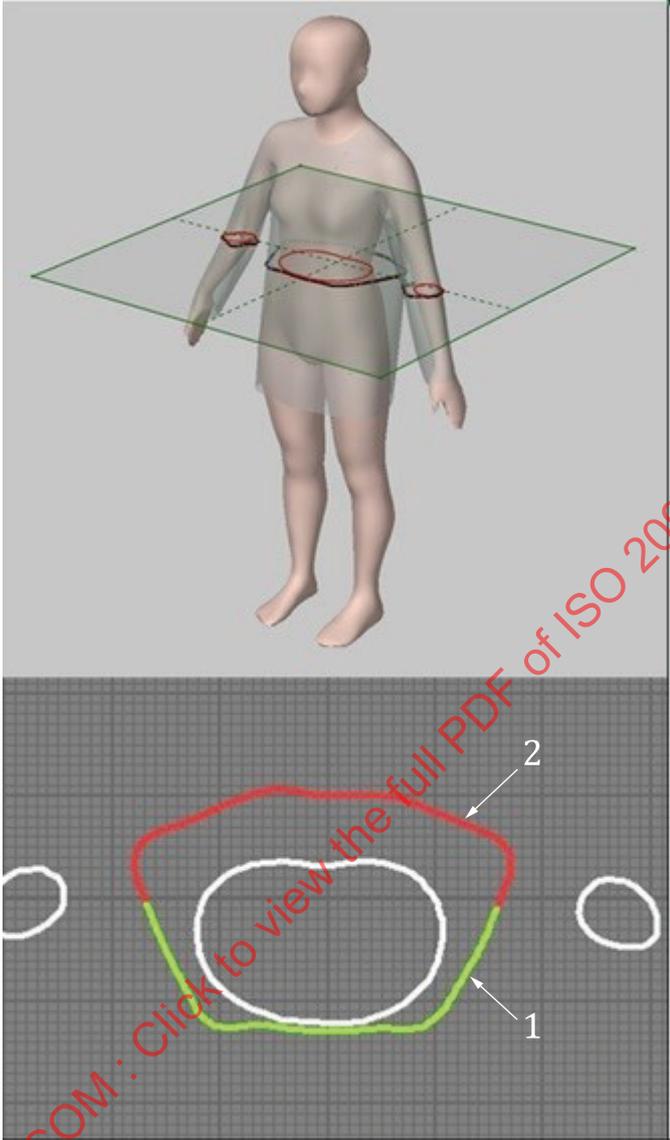


a) Virtual clone or virtual twin, upper body garment

STANDARDSISO.COM : Click to view the full PDF of ISO 20947-3:2023

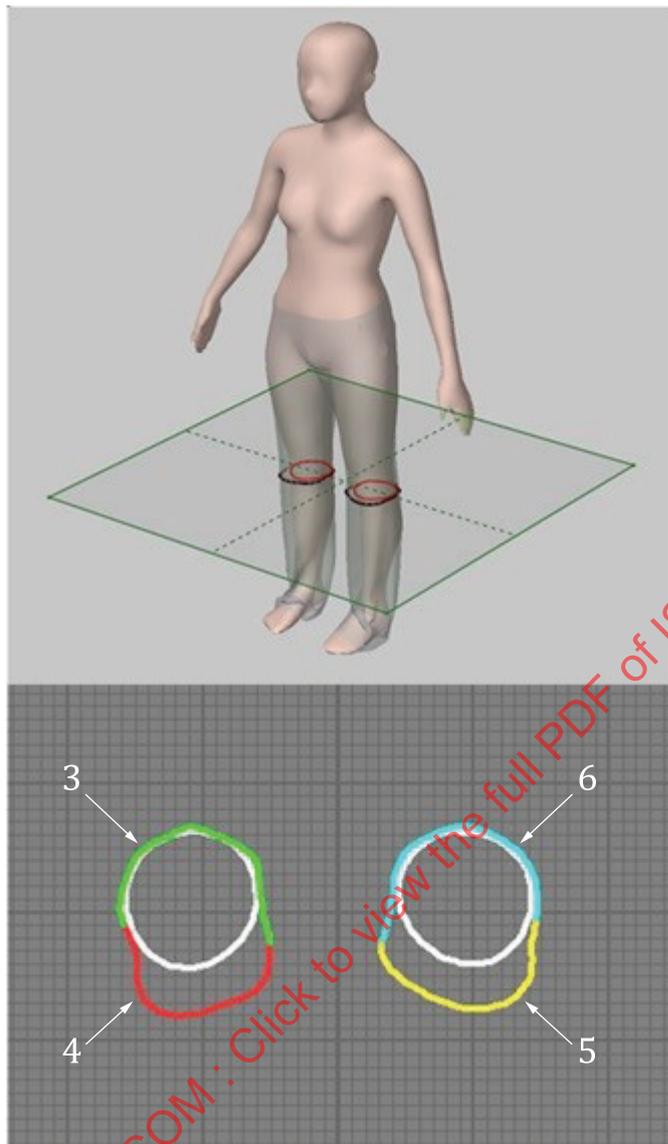


b) Virtual clone or virtual twin, lower body garment

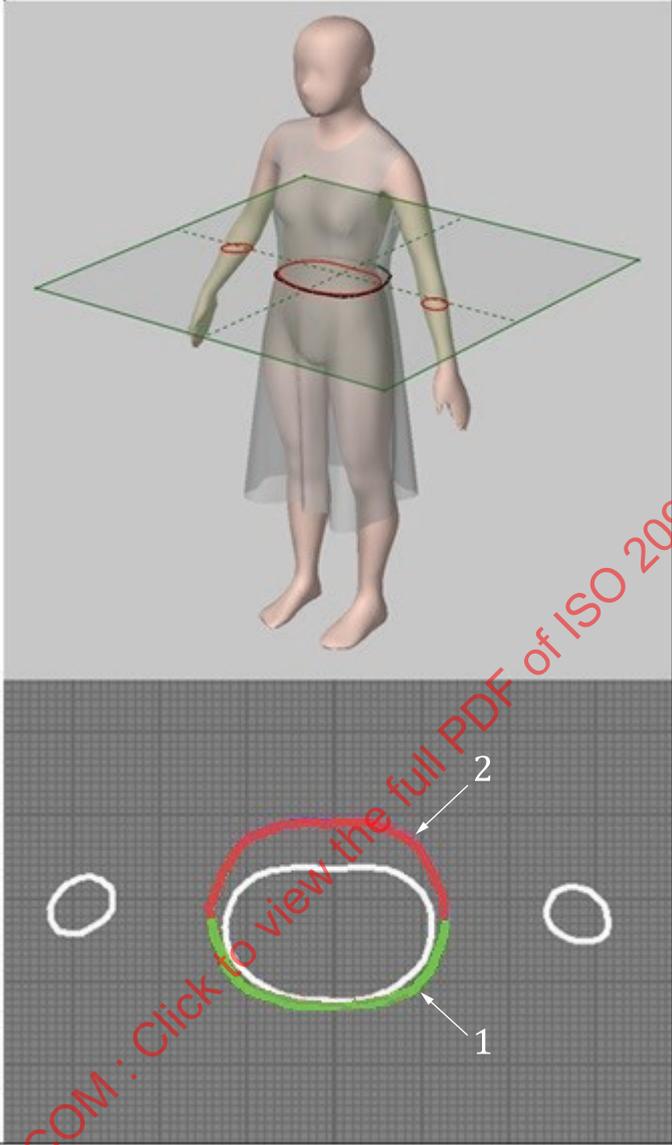


c) Virtual clone or virtual twin, whole body garment

STANDARDSISO.COM : Click to view the full PDF of ISO 20947-3:2023

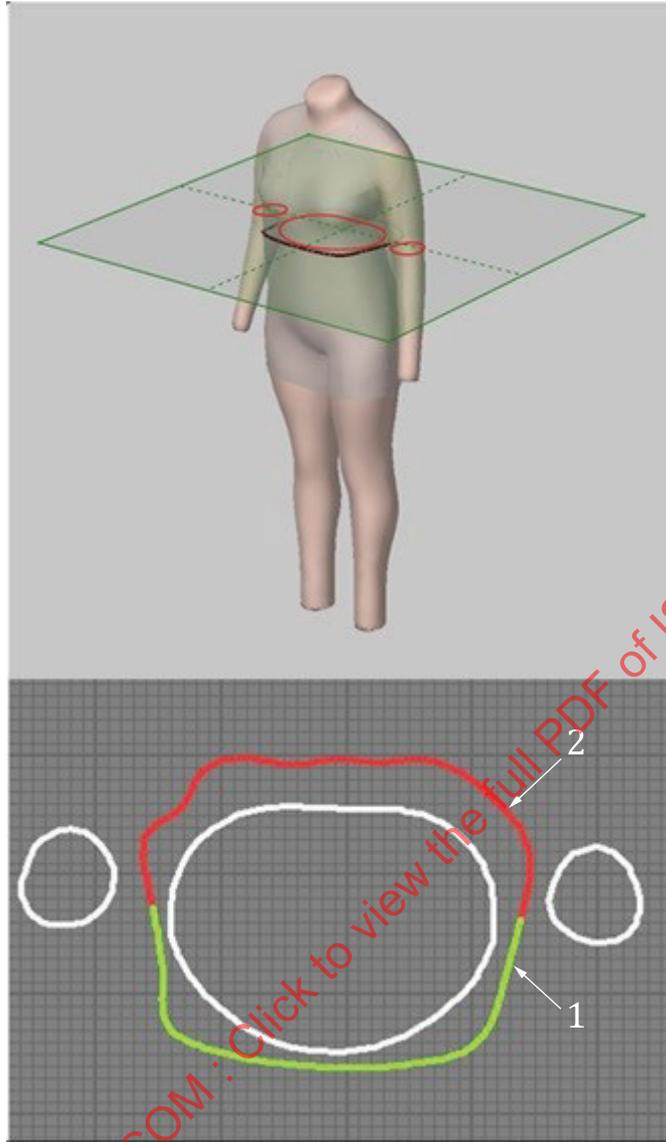


d) Virtual fit mannequin, upper body garment

STANDARDSISO.COM : Click to view the full PDF of ISO 20947-3:2023

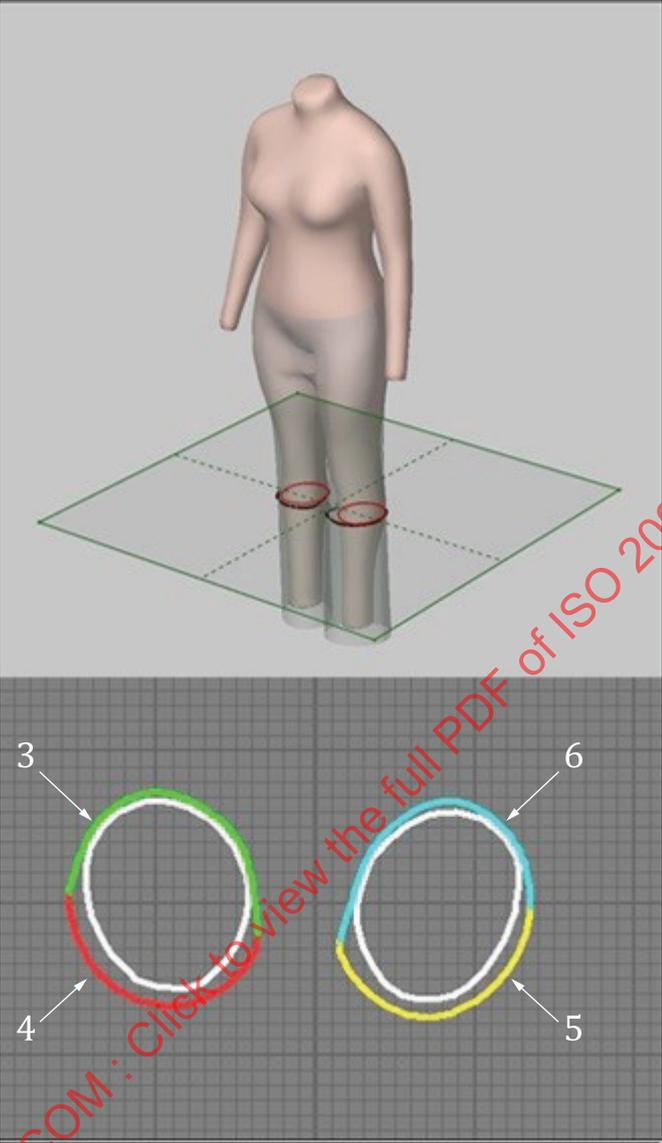

e) Virtual fit mannequin, lower body garment

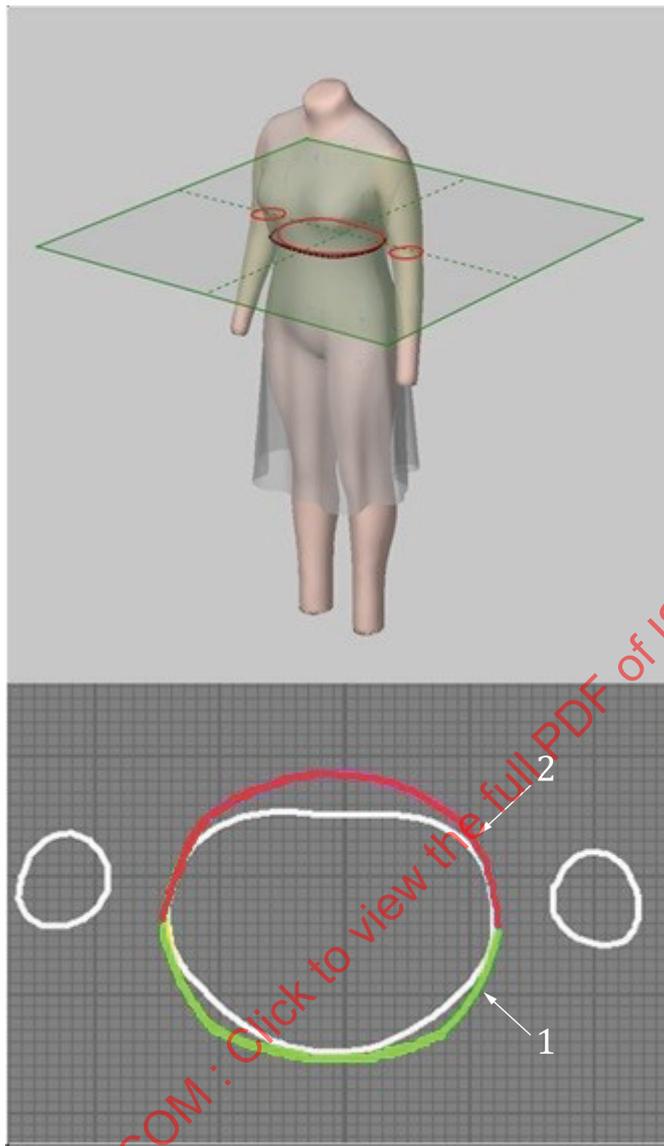

f) Virtual fit mannequin, whole body garment


Key

- 1 silhouette line of front bodice
- 2 silhouette line of back bodice
- 3 silhouette line of right back pants
- 4 silhouette line of right front pants
- 5 silhouette line of left back pants
- 6 silhouette line of left front pants

Figure 1 — Example of the perimeter measured on the virtual horizontal cross section


4.2.2 Function to measure the perimeter on the virtual vertical cross section (front centre)

This function measures the length of the virtual garment shape and the virtual clone, the virtual twin or the virtual fit mannequin (fit form) model shape from any arbitrary point on the virtual vertical cross section (front). See [Figure 2](#).

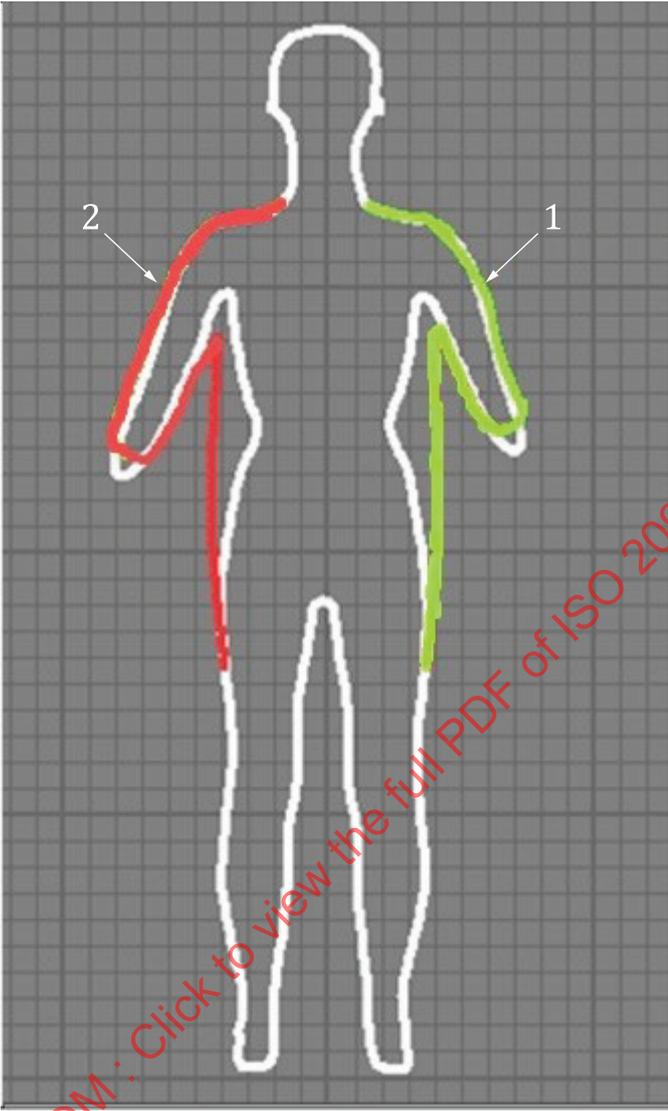


a) Virtual clone or virtual twin, upper body garment


STANDARDSISO.COM : Click to view the full PDF of ISO 20947-3:2023

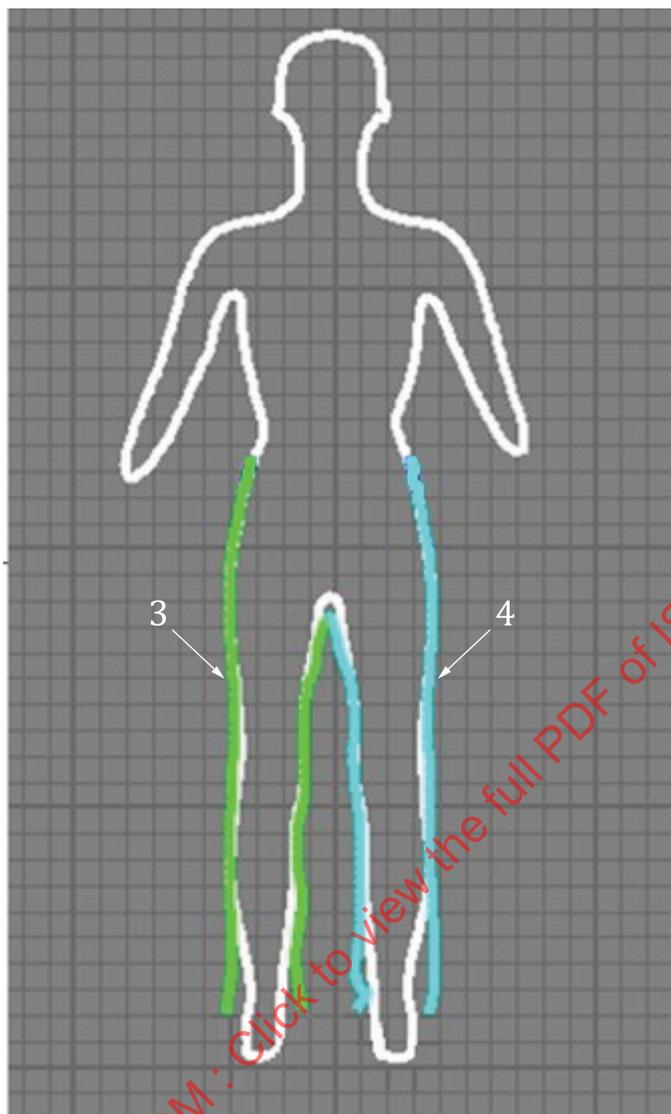

b) Virtual clone or virtual twin, lower body garment

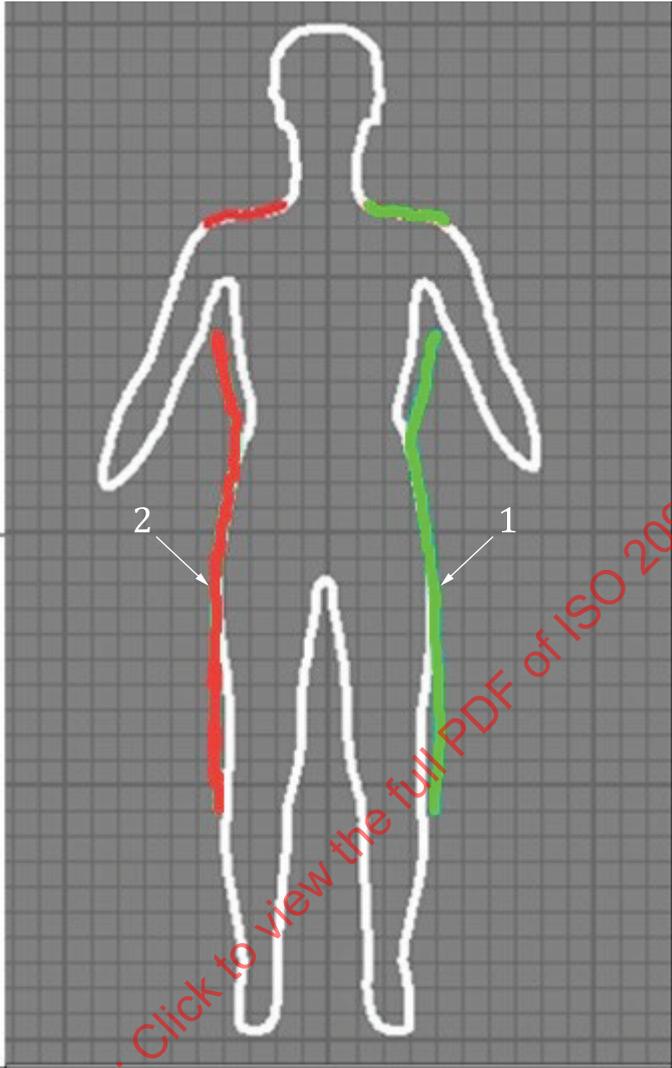


c) Virtual clone or virtual twin, whole body garment

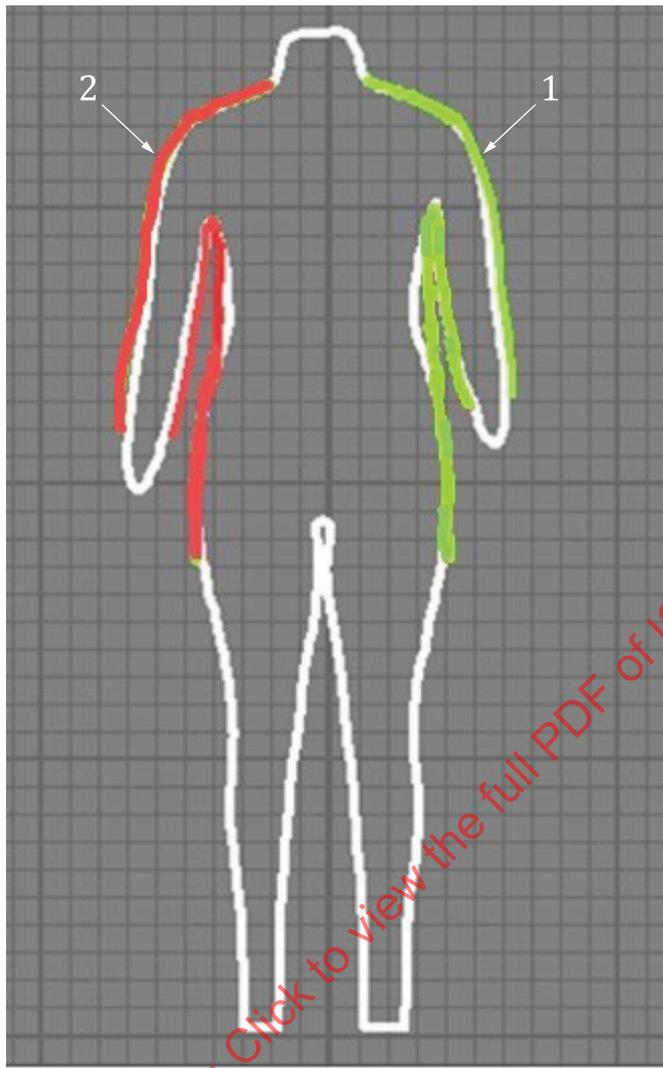


d) Virtual fit mannequin, upper body garment

STANDARDSISO.COM · Click to view the full PDF of ISO 20947-3:2023

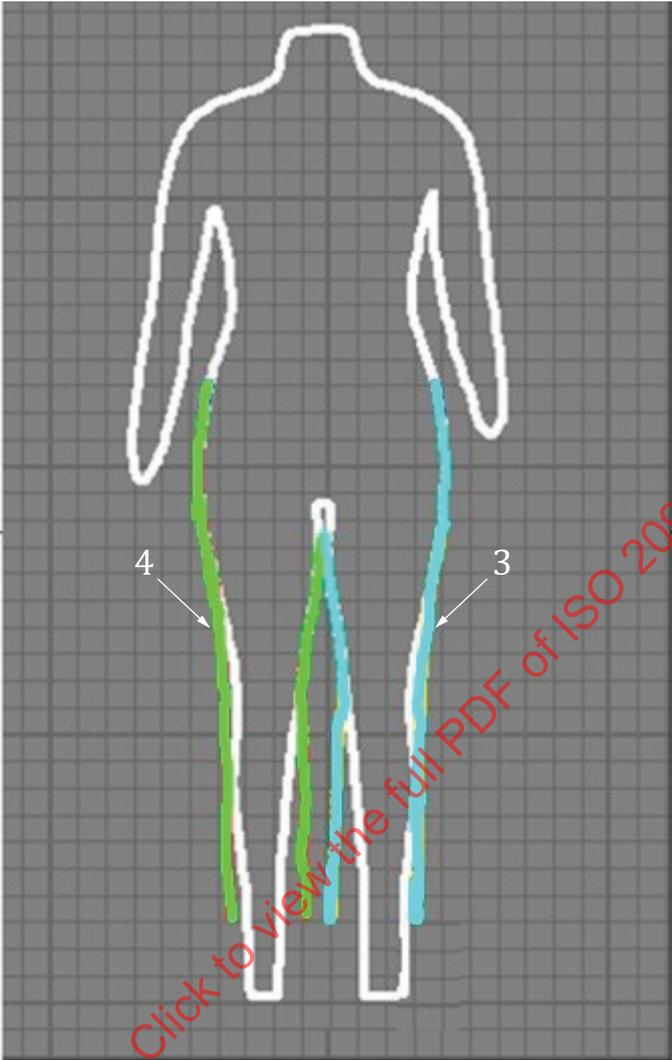

e) Virtual fit mannequin, lower body garment

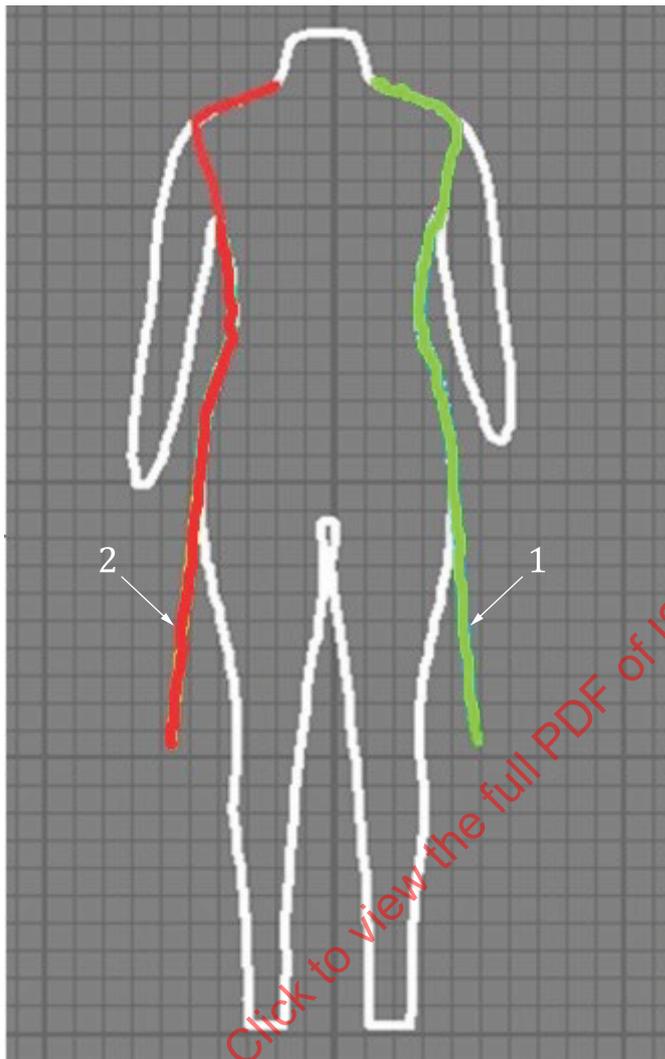

f) Virtual fit mannequin, whole body garment


Key

- 1 silhouette line of left bodice
- 2 silhouette line of right bodice
- 3 silhouette line of right pants
- 4 silhouette line of left pants

Figure 2 — Example of the front length centre shape measured on the virtual vertical cross section


4.2.3 Function to measure the perimeter on the virtual vertical cross section (side)

This function measures the length of the virtual garment shape and the virtual clone or the virtual twin or the virtual fit mannequin (fit form) model shape from any arbitrary point on the virtual vertical cross section (front). See [Figure 3](#).

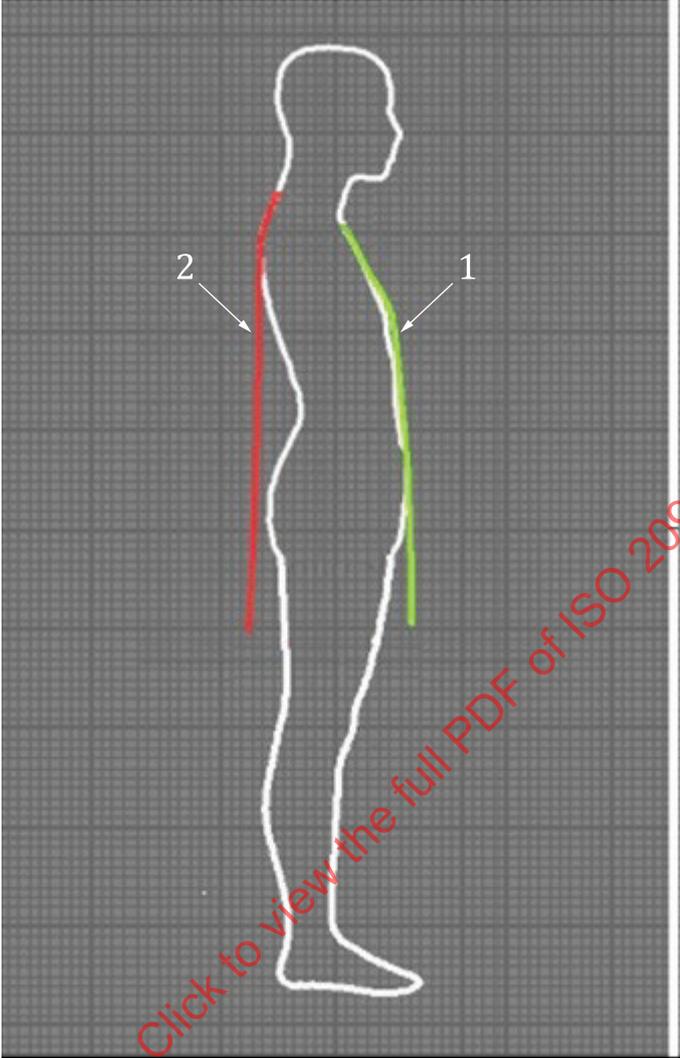


a) Virtual clone or virtual twin, upper body garment


STANDARDSISO.COM: Click to view the full PDF of ISO 20947-3:2023

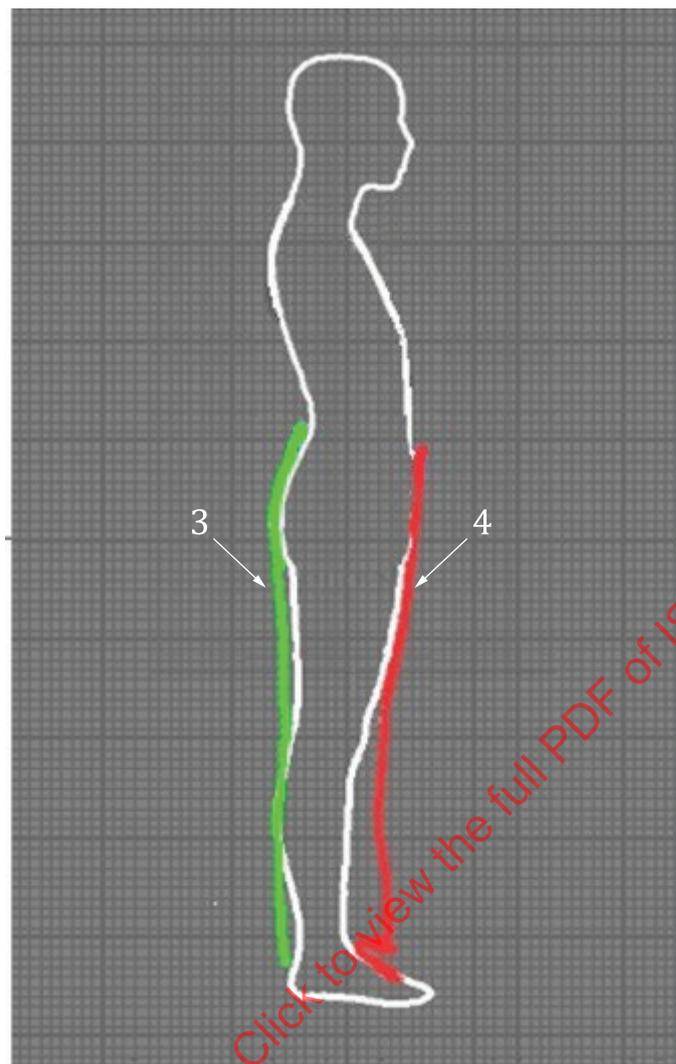


b) Virtual clone or virtual twin, lower body garment

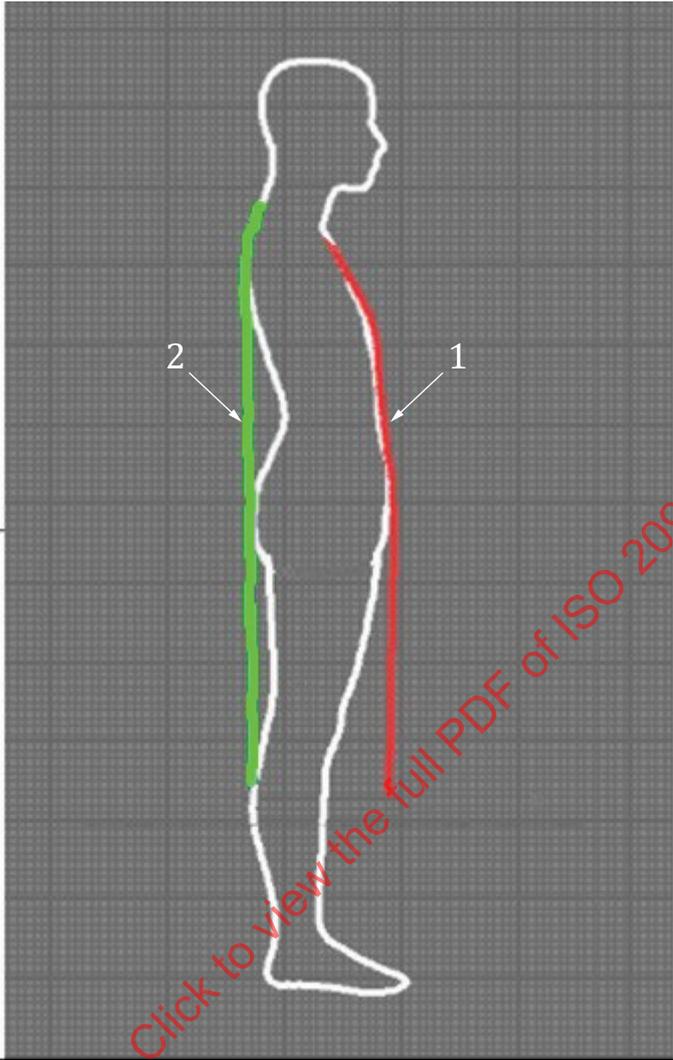

c) Virtual clone or virtual twin, whole body garment

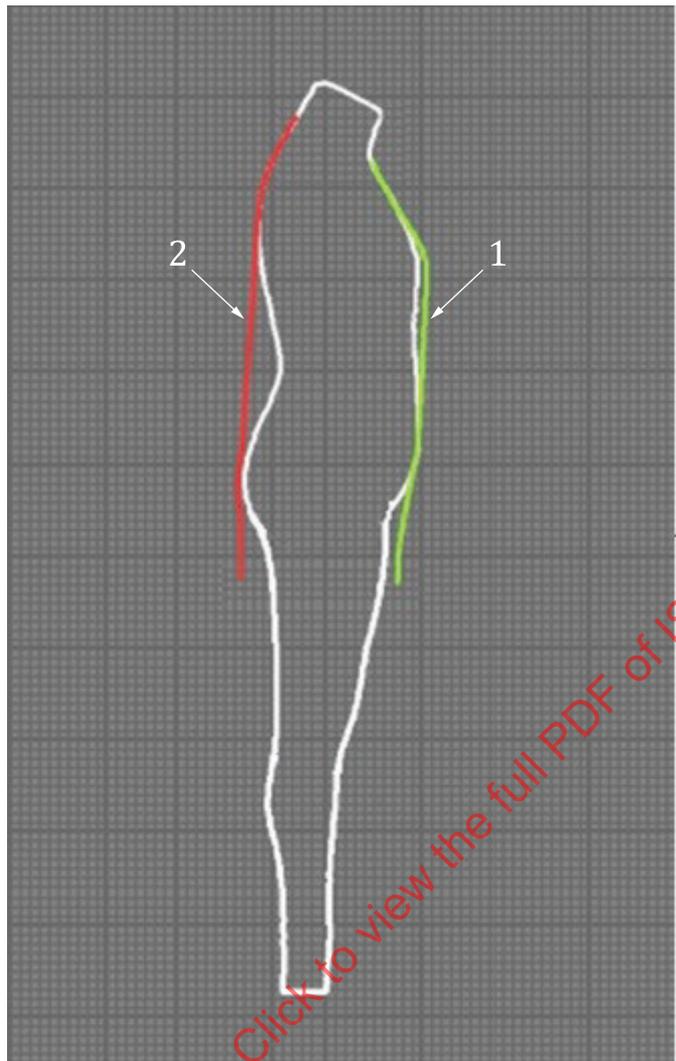


d) Virtual fit mannequin, upper body garment

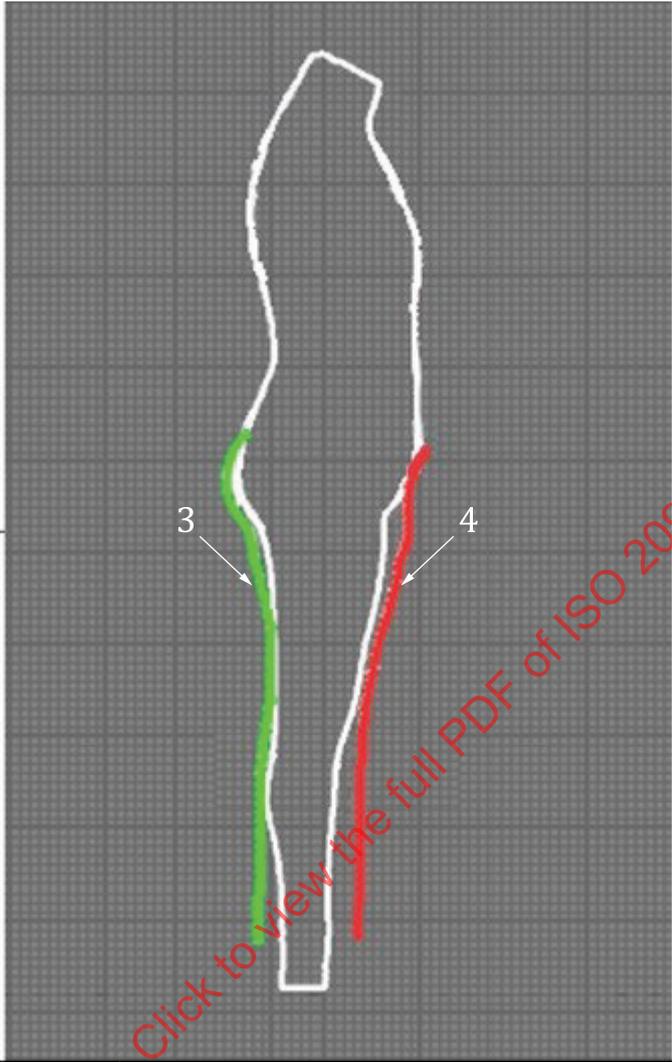

e) Virtual fit mannequin, lower body garment

STANDARDSISO.COM · Click to view the full PDF of ISO 20947-3:2023

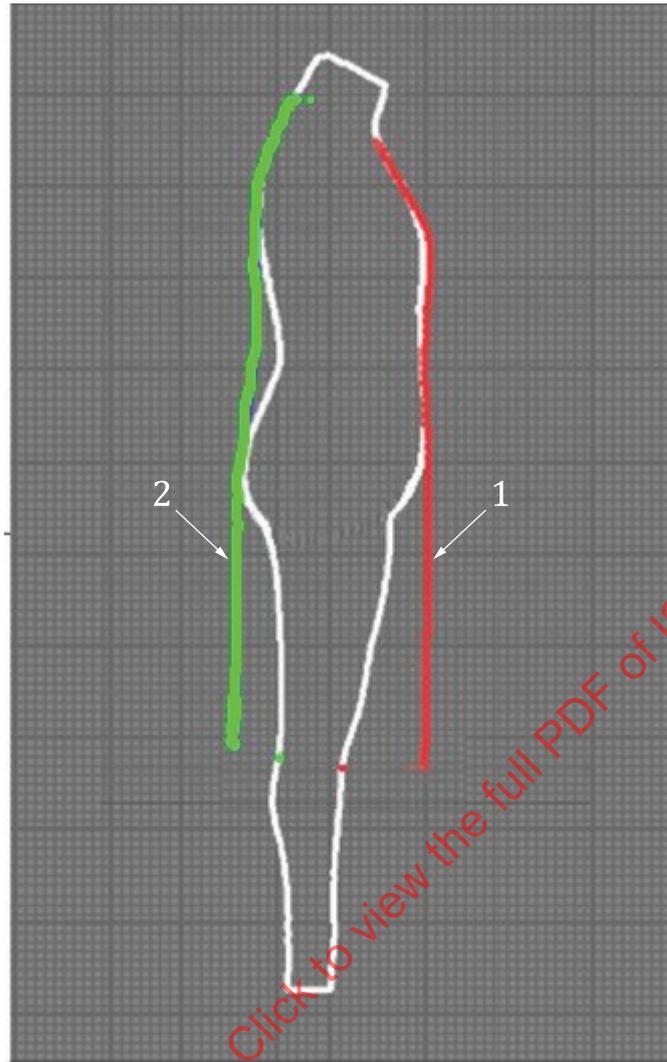

f) Virtual fit mannequin, whole body garment

Key


- 1 silhouette line of front bodice
- 2 silhouette line of back bodice
- 3 silhouette line of back pants
- 4 silhouette line of front pants

Figure 3 — Example of the length of garment measured on the virtual vertical cross section (side)


4.3 Function to measure the gap on the virtual cross section

4.3.1 Function to measure the gap of circumference on the virtual horizontal cross section


This function measures the gap between the virtual garment and the virtual clone or the virtual twin or the virtual fit mannequin (fit form) model by measuring the distance and area from any point on the virtual cross section (e.g. waist level). See [Figure 4](#).

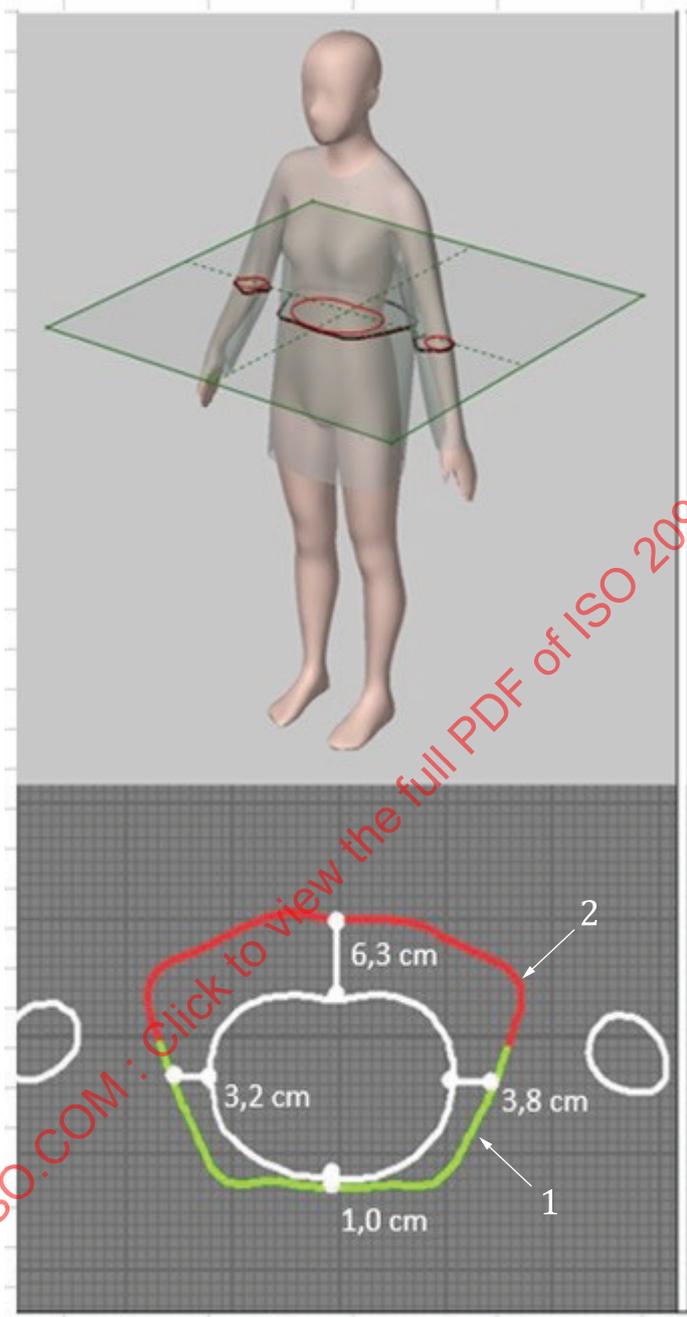

a) Virtual clone or virtual twin, upper body garment

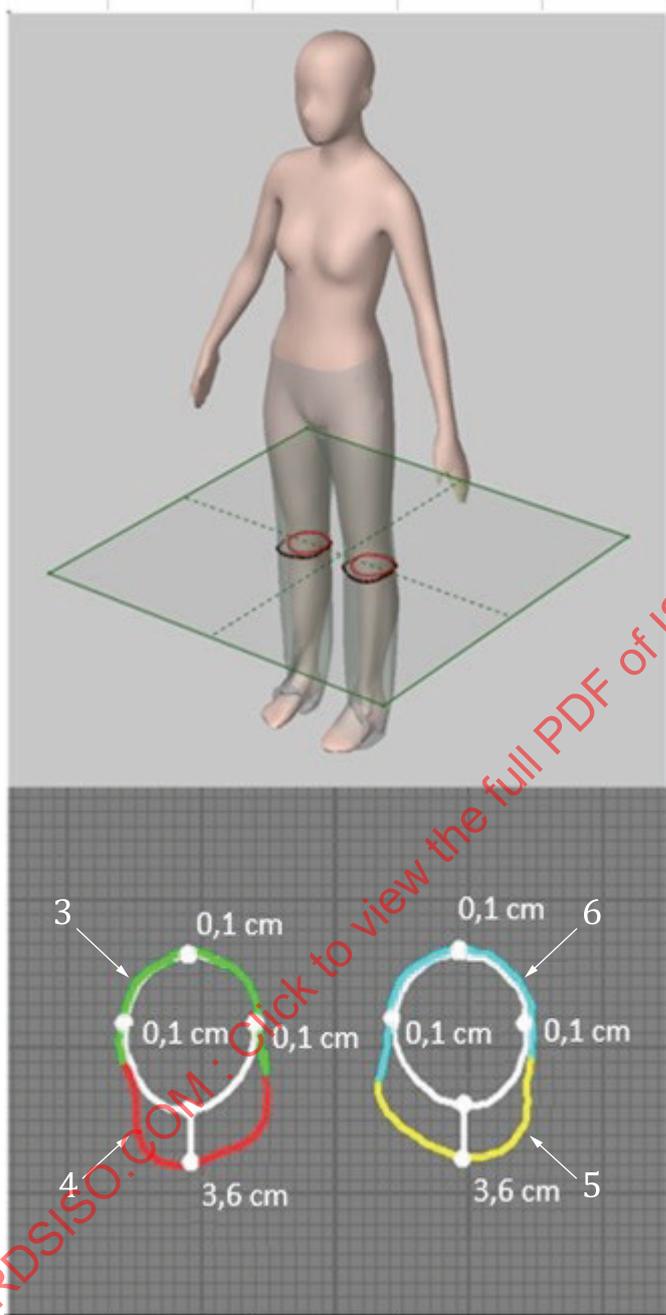


b) Virtual clone or virtual twin, lower body garment

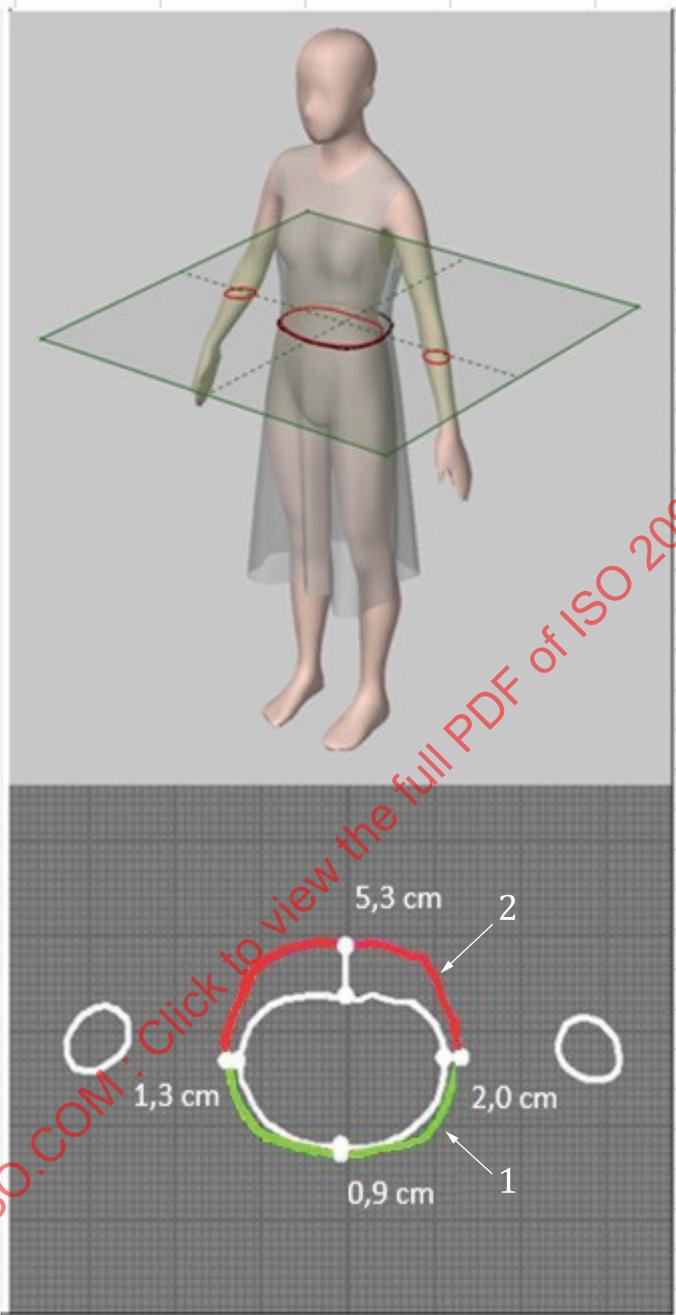


c) Virtual clone or virtual twin, whole body garment


STANDARDSISO.COM - Click to view the full PDF of ISO 20947-3:2023

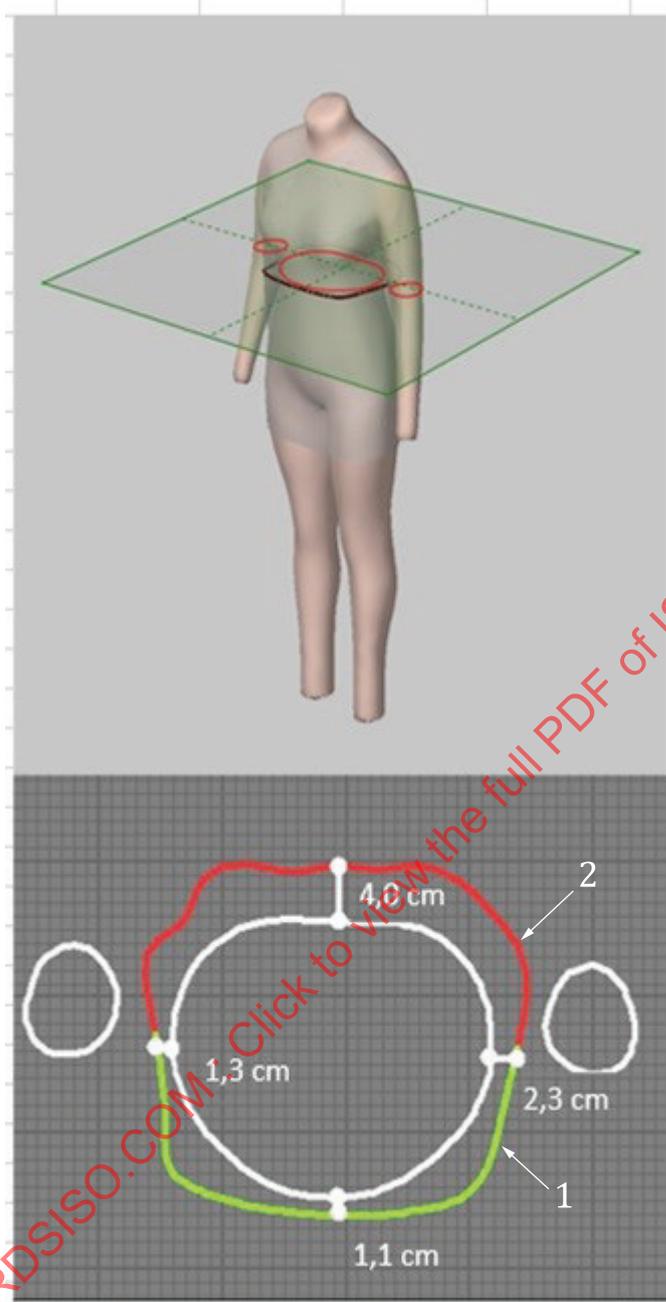

d) Virtual fit mannequin, upper body garment

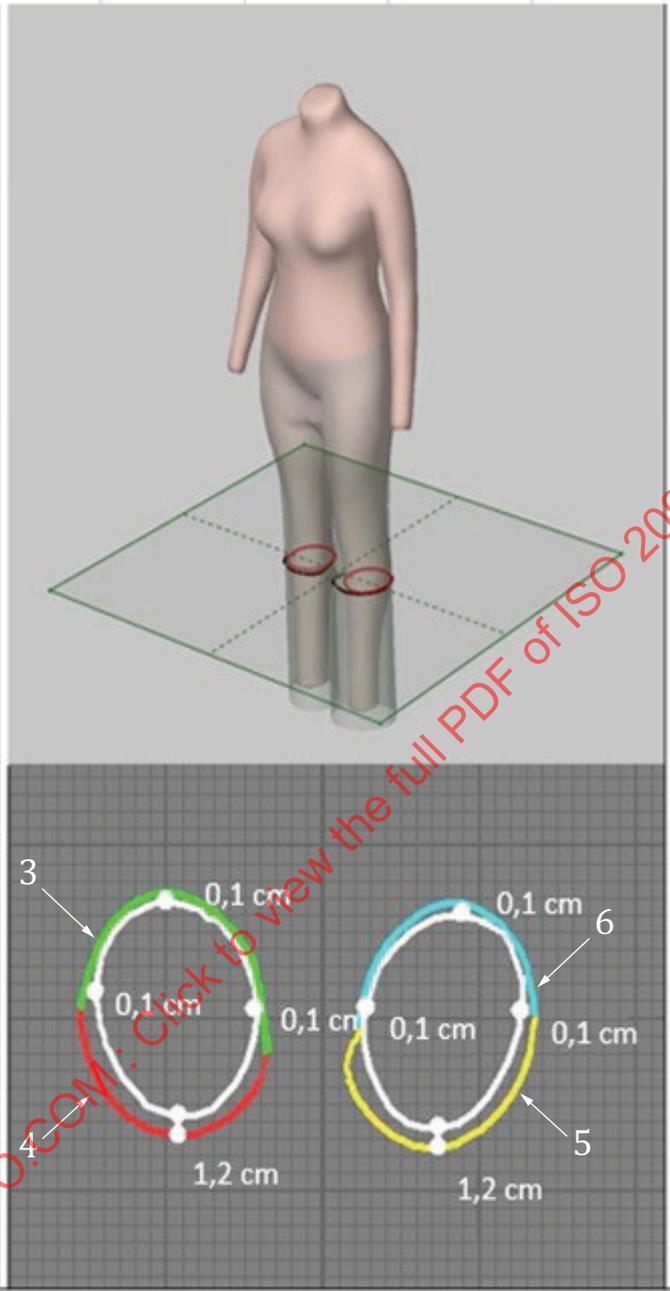

e) Virtual fit mannequin, lower body garment

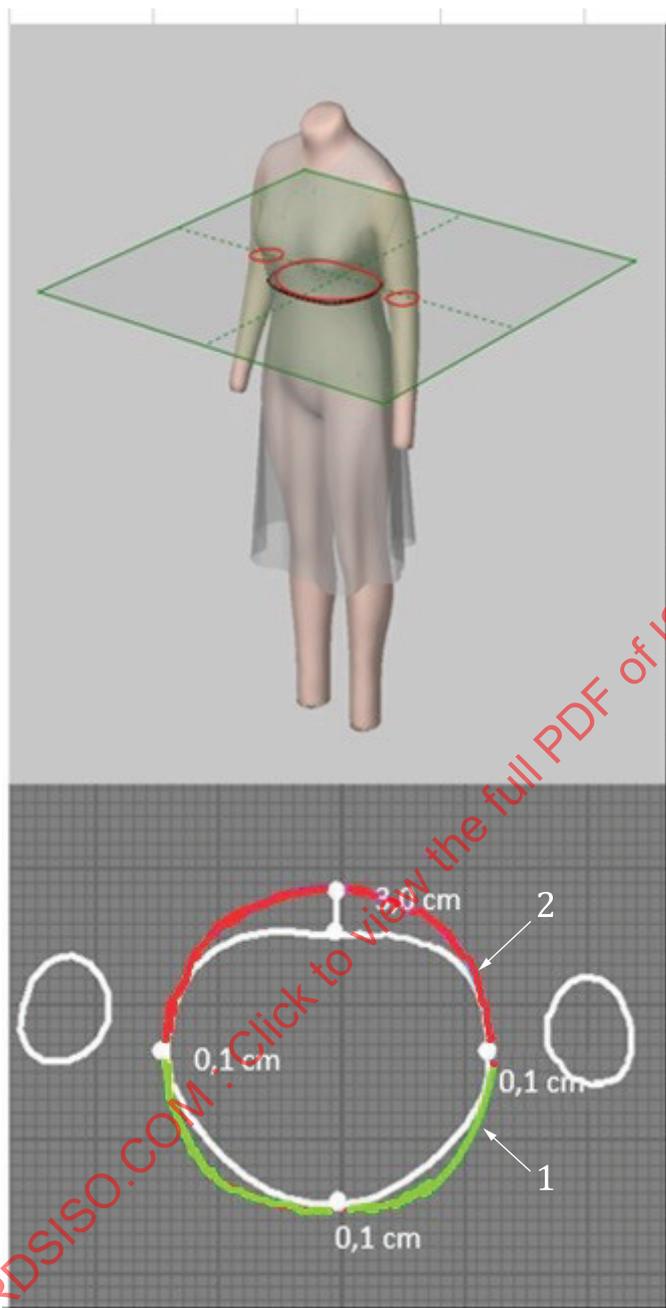

f) Virtual fit mannequin, whole body garment


Key

- 1 silhouette line of front bodice
- 2 silhouette line of back bodice
- 3 silhouette line of right back pants
- 4 silhouette line of right front pants
- 5 silhouette line of left back pants
- 6 silhouette line of left front pants


Figure 4 — Example of the gap measured on the virtual horizontal cross section

4.3.2 Function to measure the gap at side on the virtual vertical cross section (front)


This function measures the gap between the virtual garment and the virtual clone or the virtual twin or the virtual fit mannequin (fit form) model by measuring the distance and area from any point on the virtual cross section (e.g. waist level) (front). See [Figure 5](#).

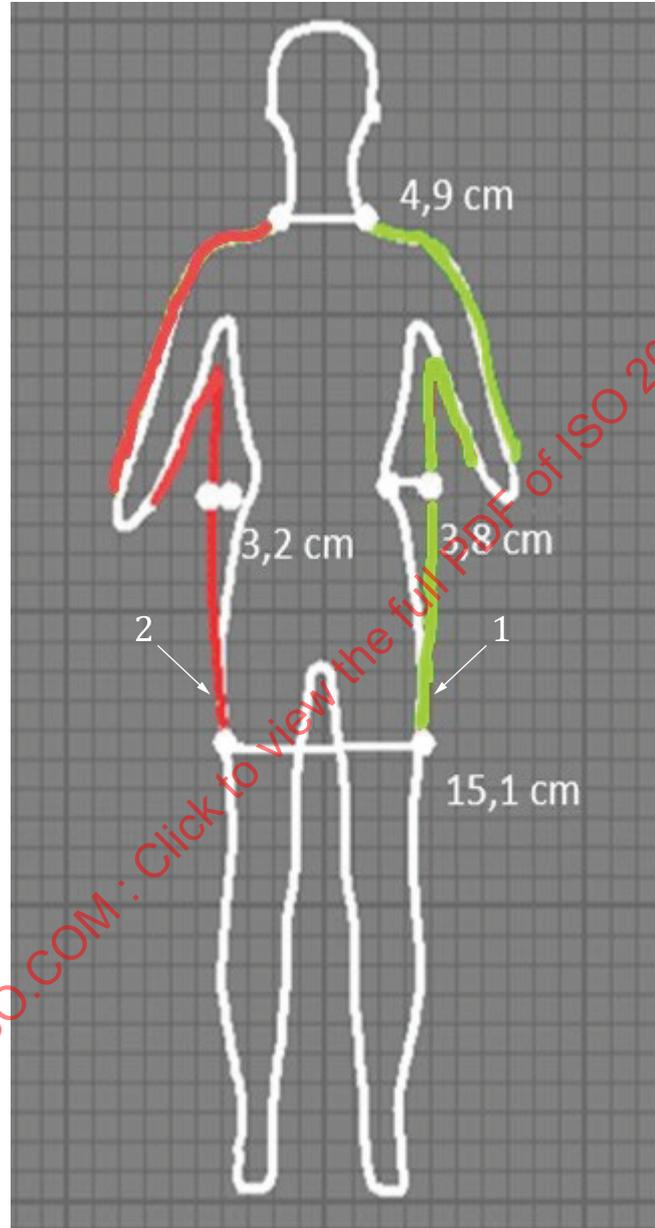


a) Virtual clone or virtual twin, upper body garment

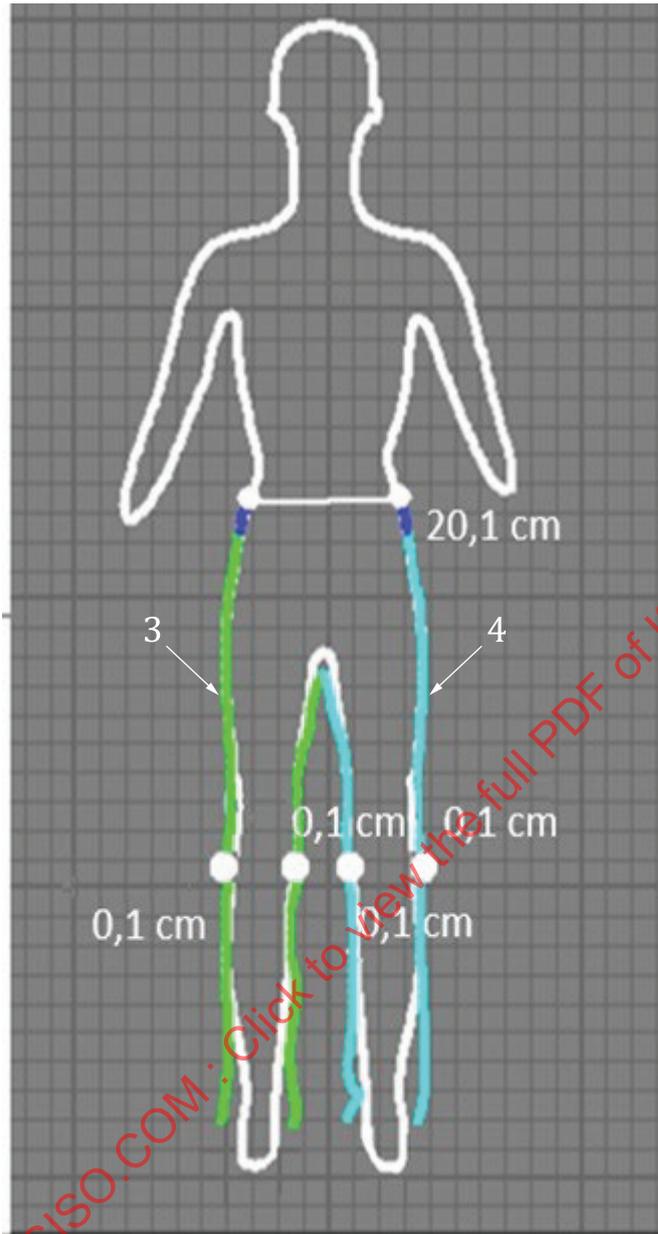


b) Virtual clone or virtual twin, lower body garment

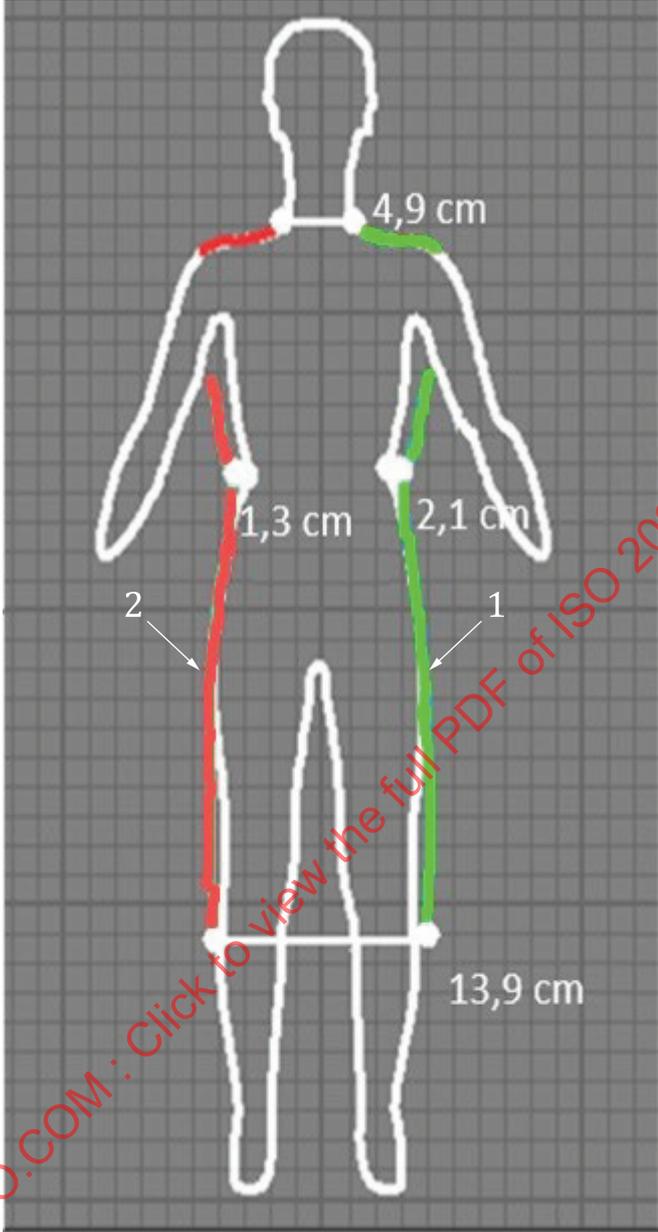


c) Virtual clone or virtual twin, whole body garment

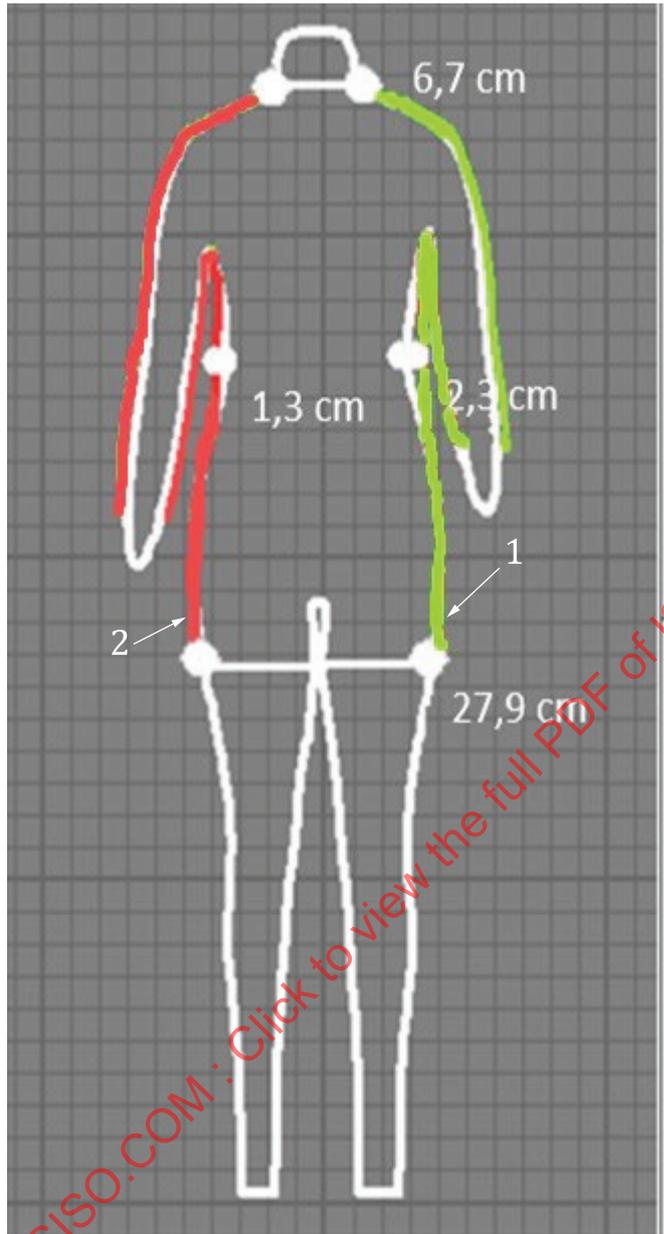

d) Virtual fit mannequin, upper body garment

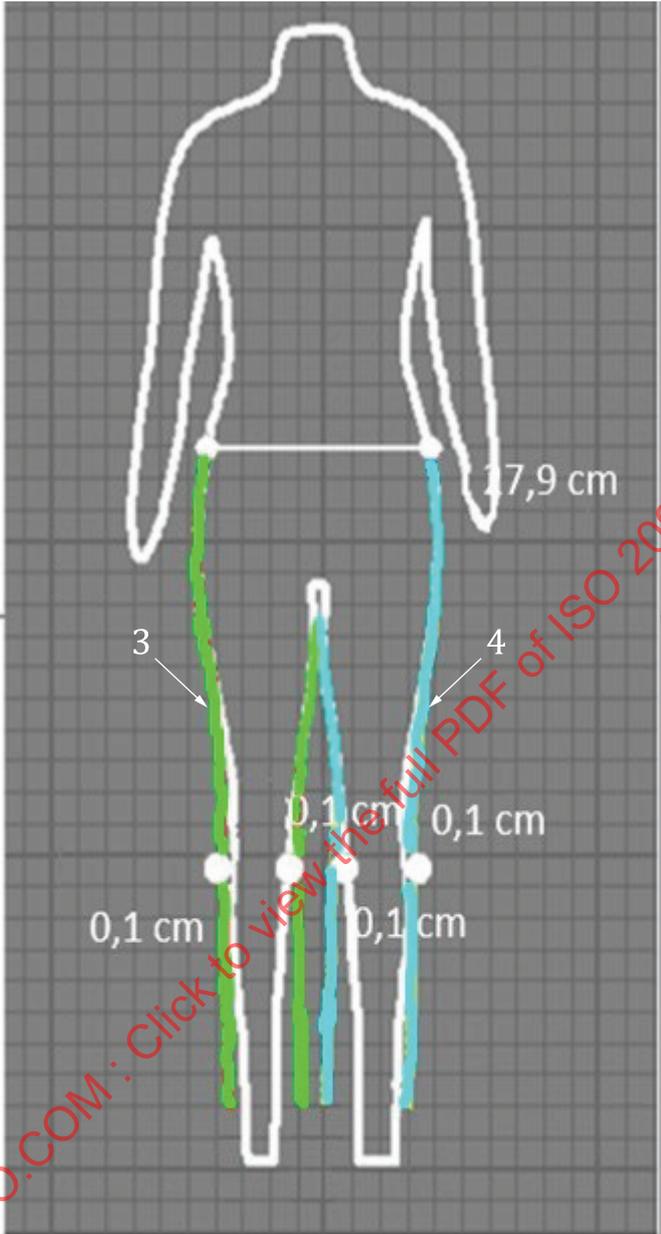

e) Virtual fit mannequin, lower body garment

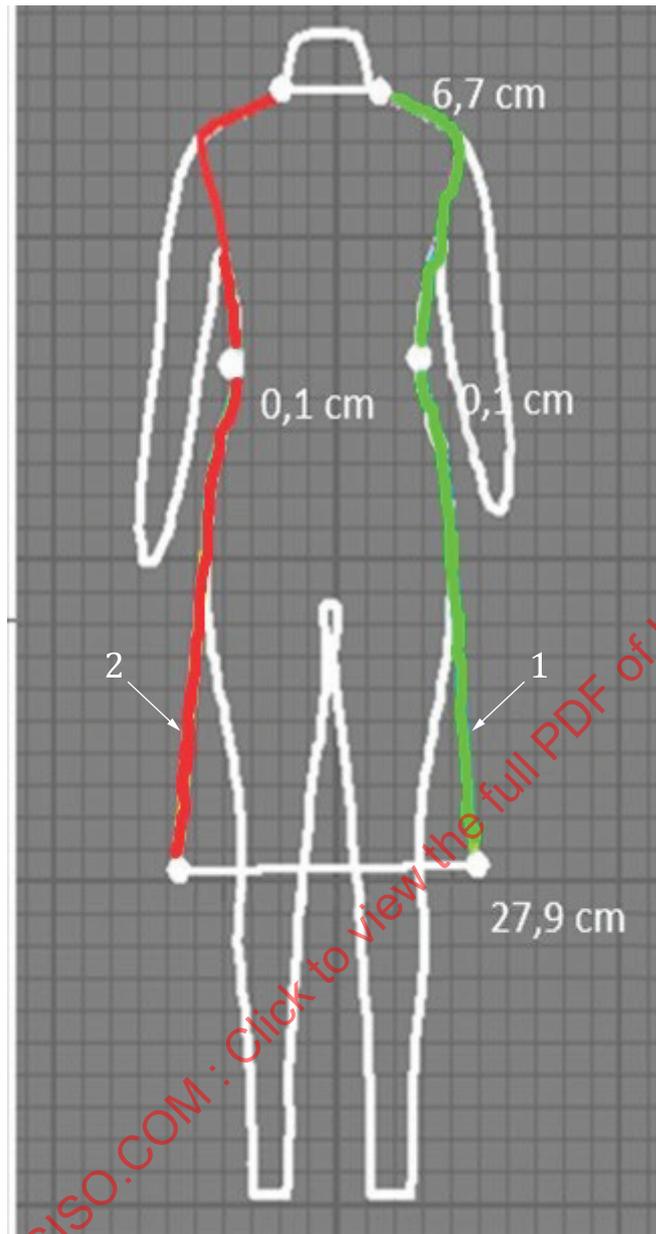

f) Virtual fit mannequin, whole body garment


Key

- 1 silhouette line of left bodice
- 2 silhouette line of right bodice
- 3 silhouette line of right pants
- 4 silhouette line of left pants

Figure 5 — Example of the gap measured on the virtual vertical cross section (front)


4.3.3 Function to measure the gap at centre front or centre back on the virtual vertical cross section (side)

This function measures the gap between the virtual garment and the virtual clone or the virtual twin or the virtual fit mannequin (fit form) model by measuring the distance and area from any point on the virtual cross section (e.g. waist level) (side). See [Figure 6](#).

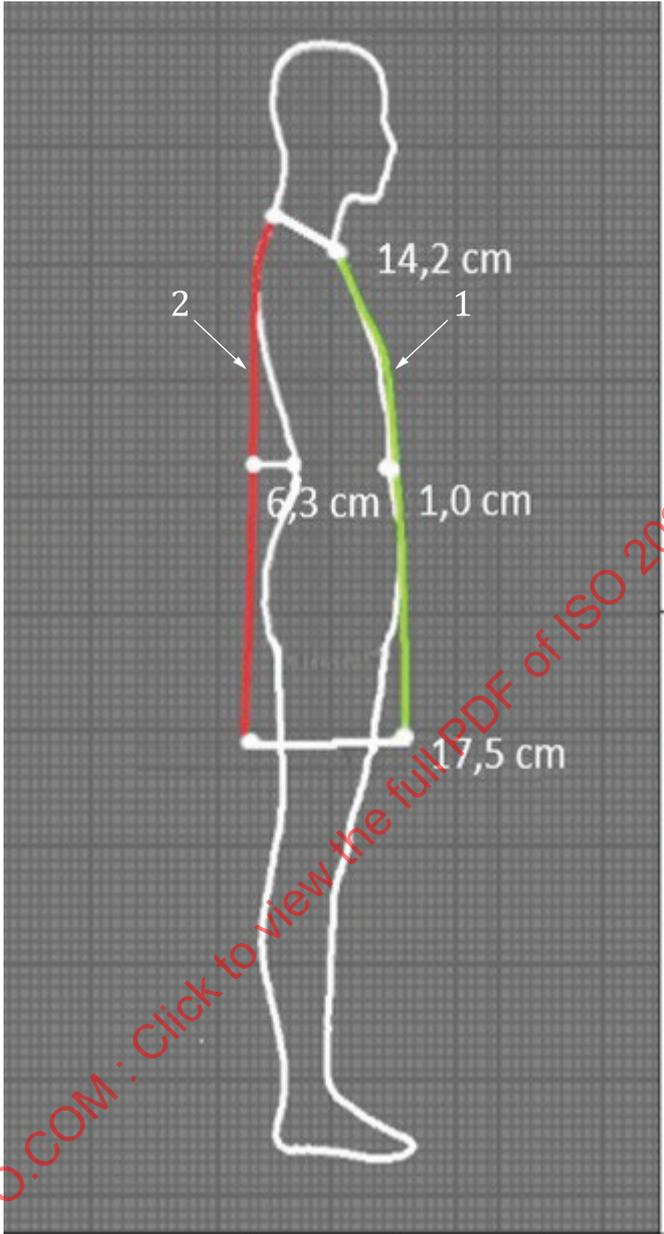


a) Virtual clone or virtual twin, upper body garment


STANDARDSISO.COM : Click to view the full PDF of ISO 20947-3:2023

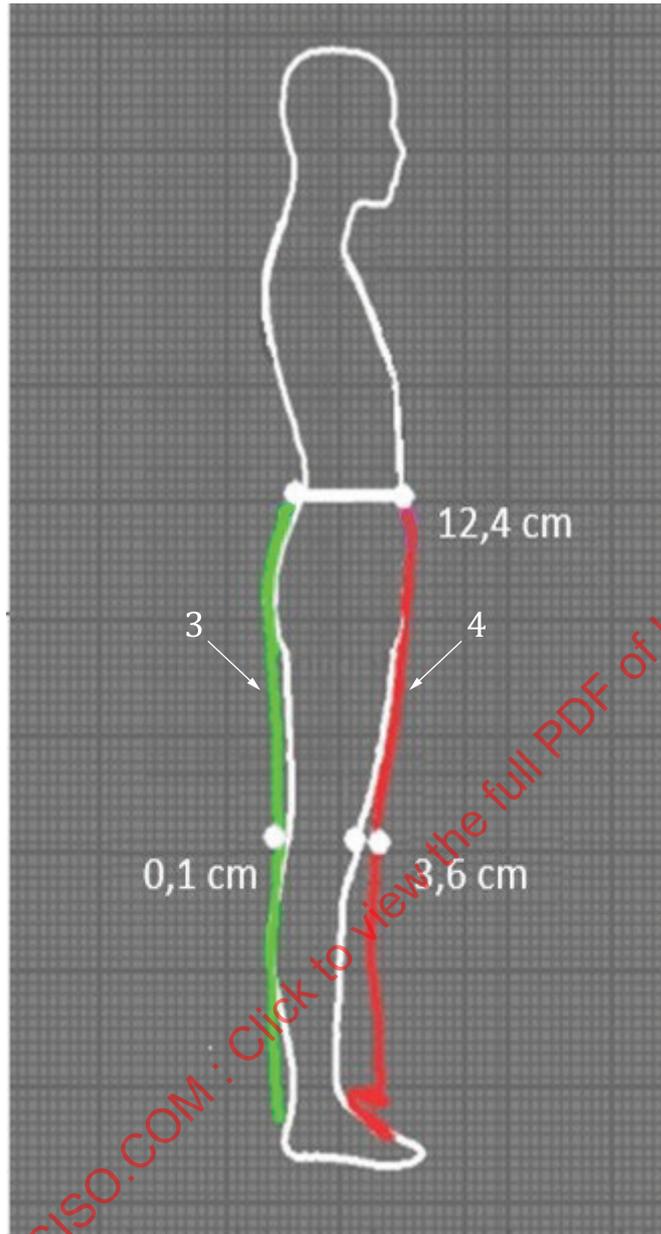


b) Virtual clone or virtual twin, lower body garment

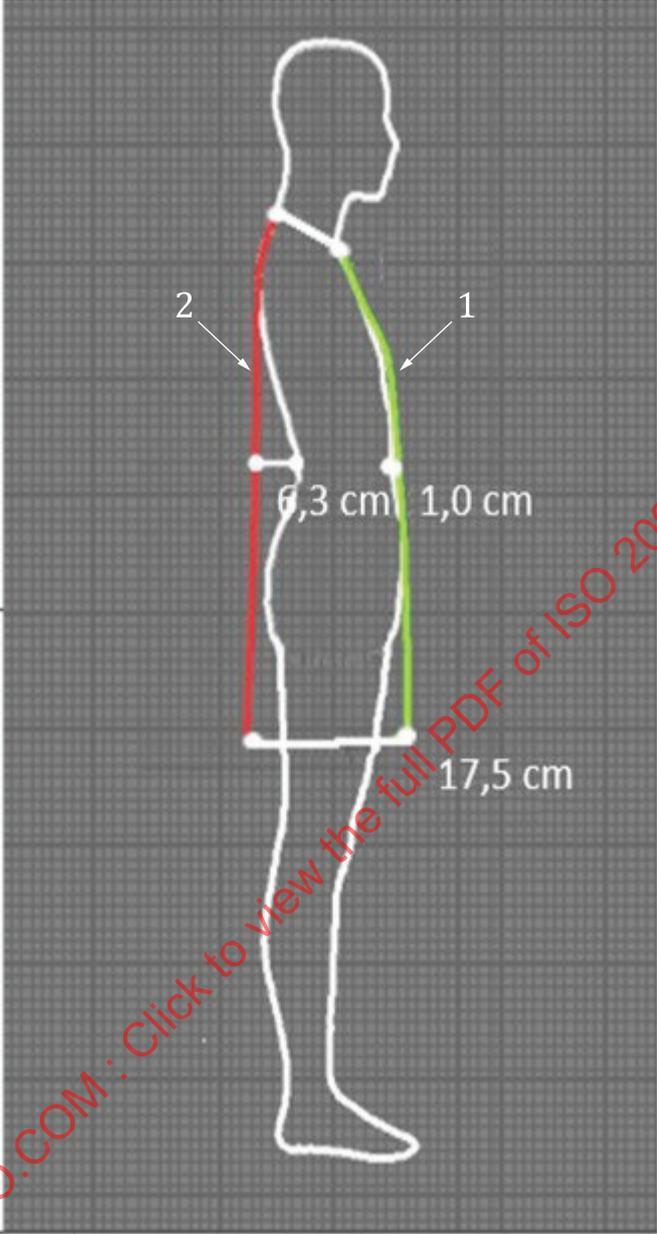


c) Virtual clone or virtual twin, whole body garment

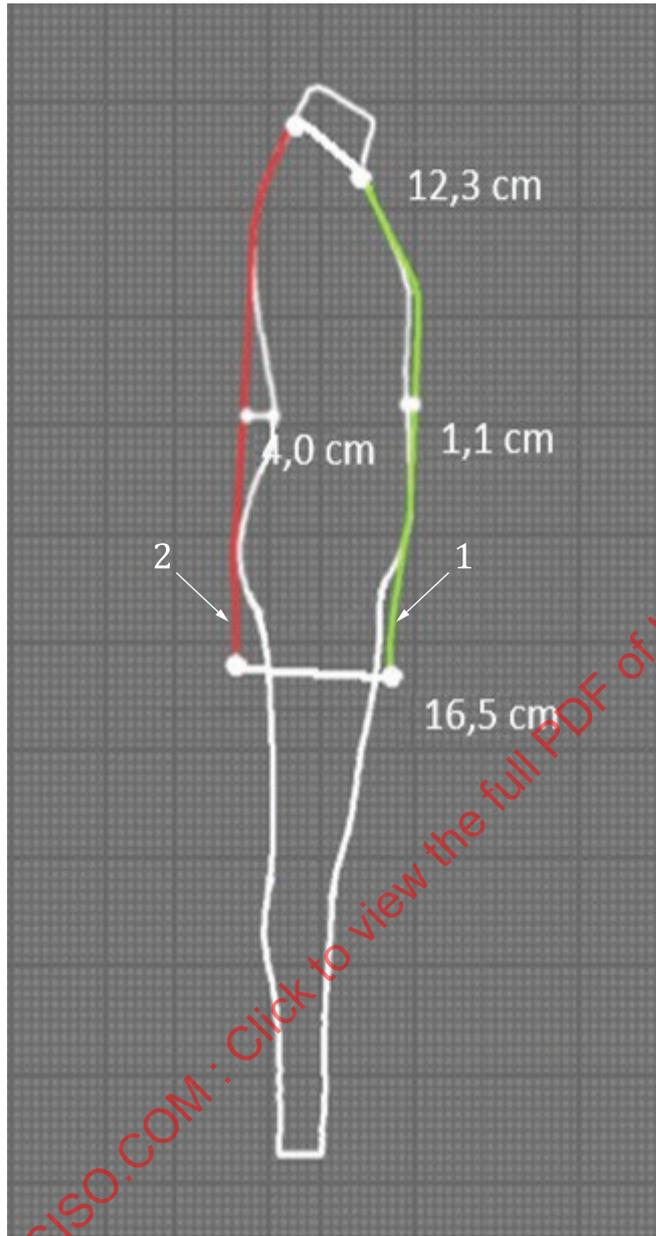

d) Virtual fit mannequin, upper body garment

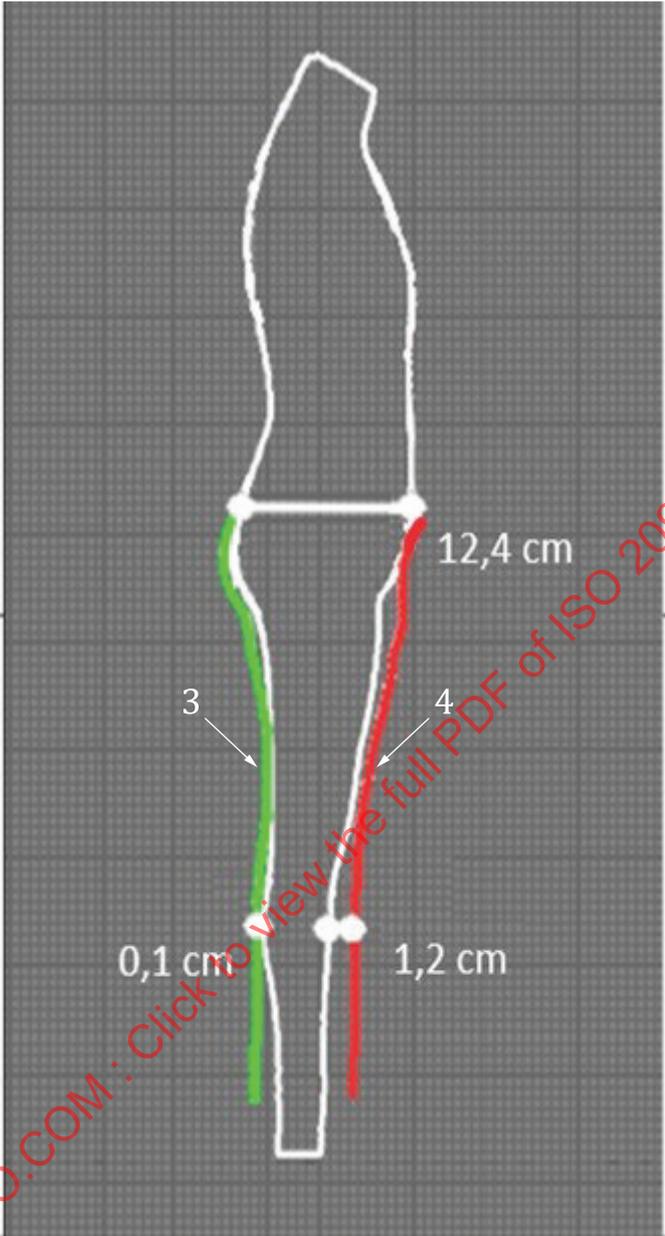

e) Virtual fit mannequin, lower body garment

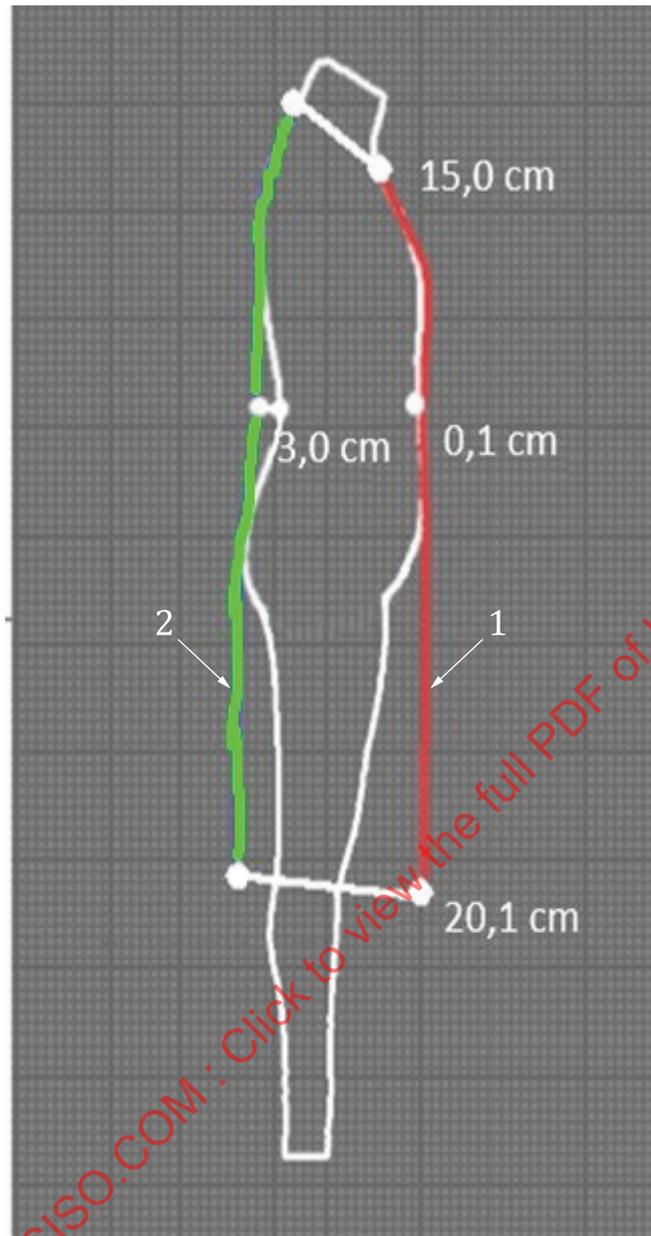

f) Virtual fit mannequin, whole body garment


Key

- 1 silhouette line of front bodice
- 2 silhouette line of back bodice
- 3 silhouette line of back pants
- 4 silhouette line of front pants


Figure 6 — Example of the gap measured on the virtual vertical cross section (side)

4.4 Tension map function


This function is used to express gap between the fabric of a virtual garment and the virtual clone or the virtual twin or the virtual fit mannequin (fit form) model when clothing simulation is conducted. See [Figure 7](#).

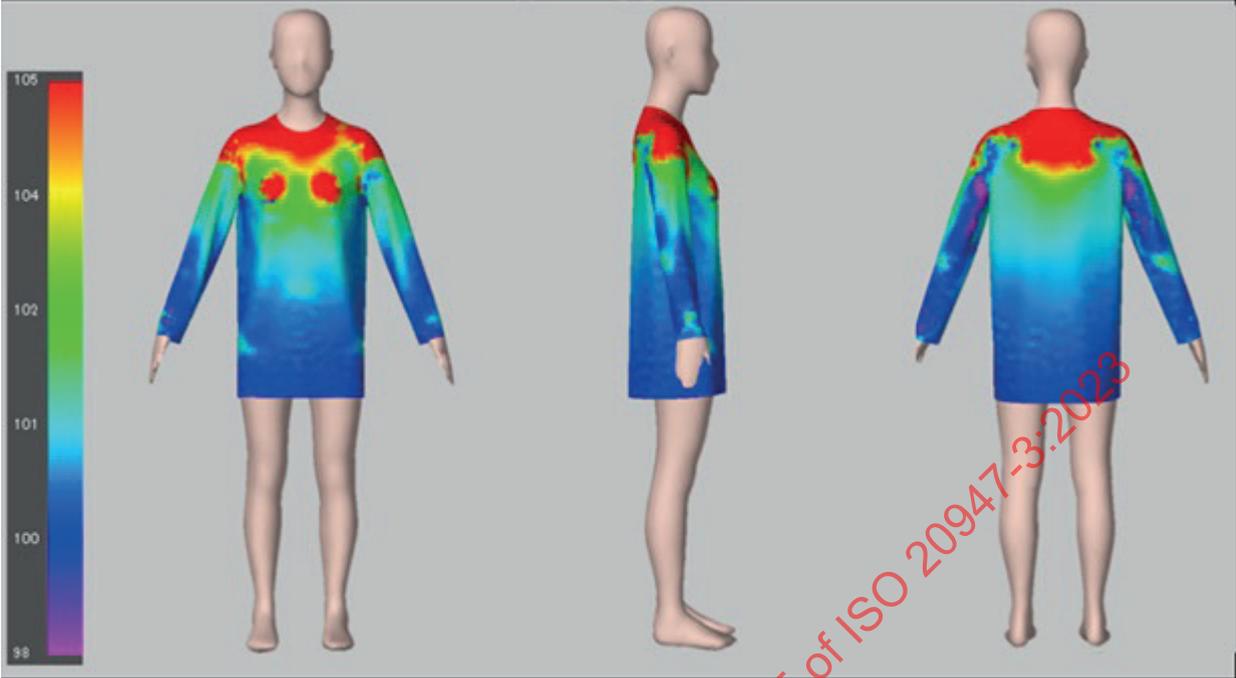

a) Virtual clone or virtual twin, upper body garment (%)

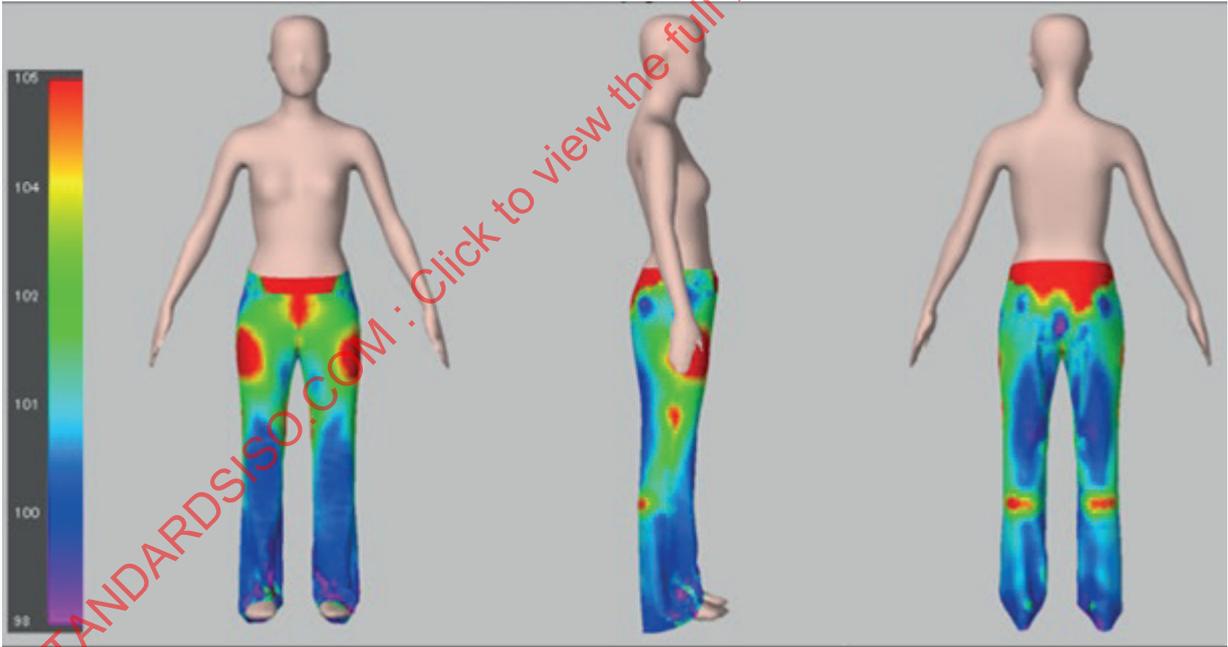


b) Virtual clone or virtual twin, lower body garment (%)

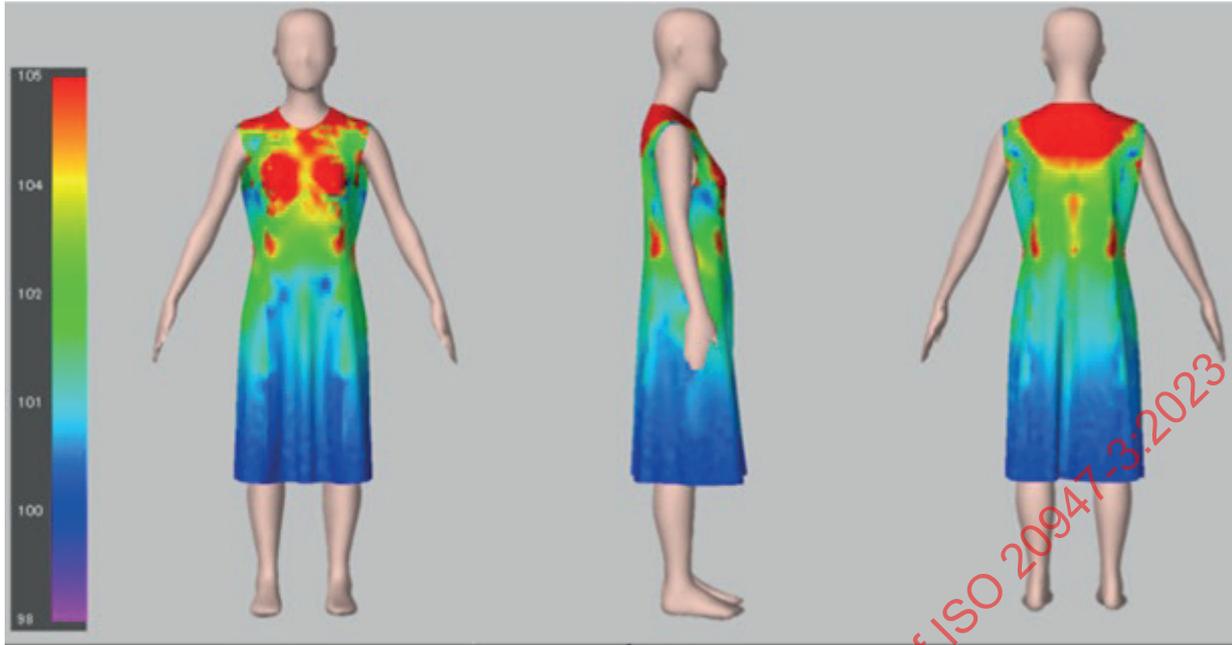

c) Virtual clone or virtual twin, whole body garment (%)



d) Virtual fit mannequin, upper body garment (%)

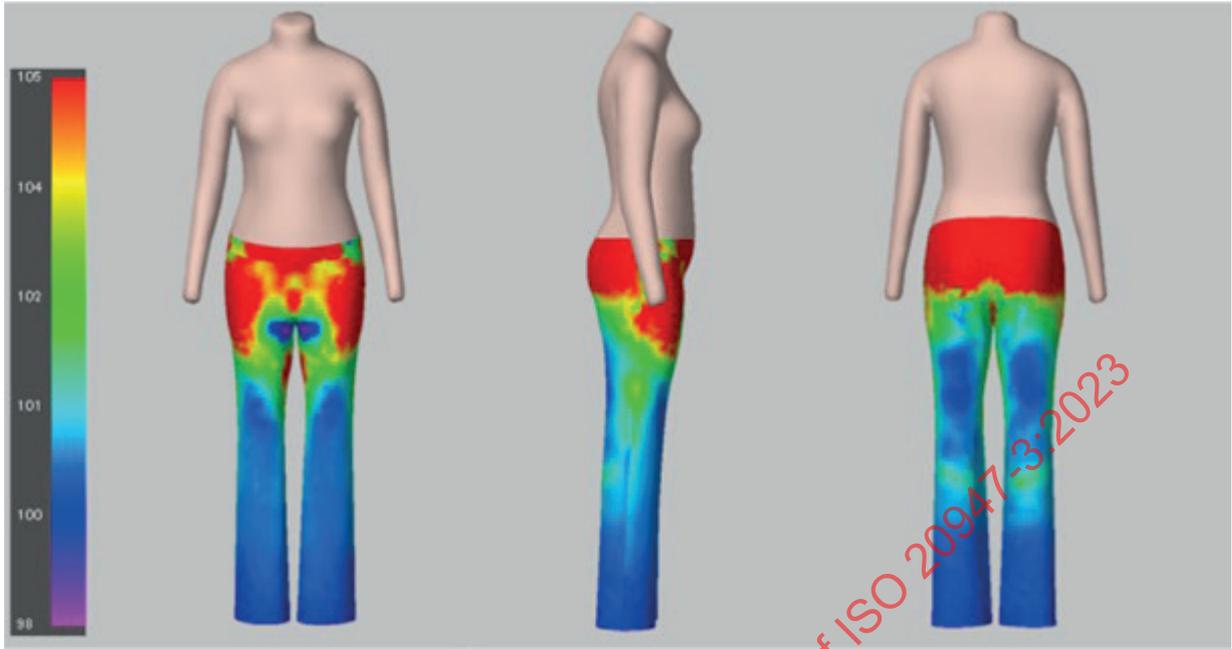

e) Virtual fit mannequin, lower body garment (%)




f) Virtual fit mannequin, whole body garment (%)


Figure 7 — Example of the gap expression

4.5 Garment pressure display function


This function is used to express pressure (strain or tension or tightness) to the virtual clone or the virtual twin or the virtual fit mannequin (fit form) model when virtual clothing simulation is conducted. See [Figure 8](#). The amount of expansion and contraction of the material (properties such as bias or elastic) can be used as an index for analysing the garment pressure.

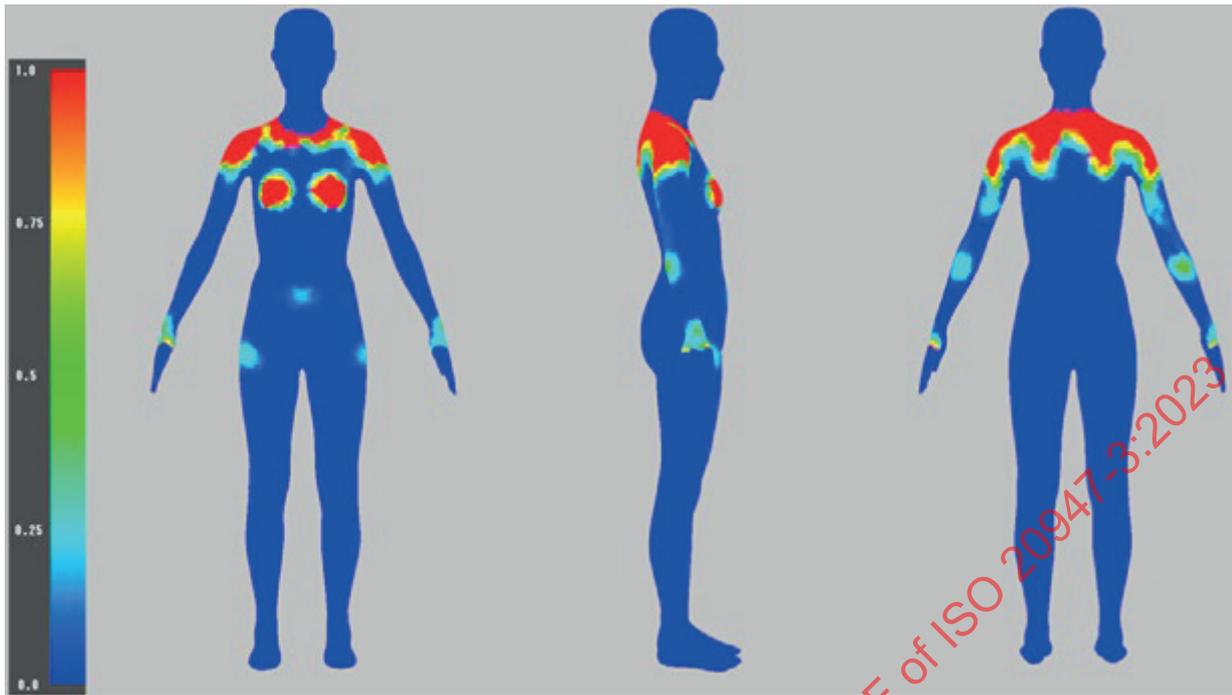


a) Virtual clone or virtual twin, upper body garment (gf/cm²)

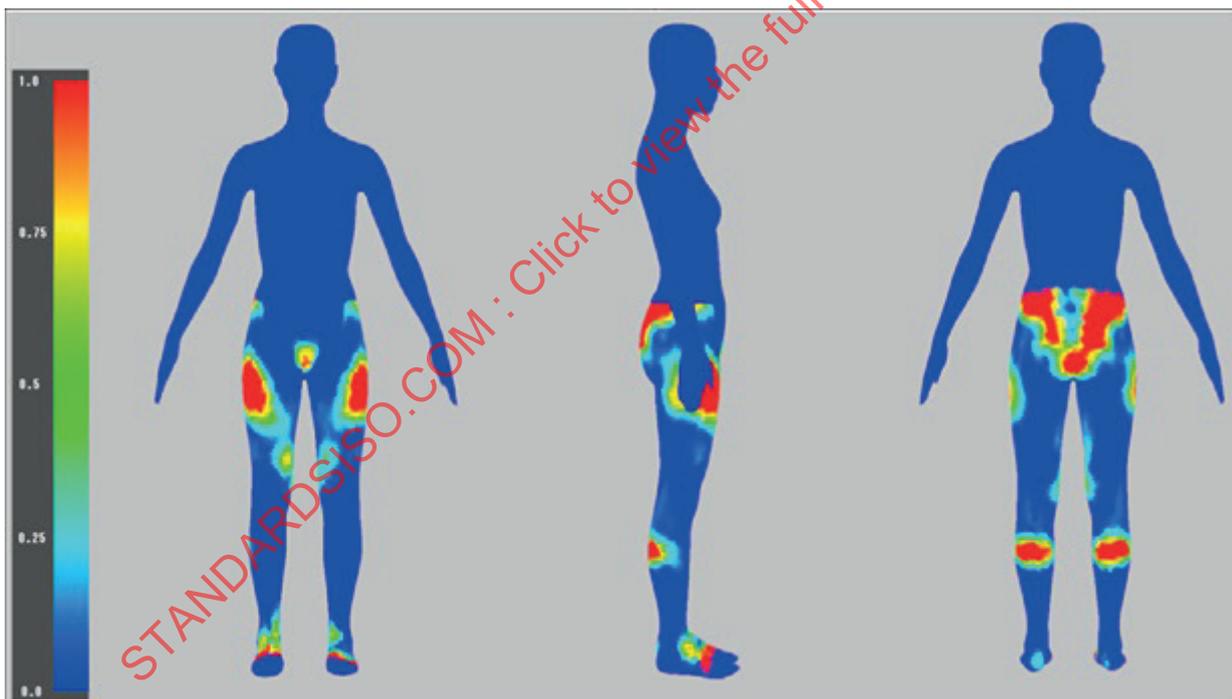


b) Virtual clone or virtual twin, lower body garment (gf/cm²)

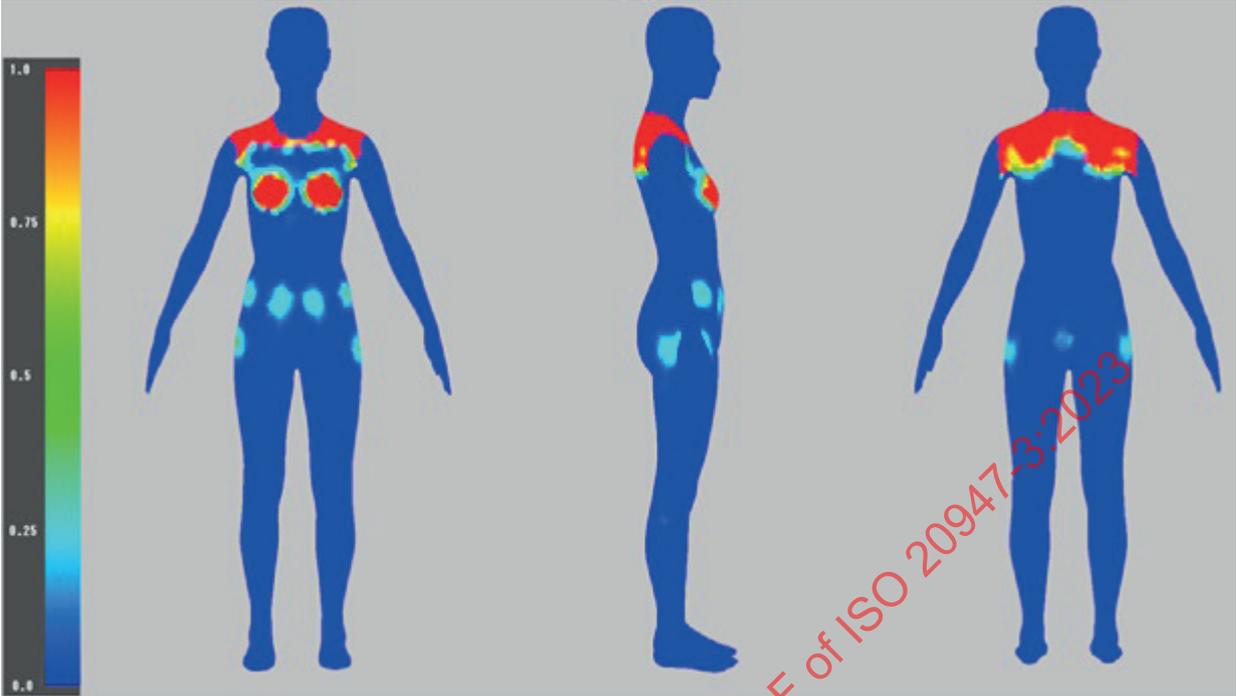


c) Virtual clone or virtual twin, whole body garment (gf/cm^2)

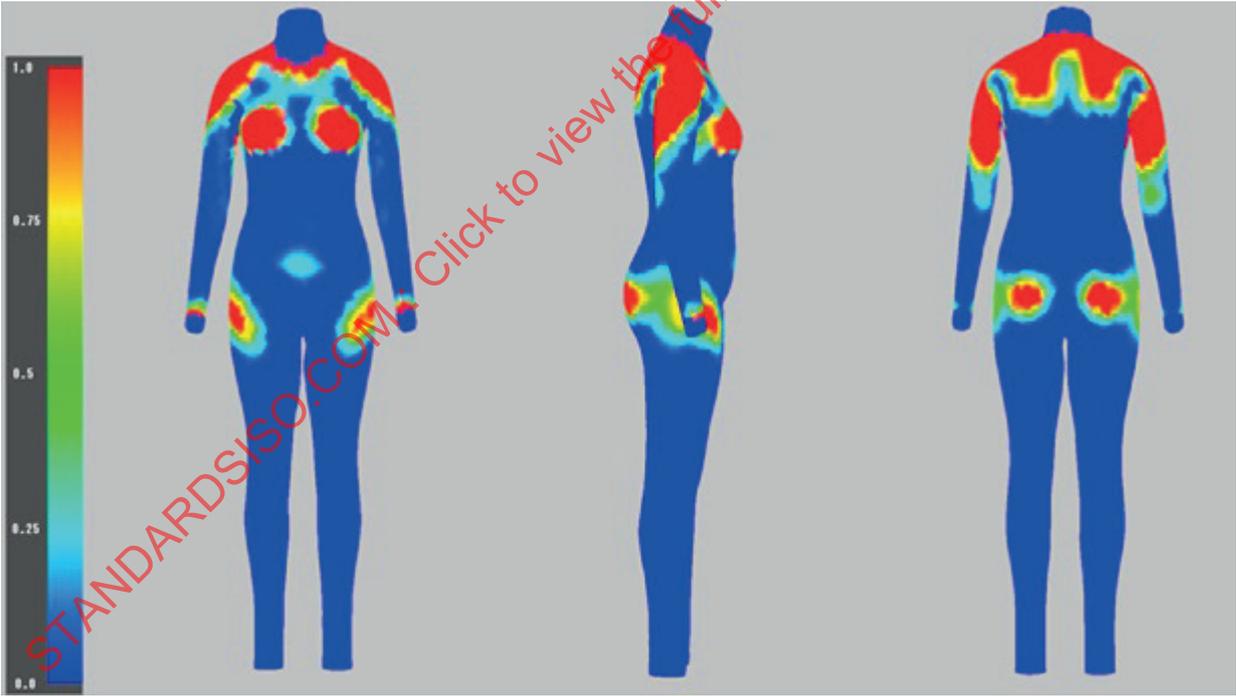

d) Virtual fit mannequin, upper body garment (gf/cm^2)

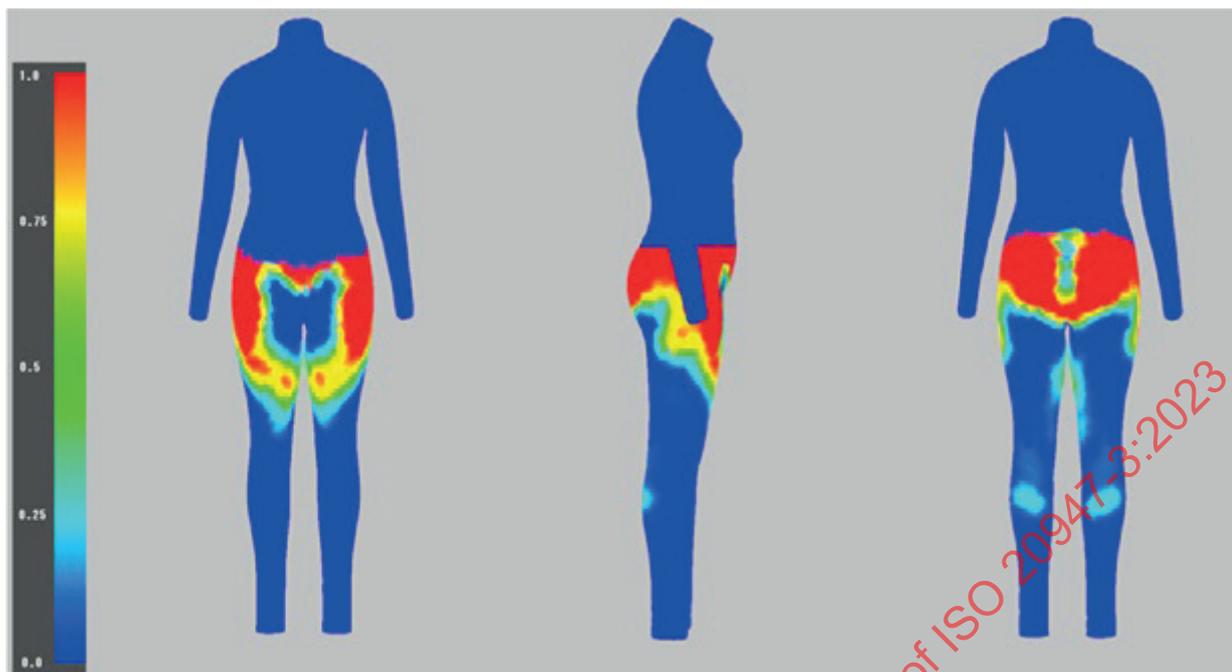

e) Virtual fit mannequin, lower body garment (gf/cm²)

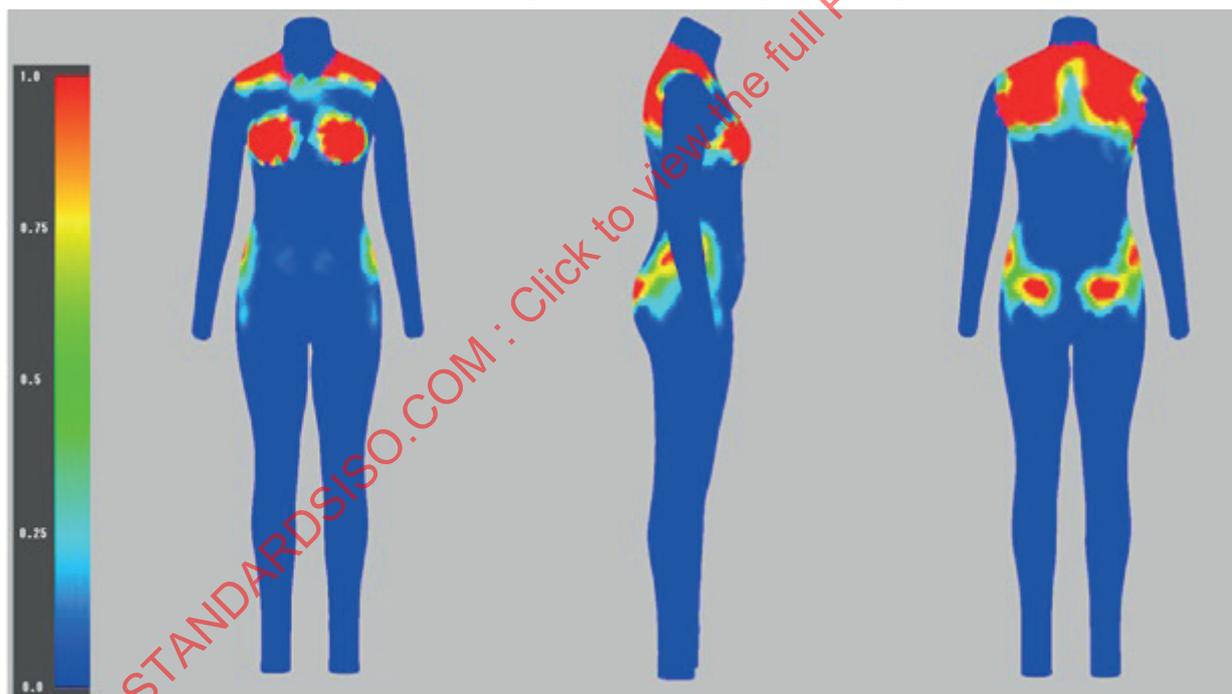


f) Virtual fit mannequin, whole body garment (gf/cm²)


Figure 8 — Example of the Garment pressure expression

4.6 Grain display function


This function is used to express grain on the virtual garment when virtual clothing simulation is conducted. See [Figure 9](#).

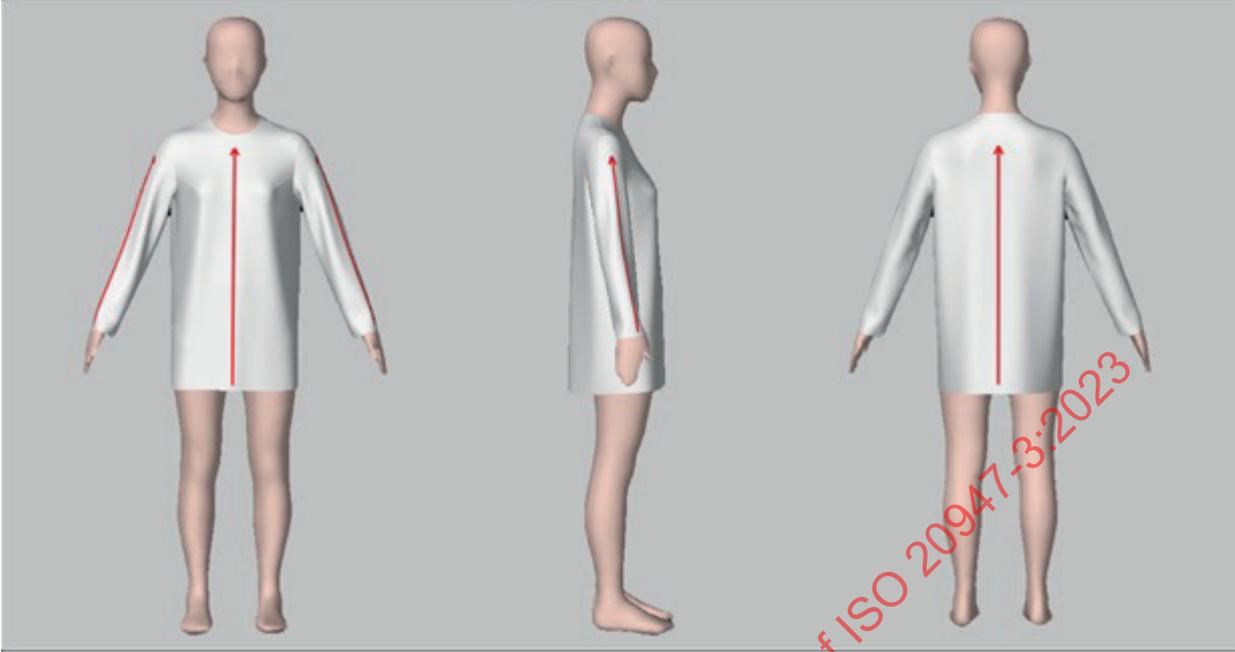


a) Virtual clone or virtual twin, upper body garment

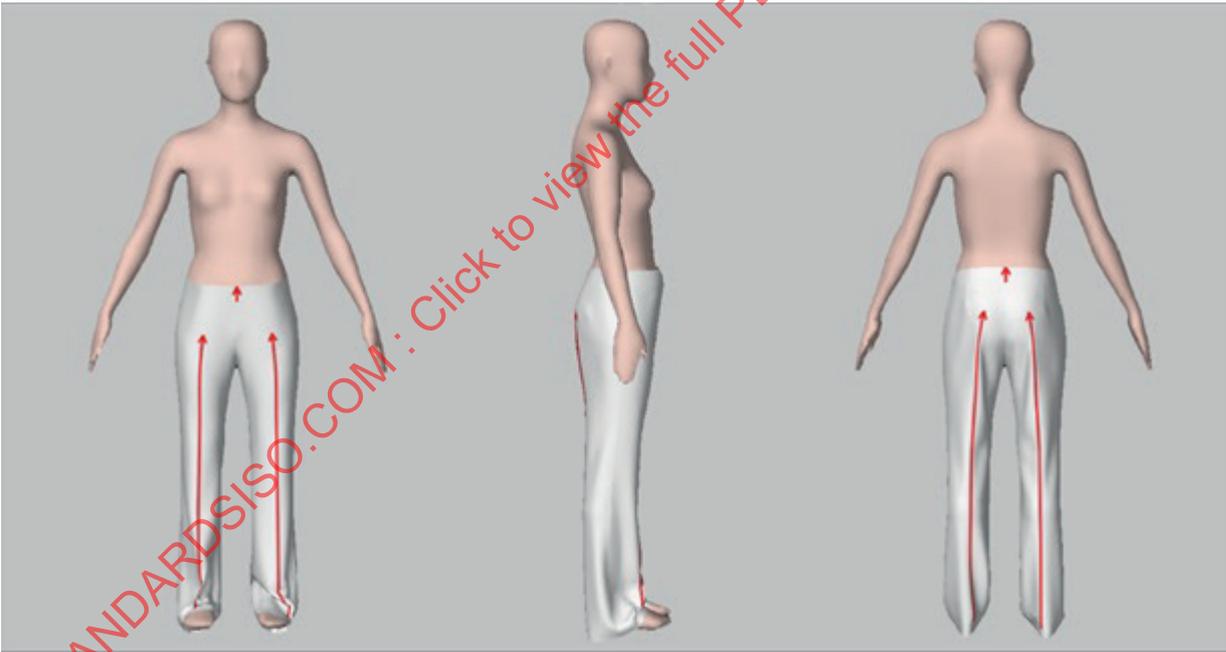


b) Virtual clone or virtual twin, lower body garment

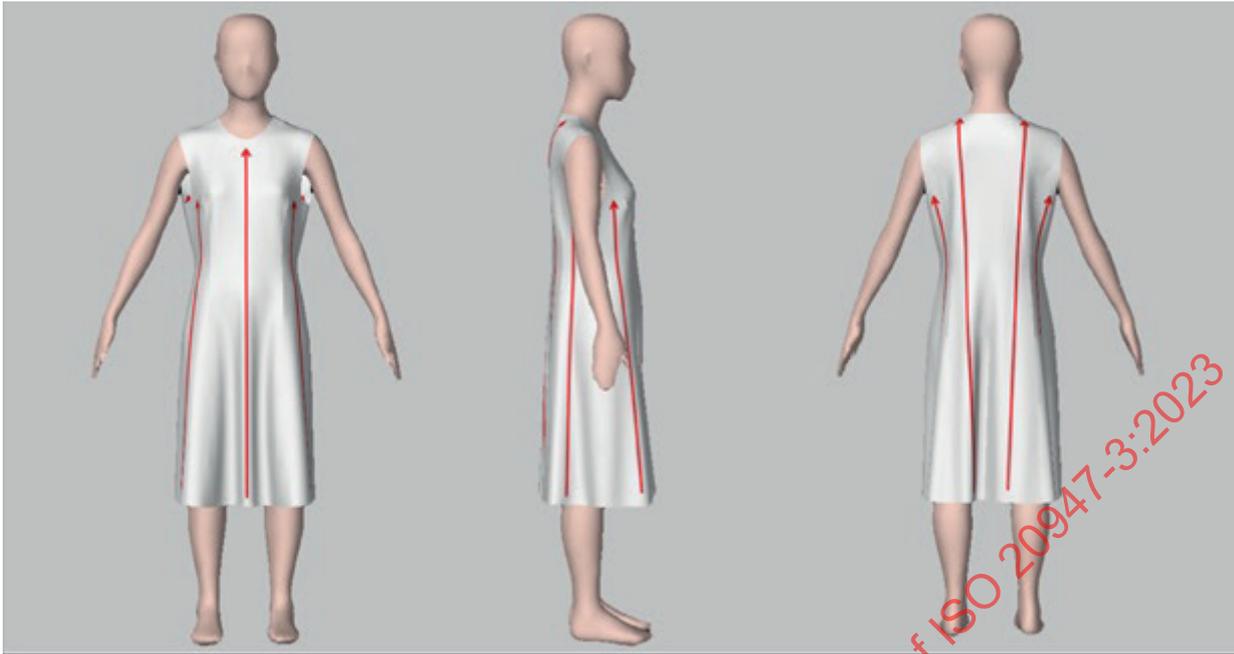


c) Virtual clone or virtual twin, whole body garment

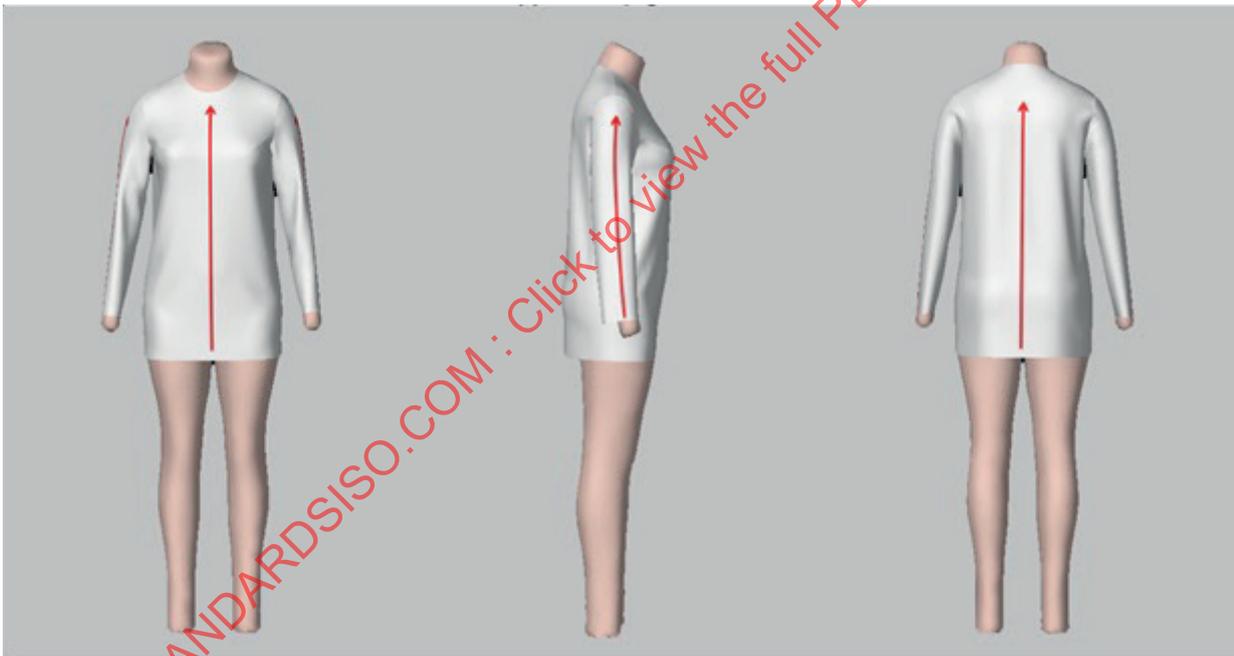

d) Virtual fit mannequin, upper body garment

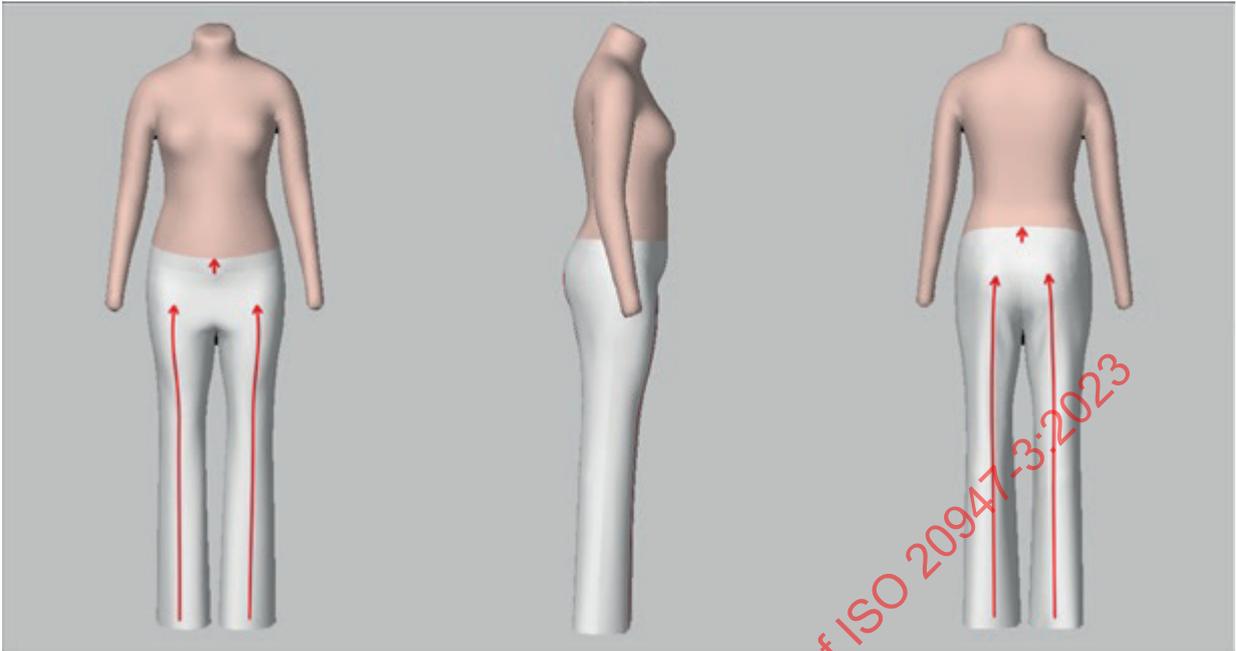

e) Virtual fit mannequin, lower body garment

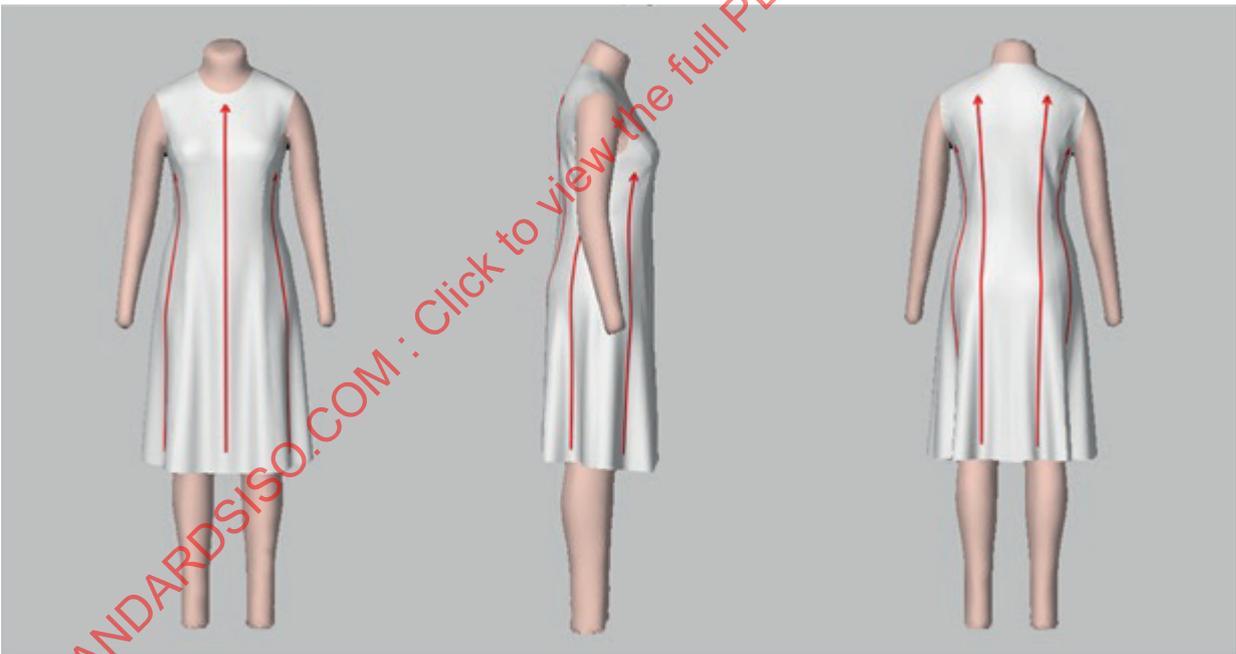

f) Virtual fit mannequin, whole body garment


Figure 9 — Example of the grain expression

4.7 Display function for projected cross-sectional garment view


4.7.1 General

This function is used to show the silhouette of the virtual garment and the virtual clone or the virtual twin or the virtual fit mannequin (fit form) model from the top or front or side or back. See [Figures 10](#) to [12](#).


4.7.2 Top

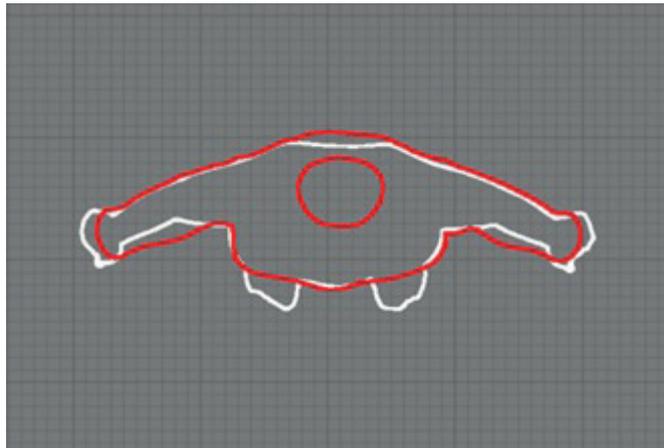

a) Virtual clone or virtual twin, upper body garment

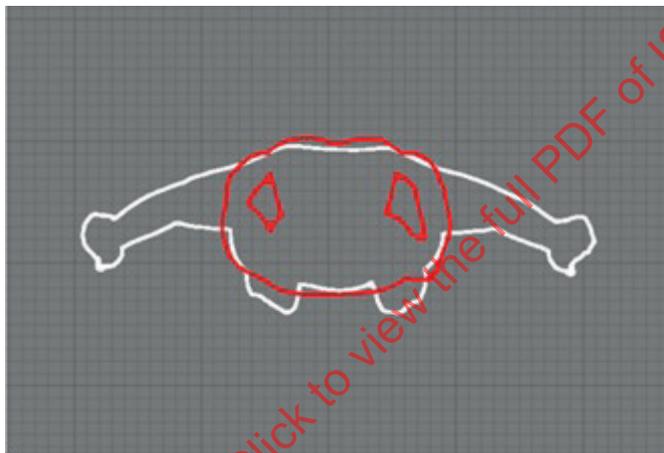


b) Virtual clone or virtual twin, lower body garment

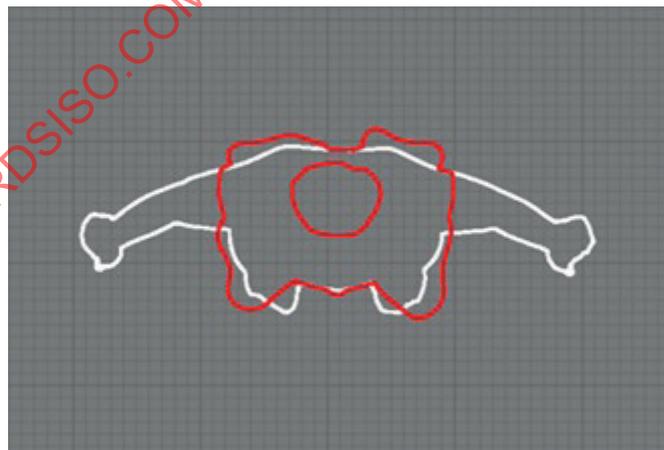


c) Virtual clone or virtual twin, whole body garment


STANDARDSISO.COM · Click to view the full PDF of ISO 20947-3:2023

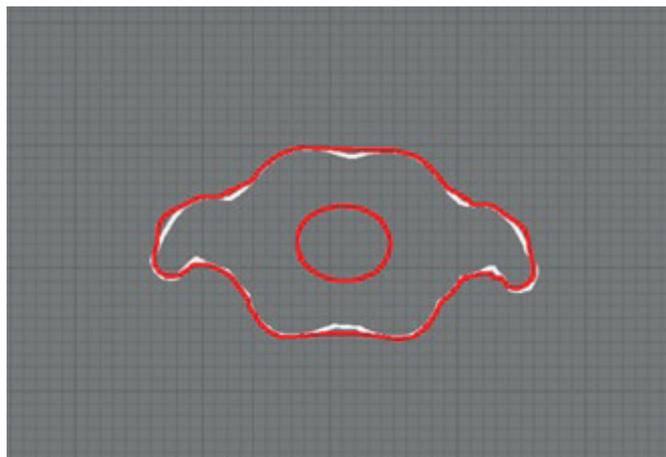

d) Virtual fit mannequin, upper body garment

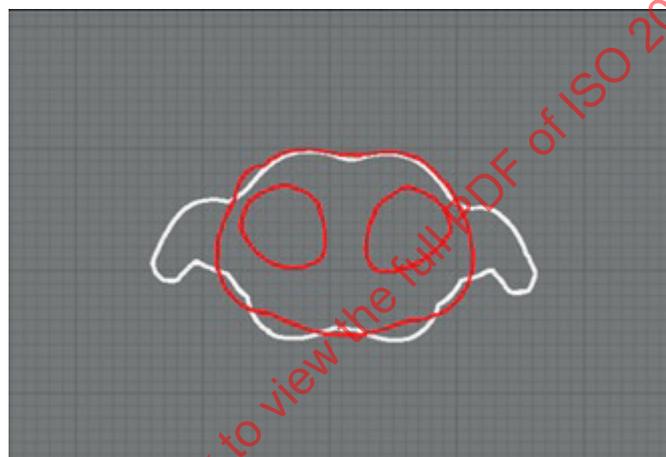


e) Virtual fit mannequin, lower body garment

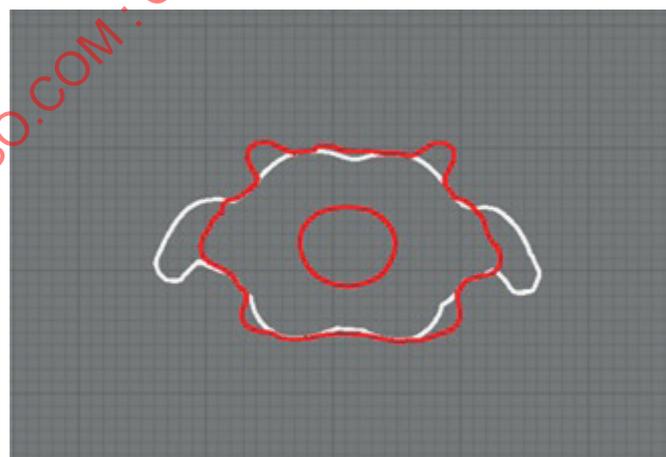


f) Virtual fit mannequin, whole body garment

Figure 10 — Example of the projected cross-sectional garment view (top)

4.7.3 Front

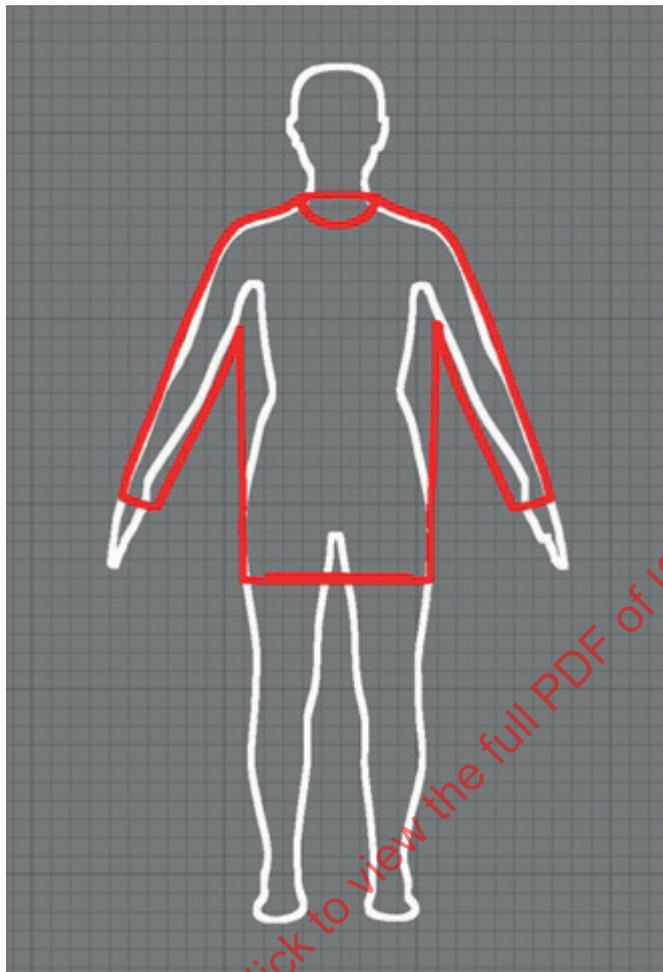


a) Virtual clone or virtual twin, upper body garment

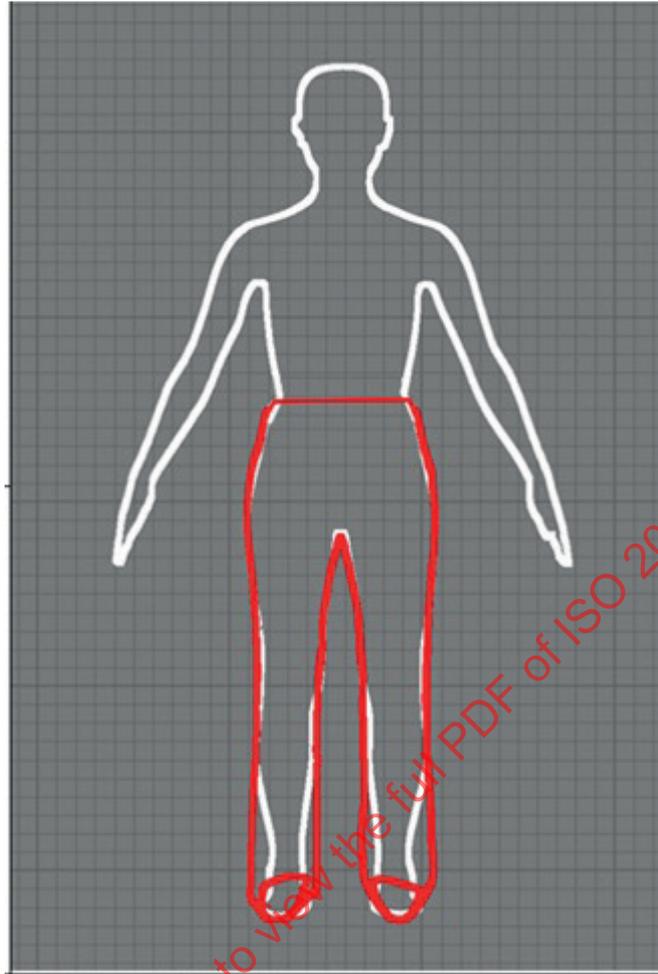


b) Virtual clone or virtual twin, lower body garment

STANDARDSISO.COM : Click to view the full PDF of ISO 20947-3:2023

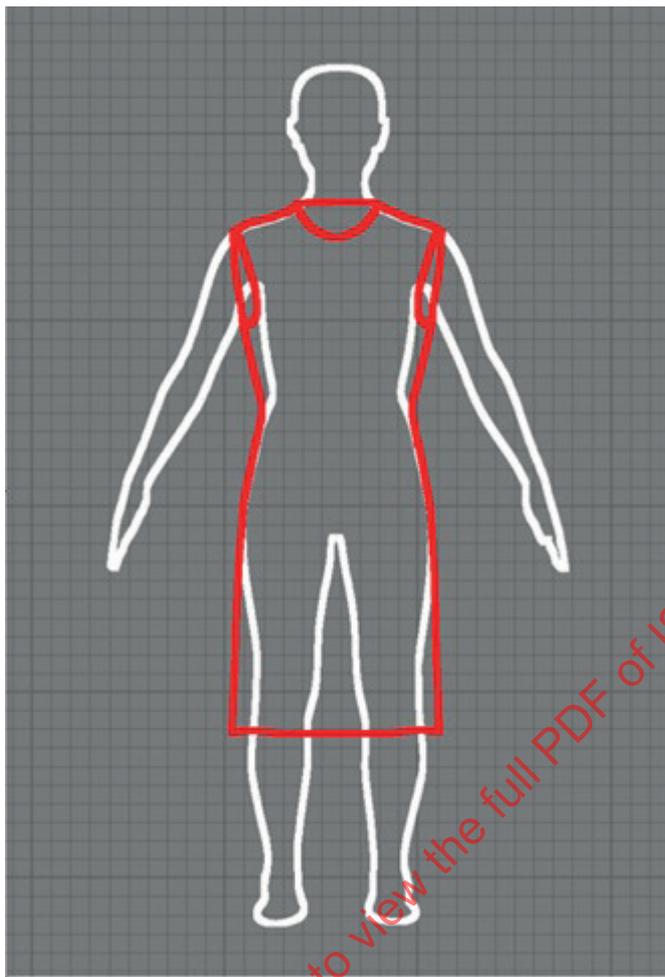


c) Virtual clone or virtual twin, whole body garment

STANDARDSISO.COM : Click to view the full PDF of ISO 20947-3:2023

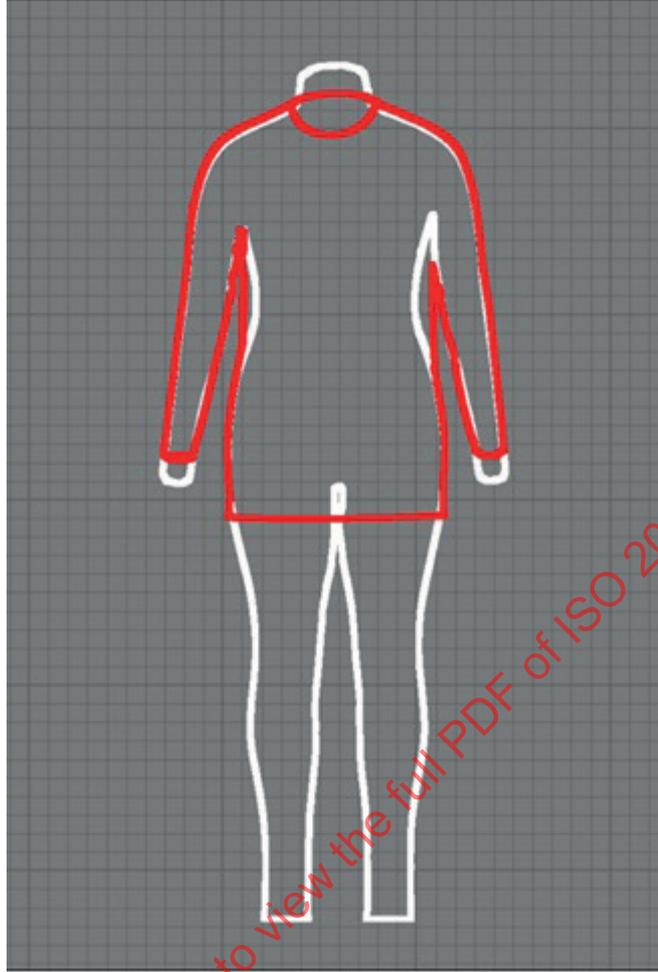

d) Virtual fit mannequin, upper body garment

STANDARDSISO.COM : Click to view the full PDF of ISO 20947-3:2023

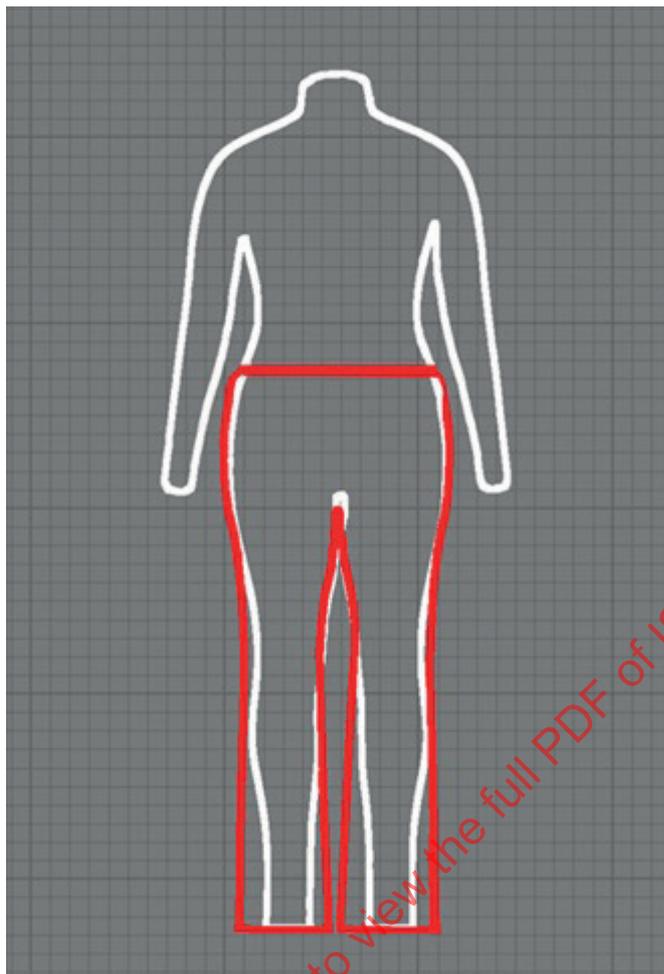

e) Virtual fit mannequin, lower body garment

STANDARDSISO.COM : Click to view the full PDF of ISO 20947-3:2023