

---

---

**Stationary training equipment —**

Part 1:

**General safety requirements and test  
methods**

*Équipement d'entraînement fixe —*

*Partie 1: Exigences générales de sécurité et méthodes d'essai*

STANDARDSISO.COM : Click to view the full PDF of ISO 20957-1:2005



**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 20957-1:2005

© ISO 2005

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

Page

Foreword.....	iv
Introduction .....	v
1 Scope .....	1
2 Normative references .....	1
3 Terms and definitions.....	2
4 Classification.....	3
4.1 General.....	3
4.2 Types.....	3
4.3 Accuracy classes.....	3
4.4 Usage classes .....	3
5 Safety requirements .....	4
5.1 Stability of free-standing equipment .....	4
5.2 External construction .....	4
5.3 Equipment access and escape.....	5
5.4 Adjustment and locking mechanisms .....	5
5.5 Ropes, belts and chains.....	5
5.6 Pull-in points .....	6
5.7 Gripping positions .....	7
5.8 Electrical safety.....	7
6 Test methods.....	7
6.1 General.....	7
6.2 Test conditions .....	7
6.3 Stability test.....	8
6.4 Determination of breaking load of ropes, belts and chains .....	8
6.5 Testing of flywheels.....	8
6.6 Determination of the removing force of applied handgrips .....	9
6.7 Testing of access/escape .....	9
6.8 Testing of endurance load .....	9
6.9 Test report .....	9
7 Care and maintenance.....	10
8 Assembly instructions .....	10
9 General instructions for use.....	10
10 Marking .....	11
Bibliography .....	12

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 20957-1 was prepared by Technical Committee ISO/TC 83, *Sports and recreational equipment*.

ISO 20957 consists of the following parts, under the general title *Stationary training equipment*:

- *Part 1: General safety requirements and test methods*
- *Part 2: Strength training equipment, additional specific safety requirements and test methods*
- *Part 4: Strength training benches, additional specific safety requirements and test methods*
- *Part 5: Pedal crank training equipment, additional specific safety requirements and test methods*
- *Part 6: Treadmills, additional specific safety requirements and test methods*
- *Part 7: Rowing machines, additional specific safety requirements and test methods*
- *Part 8: Steppers, stairclimbers and climbers — Additional specific safety requirements and test methods*
- *Part 9: Elliptical trainers, additional specific safety requirements and test methods*

## Introduction

This part of ISO 20957 specifies safety requirements that are generally applicable to stationary training equipment. For specific types of equipment these requirements are supplemented or modified by the requirements of ISO 20957-2, ISO 20957-4, ISO 20957-5, ISO 20957-6, ISO 20957-7, ISO 20957-8 and ISO 20957-9.

Where relevant additional parts exist, this part of ISO 20957 should not be used alone. Special care is required in applying this part alone to equipment for which no specific standard has yet been published.

If the user of the equipment has special needs (medical rehabilitation, disability) the owner (the person with legal responsibility) is required to conduct a specific risk assessment to determine safe use and if necessary to insure trained staff are available to supervise to activity.

STANDARDSISO.COM : Click to view the full PDF of ISO 20957-1:2005



# Stationary training equipment —

## Part 1: General safety requirements and test methods

### 1 Scope

This part of ISO 20957 specifies general safety requirements for stationary training equipment during its use, unless modified in other parts of ISO 20957.

It also specifies a classification system (see Clause 4).

This part of ISO 20957 is applicable to all stationary training equipment as defined in 3.1. This includes equipment for use in training areas of organizations such as sport associations, educational establishments, hotels, sport halls, clubs, rehabilitation centres and studios (classes S and I) where access and control are specifically regulated by the owner (person who has the legal responsibility), equipment for domestic use (class H) and other types of equipment including motor driven equipment as defined in 3.1.

The specific requirements of another part of ISO 20957 take priority over the corresponding requirements of this part of ISO 20957.

This part of ISO 20957 does not apply to stationary training equipment intended for use by children.

NOTE 1 In the event that the stationary training equipment is intended for medical purposes, attention is drawn to the requirements of Council Directive of 14 June 1993 on the approximation of the laws of the Member States relating to medical devices 93/42/EEC in addition to the requirements of this part of ISO 20957.

NOTE 2 In the event that the stationary training equipment is designed to be accessible to people with disability, attention is drawn to any relevant national guidelines (see bibliography).

### 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 6508-1, *Metallic materials — Rockwell hardness test — Part 1: Test method (scales A, B, C, D, E, F, G, H, K, N, T)*

ISO 8793, *Steel wire ropes — Ferrule-secured eye terminations*

IEC 60335-1, *Household and similar electrical appliances — Safety — Part 1: General requirements*

IEC 60601-1, *Medical electrical equipment — Part 1: General requirements for safety*

ISO 12100-1, *Safety of machinery — Basic concepts, general principles for design — Part 1: Basic terminology, methodology*

### 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

**3.1 stationary training equipment**  
(hereinafter referred to as **training equipment**)  
equipment that is not moved as a unit during use and which either stands on the floor or is attached to a wall, ceiling or other fixed structure

NOTE Training equipment can be used for example for the following:

- a) physical culture, body building or body styling;
- b) health fitness training;
- c) physical education;
- d) training specific to competition and related sports activities;
- e) preventive treatment and rehabilitation.

**3.2 training area**  
area in which the user and equipment can move when the equipment is used

NOTE The training area can be utilized to deny third party access to dangerous parts of the equipment.

**3.3 accessible hand and foot area**  
(hereinafter referred to as **accessible area**)  
area accessible to user or to third parties when the equipment is in normal use, during setting up, grasping, or adjusting the equipment or the position of the body for exercise

**3.4 reverse force**  
yielding force (eccentric force) when, for example, lowering load

**3.5 range of movement**  
space in which the user or part of the user is moving according to the instructions given in the user's manual

**3.6 dynamic direction**  
direction in which the force is applied during a normal exercise as described in the user's manual

**3.7 bodymass**  
100 kg or the maximum specified user weight as described in the user's manual, whichever is greater

**3.8 intrinsic loading**  
loading due to the user's body mass

**3.9 extrinsic loading**  
loads additional to the user's body mass

**3.10****maximum specified load**

maximum load specified by the manufacturer

**3.11****ergometer**

any piece of training equipment that measures the input of power in Watts with a specific accuracy as defined in the applicable specific part of the standard

NOTE This term can only be used for training equipment, which fulfills this condition.

**3.12****speed-dependent training equipment**

training equipment where the braking torque cannot be adjusted and is proportional to the pedal speed, e.g. a fan driven bike

**3.13****speed-independent training equipment**

training equipment where the braking torque can be adjusted by other means than speed

**3.14****power driven training equipment**

training equipment which is driven by external power (e.g. electric motors, pneumatic pistons)

**4 Classification****4.1 General**

Equipment shall be classified in accordance with accuracy and usage class as described in 4.2 to 4.4.

If the intended use of any equipment is for more classes it shall fulfill the requirements of each intended class.

**4.2 Types**

The type numbers used in the specific parts are taken from the part numbers.

NOTE For example, Type 2: strength training equipment as defined in ISO 20957-2.

**4.3 Accuracy classes**

**4.3.1** Class A: high accuracy.

**4.3.2** Class B: medium accuracy.

**4.3.3** Class C: minimum accuracy.

NOTE Accuracy classes are shown in the additional specific parts of ISO 20957.

**4.4 Usage classes**

**4.4.1** Class S (**S**tudio): professional and/or commercial use.

Such training equipment is intended for use in training areas of organizations such as sport associations, educational establishments, hotels, clubs and studios, where access and control is specifically regulated by the owner (person who has the legal responsibility).

**4.4.2** Class H (**H**ome): domestic use.

**4.4.3** Class I: professional and/or commercial use provided for inclusive use for people with special needs (e.g. visual, hearing, physical or learning disabilities).

Such equipment shall also be in compliance with class S requirements.

Such training equipment is intended for use in training areas of organizations such as sport associations, educational establishments, hotels, clubs, rehabilitation centres and studios, where access and control is specifically regulated by the owner (person who has the legal responsibility).

## 5 Safety requirements

NOTE Concerning inflammability there may be national regulations with which the products should comply.

### 5.1 Stability of free-standing equipment

When tested in accordance with 6.3, the training equipment shall not fall over.

### 5.2 External construction

#### 5.2.1 Edges

All edges and corners of surfaces supporting bodies shall have a radius  $r > 2,5$  mm.

All other edges of components which are accessible to the user or to third parties shall be free of burrs, and rounded or protected in some other way.

Test in accordance with 6.1.1 and 6.1.3.

#### 5.2.2 Tube ends

When tested in accordance with 6.1.2, accessible tube ends shall be closed off either by parts of the equipment or by plugs.

The plugs shall remain in position at the end of the endurance load test, as prescribed in the relevant parts of the applicable specific standard.

#### 5.2.3 Squeeze, shear, rotating and reciprocating points within the accessible area

For accessible areas up to a height of 1 800 mm, when tested in accordance with 6.1.1 and 6.1.2, the distance between movable parts and adjacent movable or rigid parts shall be not less than 60 mm except as follows:

- a) if the fingers only are put at risk the distance shall be not less than 25 mm;
- b) if the distance between moving part and rigid part does not change during movement, the distance shall be not more than 9,5 mm;
- c) if appropriate, stops and devices are necessary for safety reasons in the training area;
- d) if uncontrolled access by third parties is prevented by the user's body position and where the user is able to immediately stop the movement.

NOTE This specification is designed to protect the hand and fingers from injury. Injury to other body parts is considered unlikely.

### 5.2.4 Weights

The range of motion of all weights attached to the training equipment shall be limited to that required to perform the exercise. Test in accordance with 6.1.2 and 6.1.4.

NOTE 1 This may be achieved by appropriate design.

NOTE 2 An example of an undesirable characteristic is uncontrolled pendulum swing.

Stacked weights shall move freely and return to the resting point except when displaced intentionally.

### 5.3 Equipment access and escape

If the user cannot (after adjusting the equipment according to the manufacturer's instructions) attain the loaded starting position for the equipment then the equipment shall be provided with a means of assistance, e.g. pedal or lever to adjust the start/finish position of the exercise.

Testing shall be in accordance with 6.7.

### 5.4 Adjustment and locking mechanisms

When tested in accordance with 6.1.2 and 6.1.4, adjustment facilities on the training equipment shall function securely, be conspicuous and safely accessible to the user. The possibility of inadvertent alteration shall be eliminated.

Adjustment components such as knobs and levers shall not interfere with the user's range of movement.

The proper function of any locking mechanism shall be clearly self-evident.

Weight selection pins shall be fitted with a retention device to prevent inadvertent alteration or movement during the exercise.

### 5.5 Ropes, belts and chains

#### 5.5.1 General

Ropes, belts, chains and attachment devices shall have a safety factor against breakage of  $6 \times$  the maximum possible tension that can be developed. The diameter of the pulleys shall be in accordance with the applicable requirements of the rope, belt or chain manufacturers.

NOTE 1 Attachment devices are snap links, shackles, carabiners, clamps or similar (excludes e.g. handgrips).

When the tension developed is lower than the limit value specified in this part of ISO 20957, the equipment shall be tested at that limit.

When tested in accordance with 6.4, the ropes shall not break and shall be capable of normal functioning.

NOTE 2 Normal functioning means no disconnection and no obvious damage.

#### 5.5.2 Wire ropes and pulleys

5.5.2.1 Normal wire ropes shall be made of galvanized or corrosion-resistant wires. Test shall be in accordance with 6.1.5.

The rope nominal diameter,  $d$ , shall be related to the groove radius,  $r$ , of the pulley as follows; the groove radius,  $r$ , shall lie within the range:

$$\frac{d}{2} + 5\% \text{ to } \frac{d}{2} + 15\%$$

with  $\frac{d}{2} + 10\%$  as the optimum value.

Testing shall be in accordance with 6.1.1.

For special wire ropes, see 5.5.2.2.

**5.5.2.2** The size and shape of the pulley shall be in accordance with the applicable requirements of the rope, belt or chain manufacturers for the diameter and the groove. The specified endurance test of 100 000 cycles for class S and 12 000 cycles for class H as given in 6.8 shall be fulfilled.

**5.5.2.3** Ferrules of wrought aluminium alloys shall be made in accordance with ISO 8793.

The rope ends shall be clamped flush with the clamping edge  $\left( \begin{smallmatrix} +2 \\ 0 \end{smallmatrix} \right)$  mm.

On inspection the rope ends shall be clearly visible.

Pressed connections shall not be subjected to bending.

Wire rope grips shall only be used behind casings or similar protective devices.

Testing shall be in accordance with 6.1.2.

### 5.5.3 Rope and belt guides

The possibility of a rope or a belt of becoming laterally disengaged or detached shall be prevented by rope or belt guides.

Testing shall be in accordance with 6.1.2 and 6.1.4.

### 5.6 Pull-in points

Pull-in points of rope or belt drives up to 1 800 mm height shall be protected so that the user's hand, when extended, cannot be caught.

NOTE This can be achieved by ensuring that the angle between the rope and the guard is not less than 50°.

Rope and belt drives of a surface pressure  $\leq 90$  N/cm<sup>2</sup> are excluded from this requirement.

Testing shall be in accordance with 6.1.6.

Pull-in points for chains, gears and sprockets shall be protected in accordance with ISO 12100-1.

For flywheels the test finger (see Figure 1) shall not become trapped when tested in accordance with 6.5.

## 5.7 Gripping positions

### 5.7.1 Integral handgrips

Gripping positions shall be clearly marked and textured to prevent slipping. Testing shall be in accordance with 6.1.2.

### 5.7.2 Applied handgrips

When tested in accordance with 6.6, applied handgrips shall not be removed.

### 5.7.3 Rotating handgrips

Rotating handgrips shall be secured with a mechanical locking device and shall have textured surface to prevent hand slippage.

Testing shall be in accordance with 6.1.2 and 6.1.4.

## 5.8 Electrical safety

Concerning electrical and electronic aspects of training equipment, IEC 60335-1 and, for medical devices, IEC 60601-1 shall be observed.

## 6 Test methods

### 6.1 General

#### 6.1.1 Dimensional check

#### 6.1.2 Visual examination

#### 6.1.3 Tactile examination

#### 6.1.4 Performance test

#### 6.1.5 Manufacturer's certificate

#### 6.1.6 Testing of pull-in points

Apparatus: test finger in accordance with Figure 1.

Approach the pull-in point with the test finger probe to determine whether the test finger can become trapped. Introduce the test finger to the pull in point keeping the test finger parallel to the axis of the rotating part.

### 6.2 Test conditions

All testing shall be performed under the following conditions:

- a) temperature  $23\text{ °C} \pm 5\text{ °C}$ ;
- b) relative humidity of 55 % to 75 %.

### 6.3 Stability test

Carry out the test, in which all exercises are carried out in the most onerous conditions of use (maximum range of movement and maximum load), with a secured test person of  $(100 \pm 5)$  kg

- at  $10^\circ$  in the dynamic direction and
- at  $5^\circ$  in all other directions.

### 6.4 Determination of breaking load of ropes, belts and chains

Measure the rope, belt or chain tension while applying the maximum specified load. Then perform a tensile test, increasing the load linearly up to  $6 \times$  the tension measured previously.


### 6.5 Testing of flywheels

Insert the test finger (see Figure 1) from all sides into any possible entrapment point between the drive and transmission elements, while the equipment is in normal operation.

Do not introduce the test finger beyond the edge of the protective covering.

Determine whether the test finger becomes trapped.

Dimensions in millimetres

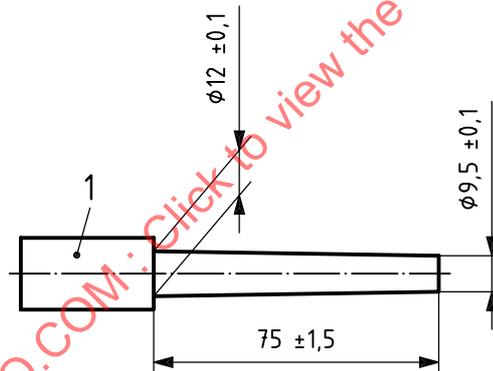

Ra value  $\leq 0,40 \mu\text{m}$

Surface hardness  $\geq$  HRC 40, measured in accordance with EN ISO 6508-1.

**Key**

- 1 handle

Figure 1 — Test finger

## 6.6 Determination of the removing force of applied handgrips

Apply a force of 70 N carefully to the handgrip by means of an appropriate pulling device.

## 6.7 Testing of access/escape

### 6.7.1 Principles

A visual and performance test shall be carried out to determine whether or not an assisted means of access/escape is required and to ensure that the machine functions properly according to the instructions in the owner's manual.

### 6.7.2 Procedure

Adjust the equipment for the test person's size according to the manufacturer's instructions. The test person shall enter the equipment and attempt to get into the exercise start position as described in the operation instructions provided by the manufacturer. The test person shall be able to get into and back out of the starting position with relative ease. If the lifting or assistance mechanism cannot be reached by the test person or if the test person cannot get into the starting position easily then further adjustment of the equipment may be required. If this is not the case (the equipment is properly adjusted per the operation instructions for the given body size of the test person), then an assist means that moves the lifting or assistance mechanism into the direction of lifting stroke shall be provided.

If an assist means is provided, then operate the mechanism and insure that it performs as described in the operation instructions. Upon completion of the exercise and return of the lifting or assistance mechanism to the rest position, actuation of the assist means shall stop the lifting or assistance mechanism prior to reaching the unloaded rest position thereby allowing the user to exit from the loaded use position.

## 6.8 Testing of endurance load

Carry out the test as close as possible to normal exercise frequency and free of shocks for:

- a) class H 12 000 cycles over 80 % of the possible range of movement;
- b) class S 100 000 cycles over 80 % of the possible range of movement:
  - 1) with maximum load;
  - 2) in direction of load in accordance with the exercise instructions fixed by a 50 percentile man;
  - 3) with a frequency of movement in accordance to a pre-test of 3 persons with personal training load.

## 6.9 Test report

The test report shall include at least the following information:

- a) name and address of testing laboratory and location where the test was carried out when different from the address of the test laboratory;
- b) unique identification of report (such as serial number) and of each page, and total number of pages of the report;
- c) name and address of client;
- d) description and identification of the test item;
- e) date of receipt of test item and date(s) of performance of test;

- f) identification of the test specification or description of the method or procedure;
- g) description of sampling procedure, where relevant;
- h) any deviations, additions or exclusions from the test specification, and any other information relevant to a specific test;
- i) measurements, examinations and derived results, supported by tables, graphs, sketches and photographs as appropriate, and any failures identified;
- j) a statement on measurement uncertainty (where relevant);
- k) a signature and title or an equivalent marking of person(s) accepting technical responsibility for the test report and date of issue;
- l) a statement to the effect that the test results relate only to the items tested.

## **7 Care and maintenance**

Care and, if applicable, maintenance advice shall be provided with each piece of equipment. The advice shall include at least:

- a) a warning notice to the effect that the safety level of the equipment can be maintained only if it is examined regularly for damage and wear, e.g. ropes, pulleys, connection points;
- b) advice to replace defective components immediately and/or keep the equipment out of use until repair;
- c) special attention to components most susceptible to wear.

## **8 Assembly instructions**

If the training equipment requires assembly, a manual shall be supplied (in the national language), giving clear and accurate assembly instructions relating to the training equipment.

If the training equipment requires assembly, then a list of tools needed shall be provided.

If the training equipment requires assembly, then a comprehensive parts list shall be supplied, including identifying part numbers.

The manufacturer shall indicate the total weight and the total surface area (e.g. foot print) of machine and the recommended minimum values (forces) the wall fixings have to withstand. When training equipment is fixed, for example, to a wall, full assembly instructions shall be provided.

## **9 General instructions for use**

Each item of training equipment shall be accompanied by instructions for use for the owner, in the national language including at least the following information:

- a) a customer service address;
- b) indication of field of application;
- c) information on the correct use (normal use) of the equipment and its features with the emphasis on safety, including guidelines on the free space required for safe operation and the importance of keeping unsupervised children away from the equipment;
- d) exercise instructions with advice with regard to correct biomechanical positioning of the user on the training equipment;