
International Standard



2110

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

Data communication — 25-pin DTE/DCE interface connector and pin assignments

Téléinformatique — Affectation des broches et description du connecteur 25 broches à la jonction entre ETTD et ETCD

Second edition — 1980-07-01

Corrected and reprinted — 1981-12-15

STANDARDSISO.COM : Click to view the full PDF of ISO 2110:1980

UDC 681.327.8 : 621.316.541

Ref. No. ISO 2110-1980 (E)

Descriptors : data processing equipment, data processing, data transmission, electrical connections, connector pins, electric connectors, numbering, numerical designations, dimensions, describing, instructions.

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards institutes (ISO member bodies). The work of developing International Standards is carried out through ISO technical committees. Every member body interested in a subject for which a technical committee has been set up has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council.

International Standard ISO 2110 was developed by Technical Committee ISO/TC 97, *Computers and information processing*, and was circulated to the member bodies in February 1979.

It has been approved by the member of the following countries:

Australia	Germany, F. R.	Romania
Belgium	Hungary	South Africa, Rep. of
Canada	Italy	Spain
Czechoslovakia	Japan	Sweden
Denmark	Libyan Arab Jamahiriya	Switzerland
Egypt, Arab Rep. of	Mexico	United Kingdom
Finland	Netherlands	USA
France	Poland	

The member body of the following country expressed disapproval of the document on technical grounds :

USSR

This second edition cancels and replaces the first edition (i.e. ISO 2110-1972).

Data communication — 25-pin DTE/DCE interface connector and pin assignments

1 Scope and field of application

This International Standard specifies the 25-pin connector and the assignment of connector pin numbers at the interface between data terminal equipment (DTE) and data circuit-terminating equipment (DCE) or automatic calling equipment (ACE). It is applicable to voice band modems, public data network (PDN) facilities, telegraph signal converters, and automatic calling equipment where CCITT¹⁾ Recommendations V.24 and V.28 are applicable.

In the case of the PDN attachment through the X.20 interface, the functions of the interchange circuits are in accordance with CCITT Recommendation X.24.

In the case of the V.20 type outstation interface, the electrical characteristics are in accordance with CCITT Recommendation V.31.

2 References

ISO 4902, *Data communication — 37-pin and 9-pin DTE/DCE interface connectors and pin assignments.*

ISO 4903, *Data communication — 15-pin DTE/DCE interface connector and pin assignments.*

CCITT Recommendation S.16, *Automatic calling and/or answering on the telex network.*

CCITT Recommendation V.10 (or X.26), *Electrical characteristics for unbalanced double-current interchange circuits for general use with integrated circuit equipment in the field of data communications.*

CCITT Recommendation V.11 (or X.27), *Electrical characteristics for balanced double-current interchange circuits for general use with integrated circuit equipment in the field of data communication.*

CCITT Recommendation V.19, *Modems for parallel data transmission using telephone signalling frequencies.*

CCITT Recommendation V.20, *Parallel data transmission modems standardized for universal use in the general switched telephone network*

CCITT Recommendation V.21, *200-baud modem standardized for use in the general switched telephone network.*

CCITT Recommendation V.23, *600/1 200-baud modem standardized for use in the general switched telephone network.*

CCITT Recommendation V.24, *List of definitions for interchange circuits between data terminal equipment (DTE) and data circuit-terminating equipment (DCE).*

CCITT Recommendation V.25, *Automatic calling and/or answering equipment on the general switched telephone network, including disabling of echo suppressors on manually established calls.*

CCITT Recommendation V.26, *2 400 bits per second modem standardized for use on 4-wire leased telephone-type circuits.*

CCITT Recommendation V.26 bis, *2 400/1 200 bits per second modem standardized for use in the general switched telephone network.*

CCITT Recommendation V.27, *4 800 bits per second modem with manual equalizer standardized for use on leased telephone-type circuits.*

CCITT Recommendation V.27 bis, *4 800 bits per second modem with automatic equalizer standardized for use on leased telephone-type circuits.*

CCITT Recommendation V.27 ter, *4 800/2 400 bits per second modem standardized for use in the general switched telephone network.*

CCITT Recommendation V.28, *Electrical characteristics for unbalanced double-current interchange circuits.*

CCITT Recommendation V.29, *9 600 bits per second modem standardized for use on leased telephone-type circuits.*

CCITT Recommendation V.31, *Electrical characteristics for single-current interchange circuits controlled by contact closure.*

CCITT Recommendation X.20, *Interface between data terminal equipment (DTE) and data circuit-terminating equipment (DCE) for start-stop transmission services on public data networks (PDN).*

1) International Telegraph and Telephone Consultative Committee.

CCITT Recommendation X.20 bis, *V.21-compatible interface between data terminal equipment (DTE) and data circuit-terminating equipment (DCE) for start-stop transmission services on public data networks (PDN)*.

CCITT Recommendation X.21 bis, *Use on public data networks (PDN) of data terminal equipment (DTE) which are designed for interfacing to synchronous V-series modems*.

CCITT Recommendation X.24, *List of definitions for interchange circuits between data terminal equipment (DTE) and data circuit-terminating equipment (DCE) on public data networks (PDN)*.

3 Connector

A 25-pin connector shall be provided for the DTE/DCE interface. A separate 25-pin connector shall be provided for the automatic calling equipment interface if this facility is used.

Figure 1 illustrates the DTE interface connector which has 25 male contacts and a female shell. Figure 2 illustrates the

DCE interface connector which has 25 female contacts and a male shell. Contact numbering is specified in figures 1 and 2. Figures 3, 4 and 5 illustrate contact spacing and dimensions.

In view of the multiplicity of known arrangements currently in use for fastening these connectors together, no preferred version is documented herein. The user is advised to determine the method available in his area.

The specification for the connector in this International Standard is provided for mechanical compatibility only. It is also intended to be mechanically compatible with the detailed connector specification currently being developed by the IEC.

4 Assignment of pin numbers

The pin assignments are given in table 2.

The list of the interchange circuits is given in table 1. Their provision and use shall be in conformity with CCITT Recommendations, referred to in the heading of table 2.

STANDARDSISO.COM : Click to view the full PDF of ISO 2110:1980

Table 1 – List of interchange circuits

Circuit number	Description
102	Signal ground or common return
103	Transmitted data
104	Received data
105	Request to send
106	Ready for sending
107	Data set ready
108/1	Connect data set to line
108/2	Data terminal ready
109	Data channel received line signal detector
110	Data signal quality detector
111	Data signalling rate selector (DTE source)
113	Transmitter signal element timing (DTE source)
114	Transmitter signal element timing (DCE source)
115	Receiver signal element timing (DCE source)
116	Select standby
118	Transmitted backward channel data
119	Received backward channel data
120	Transmit backward channel line signal
121	Backward channel ready
122	Backward channel received line signal detector
124	Select frequency groups
125	Calling indicator
126	Select transmit frequency
129	Request to receive
130	Transmit backward tone
131	Received character timing
132	Return to non-data mode
140	Remote loopback for point to point circuits
141	Local loopback
142	Test indicator
191	Transmitted voice answer
192	Received voice answer
201	Signal ground or common return
202	Call request
203	Data line occupied
204	Distant station connected
205	Abandon call
206	Digit signal (2 ⁰)
207	Digit signal (2 ¹)
208	Digit signal (2 ²)
209	Digit signal (2 ³)
210	Present next digit
211	Digit present
213	Power indication
G	Signal ground or common return
T	Transmit
R	Receive

Table 2 — Assignment of pin numbers

Pin number	Interchange circuit numbers and remarks											
	Voice band modems				Public data networks			Telegraph		Automatic calling		
	Asynchronous A V.21	B V.23	Synchronous C V.26, V.26 bis V.27, V.27 bis V.27 ter, V.29	D V.19, V.20 Instation	Parallel E V.20 Outstation	F X.20 bis	G X.21 bis	H X.208	I Telex	J Other	K Telephone V.25	L Telex S.16
1	See note 1	See note 1	See note 1	See note 1	See note 1	See note 1	See note 1	See note 1	See note 1	See note 1	See note 1	See note 1
2	103	103	103	192-A	103	103	T	103	103	211	211	See note 1
3	104	104	104	A13)	104	104	R	104	104	205	205	205
4	105	105	105	A23)	F	105	F	N	N	202	202	202
5	106	106	106	A33)	106	106	F	106	106	210	210	210
6	107	107	107	A43)	107	107	F	107	107	213	213	213
7	102	102	102	131	102	102	G	102	102	201	201	201
8	109	109	109	109	109	109	F	109	109	F	F	F
9	N	N	N	C13)	N	N	N	N	N	N	N	N
10	N	N	N	C23)	N	N	N	N	N	N	N	N
11	126	N	N	C33)	F	N	N	N	N	F	F	F
12	F	122	122	C43)	F	F	N	F	F	F	F	F
13	F	121	121	B13)	F	F	N	F	F	204	204	204
14	F	118	118	B23)	F	F	N	F	F	206	206	206
15	F	See note 2	114	B33)	F	114	N	F	F	207	207	207
16	F	119	119	B43)	F	F	N	F	F	208	208	208
17	F	See note 2	115	191-A	F	115	N	F	F	209	209	209
18	141	141	141	191-B	N	N	F	132	F	F	F	F
19	F	120	120	130	F	F	F	F	F	F	F	F
20	108*	108*	108*	105	108*	108*	F	108/2	108/2	F	F	F
21	140	140	140	125	N	N	F	F	F	F	F	F
22	125	125	125	108*	125	125	F	125	125	203	203	203
23	N	111	111	107	N	N	F	N	N	N	N	N
24	N	N	113 ⁹⁾	102	N	F	F	N	N	N	N	N
25	142	142	142	124	N	142	F	F	F	F	F	F
Electrical characteristics	V.287)	V.287)	V.287)	V.286)	V.316)	V.28	V.28	V.28	V.28	V.28	V.28	V.28

Legend : N — Pin number permanently reserved for national use.
 F — Pin number reserved for future international standardization and should not be used for national use.
 * — CT 108/1 or CT 108/2.

NOTES

1 Pin 1 is assigned for connecting the shields between tandem sections of shielded interface cable. The shield may be connected either to protective ground or to signal ground at either the DTE or DCE or both in accordance with national regulations.

Signal ground may be further connected to protective ground in accordance with national safety regulations. Caution should be exercised to prevent establishment of ground loops carrying high currents.

2 Where signal element timing is provided in the DCE, pin 15 will be used for circuit 114, and pin 17 will be used for circuit 115.

3 Received data circuits 104 are designated A1 to A4, B1 to B4, and C1 to C4 corresponding to their relevant frequency.

4 Transmitted data circuits 103 are designated A1 to A3, B1 to B3, and C1 to C3 corresponding to their relevant frequency, and all use pin 13 as the common return according to V.31.

5 Pin 2 is reserved for national use. Where circuit 110 is provided in the DCE, it will use pin 2.

6 The electrical characteristics of circuits 191 and 192 are subject to specification within V.19 and V.20.

7 Alternative use of V.10 and V.11 electrical characteristics has been recognized by CCITT for V.21, V.23, V.26, V.26 bis, V.27, V.27 bis, V.27 ter, and V.29. The connectors and pin assignments associated with application of V.10 and V.11 to these interfaces are provided by ISO 4902.

8 The functions of the interchange circuits are in accordance with X.24. This column refers only to X.20 type DTE with V.28 electrical characteristics since it may not interconnect with an X.20/V.10 DCE.

9 In some countries pin 24 is allocated to another interchange circuit such as circuit 116 (select standby).

STANDARDISO.COM · Click to view the full PDF of ISO 2110:1980

Dimensions in millimetres


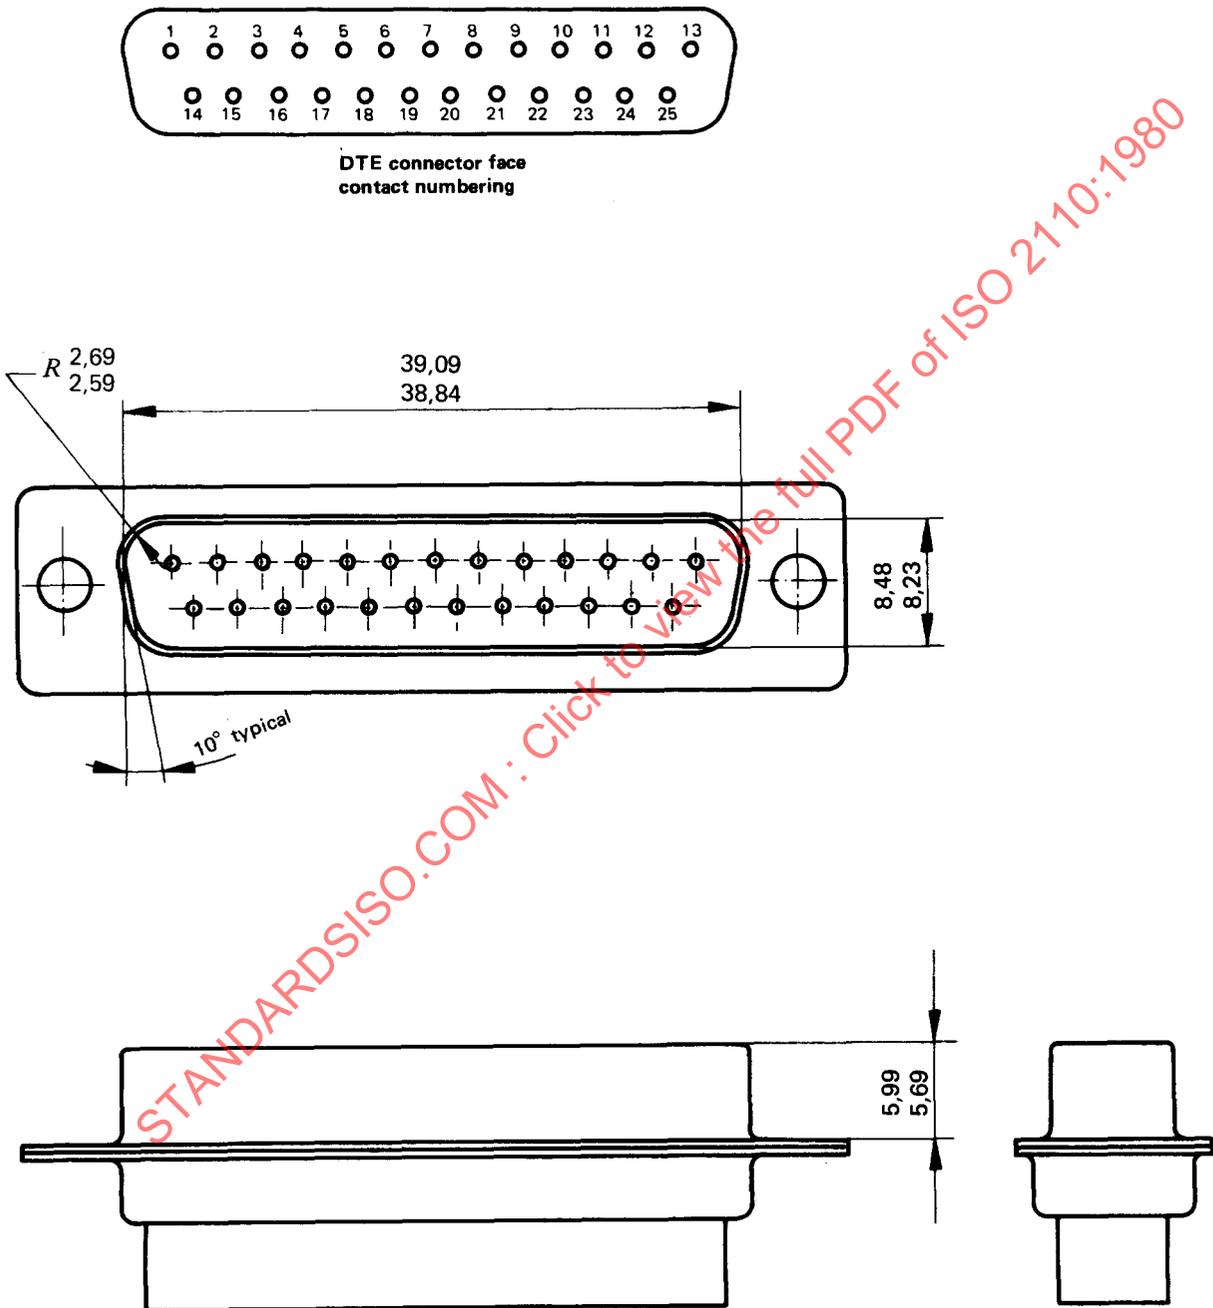


Figure 1 – DTE interface connector

Dimensions in millimetres

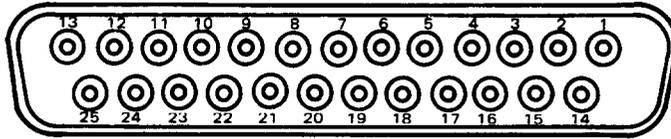

DCE connector face
contact numbering

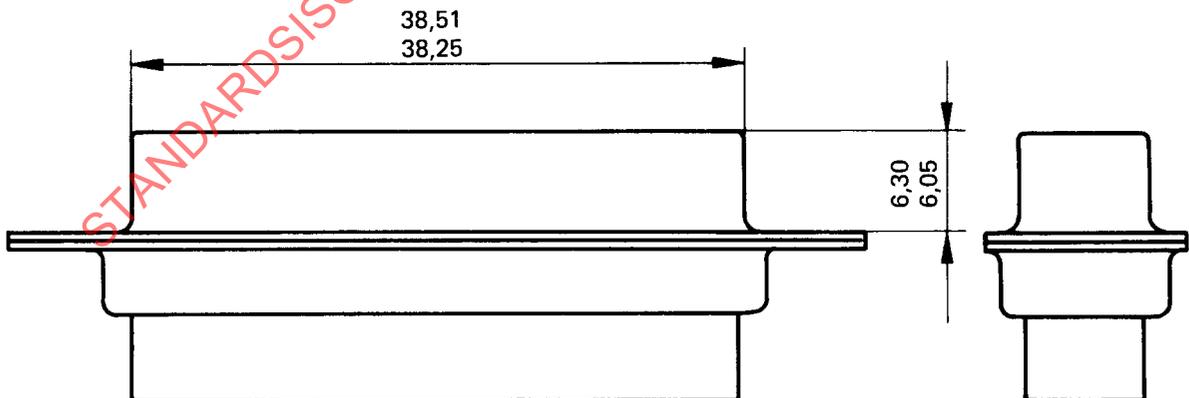
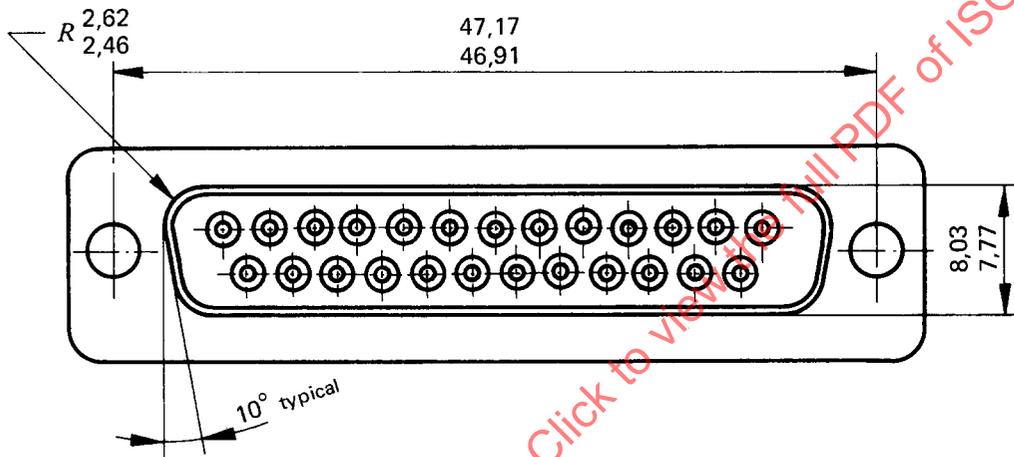


Figure 2 – DCE interface connector