
**Building construction machinery and
equipment — Concrete pumps —**

Part 1:
**Terminology and commercial
specifications**

*Machines et matériels pour la construction des bâtiments — Pompes
à béton —*

Partie 1: Terminologie et spécifications commerciales



STANDARDSISO.COM : Click to view the full PDF of ISO 21573-1:2014



COPYRIGHT PROTECTED DOCUMENT

© ISO 2014

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Classification of the concrete pumps	2
5 Commercial specifications	3
5.1 General characteristics.....	3
5.2 Applicable concrete.....	4
5.3 Drive.....	4
5.4 Dimensional characteristics.....	4
5.5 Conveying-pipe cleaning device.....	5
5.6 Chassis cleaning device.....	5
5.7 Distributing boom.....	5
5.8 Outrigger component.....	5
5.9 Hydraulic system.....	6
5.10 Truck chassis.....	6
5.11 Trailer chassis.....	6
5.12 Attachments and tools.....	7
Annex A (informative) Examples of concrete pump designs and their assemblies	8

STANDARDSISO.COM : Click to view the full PDF of ISO 21573-1:2014

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2. www.iso.org/directives

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received. www.iso.org/patents

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: Foreword - Supplementary information

The committee responsible for this document is Technical Committee ISO/TC 195, *Building construction machinery and equipment*, Subcommittee SC 1, *Machinery and equipment for concrete work*.

This second edition cancels and replaces the first edition (ISO 21573-1:2006), of which it constitutes a minor revision. The main changes are:

- editorial correction of numbering of table/figure references;
- addition of electric motor as drive power for concrete pump;
- editorial corrections in figures to clarify part names and callout.

ISO 21573 consists of the following parts, under the general title *Building construction machinery and equipment — Concrete pumps*:

- *Part 1: Terminology and commercial specifications*
- *Part 2: Procedure for examination of technical parameters*

Introduction

This part of ISO 21573 deals with concrete pumps used on building sites for concrete-mix delivery. It provides definitions and technical characteristics of the relevant machines. The figures in [Annex A](#) give examples of current structures of concrete pumps and their principles of operation.

STANDARDSISO.COM : Click to view the full PDF of ISO 21573-1:2014

STANDARDSISO.COM : Click to view the full PDF of ISO 21573-1:2014

Building construction machinery and equipment — Concrete pumps —

Part 1: Terminology and commercial specifications

1 Scope

This part of ISO 21573 establishes terminology and commercial-literature specifications for concrete pumps which are used on building sites for concrete-mix delivery.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 11375:1998, *Building construction machinery and equipment — Terms and definitions*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 11375 and the following apply.

3.1

piston-type concrete pump

pump in which a piston is used to impart energy to the concrete mix, with the intent of transporting the mix to and through the conveying pipe and/or hose

Note 1 to entry: See [Figure A.1](#).

3.2

rotary-type concrete pump

pump in which a peristaltic action is used to impart energy to the concrete mix with the intent of transporting the mix to and through the conveying pipe and/or hose

Note 1 to entry: See [Figures A.6, A.7, A.8 and A.9](#).

3.3

stationary-type concrete pump

skid, rail or wheeled-chassis mounted concrete pump intended for long-term operation on one building site

Note 1 to entry: See [Figure A.13](#).

3.4

piston-type concrete pump valve system

system composed of cut-off valves successively locking and opening concrete mix flow from the hopper to the concrete cylinder and from the latter to the conveying pipe

Note 1 to entry: See [Figures A.2, A.3, A.4 and A.5](#).

Note 2 to entry: The operation of the valves is synchronised so that, when the concrete-mix flow from the hopper to the concrete cylinder is opened, the flow to the conveying pipe is closed. Various types of valve systems are identified.

3.5
distributing boom

folded boom with fixed concrete mix conveying pipe the role of which is to deliver concrete mix to work areas within its reach

Note 1 to entry: See [Figures A.10](#) and [A.14](#).

Note 2 to entry: The boom has the possibility of folding in the vertical plane and slewing around the vertical axis. Typically, a rubber hose is fixed to the end of the conveying pipe, to facilitate concrete-mix distribution.

3.6
maximum applicable aggregate size

largest size of aggregate that can be consistently delivered through the concrete pump without blockage, including any conveying pipe that is normally supplied on the finished product

3.7
minimum applicable slump

minimum value of slump applicable for conveying by concrete pump

3.8
maximum theoretical pumping capacity

theoretical delivery volume which is obtained at the maximum strokes/revolutions per minute of concrete pump

Note 1 to entry: The actual delivery volume is calculated through application of the volumetric efficiency and the theoretical delivery volume of the concrete pump. Using concrete of slump value of 18 cm to 21 cm, the volumetric efficiency is about 90 %.

$$Q_{th} = \left(\pi \times d^2 / 4 \right) \times s \times n \times 10^{-9}$$

$$Q_a = Q_{th} \times \eta_v$$

where

Q_{th} is the theoretical delivery volume (m³/h);

Q_a is the actual delivery volume (m³/h);

d is the diameter of the concrete cylinder piston (mm)

s is the stroke (mm);

n is the number of strokes per hour;

η_v is the volumetric efficiency, equal to 0,8 to 0,9.

4 Classification of the concrete pumps

In general terms, concrete pumps are typically classified by the following five main characteristics (see [Table 1](#)):

- type of pumping unit;
- mode or frequency of transportation;
- form of conveying;
- concrete mix delivery with assistance;

— drive system.

Table 1 — Classification of the concrete pumps

Classification	Type	Current examples	Reference figures
Type of pumping unit	Piston	Hydraulic driven	Figure A.1
		Mechanical driven	—
		Single-piston	—
		Multi-piston	Figure A.1
	Rotary	Vacuum	Figure A.6, A.7
Elastic		Figure A.8, A.9	
Mode or frequency of transportation	Self-propelled mobile	Truck-mounted	Figures A.10, A.11, A.14 and ISO 11375, Figure 41
	Non self-propelled mobile	Trailer-mounted (with tires on highway)	Figure A.12 and ISO 11375, Figure 42
		Trailer-mounted, steel wheels (rides on rails)	—
		Trailer-mounted, track	—
	Stationary	Skid-mounted/Fixed in place	Figure A.13
Trailer mounted (with tires off-road)		ISO 11375, Figure 42	
Form of conveying	With integral distribution boom	Truck mounted	Figure A.10, A.14 and ISO 11375, Figure 41
		Trailer-mounted	ISO 11375, Figure 43
	With separate distribution boom	Tower-mounted boom	ISO 11375, Figure 44
		Articulating distribution arm (with support legs)	—
With connected conveying line	Pipe and/or hose run from pump to placement	—	
Concrete-mix delivery with assistance	With pressurized air	Concrete spraying	—

5 Commercial specifications

5.1 General characteristics

The following characteristics shall be specified:

- model and type;
- manufacturer's name;
- maximum theoretical pumping capacity (m³/h);
- maximum theoretical pressure in concrete (MPa);
- diameter of concrete pumping cylinder (mm);
- stroke of concrete pumping cylinder (mm);
- number of strokes per minute (min⁻¹);

ISO 21573-1:2014(E)

- outlet diameter of concrete valve device (mm);
- capacity of hopper (m³);
- engine power (kW);
- acceptable leaning angle of the machine during pumping operation (degrees);
- operating mass (kg).

Specify the mass of the concrete pump under the following conditions:

- ready to run;
- with or without cab (to be stated);
- including standard equipment;
- with a driver of mass 75 kg;
- with fuel tank half full;
- with cleaning water, cooling, lubrication and hydraulic systems full.

The manufacturer shall provide means for correlating the machine's theoretical maximum concrete line pressure to the theoretical pumping distance capability.

5.2 Applicable concrete

Specify the following:

- maximum applicable size of aggregate (mm);
- minimum applicable slump value (cm).

5.3 Drive

Specify the type of the concrete pump's drive:

- by the vehicle engine and additional gear box for hydraulic pump driving;
- by separate engine and gear box driving the hydraulic system.

5.4 Dimensional characteristics

Specify the following:

- overall dimensions:
 - length, L (mm);
 - width, W (mm);
 - height, H (mm);
- wheel base, $L1$ (mm);
- hopper height from the ground, $H1$ mm;
- reach of distributing boom (m).

For maximum out-reach of the distributing boom, see [Figure A.14](#).

5.5 Conveying-pipe cleaning device

Specify the following:

- model;
- operation method (water or pneumatic system);
- performance:
 - delivery volume (l/min);
 - delivery pressure (MPa).

5.6 Chassis cleaning device

Specify the following:

- model;
- cleaning-water tank capacity (l).

5.7 Distributing boom

Specify the following:

- model;
- maximum reach in vertical (m);
- maximum reach in horizontal (m);
- swing device:
 - model;
 - swing angles α , β , γ , δ (see [Figure A.14](#)) (degrees);
- diameter of the conveying pipe on the boom (mm);
- length of the rubber distributing hose (m);
- number of boom sections;
- mass of the distributing boom (kg).

5.8 Outrigger component

Specify the following:

- model;
- maximum extended width:
 - front (mm);
 - rear (mm);
- maximum load capacity of each outrigger.

5.9 Hydraulic system

Specify the following:

- number of hydraulic pumps;
- hydraulic oil-tank capacity (l);
- boom control block (proportional or nominal directional valve).

For each pump, specify:

- application (concrete cylinders drive, cutting-off valves drive, distributing boom drive, outriggers drive, hopper agitator drive);
- model;
- delivery volume (l/min);
- delivery pressure (MPa).

5.10 Truck chassis

Specify the following:

- general data;
- model;
- load capacity (N);
- number of axles;
- maximum permissible load on axles:
 - front (N);
 - rear (N);
- engine characteristics:
 - model;
 - rated output/engine speed (kW/min⁻¹);
 - maximum torque/engine speed (N·m/min⁻¹);
 - displacement (m³);
- fuel tank capacity (l).

5.11 Trailer chassis

Specify the following:

- model;
- type of trailer — single or double axle;
- load capacity (N);
- maximum permissible load on axle (N).

For a double-axle trailer, specify the permissible load on the front and rear axles.

5.12 Attachments and tools

Specify the following:


- remote-control panel (if any);
- operation manual;
- tools;
- spare parts;
- reduction connection for pipeline with clamp.

STANDARDSISO.COM : Click to view the full PDF of ISO 21573-1:2014

Annex A (informative)

Examples of concrete pump designs and their assemblies


See [Figures A.1](#) to [A.14](#).

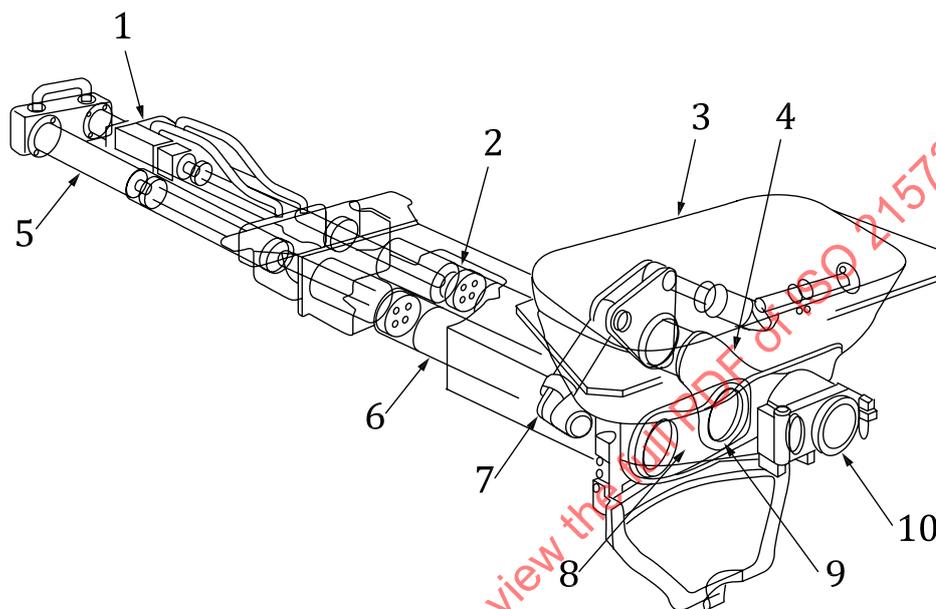

Key

- 1 hydraulic valve
- 2 concrete piston
- 3 concrete hopper
- 4 swing pipe
- 5 hydraulic cylinder
- 6 concrete cylinder
- 7 hydraulic cylinder (valve)
- 8 wear plate
- 9 wear ring
- 10 outlet port


Figure A.1 — Structure of piston-type concrete pump (swing-valve type)

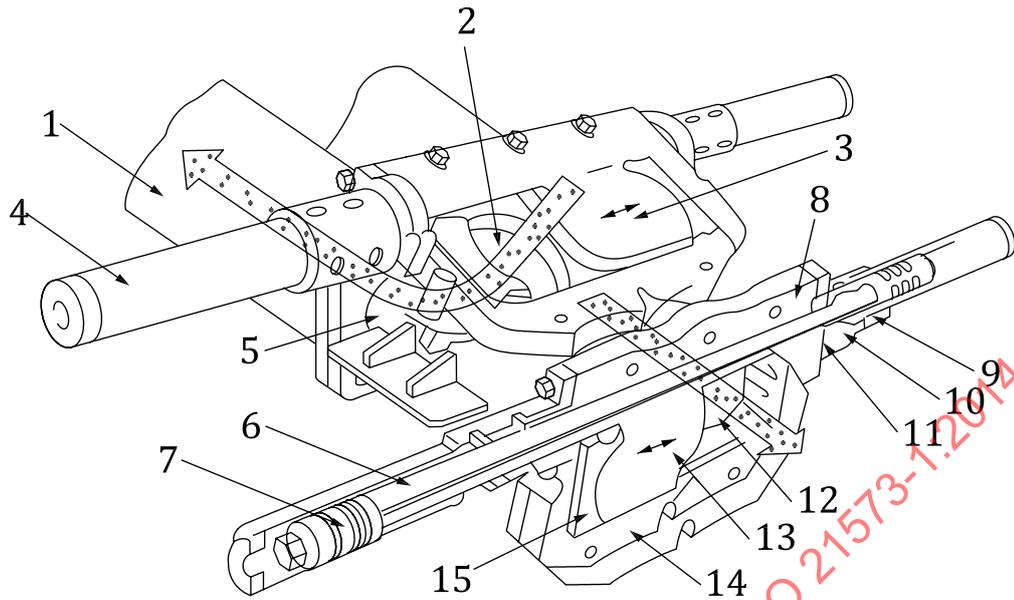

Key

- 1 concrete cylinder
- 2 suction port
- 3 inlet gate valve
- 4 hydraulic cylinder
- 5 casing
- 6 valve rod
- 7 hydraulic piston
- 8 bushing
- 9 packing (hydraulic cylinder)
- 10 lubricate bushing
- 11 packing (gate valve)
- 12 discharge port
- 13 outlet gate valve
- 14 valve housing
- 15 stopper


Figure A.2 – Structure and principle of operation of the gate valve system (horizontal type)

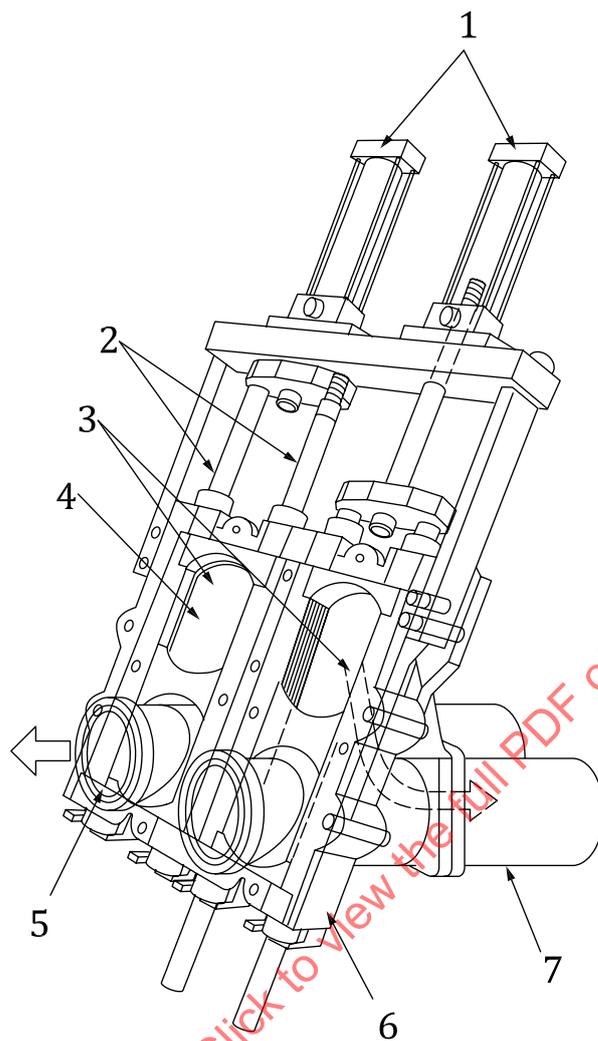

Key

- 1 hydraulic cylinder
- 2 valve rod
- 3 suction port
- 4 valve plate
- 5 discharge port
- 6 valve casing
- 7 concrete cylinder

Figure A.3 — Structure and principle of operation of the gate-valve system (vertical type)

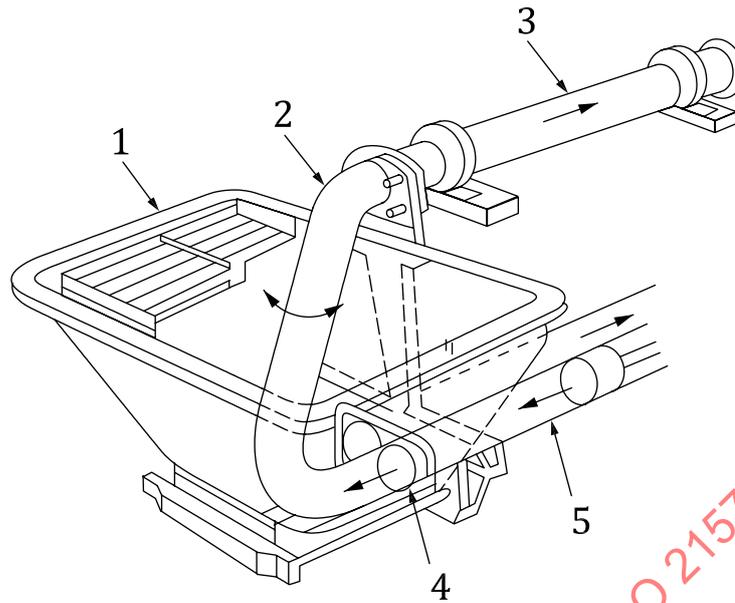


Key

- 1 concrete hopper
- 2 swing valve
- 3 outlet pipe
- 4 intake-outlet port
- 5 concrete cylinder

Figure A.4 — Structure and principle of operation of the swing-valve system


STANDARDSISO.COM : Click to view the full PDF of ISO 21573-1:2014

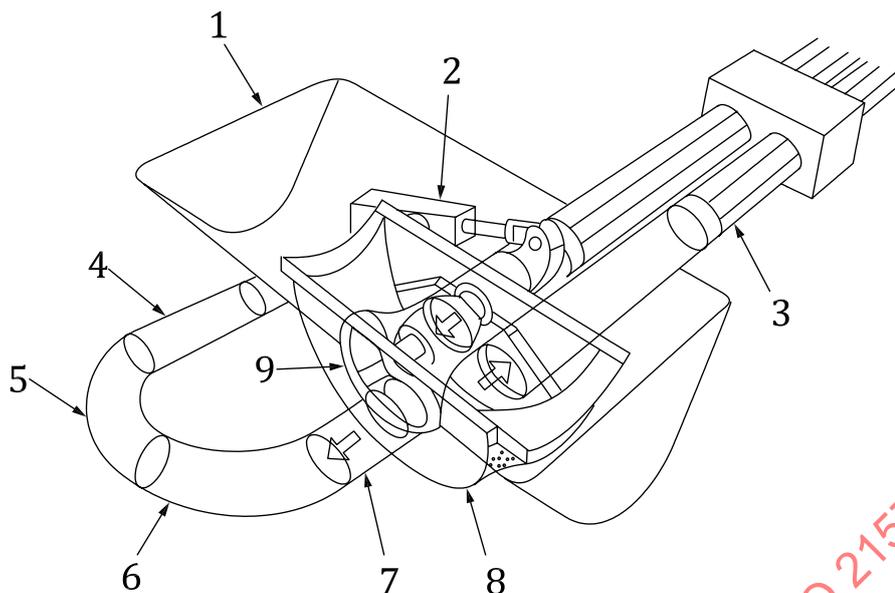

Key

- 1 concrete hopper
- 2 hydraulic cylinder (valve)
- 3 concrete cylinder
- 4 tapered pipe
- 5 bent pipe
- 6 tapered bent pipe
- 7 outlet pipe
- 8 rock-slicer
- 9 swing valve

Figure A.5 — Structure and principle of operation of the swing-valve system

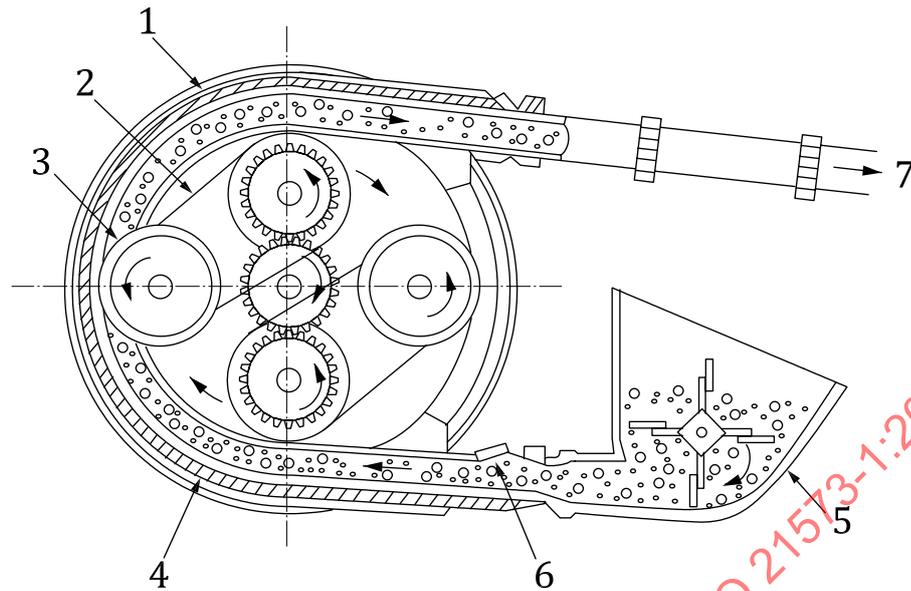


Key

- 1 rubber pad
- 2 drive chain
- 3 rubber roller
- 4 pumping tube
- 5 concrete hopper
- 6 suction port
- 7 discharge port

Figure A.6 — Structure and principle of operation of the rotary-type concrete pump

STANDARDSISO.COM : Click to view the full PDF of ISO 21573-1:2014

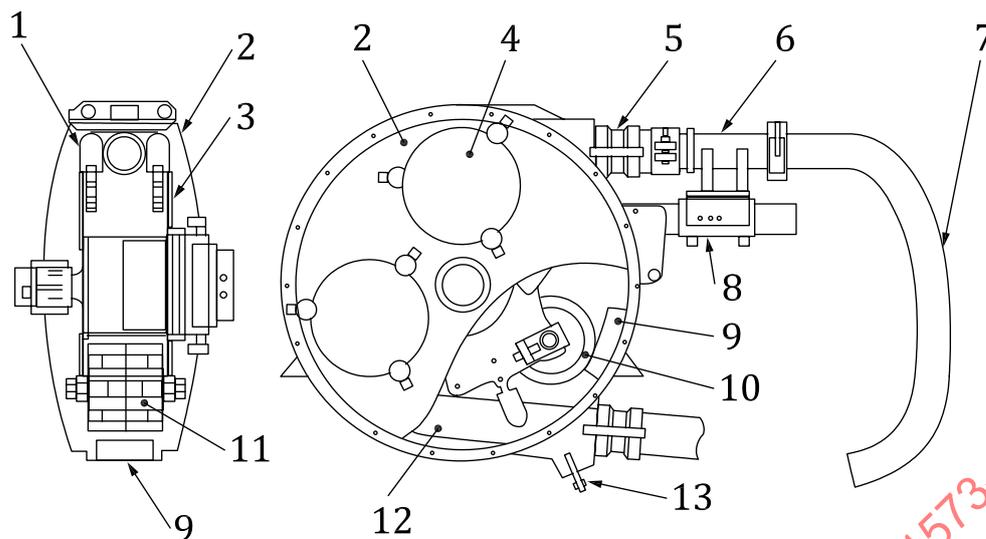


Key

- 1 guide roller
- 2 pump casing
- 3 rotor frame
- 4 hole cover
- 5 boots
- 6 transfer pipe
- 7 transfer hose
- 8 support beam
- 9 rubber pad
- 10 rubber roller
- 11 roller shaft
- 12 pumping tube
- 13 drain port

Figure A.7 — Structure of the rotary concrete pump (vacuum type)


STANDARDSISO.COM : Click to view the full PDF of ISO 21573-1:2014

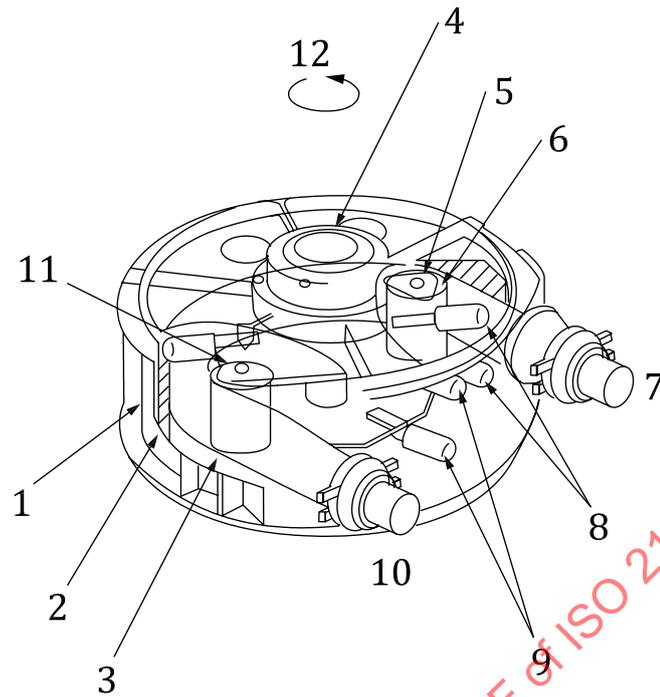

Key

- 1 pump casing
- 2 rubber pad
- 3 pumping tube
- 4 hydraulic motor
- 5 adjusting screw
- 6 rubber roller
- 7 inlet port
- 8 guide roller (A)
- 9 guide roller (B)
- 10 outlet port
- 11 adjust indicator
- 12 direction of rotation

Figure A.8 — Structure of the rotary concrete pump (elastic-restore type)

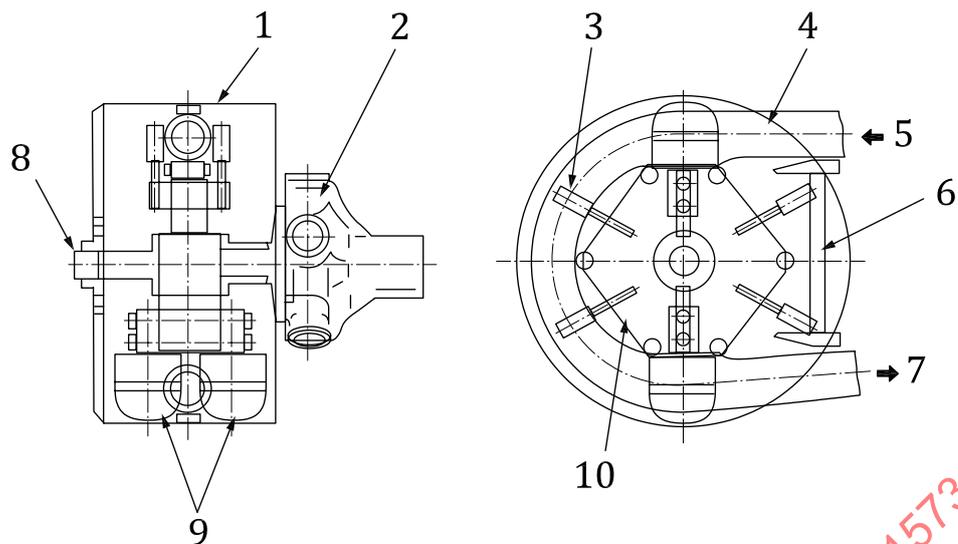

Key

- 1 pump casing
- 2 hydraulic motor
- 3 guide roller
- 4 pumping tube
- 5 inlet port
- 6 tube guide
- 7 outlet port
- 8 bearing
- 9 press roller
- 10 rotor

Figure A.9 — Structure of the rotary concrete pump with elastic restore (double roller pump)