
**Intelligent transport systems —
Communications access for land
mobiles (CALM) — ITS station
management —**

**Part 3:
Service access points**

*Systèmes intelligents de transport — Accès aux communications des
services mobiles terrestres (CALM) — Gestion des stations ITS —*

Partie 3: Points d'accès au service



STANDARDSISO.COM : Click to view the full PDF of ISO 24102-3:2013



COPYRIGHT PROTECTED DOCUMENT

© ISO 2013

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

	Page
Foreword	v
Introduction	vi
1 Scope	1
2 Normative references	1
3 Terms and definitions	2
4 Abbreviated terms	2
5 Requirements	3
6 MI-SAP	3
6.1 General.....	3
6.2 MI-SET.....	4
6.3 MI-GET.....	5
6.4 MI-COMMAND.....	6
6.5 MI-REQUEST.....	7
6.6 MI-NOTIFY.....	8
7 MN-SAP	9
7.1 General.....	9
7.2 MN-COMMAND.....	9
7.3 MN-REQUEST.....	10
8 MF-SAP	11
8.1 General.....	11
8.2 MF-COMMAND.....	11
8.3 MF-REQUEST.....	13
9 SI-SAP	14
9.1 General.....	14
9.2 SI-COMMAND.....	14
9.3 SI-REQUEST.....	15
10 SN-SAP	16
10.1 General.....	16
10.2 SN-COMMAND.....	16
10.3 SN-REQUEST.....	17
11 SF-SAP	18
11.1 General.....	18
11.2 SF-COMMAND.....	19
11.3 SF-REQUEST.....	20
12 MS-SAP	21
12.1 General.....	21
12.2 MS-COMMAND.....	21
12.3 MS-REQUEST.....	22
13 Conformance	23
Annex A (normative) ASN.1 modules	24
Annex B (normative) MF-COMMANDs	36
Annex C (normative) MF-REQUESTs	39
Annex D (normative) MN-COMMANDs	42
Annex E (normative) MN-REQUESTs	44
Annex F (normative) MI-COMMANDs	47

Annex G (normative) MI-REQUESTs	52
Annex H (normative) SF-COMMANDs	56
Annex I (normative) SF-REQUESTs	57
Annex J (normative) SN-COMMANDs	58
Annex K (normative) SN-REQUESTs	59
Annex L (normative) SI-COMMANDs	60
Annex M (normative) SI-REQUESTs	61
Annex N (normative) MS-COMMANDs	62
Annex O (normative) MS-REQUESTs	63
Annex P (normative) Error/return codes	64
Bibliography	65

STANDARDSISO.COM : Click to view the full PDF of ISO 24102-3:2013

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2. www.iso.org/directives

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received. www.iso.org/patents

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

The committee responsible for this document is ISO/TC 204, *Intelligent transport systems*.

ISO 24102 consists of the following parts, under the general title *Intelligent transport systems — Communications access for land mobiles (CALM) — ITS station management*:

- *Part 1: Local management*
- *Part 3: Service access points*
- *Part 4: ITS station-internal management communications*
- *Part 5: Fast service advertisement protocol (FSAP)*

The following parts are under preparation:

- *Part 2: Remote management*
- *Part 6: Path and flow management*

Introduction

This International Standard is part of a family of International Standards for communications access for land mobiles (CALM). An introduction to the whole set of International Standards is provided in ISO 21217.

This part of ISO 24102 is part 3 of a multipart International Standard which determines the intelligent transport systems (ITS) station management service access points.

The ITS station management entity provides functionality related to the management of communication protocol layers and the security entity presented in the ITS station reference architecture specified in ISO 21217 and presented in [Figure 1](#), and in line with the general ITS architecture specified in ISO 21217.

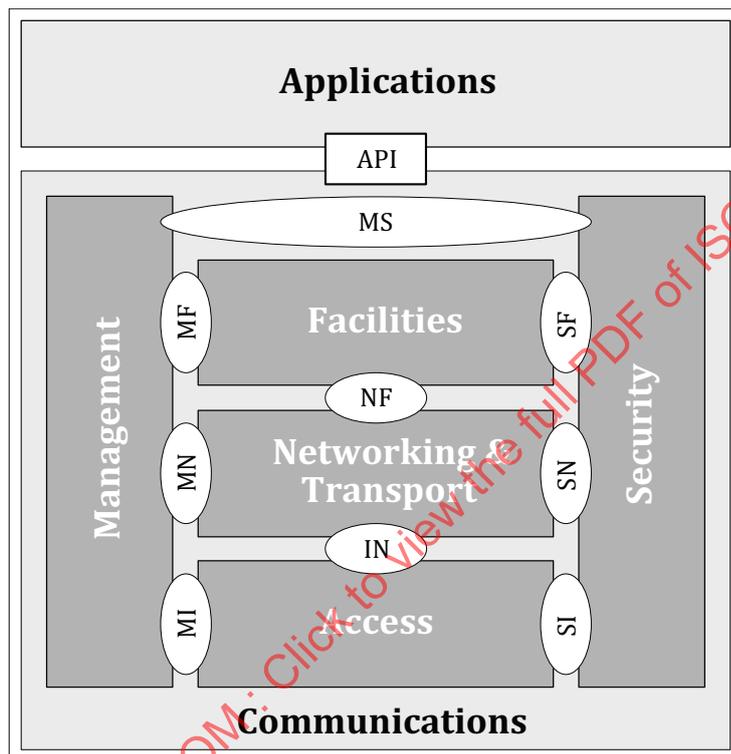


Figure 1 — ITS station reference architecture with named interfaces

ITS station management is specified as a distributed process, where no supervisory entity is employed.

Intelligent transport systems — Communications access for land mobiles (CALM) — ITS station management —

Part 3: Service access points

1 Scope

This part of ISO 24102 specifies the management service access points, i.e. the service access points of

- the interfaces between the ITS-S management entity and
 - the ITS-S access layer (MI-SAP),
 - the ITS-S networking and transport layer (MN-SAP),
 - the ITS-S facilities layer (MF-SAP),
- the interfaces between the ITS-S security entity and
 - the ITS-S access layer,
 - the ITS-S networking and transport layer,
 - the ITS-S facilities layer,
- the interface between the ITS-S management entity and the ITS-S security entity (MS-SAP).

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 8825-2, *Information technology — ASN.1 encoding rules: Specification of Packed Encoding Rules (PER) — Part 2*

ISO 21217, *Intelligent transport systems — Communications access for land mobiles (CALM) — Architecture*

ISO 21218, *Intelligent transport systems — Communications access for land mobiles (CALM) — Access technology support*

ISO 24102-1, *Intelligent transport systems — Communications access for land mobiles (CALM) — ITS station management — Part 1: Local management*

ISO 24102-4, *Intelligent transport systems — Communications access for land mobiles (CALM) — ITS station management — Part 4: Station-internal management communications*

ISO 24102-5, *Intelligent transport systems — Communications access for land mobiles (CALM) — ITS station management — Part 5: Fast service advertisement protocol (FSAP)*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 21217 apply.

4 Abbreviated terms

For the purposes of this document, the abbreviated terms given in ISO 21217 and the following apply.

MF-COMMAND	command issued by the ITS-S management entity and sent to the ITS-S facilities layer via the MF-SAP
MF-REQUEST	command issued by the ITS-S facilities layer and sent to the ITS-S management entity via the MF-SAP
MI-COMMAND	command issued by the ITS-S management entity and sent to the ITS-S access layer via the MI-SAP
MI-GET	command issued by the ITS-S management entity in order to get the value of one or several CI parameters; sent via the MI-SAP to the ITS-S access layer
MI-REQUEST	command issued by the ITS-S access layer and sent to the ITS-S management entity via the MI-SAP
MI-SET	command issued by the ITS-S management entity in order to set the value of one or several CI parameters; sent via the MI-SAP to the ITS-S access layer
MN-COMMAND	command issued by the ITS-S management entity and sent to the ITS-S networking and transport layer via the MN-SAP
MN-REQUEST	command issued by the ITS-S networking and transport layer and sent to the ITS-S management entity via the MN-SAP
MS-COMMAND	command issued by the ITS-S management entity and sent to the ITS-S security entity via the MS-SAP
MS-REQUEST	command issued by the ITS-S security entity and sent to the ITS-S management entity via the MS-SAP
SF-COMMAND	command issued by the ITS-S security entity and sent to the ITS-S facilities layer via the SF-SAP
SF-REQUEST	command issued by the ITS-S facilities layer and sent to the ITS-S security entity via the SF-SAP
SI-COMMAND	command issued by the ITS-S security entity and sent to the ITS-S access layer via the SI-SAP
SI-REQUEST	command issued by the ITS-S access layer and sent to the ITS-S security entity via the SI-SAP
SN-COMMAND	command issued by the ITS-S security entity and sent to the ITS-S networking and transport layer via the SN-SAP
SN-REQUEST	command issued by the ITS-S networking and transport layer and sent to the ITS-S security entity via the SN-SAP

5 Requirements

The ITS station management includes functionality specified in the various parts of this International Standard:

- 1) General management functionality specified in ISO 24102-1.
- 2) The functionality of remote ITS station management specified in ISO 24102-2.
- 3) The functionality of management/security service access points specified this part of ISO 24102.
- 4) The functionality of ITS station-internal management communications specified in ISO 24102-4.
- 5) The functionality of the “Fast Service Advertisement Protocol” (FSAP) specified in ISO 24102-5.

The functionality of the service access points

- MI-SAP, MN-SAP, MF-SAP,
- SI-SAP, SN-SAP, SF-SAP,
- MS-SAP,

shall be as specified in this part of ISO 24102.

NOTE 1 SAPs can be non-exposed interfaces. Thus, service primitives of SAPs are not subject to conformance tests.

NOTE 2 The MA-interface and SA-interface presented in [Figure 1](#) are not specified in this part of ISO 24102, although these are recognized as part of the ITS station reference architecture specified in ISO 21217. All interfaces towards the ITS-S applications are considered to be APIs rather than SAPs.

Means to secure the access to management functionality need to be specified within the global context of CALM security. Details are outside the scope of this part of ISO 24102.

Detailed mandatory requirements are specified in the following clauses of this part of ISO 24102:

- [Clause 6](#) specifies the MI-SAP.
- [Clause 7](#) specifies the MN-SAP.
- [Clause 8](#) specifies the MF-SAP.
- [Clause 9](#) specifies the SI-SAP.
- [Clause 10](#) specifies the SN-SAP.
- [Clause 11](#) specifies the SF-SAP.
- [Clause 12](#) specifies the MS-SAP.
- Annexes provide further mandatory requirements.

6 MI-SAP

6.1 General

Basically, there are the following different types of services:

- a) a service that allows the ITS-S management entity to set I-Parameter values in a “(Virtual) Communication Interface” (CI, VCI), see ISO 21218;
- b) a service that allows the ITS-S management entity to read I-Parameter values from a (virtual) CI;

- c) a service that allows a “Management Adaptation Entity” (MAE), see ISO 21218, to notify events to the ITS-S management, including changes in (virtual) CI I-Parameter values;
- d) a service that allows the ITS-S management entity to send a command to an MAE;
- e) a service that allows an MAE to send a command to the ITS-S management entity;
- f) a service for transmission requests of a management data packet;
- g) a service for reception notification of a management data packet.

Setting of I-Parameter values shall be built on the service MI-SET.

Reading of I-Parameter values shall be built on the service MI-GET.

Issuing of commands by the ITS-S management entity shall be built on the service MI-COMMAND.

Issuing of commands by a CI or VCI shall be built on the service MI-REQUEST.

Transmission request and reception notification of management data packets shall be built on the services MI-COMMAND and MI-REQUEST.

Event notifications shall be built on the service MI-REQUEST.

Every request and confirm service primitive shall be identified by a CommandRef parameter. A value unique within the available number space shall be assigned to the request service primitive. The related confirm service primitive shall use the same number as provided in the related request service primitive.

Management communications with the access layer in other ITS-SCUs shall be with Inter-ITS-SCU communication PDUs “MI-rset”, “MI-rget”, “MI-rcmd”, and “MI-rreq” as specified in ISO 24102-4.

Details of the service primitives shall be as specified in [Annex A](#).

6.2 MI-SET

6.2.1 MI-SET.request

The service primitive MI-SET.request allows setting of I-Parameters by the ITS-S management.

The parameters of MI-SET.request are as follows:

```
MI-SET.request
(
    Link-ID,
    CommandRef,
    Sequence of I-Param
)
```

Table 1 — MI-SET.request parameter description

Name	Description
Link-ID	Unique identifier of a VCI/CI.
CommandRef	Unique cyclic reference number of command.
-	Number of subsequent elements I-Param.
I-Param.No	See ISO 21218.
I-Param.Value	See ISO 21218.

An MI-SET.request is generated by the ITS-S management entity when I-Parameters specified in ISO 21218 shall be set.

On receipt of MI-SET.request, the selected parameters shall be set if applicable.

6.2.2 MI-SET.confirm

The service primitive MI-SET.confirm reports the result of a previous MI-SET.request.

The parameters of MI-SET.confirm are as follows:

```
MI-SET.confirm      (
                    Link-ID,
                    CommandRef,
                    Sequence of Errors OPTIONAL
                    )
```

The optional element “Sequence of Errors” shall be available once at least one of the requested settings was in error. It may be available in order to acknowledge settings explicitly.

Table 2 — MI-SET.confirm parameter description

Name	Description
Link-ID	Unique identifier of a VCI/CI.
CommandRef	Unique cyclic reference number of command.
-	Number of subsequent error messages.
Errors.I-ParamNo	Parameter reference number for which Result.Code applies.
Errors.errStatus	Return/error code, see Table P.1 .

A request to set a defined “read only” I-Parameter shall be acknowledged with ErrStatus 7 “ACCESS VIOLATION”. A request to set an undefined I-Parameter shall be acknowledged with ErrStatus 2 “INVALID PARAMETER NUMBER”. A request to set a defined I-Parameter with an illegal value shall be acknowledged with ErrStatus 3 “INVALID PARAMETER VALUE”. A request to set a defined I-Parameter with an illegal type of value shall be acknowledged with ErrStatus 1 “UNSPECIFIED FAILURE”.

An MI-SET.confirm is generated by the MAE upon reception of a previous MI-SET.request.

On receipt of MI-SET.confirm, the ITS-S management entity shall evaluate Errors, if applicable, and act accordingly. Details are outside the scope of this part of ISO 24102.

6.3 MI-GET

6.3.1 MI-GET.request

The service primitive MI-GET.request requests reporting of I-Parameter values to the ITS-S management.

The parameters of the management service primitive MI-GET.request are as follows:

```
MI-GET.request      (
                    Link-ID,
                    CommandRef,
                    Sequence of I-ParamNo
                    )
```

Table 3 — MI-GET.request parameter description

Name	Description
Link-ID	Unique identifier of a VCI/CI.
CommandRef	Unique cyclic reference number of command.
-	Number of subsequent elements I-Param.No.
I-ParamNo	See ISO 21218.

This primitive is generated by the ITS-S management entity when I-Parameter values shall be retrieved.

On receipt of MI-GET.request, I-Parameters shall be reported to the ITS-S management entity.

6.3.2 MI-GET.confirm

The management service primitive MI-GET.confirm reports I-Parameter values to the ITS-S management entity.

The parameters of MI-GET.confirm are as follows:

```
MI-GET.confirm      (
                    Link-ID,
                    CommandRef,
                    Sequence of I-Param
                    )
```

Table 4 — MI-GET.confirm parameter description

Name	Description
Link-ID	Unique identifier of a VCI/CI.
CommandRef	Unique cyclic reference number of command.
-	Number of subsequent elements I-Param.
I-Param.No	See ISO 21218.
I-Param.Value	See ISO 21218.

A request to get the value of a defined “write only” I-Parameter shall be acknowledged with ErrStatus 7 “ACCESS VIOLATION”. A request to get the value of an undefined I-Parameter shall be acknowledged with ErrStatus 2 “INVALID PARAMETER NUMBER”.

The management service primitive MI-GET.confirm shall be generated by the MAE upon reception of a previous MI-GET.request.

The ITS-S management entity shall evaluate the parameter values and act accordingly. If any errors occurred in the processing of the related MI-GET.request, the MI-GET.confirm shall contain at least the entry Param.No = 255, where I-Param.Value shall explain the details of the error (see ISO 21218).

Further details are outside the scope of this part of ISO 24102.

6.4 MI-COMMAND

6.4.1 MI-COMMANDs

[Annex F](#) provides an overview and coding details on MI-COMMANDs that may be sent by the ITS-S management entity to the ITS-S access layer.

MI-COMMANDs shall be enabled by means of the service primitives MI-COMMAND.request and MI-COMMAND.confirm.

6.4.2 MI-COMMAND.request

The service primitive MI-COMMAND.request allows the ITS-S management to trigger an action at a CI.

The parameters of MI-COMMAND.request are as follows:

```
MI-COMMAND.request (
                    Link-ID,
                    CommandRef,
                    MI-Command
                    )
```

Table 5 — MI-COMMAND.request parameter description

Name	Description
Link-ID	Unique identifier of a VCI/CI.
CommandRef	Unique cyclic reference number of command.
MI-Command.No	See Annex F .
MI-Command.Value	See Annex F .

An MI-COMMAND.request shall be generated by the ITS-S management when the CI shall perform an action. On receipt of MI-COMMAND.request by the MAE, the requested action shall be performed.

6.4.3 MI-COMMAND.confirm

The service primitive MI-COMMAND.confirm reports the result of a previous MI-COMMAND.request.

The parameters of MI-COMMAND.confirm are as follows:

```
MI-COMMAND.confirm      (
                          Link-ID,
                          CommandRef
                          ErrStatus
                          )
```

Table 6 — MI-COMMAND.confirm parameter description

Name	Description
Link-ID	Unique identifier of a VCI/CI.
CommandRef	Unique cyclic reference number of command.
ErrStatus	Return/error code, see Table E.1 .

An undefined MI-COMMAND shall be acknowledged with ErrStatus 5 “INVALID COMMAND/REQUEST NUMBER”.

An MI-COMMAND.confirm shall be generated by the MAE upon performance of a previous MI-COMMAND.request.

On receipt of MI-COMMAND.confirm, the ITS-S management entity shall evaluate ErrStatus and act accordingly. Details are outside the scope of this part of ISO 24102.

6.5 MI-REQUEST

6.5.1 MI-REQUESTs

[Annex G](#) provides an overview and coding details on MI-REQUESTs.

MI-REQUESTs shall be enabled by means of the service primitives MI-REQUEST.request and MI-REQUEST.confirm.

6.5.2 MI-REQUEST.request

The service primitive MI-REQUEST.request allows the MAE to trigger an action at the ITS-S management entity.

The parameters of MI-REQUEST.request are as follows:

```
MI-REQUEST.request      (
                          Link-ID,
                          CommandRef,
```

MI-Request
)

Table 7 — MI-REQUEST.request parameter description

Name	Description
Link-ID	Unique identifier of a VCI/CI.
CommandRef	Unique cyclic reference number of command.
MI-Request.No	See Annex G .
MI-Request.Value	See Annex G .

An MI-REQUEST.request shall be generated by a MAE when the ITS-S management entity shall perform an action.

On receipt of MI-REQUEST.request the required action is performed.

6.5.3 MI-REQUEST.confirm

The service primitive MI-REQUEST.confirm reports the result of a previous MI-REQUEST.request.

The parameters of MI-REQUEST.confirm are as follows:

```
MI-REQUEST.confirm (
    Link-ID,
    CommandRef,
    ErrStatus
)
```

Table 8 — MI-REQUEST.confirm parameter description

Name	Description
Link-ID	Unique identifier of a VCI/CI.
CommandRef	Unique cyclic reference number of command.
ErrStatus	Return/error code, see Table F.1 .

An undefined REQUEST shall be acknowledged with ErrStatus 5 “INVALID COMMAND/REQUEST NUMBER”.

An MI-REQUEST.confirm shall be generated by the ITS-S management e upon performance of a previous MI-REQUEST.request.

On receipt of MI-REQUEST.confirm, the MAE shall evaluate ErrStatus and act accordingly. Details are outside the scope of this part of ISO 24102.

6.6 MI-NOTIFY

6.6.1 Pseudo-service

The MI-NOTIFY service is a pseudo-service.

The MI-COMMAND “Monitor” shall be used to start and stop monitoring of a specific I-Parameter.

Notification of an I-Parameter value shall be done with MI-REQUEST “Event”.

6.6.2 Retrieve monitor status

The actual status of monitoring of I-Parameters can be retrieved by means of the MI-GET.request service primitive with I-Parameter “Notify”.

The related MI-GET.response shall show all I-Parameter numbers that are currently activated for monitoring.

6.6.3 MAC management frame

MI-COMMAND “UnitDataCmd” is used by the ITS-S management to request transmission of a management data packet. The MAE shall treat this packet the same way as packets received from the IN-SAP, except for indication of a management packet in the MAC header of the transmitted frame.

MI-REQUEST “UnitDataReq” is used by the MAE to notify reception of a management data packet to the ITS-S management entity.

7 MN-SAP

7.1 General

Basically, there shall be the following different types of services that facilitate

- a) sending a command from the ITS-S management entity to the ITS-S networking and transport layer, and
- b) receiving a request (command) from the ITS-S networking and transport layer to the ITS-S management entity.

Issuing of commands to the ITS-S networking and transport layer shall be built on the service MN-COMMAND.

Receiving requests from the ITS-S networking and transport layer shall be built on the service MN-REQUEST.

Details of the service primitives shall be as specified in [Annex A](#).

Management communications with the networking and transport layer in other ITS-SCUs shall be with Inter-ITS-SCU communication PDUs “MN-rcmd” and “MN-rreq” as specified in ISO 24102-4.

7.2 MN-COMMAND

7.2.1 MN-COMMANDs

[Annex D](#) provides an overview and coding details on MN-COMMANDs that may be sent by the ITS-S management entity to the ITS-S networking and transport layer.

MN-COMMANDs shall be enabled by means of the service primitives MN-COMMAND.request and MN-COMMAND.confirm.

7.2.2 MN-COMMAND.request

The service primitive MN-COMMAND.request allows the ITS-S management entity to trigger an action at the ITS-S networking and transport layer.

The parameters of the management service primitive MN-COMMAND.request are as follows:

```
MN-COMMAND.request      (
                          CommandRef,
                          MN-Command
                          )
```

Table 9 — MN-COMMAND.request parameter description

Name	Description
CommandRef	Unique cyclic reference number of command.
MN-Command.No	Reference number of command.
MN-Command.Value	Value of command.

An MN-COMMAND.request shall be generated by the ITS-S management entity when the ITS-S networking and transport layer shall perform an action.

On receipt of MN-COMMAND.request, the requested action shall be performed.

7.2.3 MN-COMMAND.confirm

The service primitive MN-COMMAND.confirm reports the result of a previous MN-COMMAND.request.

The parameters of the management service primitive MN-COMMAND.confirm are as follows:

```
MN-COMMAND.confirm      (
                          CommandRef,
                          MN-CmdConfirm,
                          ErrStatus
                          )
```

Table 10 — MN-COMMAND.confirm parameter description

Name	Description
CommandRef	Unique cyclic reference number of command. Same value as in related MN-COMMAND.request.
MN-CmdConfirm.No	Reference number of command. Same value as MN-Command.No in related MN-COMMAND.request.
MN-CmdConfirm.Value	Carries optional confirm data.
ErrStatus	Error/return code, see Table P.1 .

An MN-COMMAND.confirm shall be generated by the ITS-S networking and transport layer upon performance of a previous MN-COMMAND.request in case ErrStatus indicates error or MN-CmdConfirm is present. It may be generated in case ErrStatus indicates success or MN-CmdConfirm is not present.

On receipt of MN-COMMAND.confirm, ErrStatus and MN-CmdConfirm shall be evaluated and a possible action shall be performed properly.

7.3 MN-REQUEST

7.3.1 MN-REQUESTs

[Annex E](#) provides an overview and coding details on MN-REQUESTs.

MN-REQUESTs shall be enabled by means of the service primitives MN-REQUEST.request and MN-REQUEST.confirm.

7.3.2 MN-REQUEST.request

The service primitive MN-REQUEST.request allows the ITS-S networking and transport layer to trigger an action at the ITS-S management entity.

The parameters of MN-REQUEST.request are as follows:

```
MN-REQUEST.request      (
                          CommandRef,
                          MN-Request
                          )
```

Table 11 — MN-REQUEST.request parameter description

Name	Description
CommandRef	Unique cyclic reference number of command.
MN-Request.No	Reference number of the request.
MN-Request.Value	Value of the request.

An MN-REQUEST.request shall be generated by the ITS-S networking and transport layer when the ITS-S management entity shall perform an action.

On receipt of MN-REQUEST.request, the required action shall be performed.

7.3.3 MN-REQUEST.confirm

The service primitive MN-REQUEST.confirm reports the result of a previous MN-REQUEST.request.

The parameters of MN-REQUEST.confirm are as follows:

```
MN-REQUEST.confirm      (
                          CommandRef,
                          MN-ReqConfirm,
                          ErrStatus
                          )
```

Table 12 — MN-REQUEST.confirm parameter description

Name	Description
CommandRef	Unique cyclic reference number of command. Same value as in related MN-REQUEST.request.
MN-ReqConfirm.No	Reference number of command. Same value as MN-Request.No in related MN-REQUEST.request.
MN-ReqConfirm.Value	Carries optional confirm data.
ErrStatus	Error/return code, see Table P.1 .

The service primitive MN-REQUEST.confirm shall be generated by the ITS station management entity upon performance of a previous MN-REQUEST.request in case ErrStatus indicates error or MN-ReqConfirm is present. It may be generated in case ErrStatus indicates success or MN-ReqConfirm is not present.

On receipt of MN-REQUEST.confirm, ErrStatus and MN-ReqConfirm shall be evaluated and a possible action shall be performed properly. Details are outside the scope of this part of ISO 24102.

8 MF-SAP

8.1 General

Basically, there shall be the following different types of services that facilitate

- sending a command from the ITS-S management entity to the ITS-S facilities layer, and
- receiving a request (command) from the ITS-S facilities layer by the ITS-S management entity.

Issuing of commands to the facilities layer shall be built on the service MF-COMMAND.

Receiving of requests from the facilities layer shall be built on the service MF-REQUEST.

Details of the service primitives shall be as specified in [Annex A](#).

Management communications with other ITS-SCUs shall be with Inter-ITS-SCU communication PDUs “MF-rcmd” and “MF-rreq” as specified in ISO 24102-4.

8.2 MF-COMMAND

8.2.1 MF-COMMANDs

[Annex B](#) provides an overview and coding details on MF-COMMANDs that may be sent by the ITS-S management entity to the facilities layer.

MF-COMMANDs shall be enabled by means of the service primitives MF-COMMAND.request and MF-COMMAND.confirm.

8.2.2 MF-COMMAND.request

The service primitive MF-COMMAND.request allows the ITS-S management entity to trigger an action at the ITS-S facilities layer.

The parameters of MF-COMMAND.request are as follows:

```
MF-COMMAND.request      (
                          CommandRef,
                          MF-Command
                          )
```

Table 13 — MF-COMMAND.request parameter description

Name	Description
CommandRef	Unique cyclic reference number of command.
MF-Command.No	Reference number of command.
MF-Command.Value	Value of command.

An MF-COMMAND.request shall be generated by the ITS-S management entity when the ITS-S facilities layer shall perform an action.

On receipt of MF-COMMAND.request the requested action shall be performed.

8.2.3 MF-COMMAND.confirm

The service primitive MF-COMMAND.confirm reports the result of a previous MF-COMMAND.request.

The parameters of MF-COMMAND.confirm are as follows:

```
MF-COMMAND.confirm     (
                          CommandRef,
                          MF-CmdConfirm,
                          ErrStatus
                          )
```

Table 14 — MF-COMMAND.confirm parameter description

Name	Description
CommandRef	Unique cyclic reference number of command. Same value as in related MF-COMMAND.request.
MF-CmdConfirm.No	Reference number of command. Same value as MF-Command.No in related MF-COMMAND.request.
MF-CmdConfirm.Value	Carries optional confirm data.
ErrStatus	Error/return code, see Table P.1 .

An MF-COMMAND.confirm shall be generated by the ITS-S facilities layer upon performance of a previous MF-COMMAND.request in case ErrStatus indicates error or MF-CmdConfirm is present. It may be generated in case ErrStatus indicates success or MF-CmdConfirm is not present.

On receipt of this primitive, ErrStatus and MF-CmdConfirm shall be evaluated and a possible action shall be performed properly.

8.3 MF-REQUEST

8.3.1 MF-REQUESTs

[Annex C](#) provides an overview and coding details on MF-REQUESTs.

MF-REQUESTs shall be enabled by means of the service primitives MF-REQUEST.request and MF-REQUEST.confirm.

8.3.2 MF-REQUEST.request

The service primitive MF-REQUEST.request allows the ITS-S facilities layer to trigger an action at the ITS-S management entity.

The parameters of MF-REQUEST.request are as follows:

```
MF-REQUEST.request      (
                          CommandRef,
                          MN-Request
                          )
```

Table 15 — MF-REQUEST.request parameter description

Name	Description
CommandRef	Unique cyclic reference number of command.
MF-Request.No	Reference number of the request.
MF-Request.Value	Value of the request.

An MF-REQUEST.request shall be generated by the facilities layer when the ITS-S management entity shall perform an action.

On receipt of MF-REQUEST.request, the required action shall be performed.

8.3.3 MF-REQUEST.confirm

The service primitive MF-REQUEST.confirm reports the result of a previous MF-REQUEST.request.

The parameters of MF-REQUEST.confirm are as follows:

```
MF-REQUEST.confirm     (
                          CommandRef,
                          MF-ReqConfirm,
                          ErrStatus
                          )
```

Table 16 — MF-REQUEST.confirm parameter description

Name	Description
CommandRef	Unique cyclic reference number of command. Same value as in related MF-REQUEST.request.
MF-ReqConfirm.No	Reference number of command. Same value as MF-Request.No in related MF-REQUEST.request.
MF-ReqConfirm.Value	Carries optional confirm data.
ErrStatus	Error/return code, see Table P.1 .

An MF-REQUEST.confirm shall be generated by the ITS-S management entity upon performance of a previous MF-REQUEST.request in case ErrStatus indicates error or MF-ReqConfirm is present. It may be generated in case ErrStatus indicates success or MF-ReqConfirm is not present.

On receipt of MF-REQUEST.confirm, ErrStatus and MF-ReqConfirm shall be evaluated and a possible action shall be performed properly. Details are outside the scope of this part of ISO 24102.

9 SI-SAP

9.1 General

Basically, there are the following different types of services:

- a) a service that allows the ITS-S security entity to send a command to a CI / VCI in the ITS-S access layer; and
- b) a service that allows a CI / VCI in the ITS-S access layer to send a command to the ITS-S security entity.

Issuing of commands by a protocol in the ITS-S security entity shall be built on the service SI-COMMAND.

Issuing of commands by a protocol in the ITS-S access layer, i.e. by a CI or VCI, shall be built on the service SI-REQUEST.

Every request and confirm service primitive shall be identified by a CommandRef parameter. A value unique within the available number space shall be assigned to the request service primitive. The related confirm service primitive shall use the same number as provided in the related request service primitive.

Details of the service primitives shall be as specified in [Annex A](#).

9.2 SI-COMMAND

9.2.1 SI-COMMANDs

[Annex L](#) provides an overview and coding details on SI-COMMANDs that may be sent by the ITS-S security entity to the ITS-S access layer.

SI-COMMANDs shall be enabled by means of the service primitives SI-COMMAND.request and SI-COMMAND.confirm.

9.2.2 SI-COMMAND.request

The service primitive SI-COMMAND.request allows the ITS-S security entity to trigger an action at a CI / VCI.

The parameters of SI-COMMAND.request are as follows:

```
SI-COMMAND.request (
    Link-ID,
    CommandRef,
    SI-Command
)
```

Table 17 — SI-COMMAND.request parameter description

Name	Description
Link-ID	Unique identifier of a VCI/CI.
CommandRef	Unique cyclic reference number of command.
SI-Command.No	See Annex L .
SI-Command.Value	See Annex L .

An SI-COMMAND.request shall be generated by the ITS-S security entity when the CI shall perform an action.

On receipt of a SI-COMMAND.request by a CI / VCI, the requested action shall be performed.

9.2.3 SI-COMMAND.confirm

The service primitive SI-COMMAND.confirm reports the result of a previous SI-COMMAND.request.

The parameters of SI-COMMAND.confirm are as follows:

```
SI-COMMAND.confirm      (
                          Link-ID,
                          CommandRef
                          ErrStatus
                          )
```

Table 18 — SI-COMMAND.confirm parameter description

Name	Description
Link-ID	Unique identifier of a VCI/CI.
CommandRef	Unique cyclic reference number of command.
ErrStatus	Return/error code, see Table P.1 .

An undefined SI-COMMAND shall be acknowledged with ErrStatus 5 “INVALID COMMAND/REQUEST NUMBER”.

An SI-COMMAND.confirm shall be generated by a CI/VCI upon performance of a previous SI-COMMAND.request.

On receipt of SI-COMMAND.confirm, the ITS security entity shall evaluate ErrStatus and act accordingly. Details are outside the scope of this part of ISO 24102.

9.3 SI-REQUEST

9.3.1 S-REQUESTs

[Annex M](#) provides an overview and coding details on SI-REQUESTs.

SI-REQUESTs shall be enabled by means of the service primitives SI-REQUEST.request and SI-REQUEST.confirm.

9.3.2 SI-REQUEST.request

The service primitive SI-REQUEST.request allows a CI/VCI to trigger an action at the ITS-S security entity.

The parameters of SI-REQUEST.request are as follows:

```
SI-REQUEST.request     (
                          Link-ID,
                          CommandRef,
                          SI-Request
                          )
```

Table 19 — SI-REQUEST.request parameter description

Name	Description
Link-ID	Unique identifier of a VCI/CI.
CommandRef	Unique cyclic reference number of command.
SI-Request.No	See Annex M .
SI-Request.Value	See Annex M .

An SI-REQUEST.request shall be generated by a CI/VCI when the ITS-S security entity shall perform an action.

On receipt of a SI-REQUEST.request, the required action shall be performed.

9.3.3 SI-REQUEST.confirm

The service primitive SI-REQUEST.confirm reports the result of a previous SI-REQUEST.request.

The parameters of SI-REQUEST.confirm are as follows:

```
SI-REQUEST.confirm      (
                        Link-ID,
                        CommandRef,
                        ErrStatus
                        )
```

Table 20 — SI-REQUEST.confirm parameter description

Name	Description
Link-ID	Unique identifier of a VCI/CI.
CommandRef	Unique cyclic reference number of command.
ErrStatus	Return/error code, see Table P.1 .

An undefined REQUEST shall be acknowledged with ErrStatus 5 “INVALID COMMAND/REQUEST NUMBER”.

An MI-REQUEST.confirm shall be generated by the ITS-S security entity upon performance of a previous SI-REQUEST.request.

On receipt of MI-REQUEST, the CI/VCI shall evaluate ErrStatus and act accordingly. Details are outside the scope of this part of ISO 24102.

10 SN-SAP

10.1 General

Basically, there shall be the following different types of services that facilitate

- a) sending a command from the ITS-S security entity to the ITS-S networking and transport layer, and
- b) receiving a request (command) from the ITS-S networking and transport layer by the ITS-S security entity.

Issuing of commands to the ITS-S networking and transport layer shall be built on the service SN-COMMAND.

Receiving requests from the ITS-S networking and transport layer shall be built on the service SN-REQUEST.

Details of the service primitives shall be as specified in [Annex A](#).

10.2 SN-COMMAND

10.2.1 SN-COMMANDs

[Annex J](#) provides an overview and coding details on SN-COMMANDs that may be sent by the ITS-S security entity to the ITS-S networking and transport layer.

SN-COMMANDs shall be enabled by means of the service primitives SN-COMMAND.request and SN-COMMAND.confirm.

10.2.2 SN-COMMAND.request

The service primitive SN-COMMAND.request allows the ITS-S security entity to trigger an action at the ITS-S networking and transport layer.

The parameters of SN-COMMAND.request are as follows:

```

SN-COMMAND.request      (
                          CommandRef,
                          SN-Command
                          )

```

Table 21 — SN-COMMAND.request parameter description

Name	Description
CommandRef	Unique cyclic reference number of command.
SN-Command.No	See Annex J .
SN-Command.Value	See Annex J .

An SN-COMMAND.request shall be generated by the ITS-S security entity when the ITS-S networking and transport layer shall perform an action.

On receipt of an SN-COMMAND.request, the requested action shall be performed.

10.2.3 SN-COMMAND.confirm

The service primitive SN-COMMAND.confirm reports the result of a previous SN-COMMAND.request.

The parameters of SN-COMMAND.confirm are as follows:

```

SN-COMMAND.confirm      (
                          CommandRef,
                          SN-CmdConfirm,
                          ErrStatus
                          )

```

Table 22 — SN-COMMAND.confirm parameter description

Name	Description
CommandRef	Unique cyclic reference number of command. Same value as in related SN-COMMAND.request.
SN-CmdConfirm.No	Reference number of command. Same value as SN-Command.No in related SN-COMMAND.request.
SN-CmdConfirm.Value	Carries optional confirm data.
ErrStatus	Error/return code, see Table P.1 .

An SN-COMMAND.confirm shall be generated by the ITS-S networking and transport layer upon performance of a previous SN-COMMAND.request in case ErrStatus indicates error or SN-CmdConfirm is present. It may be generated in case ErrStatus indicates success or SN-CmdConfirm is not present.

On receipt of SN-COMMAND.confirm, ErrStatus and SN-CmdConfirm shall be evaluated and a possible action shall be performed properly.

10.3 SN-REQUEST

10.3.1 SN-REQUESTs

[Annex K](#) provides an overview and coding details on SN-REQUESTs.

SN-REQUESTs shall be enabled by means of the service primitives SN-REQUEST.request and SN-REQUEST.confirm.

10.3.2 SN-REQUEST.request

The security service primitive SN-REQUEST.request allows the ITS-S networking and transport layer to trigger an action at the ITS-S security entity.

The parameters of SN-REQUEST.request are as follows:

```
SN-REQUEST.request (
    CommandRef,
    SN-Request
)
```

Table 23 — SN-REQUEST.request parameter description

Name	Description
CommandRef	Unique cyclic reference number of command.
SN-Request.No	See Annex K .
SN-Request.Value	See Annex K .

An SN-REQUEST.request shall be generated by the ITS-S networking and transport layer when the ITS-S security entity shall perform an action.

On receipt of SN-REQUEST.request, the required action shall be performed.

10.3.3 SN-REQUEST.confirm

The service primitive SN-REQUEST.confirm reports the result of a previous SN-REQUEST.request.

The parameters of SN-REQUEST.confirm are as follows:

```
SN-REQUEST.confirm (
    CommandRef,
    SN-ReqConfirm,
    ErrStatus
)
```

Table 24 — SN-REQUEST.confirm parameter description

Name	Description
CommandRef	Unique cyclic reference number of command. Same value as in related SN-REQUEST.request.
SN-ReqConfirm.No	Reference number of command. Same value as SN-Request.No in related SN-REQUEST.request.
SN-ReqConfirm.Value	Carries optional confirm data.
ErrStatus	Error/return code, see Table P.1 .

An SN-REQUEST.confirm shall be generated by the ITS-S security entity upon performance of a previous SN-REQUEST.request in case ErrStatus indicates error or SN-ReqConfirm is present. It may be generated in case ErrStatus indicates success or SN-ReqConfirm is not present.

On receipt of SN-REQUEST.confirm, ErrStatus and SN-ReqConfirm shall be evaluated and a possible action shall be performed properly. Details are outside the scope of this part of ISO 24102.

11 SF-SAP

11.1 General

Basically, there shall be the following different types of services that facilitate

- a) sending a command from the ITS-S security entity to the ITS-S facilities layer, and
- b) receiving a request (command) from the ITS-S facilities layer by the ITS-S security entity.

Issuing of commands by the ITS-S security entity to the ITS-S facilities layer shall be built on the service SF-COMMAND.

Receiving of requests from the ITS-S facilities layer by the ITS-S security entity shall be built on the service SF-REQUEST.

Details of the service primitives shall be as specified in [Annex A](#).

11.2 SF-COMMAND

11.2.1 SF-COMMANDs

[Annex H](#) provides an overview and coding details on SF-COMMANDs that may be sent by the ITS-S security entity to the ITS-S facilities layer.

SF-COMMANDs shall be enabled by means of the service primitives SF-COMMAND.request and SF-COMMAND.confirm.

11.2.2 SF-COMMAND.request

The service primitive SF-COMMAND.request allows the ITS-S security entity to trigger an action at the ITS-S facilities layer.

The parameters of SF-COMMAND.request are as follows:

```
SF-COMMAND.request      (
                          CommandRef,
                          SF-Command
                          )
```

Table 25 — SF-COMMAND.request parameter description

Name	Description
CommandRef	Unique cyclic reference number of command.
SF-Command.No	See Annex H .
SF-Command.Value	See Annex H .

An SF-COMMAND.request shall be generated by the ITS-S security entity when the ITS-S facilities layer shall perform an action.

On receipt of SF-COMMAND.request, the requested action shall be performed.

11.2.3 SF-COMMAND.confirm

The service primitive SF-COMMAND.confirm reports the result of a previous SF-COMMAND.request.

The parameters of SF-COMMAND.confirm are as follows:

```
SF-COMMAND.confirm      (
                          CommandRef,
                          SF-CmdConfirm,
                          ErrStatus
                          )
```

Table 26 — SF-COMMAND.confirm parameter description

Name	Description
CommandRef	Unique cyclic reference number of command. Same value as in related SF-COMMAND.request.
SF-CmdConfirm.No	Reference number of command. Same value as SF-Command.No in related SF-COMMAND.request.
SF-CmdConfirm.Value	Carries optional confirm data.
ErrStatus	Error/return code, see Table P.1 .

An SF-COMMAND.confirm shall be generated by the ITS-S facilities layer upon performance of a previous SF-COMMAND.request in case ErrStatus indicates error or SF-CmdConfirm is present. It may be generated in case ErrStatus indicates success or SMF-CmdConfirm is not present.

On receipt of SF-COMMAND.confirm, ErrStatus and SF-CmdConfirm shall be evaluated and a possible action shall be performed properly.

11.3 SF-REQUEST

11.3.1 SF-REQUESTs

[Annex I](#) provides an overview and coding details on SF-REQUESTs.

SF-REQUESTs shall be enabled by means of the service primitives SF-REQUEST.request and SF-REQUEST.confirm.

11.3.2 SF-REQUEST.request

The service primitive SF-REQUEST.request allows the ITS-S facilities layer to trigger an action at the ITS-S security entity.

The parameters of SF-REQUEST.request are as follows:

```
SF-REQUEST.request (
    CommandRef,
    SN-Request
)
```

Table 27 — SF-REQUEST.request parameter description

Name	Description
CommandRef	Unique cyclic reference number of command.
SF-Request.No	See Annex I .
SF-Request.Value	See Annex I .

An SF-REQUEST.request shall be generated by the facilities layer when the ITS station management entity shall perform an action.

On receipt of SF-REQUEST.request, the required action shall be performed.

11.3.3 SF-REQUEST.confirm

The service primitive SF-REQUEST.confirm reports the result of a previous SF-REQUEST.request.

The parameters of SF-REQUEST.confirm are as follows:

```
SF-REQUEST.confirm (
    CommandRef,
    SF-ReqConfirm,
    ErrStatus
)
```

Table 28 — SF-REQUEST.confirm parameter description

Name	Description
CommandRef	Unique cyclic reference number of command. Same value as in related SF-REQUEST.request.
SF-ReqConfirm.No	Reference number of command. Same value as SF-Request.No in related SF-REQUEST.request.

Table 28 (continued)

Name	Description
SF-ReqConfirm.Value	Carries optional confirm data.
ErrStatus	Error/return code, see Table P.1 .

An SF-REQUEST.confirm shall be generated by the ITS-S security entity upon performance of a previous SF-REQUEST.request in case ErrStatus indicates error or SF-ReqConfirm is present. It may be generated in case ErrStatus indicates success or MF-ReqConfirm is not present.

On receipt of SF-REQUEST.confirm, ErrStatus and SF-ReqConfirm shall be evaluated and a possible action shall be performed properly. Details are outside the scope of this part of ISO 24102.

12 MS-SAP

12.1 General

Basically, there shall be the following different types of services that facilitate

- a) sending a command from the ITS-S management entity to the ITS-S security entity, and
- b) receiving a request (command) from the ITS-S security entity by the ITS-S management entity.

Issuing of commands by the ITS-S management entity to the ITS-S security entity shall be built on the service MS-COMMAND.

Receiving of requests from the ITS-S security entity by the ITS-S management entity shall be built on the service MS-REQUEST.

Details of the service primitives shall be as specified in [Annex A](#).

12.2 MS-COMMAND

12.2.1 MS-COMMANDs

[Annex N](#) provides an overview and coding details on MS-COMMANDs that may be sent by the ITS-S management entity to the ITS-S security entity.

MS-COMMANDs shall be enabled by means of the service primitives MS-COMMAND.request and MS-COMMAND.confirm.

12.2.2 MS-COMMAND.request

The management service primitive MS-COMMAND.request allows the ITS-S management entity to trigger an action at the ITS-S security entity.

The parameters of the management service primitive MS-COMMAND.request are as follows:

```
MS-COMMAND.request      (
                          CommandRef,
                          MS-Command
                          )
```

Table 29 — MS-COMMAND.request parameter description

Name	Description
CommandRef	Unique cyclic reference number of command.
MS-Command.No	See Annex N .
MS-Command.Value	See Annex N .

An MS-COMMAND.request shall be generated by the ITS-S management entity when the ITS-S security entity shall perform an action.

On receipt of MS-COMMAND.request, the requested action shall be performed.

12.2.3 MS-COMMAND.confirm

The service primitive MS-COMMAND.confirm reports the result of a previous MS-COMMAND.request.

The parameters of MS-COMMAND.confirm are as follows:

```
MS-COMMAND.confirm      (
                          CommandRef,
                          MS-CmdConfirm,
                          ErrStatus
                          )
```

Table 30 — MS-COMMAND.confirm parameter description

Name	Description
CommandRef	Unique cyclic reference number of command. Same value as in related MS-COMMAND.request.
MS-CmdConfirm.No	Reference number of command. Same value as MS-Command.No in related MS-COMMAND.request.
MS-CmdConfirm.Value	Carries optional confirm data.
ErrStatus	Error/return code, see Table P.1 .

An MS-COMMAND.confirm shall be generated by the ITS-S security entity upon performance of a previous MS-COMMAND.request in case ErrStatus indicates error or MS-CmdConfirm is present. It may be generated in case ErrStatus indicates success or MS-CmdConfirm is not present.

On receipt of MS-COMMAND.confirm, ErrStatus and MS-CmdConfirm shall be evaluated and a possible action shall be performed properly.

12.3 MS-REQUEST

12.3.1 MS-REQUESTs

[Annex O](#) provides an overview and coding details on MS-REQUESTs.

MS-REQUESTs shall be enabled by means of the service primitives MS-REQUEST.request and MS-REQUEST.confirm.

12.3.2 MS-REQUEST.request

The management service primitive MS-REQUEST.request allows the ITS-S security entity to trigger an action at the ITS-S management entity.

The parameters of MS-REQUEST.request are as follows:

```
MS-REQUEST.request      (
                          CommandRef,
                          MS-Request
                          )
```

Table 31 — MS-REQUEST.request parameter description

Name	Description
CommandRef	Unique cyclic reference number of command.
MS-Request.No	See Annex O .
MS-Request.Value	See Annex O .

An MS-REQUEST.request shall be generated by the ITS-S security entity when the ITS station management entity shall perform an action.

On receipt of MS-REQUEST.request, the required action shall be performed.

12.3.3 MS-REQUEST.confirm

The service primitive MS-REQUEST.confirm reports the result of a previous MS-REQUEST.request.

The parameters of MS-REQUEST.confirm are as follows:

```
MS-REQUEST.confirm      (
                          CommandRef,
                          MS-ReqConfirm,
                          ErrStatus
                          )
```

Table 32 — MS-REQUEST.confirm parameter description

Name	Description
CommandRef	Unique cyclic reference number of command. Same value as in related MS-REQUEST.request.
MS-ReqConfirm.No	Reference number of command. Same value as MS-Request.No in related MS-REQUEST.request.
MS-ReqConfirm.Value	Carries optional confirm data.
ErrStatus	Error/return code, see Table P.1 .

An MS-REQUEST.confirm shall be generated by the ITS-S management entity upon performance of a previous MS-REQUEST.request in case ErrStatus indicates error or MS-ReqConfirm is present. It may be generated in case ErrStatus indicates success or MS-ReqConfirm is not present.

On receipt of MS-REQUEST.confirm, ErrStatus and MS-ReqConfirm shall be evaluated and a possible action shall be performed properly. Details are outside the scope of this part of ISO 24102.

13 Conformance

Service access points may be not observable and not testable. Thus, no conformance tests are specified.

NOTE Service access points may become observable and thus testable as PDUs for Inter-ITS-SCU communications specified in ISO 24102-4.

Annex A (normative)

ASN.1 modules

A.1 Overview

The following ASN.1 module is specified in this annex:

- CALMmsap { ISO (1) standard (0) calm-management (24102) msap (3) version1 (1)}

A.2 Module CALMmsap

This module specifies ASN.1 type definitions together with useful ASN.1 value definitions.

Unaligned packed encoding rules (PER) as specified in ISO/IEC 8825-2 shall be applied for this ASN.1 module.

In order to achieve octet alignment and enabling cheap implementations, "fill" bits were defined. All fill bits shall be set to the value '0'b. In case fill bits precede a CHOICE type, the CHOICE tag shall be evaluated only in case all fill bits show the value '0'b in order to identify a conflict with newer versions of the specification providing more choices.

```

CALMmsap { iso (1) standard (0) calm-management (24102) msap (3) version1 (1)}

DEFINITIONS AUTOMATIC TAGS ::= BEGIN

IMPORTS

Ciclass, Cistatus, Errors, INsapPrimitivesDown, INsapPrimitivesUp, I-Param, I-ParamNo,
KineVectOut, Link-ID, MACaddress, MedID, MedType, UserPriority FROM CALMllsap {iso(1)
standard(0) calm-ll-sap(21218) version1(1)}

ITS-scuId, ITS-SSI FROM CALMmanagement { iso (1) standard (0) calm-management (24102)
local(1) version1 (1)}

IICrequestTX, IICresponseTX, IICrequestRX, IICresponseRX FROM CALMiiTSSCU { iso (1)
standard (0) calm-management (24102) iitsscu (4) version1 (1)}

GCctx, GCdeleteCmd, GCregerServer, GCregerServerConf, GCsam, GCsamctx, GCsamctxConf,
GCctxTxCmd, GCperiodCmd, CTXrxNot, SAMrxNot, GCupdateServer, GCupdateServerConf,
GCderegServer, GCderegServerConf, GCregerClient, GCregerClientConf, GCupdateClient,
GCupdateClientConf, GCderegClient, GCderegClientConf FROM CALMfsap { iso (1) standard (0)
calm-management (24102) fsap (5) version1 (1)}

SetIPv6, SetConfIPv6, UpdateIPv6, DeleteIPv6, SetNotIPv6, UpdateNotIPv6, DeleteNotIPv6
FROM CALMipv6{iso(1) standard(0) calm-ipv6(21210) version0(0)}

HostServiceInfo, NFSapPrimitivesDown, NFSapPrimitivesUp, SetFNTP, SetConfFNTP, UpdateFNTP,
DeleteFNTP, SetNotFNTP, UpdateNotFNTP, DeleteNotFNTP FROM CALMfntp { iso (1) standard (0)
calm-nonip(29281) fntp(1) version1 (1)}

ITS-S-Appl-Reg FROM CITSapplReq {iso(1) standard(0) cits-applReq (17423) version1 (1)}

;
-- End of IMPORTS
-- Types

-- MF-SAP Service primitives --

MF-Command-request ::= SEQUENCE {
    commandRef      CommandRef,

```

```

command-param      MF-Command
}

MF-Command ::= SEQUENCE {
    fill            BIT STRING (SIZE(4)),
    mfCmd           CHOICE {
        gCsamctx    GCsamctx,
        gCsam       GCsam,
        gCctx       GCctx,
        lDMnotify   LDMnotify,
        legacyCI     LegacyCIreq,
        stateCInotify StateCInotify,
        gCperiodCmd GCperiodCmd,
        gCctxTxCmd  GCctxTxCmd,
        gCdeleteCmd GCdeleteCmd,
        iICrequestTX IICrequestTX,
        iICresponseTX IICresponseTX
    }
}

LDMnotify ::= SEQUENCE (SIZE(0..255)) OF RadarView

RadarView ::= SEQUENCE {
    peerITS-SSI    ITS-SSI
}

LegacyCIreq ::= SEQUENCE {
    cIclass        Ciclass,
    legacyOption   INTEGER(0..255),
    linkId         Link-ID
}

StateCInotify ::= SEQUENCE {
    linkId         Link-ID,
    cIstatus       CIstatus
}

MF-Command-confirm ::= SEQUENCE {
    commandRef     CommandRef,
    cmdConfirm     MF-CmdConfirm,
    errStatus      ErrStatus
}

MF-CmdConfirm ::= SEQUENCE {
    fill           BIT STRING (SIZE(4)),
    mfCmdConf     CHOICE {
        gCsamctx    GCsamctxConf,
        gCsam       NULL,
        gCctx       NULL,
        lDMnotify   NULL,
        legacyCI     HostServiceInfo,
        stateCInotify NULL,
        gCperiodCmdConf NULL,
        gCctxTxCmdConf NULL,
        gCdeleteCmdConf NULL,
        iICrequestTXConf NULL,
        iICresponseTXConf NULL
    }
}

MF-Request-request ::= SEQUENCE {
    commandRef     CommandRef,
    request-param  MF-Request
}

MF-Request ::= SEQUENCE {
    fill           BIT STRING (SIZE(4)),
    mfReq         CHOICE {
        ITS-S-Appl-Reg ITS-S-Appl-Reg,
        gCregServer    GCregServer,
        gCupdateServer GCupdateServer,

```

```

        gCderegServer      GCderegServer,
        gCregClient        GCregClient,
        gCupdateClient     GCupdateClient,
        gCderegClient      GCderegClient,
        lDMregister        LDMregister,
        sAMrxNot           SAMrxNot,
        cTXrxNot           CTXrxNot,
        iICrequestRX       IICrequestRX,
        iICresponseRX      IICresponseRX
    }
}

LDMregister ::= SEQUENCE {
    ITS-scuId      ITS-scuId,
    reference      OCTET STRING (SIZE(0..65535))
}

MF-Request-confirm ::= SEQUENCE {
    commandRef     CommandRef,
    reqConfirm     MF-ReqConfirm,
    errStatus      ErrStatus
}

MF-ReqConfirm ::= SEQUENCE {
    fill          BIT STRING (SIZE(4)),
    mfReqConf     CHOICE {
        ITS-S-Appl-Reg      NULL,
        gCregServer         GCregServerConf,
        gCupdateServer     GCupdateServerConf,
        gCderegServer      GCderegServerConf,
        gCregClient        GCregClientConf,
        gCupdateClient     GCupdateClientConf,
        gCderegClient      GCderegClientConf,
        lDMregister        ITS-scuId,
        sAMrxNot           NULL,
        cTXrxNot           NULL,
        iICrequestRXConf  NULL,
        iICresponseRXConf NULL
    }
}

-- MN-SAP Service primitives --

MN-Command-request ::= SEQUENCE {
    commandRef     CommandRef,
    command-param MN-Command
}

MN-Command ::= SEQUENCE {
    fill          BIT STRING (SIZE(5)),
    mnCmd        CHOICE {
        simNFcmd      SimNFcmd,
        fWTset        FWTset,
        fWTupdate     FWTupdate,
        fWTdelete     FWTdelete
    }
}

SimNFcmd ::= SEQUENCE {
    fill          BIT STRING (SIZE(7)),
    simNFcmd     CHOICE {
        fntp          NFsapPrimitivesDown
    }
}

FWTset ::= SEQUENCE {
    fill          BIT STRING (SIZE(7)),
    set          CHOICE {
        ipv6          SetIPv6,
        fntp          SetFNTP
    }
}

--
    geo          SetGeo,

```

```

--      oem          SetOEM,
    }
}

FWTupdate ::= SEQUENCE {
    fill          BIT STRING (SIZE(7)),
    update        CHOICE {
        ipv6       UpdateIPv6,
        fntp       UpdateFntp,
--      geo        UpdateGeo,
--      oem        UpdateOEM,
    }
}

FWTdelete ::= SEQUENCE {
    fill          BIT STRING (SIZE(7)),
    delete        CHOICE {
        ipv6       DeleteIPv6,
        fntp       DeleteFntp,
--      geo        DeleteGeo,
--      oem        DeleteOEM,
    }
}

MN-Command-confirm ::= SEQUENCE {
    commandRef    CommandRef,
    cmdConfirm    MN-CmdConfirm,
    errStatus     ErrStatus
}

MN-CmdConfirm ::= SEQUENCE {
    fill          BIT STRING (SIZE(5)),
    mfCmdConf     CHOICE {
        simNfCmd   NULL,
        fWTsetConf FWTsetConf,
        fWTupdateConf NULL,
        fWTdeleteConf NULL
    }
}

FWTsetConf ::= SEQUENCE {
    fill          BIT STRING (SIZE(7)),
    setConf       CHOICE {
        ipv6       SetConfIPv6,
        fast       SetConfFntp,
--      geo        SetConfGeo,
--      oem        SetConfOEM,
    }
}

MN-Request-request ::= SEQUENCE {
    commandRef    CommandRef,
    request-param MN-Request
}

MN-Request ::= SEQUENCE {
    fill          BIT STRING (SIZE(5)),
    mnReq         CHOICE {
        simNfReq   SimNfReq,
        fWTsetNot  FWTsetNot,
        fWTupdateNot FWTupdateNot,
        fWTdeleteNot FWTdeleteNot,
        vCIcreatePeerMAC VCIcreatePeerMAC,
        its-ssiPeerNot Its-ssiPeerNot
    }
}

SimNfReq ::= SEQUENCE {
    fill          BIT STRING (SIZE(7)),
    simNfReq     CHOICE {
        fntp       NfsapPrimitivesUp
    }
}

```

```

    }
}

FWTsetNot ::= SEQUENCE {
    fill          BIT STRING (SIZE(7)),
    setNot        CHOICE {
        ipv6       SetNotIPv6,
        fast       SetNotFNTF,
        -- geo     SetNotGeo,
        -- oem     SetNotOEM,
    }
}

FWTupdateNot ::= SEQUENCE {
    fill          BIT STRING (SIZE(7)),
    updateNot     CHOICE {
        ipv6       UpdateNotIPv6,
        fast       UpdateNotFNTF,
        -- geo     UpdateNotGeo,
        -- oem     UpdateNotOEM,
    }
}

FWTdeleteNot ::= SEQUENCE {
    fill          BIT STRING (SIZE(7)),
    deleteNot    CHOICE {
        ipv6       DeleteNotIPv6,
        fast       DeleteNotFNTF,
        -- geo     DeleteNotGeo,
        -- oem     DeleteNotOEM,
    }
}

VCIcreatePeerMAC ::= SEQUENCE {
    reference     INTEGER (0..255),
    linkId        Link-ID,
    peerMac       MACAddress
}

Its-ssiPeerNot ::= SEQUENCE {
    sap           INTEGER (0..255),
    macAddress    MACAddress,
    linkId        Link-ID,
    its-ssiData   ITS-SSI
}

StationType ::= INTEGER {
    mobile        (0),
    fixed         (1),
    infrastructure (2),
    vehicle       (3),
    roadside      (4),
    central       (5),
    portable      (6),
    unknown       (255)
} (0..255)

StationID ::= OCTET STRING (SIZE(4))

MN-Request-confirm ::= SEQUENCE {
    commandRef    CommandRef,
    reqConfirm    MN-ReqConfirm,
    errStatus     ErrStatus
}

MN-ReqConfirm ::= SEQUENCE {
    fill          BIT STRING (SIZE(5)),
    mnReqConf     CHOICE {
        simNFreq   NULL,
        fWTsetNot  NULL,
        fWTupdateNot NULL,
    }
}

```

```

        fWTdeletNot      NULL,
        vCIcreatePeerMAC VCIPeerMAC,
        its-ssiPeerNot   NULL
    }
}

VCIPeerMAC ::= SEQUENCE {
    reference    INTEGER (0..255),
    linkId      Link-ID
}

-- MI-SAP Service primitives --

MI-Command-request ::= SEQUENCE {
    linkID      Link-ID,
    commandRef  CommandRef,
    command-param MI-Command
}

MI-Command ::= SEQUENCE {
    fill        BIT STRING (SIZE(4)),
    miCmd       CHOICE {
        simINcmd      SimINcmd,
        regCmd        RegCmd,
        cIstate       CIstateChng,
        wakeup        WakeUp,
        rTScmd        RTScmd,
        rTSackCmd     RTSackCmd,
        cONcmd        CONcmd,
        rIcmd         RICmd,
        manuCmd       OCTET STRING,
        vciCmd        VciCmd,
        monitor       Monitor,
        unitDataCmd   UnitData
    }
}

SimINcmd ::= SEQUENCE {
    fill        BIT STRING (SIZE(7)),
    simINcmd    CHOICE {
        inDown        INsapPrimitivesDown
    }
}

RegCmd ::= SEQUENCE {
    scuId       ITS-scuId,
    medID       MedID
}

CIstateChng ::= INTEGER {
    deregister   (0),
    activate     (4),
    resume       (8),
    connect      (16),
    disconnect   (32),
    suspend      (64),
    inactivate   (128)
} (0..255)

WakeUp ::= INTEGER (0..255)

RTScmd ::= SEQUENCE {
    reqID       ReqID,
    priority    UserPriority,
    seqNo       INTEGER (0..255),
    status      INTEGER {
        release      (0), -- release prioritization
        request      (16) -- request prioritization
    } (0..255)
}

```

```

ReqID ::= SEQUENCE {
    linkID      Link-ID
}

RTSackCmd ::= SEQUENCE {
    priority    UserPriority,
    seqNo      INTEGER (0..255),
    status     INTEGER {
        ignored      (64), -- request ignored
        granted      (128) -- request granted
    } (0..255)
}

CONcmd ::= INTEGER {
    deleteAC   (0),
    connect    (1),
    disconnect  (255)
} (0..255)

RIcmd ::= SEQUENCE {
    linkID      Link-ID,
    ri          RI
}

RI ::= OCTET STRING (SIZE(0..65535))

VciCmd ::= SEQUENCE (SIZE(0..65535)) OF SEQUENCE {
    fill        BIT STRING (SIZE(7)),
    linkID      Link-ID,
    alive       BOOLEAN OPTIONAL
}

Monitor ::= SEQUENCE (SIZE(0..255)) OF SEQUENCE {
    paramNo     INTEGER (0..255), -- valid parameter number
    active      INTEGER {
        stop (0),
        start (255)
    } (0..255)
}

MI-Command-confirm ::= SEQUENCE {
    linkID      Link-ID,
    commandRef  CommandRef,
    errStatus   ErrStatus
}

MI-Request-request ::= SEQUENCE {
    linkID      Link-ID,
    commandRef  CommandRef,
    request-param MI-Request
}

MI-Request ::= SEQUENCE {
    fill        BIT STRING (SIZE(4)),
    miReq       CHOICE {
        simINreq  SimINreq,
        regReq    RegReq,
        prioReg   PrioReg,
        rTSreq    RTSreq,
        rTSackReq RTSackReq,
        rIreq     RIreq,
        manure    OCTET STRING,
        events    Events21218,
        posUpdateReq PosUpdateReq,
        unitDataReq UnitData
    }
}

SimINreq ::= SEQUENCE {
    fill        BIT STRING (SIZE(7)),
    simINreq    CHOICE {

```

STANDARD.PDF.COM : Click to view the full PDF of ISO 24102-3:2013

```

        inUp          INsapPrimitivesUp
    }
}

RegReq ::= SEQUENCE {
    medType          MedType
}

PrioReq ::= SEQUENCE {
    interferers      Interferers,
    timeout          INTEGER (0..255)
}

Interferers ::= SEQUENCE (SIZE (0..255)) OF MedType

RTSreq ::= SEQUENCE {
    priority         UserPriority,
    seqNo           INTEGER (0..255),
    status          INTEGER {
        release      (0), -- release prioritization
        request      (16) -- request prioritization
    } (0..255)
}

RTSackReq ::= SEQUENCE {
    reqID           ReqID,
    seqNo          INTEGER (0..255),
    status         INTEGER {
        ignored      (64), -- request ignored
        granted      (128) -- request granted
    } (0..255)
}

RIreq ::= SEQUENCE {
    medType         MedType,      -- medium for retrieval
    riAccess        RIaccess     -- request frame details
}

RIaccess ::= OCTET STRING (SIZE (0..65535))
Events21218 ::= SEQUENCE {
    fill           BIT STRING (SIZE (4)),
    events        CHOICE {
        minUserPrio      E21218-0, -- MinimumUserPriority
        txQueueThreshold E21218-1, -- TX queue at threshold
        txQueueFull      E21218-2, -- TX queue full
        vciCreated       E21218-3, -- VCI created
        vciDeleted       E21218-4, -- VCI deleted
        paramMonitor     E21218-5, -- Automatic notification
        txQueueLow       E21218-6, -- TX queue below low thresh.
        vciReset         E21218-7 -- VCI reset
    }
}

E21218-0 ::= SEQUENCE {
    priority         UserPriority,
    linkID          Link-ID
}

E21218-1 ::= UserPriority
E21218-2 ::= UserPriority
E21218-3 ::= Link-ID
E21218-4 ::= Link-ID
E21218-5 ::= I-Param
E21218-6 ::= UserPriority
E21218-7 ::= Link-ID

```

PosUpdateReq ::= INTEGER(0..65535) -- 0: Update disabled
 -- >0: Update interval in ms

```
MI-Request-confirm ::= SEQUENCE {
  linkID      Link-ID,
  commandRef  CommandRef,
  errStatus   ErrStatus
}
```

```
MI-Set-request ::= SEQUENCE {
  linkID      Link-ID,
  commandRef  CommandRef,
  set-param   SEQUENCE OF I-Param
}
```

```
MI-Set-confirm ::= SEQUENCE {
  linkID      Link-ID,
  commandRef  CommandRef,
  set-param   SEQUENCE OF Errors
}
```

```
MI-Get-request ::= SEQUENCE {
  linkID      Link-ID,
  commandRef  CommandRef,
  get-param-no SEQUENCE OF I-ParamNo
}
```

```
MI-Get-confirm ::= SEQUENCE {
  linkID      Link-ID,
  commandRef  CommandRef,
  set-param   SEQUENCE OF I-Param
}
```

```
UnitData ::= SEQUENCE {
  sourceAddr  Link-ID,
  destAddr    Link-ID,
  data        OCTET STRING (SIZE(0..65535)),
  priority    UserPriority,
  parameter   OCTET STRING (SIZE(0..65535)) -- tbd dependent on medium
}
```

-- SF-SAP Service primitives --

```
SF-Command-request ::= SEQUENCE {
  commandRef  CommandRef,
  command-param SF-Command
}
```

```
SF-Command ::= SEQUENCE {
  fill        BIT STRING (SIZE(7)),
  sfCmd       CHOICE {
    dummy      NULL
  }
}
```

```
SF-Command-confirm ::= SEQUENCE {
  commandRef  CommandRef,
  cmdConfirm  SF-CmdConfirm,
  errStatus   ErrStatus
}
```

```
SF-CmdConfirm ::= SEQUENCE {
  fill        BIT STRING (SIZE(7)),
  sfCmdConf   CHOICE {
    dummy      NULL
  }
}
```

```
SF-Request-request ::= SEQUENCE {
  commandRef  CommandRef,
```

```

    request-param      SF-Request
  }

SF-Request ::= SEQUENCE {
    fill              BIT STRING (SIZE(7)),
    sfReq            CHOICE {
        dummy        NULL
    }
}

SF-Request-confirm ::= SEQUENCE {
    commandRef      CommandRef,
    reqConfirm      SF-ReqConfirm,
    errStatus       ErrStatus
}

SF-ReqConfirm ::= SEQUENCE {
    fill            BIT STRING (SIZE(7)),
    sfReqConf      CHOICE {
        dummy        NULL
    }
}

-- SN-SAP Service primitives --

SN-Command-request ::= SEQUENCE {
    commandRef      CommandRef,
    command-param   SN-Command
}

SN-Command ::= SEQUENCE {
    fill            BIT STRING (SIZE(7)),
    snCmd          CHOICE {
        dummy        NULL
    }
}

SN-Command-confirm ::= SEQUENCE {
    commandRef      CommandRef,
    cmdConfirm      SN-CmdConfirm,
    errStatus       ErrStatus
}

SN-CmdConfirm ::= SEQUENCE {
    fill            BIT STRING (SIZE(7)),
    snCmdConf      CHOICE {
        dummy        NULL
    }
}

SN-Request-request ::= SEQUENCE {
    commandRef      CommandRef,
    request-param   SN-Request
}

SN-Request ::= SEQUENCE {
    fill            BIT STRING (SIZE(7)),
    snReq          CHOICE {
        dummy        NULL
    }
}

SN-Request-confirm ::= SEQUENCE {
    commandRef      CommandRef,
    reqConfirm      SN-ReqConfirm,
    errStatus       ErrStatus
}

SN-ReqConfirm ::= SEQUENCE {
    fill            BIT STRING (SIZE(7)),
    snReqConf      CHOICE {

```

```

        dummy          NULL
    }
}

-- SI-SAP Service primitives --

SI-Command-request ::= SEQUENCE {
    commandRef        CommandRef,
    command-param     SI-Command
}

SI-Command ::= SEQUENCE {
    fill              BIT STRING (SIZE(7)),
    siCmd            CHOICE {
        dummy          NULL
    }
}

SI-Command-confirm ::= SEQUENCE {
    commandRef        CommandRef,
    cmdConfirm        SI-CmdConfirm,
    errStatus         ErrStatus
}

SI-CmdConfirm ::= SEQUENCE {
    fill              BIT STRING (SIZE(7)),
    siCmdConf        CHOICE {
        dummy          NULL
    }
}

SI-Request-request ::= SEQUENCE {
    commandRef        CommandRef,
    request-param     SI-Request
}

SI-Request ::= SEQUENCE {
    fill              BIT STRING (SIZE(7)),
    siReq            CHOICE {
        dummy          NULL
    }
}

SI-Request-confirm ::= SEQUENCE {
    commandRef        CommandRef,
    reqConfirm        SI-CmdConfirm,
    errStatus         ErrStatus
}

SI-ReqConfirm ::= SEQUENCE {
    fill              BIT STRING (SIZE(7)),
    siReqConf        CHOICE {
        dummy          NULL
    }
}

-- MS-SAP Service primitives --

MS-Command-request ::= SEQUENCE {
    commandRef        CommandRef,
    command-param     MS-Command
}

MS-Command ::= SEQUENCE {
    fill              BIT STRING (SIZE(7)),
    msCmd            CHOICE {
        dummy          NULL
    }
}

MS-Command-confirm ::= SEQUENCE {

```

STANDARDS150.COM : Click to view the full PDF of ISO 24102-3:2013

```

        commandRef      CommandRef,
        cmdConfirm      MS-CmdConfirm,
        errStatus       ErrStatus
    }

MS-CmdConfirm ::= SEQUENCE {
    fill                BIT STRING (SIZE(7)),
    msCmdConf          CHOICE {
        dummy           NULL
    }
}

MS-Request-request ::= SEQUENCE {
    commandRef          CommandRef,
    request-param       MS-Request
}

MS-Request ::= SEQUENCE {
    fill                BIT STRING (SIZE(7)),
    msReq               CHOICE {
        dummy           NULL
    }
}

MS-Request-confirm ::= SEQUENCE {
    commandRef          CommandRef,
    reqConfirm          MS-ReqConfirm,
    errStatus           ErrStatus
}

MS-ReqConfirm ::= SEQUENCE {
    fill                BIT STRING (SIZE(7)),
    msReqConf           CHOICE {
        dummy           NULL
    }
}

-- General types --

ErrStatus ::= INTEGER {
    Success              (0),
    unspecFailure       (1), -- unspecified failure
    invalParamNo        (2), -- invalid param no.
    invalParamVal       (3), -- invalid param value
    riViolation         (4), -- RI violation
    cmdReqNo            (5), -- invalid cmd/req no.
    cmdReqVal           (6), -- invalid cmd/req value
    accessViolation     (7), -- access violation
    invalidType         (8), -- invalid cmd/req type
    sequenceError       (9), -- cmd/req not applicable in the given context
    nonavailValue       (10), -- value required in cmd/req is not available
    hardwareFailure     (255) -- unspecified hardware failure
} (0..255)

CommandRef ::= INTEGER(0..255)

-- Values

/*
The ASN.1 specification has been checked for conformance to the ASN.1
standards by OSS ASN.1 Syntax Checker, and by OSS ASN-1STEP
*/

END

```

Annex B (normative)

MF-COMMANDS

B.1 Overview

Table B.1 presents a summary of defined MF-COMMANDS. ASN.1 types are presented for request/confirm service primitives. A more detailed description is provided in B.2.

Table B.1 — MF-COMMANDS

COMMAND	Description
GCsamctx	Notifies a service ITS-S application, which is registered for groupcasting, reception of a service advertisement frame (SAF), and acknowledgment of the expected service with a service context frame (SCF). ASN.1 type: GCsamctx / -
GCsam	Notifies to a service ITS-S application, which is registered for groupcasting, reception of a service advertisement frame (SAF) without acknowledgment of the expected service with a service context frame (SCF). ASN.1 types: GCsam / -
GCctx	Notifies to a server ITS-S application, which is registered for groupcasting, that a SCF requesting a specific context of the service was received. ASN.1 type: GCctx / -
LDMnotify	Notifies the LDM application about an update of the "Radar View". ASN.1 type: LDMnotify / -
LegacyCI	Notifies the "Legacy CI Port Manager" of the presence of a "Legacy CI". ASN.1 type: LegacyCIreq / HostServiceInfo
StateCInotify	Notifies the state of a CI. ASN.1 type: StateCInotify / -
GCperiodCmd	Send a groupcast request to the groupcast communication manager in order to trigger subsequent periodic groupcast transmissions to be performed by the FAST networking protocol. ASN.1 type: GCperiodCmd / -
GCctxTxCmd	Send "Context message" (CTX) to the groupcast communication manager for the purpose of unicast delivery to the selected peer station. ASN.1 type: GCctxTxCmd / -
GCdeleteCmd	Notifies deletion of a registration of an ITS-S application to the groupcast communication manager. ASN.1 type: GCdeleteCmd / -
IICrequestTX	Send IIC-Request PDU to IICA for transmission via the ITS station-internal network. ASN.1 type: IICrequestTX / -
IICresponseTX	Send IIC-Response PDU to IICA for transmission via the ITS station-internal network. ASN.1 type: IICresponseTX / -
SimFACmd	To be added in a future version of this part of ISO 24102.

B.2 Description

B.2.1 Basics

This subclause defines the detailed structure of MF-COMMANDs.

B.2.2 GCsafscf

This MF-COMMAND shall be as specified in ISO 24102-5.

Optionally, the MF-COMMAND.request may be confirmed with an MF-COMMAND.confirm carrying only an ErrStatus.

B.2.3 GCsam

This MF-COMMAND shall be as specified in ISO 24102-5.

This MF-COMMAND.request shall not be confirmed with an MF-COMMAND.confirm carrying only an ErrStatus.

B.2.4 GCsam

This MF-COMMAND shall be as specified in ISO 24102-5.

This MF-COMMAND.request shall not be confirmed with an MF-COMMAND.confirm carrying only an ErrStatus.

B.2.5 LDMnotify

Table B.2 — MF-COMMAND.request for MF-COMMAND LDMnotify

ASN.1 type	Description
MF-Command.IDMnotify	Notification of an update of the “Radar View” to the LDM application.
LDMnotify.radarView	Update of “Radar View”.
RadarView.iTS-SSI	ITS station state information.
ITS-SSI.stationType	See ISO 24102-1.
ITS-SSI.stationID	See ISO 24102-1.
ITS-SSI.kineVectOut	See ISO 21218.

Optionally, the MF-COMMAND.request may be confirmed with an MF-COMMAND.confirm carrying only an ErrStatus.

B.2.6 LegacyCI

Table B.3 — MF-COMMAND.request for MF-Command LegacyCI

ASN.1 type	Description
MF-Command.legacyCIrq	Notification of presence of an active “15628 CI”.
LegacyCIreq.ciClass	CI class of legacy CI as specified in ISO 21218.
LegacyCIreq.legacyOption	Type of “Legacy CI”.
LegacyCIreq.linkId	Link-ID of UC-VCI of the “Legacy CI”.

The MF-COMMAND.request shall be confirmed with an MF-COMMAND.confirm as specified in [Table B.4](#).

Table B.4 — MF-COMMAND.confirm for MF-COMMAND LegacyCI

ASN.1 type	Description
MF-Command.confirm.hostServiceInfo	
HostServiceInfo.serviceNWref	ServiceNWref of "Legacy CI Port Manager".
ServiceNWref.nWref	NWref pointing to "Legacy CI Port Manager".
ServiceNWref.ITS-scuId	ITS-SCU-ID of "Legacy CI Port Manager".

B.2.7 StateCInotify

Table B.5 — MF-COMMAND.request for MF-COMMAND StateCInotify

ASN.1 type	Description
MF-Command.stateCInotify	Notification of the state of a CI.
StateCInotify.linkId	Link-ID of CI specified in ISO 21218.
StateCInotify.cIstatus	Actual state of the CI specified in ISO 21218.

The MF-COMMAND.request shall not be acknowledged with an MF-COMMAND.confirm.

B.2.8 GCperiodCmd

This MF-COMMAND shall be as specified in ISO 24102-5.

B.2.9 GCctxTxCmd

This MF-COMMAND shall be as specified in ISO 24102-5.

B.2.10 GCdeleteCmd

This MF-COMMAND shall be as specified in ISO 24102-5.

B.2.11 IICrequestTX

This MF-COMMAND shall be as specified in ISO 24102-4.

B.2.12 IICresponseTX

This MF-COMMAND shall be as specified in ISO 24102-4.

Annex C (normative)

MF-REQUESTs

C.1 Overview

[Table C.1](#) presents a summary of defined MF-REQUESTs. ASN.1 types are presented for .request/.confirm service primitives. A more detailed description is provided in C.2.

Table C.1 — MF-REQUESTs

REQUEST name	Description
ITS-S-Appl-Reg	Allows an ITS-S application to announce its communication needs to the CI selection manager. ASN.1 types: ITS-S-Appl-Reg / -
GCreateServer	Allows a server application to register for groupcasting providing serviceData. ASN.1 type: GCreateServer / GCreateServerConf
GUpdateServer	Allows a server application to update groupcast information providing serviceData. ASN.1 type: GUpdateServer / GUpdateServerConf
GDeregServer	Allows a server application to deregister from groupcasting. ASN.1 type: GDeregServer / GDeregServerConf
GCreateClient	Allows a service user application to register for groupcasting. ASN.1 type: GCreateClient / GCreateClientConf
GUpdateClient	Allows a service user application to update groupcast information. ASN.1 type: GUpdateClient / GCreateClientConf
GDeregClient	Allows a service user application to deregister from groupcasting. ASN.1 type: GDeregClient / GDeregClientConf
LDMregister	Allows the LDM application to register at the ITS station management entity in order to receive updates of the "Radar View". ASN.1 type: LDMregister / ITS-scuId
SAMrxNot	Notifies reception of SAM. ASN.1 type: SAMrxNot / -
CTXrxNot	Notifies reception of CTX. ASN.1 type: CTXrxNot / -
IICrequestRX	Notifies reception of an IIC-Request PDU. ASN.1 type:
IICresponseRX	Notifies reception of an IIC-Response PDU. ASN.1 type:
SimFAreq	To be added in a future version of this part of ISO 24102.

C.2 Description

C.2.1 Basics

This subclause defines the detailed structure of MF-REQUESTs.

C.2.2 ITS-S-Appl-Reg

This MF-REQUEST shall be as specified in ISO 24102-1.

This MF-REQUEST shall be processed by the CI selection manager in the ITS-SCU for local usage and shall be forwarded to all other ITS-SCUs in the same ITS station.

In case the MF-REQUEST was not properly processed, MF-REQUEST.confirm shall indicate the error. Otherwise, there shall not be an acknowledgement of the MF-REQUEST.

C.2.3 GCregServer

This MF-REQUEST shall be as specified in ISO 24102-5.

In case of failure to process the MF-REQUEST.request, it shall be confirmed with an MF-REQUEST.confirm carrying only an ErrStatus.

C.2.4 GCupdateServer

This MF-REQUEST shall be as specified in ISO 24102-5.

In case of failure to process the MF-REQUEST.request, it shall be confirmed with an MF-REQUEST.confirm carrying only an ErrStatus.

C.2.5 GCderegServer

This MF-REQUEST shall be as specified in ISO 24102-5.

In case of failure to process the MF-REQUEST.request, it shall be confirmed with an MF-REQUEST.confirm carrying only an ErrStatus.

C.2.6 GCregClient

This MF-REQUEST shall be as specified in ISO 24102-5.

In case of failure to process the MF-REQUEST.request, it shall be confirmed with an MF-REQUEST.confirm carrying only an ErrStatus.

C.2.7 GCupdateClient

This MF-REQUEST shall be as specified in ISO 24102-5.

In case of failure to process the MF-REQUEST.request, it shall be confirmed with an MF-REQUEST.confirm carrying only an ErrStatus.

C.2.8 GCderegClient

This MF-REQUEST shall be as specified in ISO 24102-5.

In case of failure to process the MF-REQUEST.request, it shall be confirmed with an MF-REQUEST.confirm carrying only an ErrStatus.

C.2.9 LDMregister

Table C.2 — MF-REQUEST.request for MF-REQUEST LDMregister

ASN.1 type	Description
MF-Request.IDMregister	Allows the LDM application to register at the ITS station management entity in order to receive updates of the “Radar View”.
LDMregister.ITS-sculd	ITS-SCU-ID of host where LDM application resides.
LDMregister.reference	Defined by LDM application.

The MF-REQUEST.request shall be confirmed with an MF-REQUEST.confirm as specified in [Table C.3](#).

Table C.3 — MF-REQUEST.confirm for MF-REQUEST LDMregister

ASN.1 type	Description
MF-Request.IDMregister	ITS-SCU-ID of router where “Radar View” data are produced.

C.2.10 SAMrxNot

This MF-REQUEST shall be as specified in ISO 24102-5.

C.2.11 CTXrxNot

This MF-REQUEST shall be as specified in ISO 24102-5.

Annex D (normative)

MN-COMMANDs

D.1 Overview

[Table D.1](#) presents a summary of defined MN-COMMANDs. ASN.1 types are presented for request/confirm service primitives. A more detailed description is provided in D.2.

Table D.1 — MN-COMMANDs

COMMAND name	Description
SimNFcmd	Command to simulate an access to the networking and transport layer via NF-SAP. Applicable only in test mode. ASN.1: SimNFcmd / -
FWTset	Sets an entry in the forwarding table of a networking protocol. ASN.1: FWTset / FWTsetConf
FWTupdate	Updates an entry in the forwarding table of a networking protocol. ASN.1: FWTupdate / FWTupdateNot
FWTdelete	Deletes an entry in the forwarding table of a networking protocol. ASN.1: FWTdelete / FWTdeleteNot
PathMgmt	Command for managing a path. NOTE Details will be specified in the next revision of this part of ISO 24102.
FlowClassificationRule	Attribute an identifier to each packet that is output or forwarded by ITS Station. NOTE Details will be specified in the next revision of this part of ISO 24102.
FlowPolicy	Set flow policy for the currently available paths in local and neighbour ITS stations. NOTE Details will be specified in the next revision of this part of ISO 24102.
FlowFeedback	Request flow statistics from the network. NOTE Details will be specified in the next revision of this part of ISO 24102.
STAServDiscov	Discover an ITS station that can provide a service. NOTE Details will be specified in the next revision of this part of ISO 24102.

D.2 Description

D.2.1 Basics

This subclause defines the detailed structure of MN-COMMANDs.

D.2.2 SimNFcmd

Table D.2 — MN-COMMAND.request for MN-COMMAND SimNFcmd

ASN.1 type	Description
MN-Command.simNFcmd	Simulation of an NF-SAP service primitive issued at the ITS-S networking and transport layer to the ITS-S facilities layer. Requires activation of test mode.

D.2.3 FWTset

Table D.3 — MN-COMMAND.request for MN-COMMAND FWTset

ASN.1 type	Valid Range	Description
MN-Command.fWTset	CHOICE	Create a new entry in a forwarding table.

Table D.4 — MN-COMMAND.confirm for MN-COMMAND FWTset

ASN.1 type	Valid Range	Description
MN-CmdConfirm.fWTsetConf	CHOICE	Confirm creation of a new entry in a forwarding table.

D.2.4 FWTupdate

Table D.5 — MN-COMMAND.request for MN-COMMAND FWTupdate

ASN.1 type	Valid Range	Description
MN-Command.fWTupdate	CHOICE	Update an entry in a forwarding table.

D.2.5 FWTdelete

Table D.6 — MN-COMMAND.request for MN-COMMAND FWTdelete

ASN.1 type	Valid Range	Description
MN-Command.fWTdelete	CHOICE	Delete an entry in a forwarding table.

Annex E (normative)

MN-REQUESTs

E.1 Overview

Table E.1 presents a summary of defined MN-COMMANDs. ASN.1 types are presented for request/confirm service primitives. A more detailed description is provided in E.2.

Table E.1 — MN-REQUESTs

REQUEST name	Description
SimNFreq	Request using service primitives of the NF-SAP towards the ITS-S management. Applicable only in test mode. ASN.1: SimNFreq / -
FWTsetNot	Notification of creation of an entry in a forwarding table. ASN.1: FWTsetNot / -
FWTupdateNot	Notification of an update of an entry in a forwarding table. ASN.1: FWTupdateNot / -
FWTdeleteNot	Notification of deletion of an entry in a forwarding table. ASN.1: FWTdeleteNot / -
VCIcreatePeerMAC	Request to create a VCI in a specific CI with a given relation to a peer station expressed by the MAC address of the peer station. ASN.1: VCIcreatePeerMAC / VCIPeerMAC
Its-ssiPeerNot	Notification of "ITS-SSI Data" from a peer station. ASN.1: Its-ssiPeerNot / NULL
STAGeoNot	Notification of geographic information of an ITS station. NOTE Details will be specified in the next revision of this part of ISO 241002.
STATopoNot	Notification of topological locator of an ITS station. NOTE Details will be specified in the next revision of this part of ISO 241002.
STAServNot	Notification of service of an ITS station. NOTE Details will be specified in the next revision of this part of ISO 241002.
PathNot	Notification of status of a path. NOTE Details will be specified in the next revision of this part of ISO 241002.
PathMetricNot	Notification of network metric of a path. NOTE Details will be specified in the next revision of this part of ISO 241002.
FlowStatistics	Provide network flow statistics. NOTE Details will be specified in the next revision of this part of ISO 241002.

E.2 Description

E.2.1 Basics

This subclause defines the detailed structure of MN-REQUESTs.

E.2.2 SimNFreq

Table E.2 — MN-REQUEST.request for MN-REQUEST SimNFreq

ASN.1 type	Description
MN-Request.simNFreq	Simulation of an NF-SAP service primitive issued at the ITS-S networking and transport layer to the ITS-S facilities layer. Requires activation of test mode.

This request shall not be acknowledged with MN-REQUEST.confirm.

E.2.3 FWTsetNot

Table E.3 — MN-REQUEST.request for MN-REQUEST FWTsetNot

ASN.1 type	Description
MN-Request.fWTsetNot	Notification of creation of an entry in a forwarding table.

This request shall not be acknowledged with MN-REQUEST.confirm.

E.2.4 FWUpdateNot

Table E.4 — MN-REQUEST.request for MN-REQUEST FWUpdateNot

ASN.1 type	Description
MN-Request.fWUpdateNot	Notification of an update of an entry in a forwarding table.

This request shall not be acknowledged with MN-REQUEST.confirm.

E.2.5 FWTdeleteNot

Table E.5 — MN-REQUEST.request for MN-REQUEST FWTdeleteNot

ASN.1 type	Description
MN-Request.fWTdeleteNot	Notification of deletion of an entry in a forwarding table.

This request shall not be acknowledged with MN-REQUEST.confirm.

E.2.6 VCIcreatePeerMAC

Table E.6 — MN-REQUEST.request for MN-REQUEST VCIcreatePeerMAC

ASN.1 type	Description
MN-Request.vCIcreatePeerMAC	Request to create a VCI in a specific CI with a given relation to a peer station expressed by the MAC address of the peer station.
VCIcreatePeerMAC.reference	Cyclic reference number. To be incremented with every next request.

Table E.6 (continued)

ASN.1 type	Description
VCIcreatePeerMAC.linkID	Link-ID of CI, in which the VCI shall be created.
VCIcreatePeerMAC.mACaddress	MAC address of a potential peer ITS station which likely is in an existing communication zone of the own station.

This request shall be acknowledged with MN-REQUEST.confirm as specified in [Table E.7](#).

Table E.7 — MN-REQUEST.confirm for MN-REQUEST VCIcreatePeerMAC

ASN.1 type	Description
MN-ReqConfirm.vCIPeerMAC	Confirms creation of the requested VCI.
VCIPeerMAC.reference	Same value as in related request.
VCIPeerMAC.linkId	Link-ID of new VCI specified in ISO 21218.

E.2.7 Its-ssiPeerNot

Table E.8 — MN-REQUEST.request for MN-REQUEST Its-ssiPeerNot

ASN.1 type	Description
MN-Request.its-ssiPeerNot	Notification of "ITS-SSI Data" from a peer station.
Its-ssiPeerNot.sap	SAP address indicating type of networking protocol.
Its-ssiPeerNot.mACaddress	MAC address of peer station which provided the "ITS-SSI Data".
Its-ssiPeerNot.linkId	Link-ID related to peer station.
Its-ssiPeerNot.its-ssiData	ITS station state information specified in ISO 24102-1.

Annex F (normative)

MI-COMMANDS

F.1 Overview

[Table F.1](#) presents a summary of defined MN-COMMANDS. ASN.1 types are presented for request service primitives. A more detailed description is provided in F.2. See also ISO 21218.

Table F.1 — MI-COMMANDS

COMMAND name	Description
SimINcmd	Command to simulate an access to the access layer via IN-SAP. Applicable only in test mode. ASN.1: SimINcmd
RegCmd	Command acknowledging the request to register the CI. ASN.1: RegCmd
CIstateChng	Change of CI status. ASN.1: CIstateChng
WakeUp	0: Stops transmission of wake-up signal. 1 to 255: Starts repetitive transmission of wake-up signal with maximum interval in milliseconds. ASN.1: WakeUp
RTScmd	Information on a Request To Send (RTS). Used for cross-CI prioritization. ASN.1: RTScmd
RTSackCmd	Acknowledgement of an RTSreq request. ASN.1: RTSackCmd
CONcmd	Request a CI of CI access class CIAC-2 to connect to the communication service as soon as possible. ASN.1: CONcmd
RIcmd	Provision of regulatory information. ASN.1: RIcmd
ManuCmd	Allows for manufacturer-specific access to the CI. Used e.g. for test and maintenance purposes. NOTE Details are outside the scope of this part of ISO 24102. ASN.1: OCTET STRING
VCIcmd	Command to request creation, reset, or deletion of a VCI. Setting of parameters different to the default values for a newly created VCI has to be done in subsequent MI-SET commands. ASN.1: VciCmd

Table F.1 (continued)

COMMAND name	Description
Monitor	Command to request monitoring of parameters. ASN.1: Monitor
UnitDataCmd	Command to request transmission of a management data packet. ASN.1: UnitData

F.2 Description

F.2.1 Basics

This subclause defines the detailed structure of MI-COMMANDs.

Some MI-COMMANDs are applicable only for selected media.

F.2.2 SimINcmd

MI-COMMAND “Simulate_IN-SAP_Cmd” shall be used by the ITS-S management to simulate an access to the access layer via IN-SAP.

ASN.1 type	Valid range	Description
MI-Command.SimINcmd		IN-SAP service primitive used by networking and transport layer.
SimINcmd.simINcmd	CHOICE	
simINcmd.inDown		IN-SAP service primitives (from ITS-S network and transport layer to ITS-S access layer).

F.2.3 RegCmd

MI-COMMAND “RegCmd” shall be used by the ITS-S management to acknowledge a registration request from a CI.

ASN.1 type	Valid range	Description
MI-Command.regCmd		Request to register the CI.
RegCmd.scuID	0 to 255	Value of ITS-SCU-ID assigned by ITS-S management.
RegCmd.medID	0 to 255	Value of MedID assigned by ITS-S management.

F.2.4 CistateChng

MI-COMMAND “CistateChng” shall be used by the ITS-S management to request a change of CI state.

ASN.1 type	Valid range	Description
MI-Command.cIstate	INTEGER	deregister activate reactivate connect disconnect suspend inactivate

F.2.5 WakeUp

MI-COMMAND “WakeUp” shall be used by the ITS-S management to enable and disable transmission of wake-up signals in a CI. Details depend on the access technology (medium).

ASN.1 type	Valid range	Description
MI-Command.wakeUp	0, 1 to 255	0: Stops transmission of wake-up signal. 1 to 255: Starts repetitive transmission of wake-up signal with maximum interval in milliseconds.

F.2.6 RTScmd

MI-COMMAND “RTScmd” shall be used by the ITS-S management to request prioritization over interfering CIs.

ASN.1 type	Valid range	Description
MI-Command.rTScmd	—	Information on a Request To Send (RTS) of another CI. Used for cross-CI prioritization. Shall be acknowledged by REQUEST “RTSackReq”.
RTScmd.reqID	1 to 255	LocalCIID of CI announcing the dummy request.
RTScmd.priority	0 to 255	User priority of dummy request.
RTScmd.seqNo	0 to 255	Sequential number to identify dummy request. Cyclic counter.
RTScmd.status	INTEGER	release request

F.2.7 RTSackCmd

MI-COMMAND “RTSackcmd” shall be used by the ITS-S management to acknowledge a prioritization request from a CI.

ASN.1 type	Valid range	Description
MI-Command.rTSackCmd	—	Acknowledgement of a REQUEST “RTSreq”.
RTSackCmd.priority	0 to 255	Equal to MinPrioCrossCI, see ISO 21218.
RTSackCmd.seqNo	0 to 255	Sequential number to identify dummy request. Cyclic counter.
RTSackCmd.status	INTEGER	ignored granted

F.2.8 CONcmd

MI-COMMAND “CONcmd” shall be used by the CALM management to request that a CI of CI access class CIAC-2 or CIAC-3 connects/disconnects to the communication service or deletes access information.

ASN.1 type	Valid range	Description
MI-Command.cONcmd	INTEGER	deleteAC: Delete access information I-parameters “SIMpin” and “ProviderInfo”. This shall automatically disconnect from the service, if applicable. connect: Connect asap with given access information. If this information is not available, confirm command with error code 7. disconnect: Disconnect immediately without deleting access information.

F.2.9 RIcmd

MI-COMMAND “RIcmd” shall be used by the ITS-S management to forward a management data packet to a CI containing regulatory information as received via another CI.

ASN.1 type	Valid range	Description
MI-Command.rIcmd		
RIcmd.linkID		Link-ID of CI which shall receive regulatory information.
RIcmd.ri	OCTET STRING	Regulatory Information (RI) in medium-specific format.

F.2.10 Manufacturer

MI-COMMAND “ManuCmd” shall be used by the ITS-S management to allow a manufacturer to have private access to their CI.

ASN.1 type	Valid range	Description
MI-Command.manuCmd	any octet string	Manufacturer-specific octet string.

F.2.11 VCIcmd

MI-COMMAND “VCIcmd” shall be used by the ITS-S management to request creation, deletion, or reset of a VCI.

ASN.1 type	Valid range	Description
MI-Command.VCIcmd		
VCIcmd.linkID		Link-ID.
VCIcmd.alive	BOOLEAN	FALSE: Delete VCI, if alive. TRUE: Create VCI, if not existent, or reset it. For creation. use vciRef as SerialNumber of the LINK-ID of the new VCI .

F.2.12 Monitor

MI-COMMAND “Monitor” shall be used by the ITS-S management to request automatic notification of change of parameter values.

ASN.1 type	Valid range	Description
MI-Command. monitor	SEQUENCE	Sequence of parameters of which change of value shall be notified.
Monitor. I-ParamNo	CHOICE tag	Reference tag number of parameter to be monitored.
Monitor. active	0, 255	0: stop monitoring 255: start monitoring

F.2.13 UnitDataCmd

MI-COMMAND “UnitDataCmd” shall be used by the ITS-S management to request transmission of a management data packet.

ASN.1 type	Valid range	Description
MI-Command. unitDataCmd		Transmission request of a management data packet.
UnitDataCmd. sourceAddr	Link-ID	Same as source_address in DL_UNITDATA.request.
UnitDataCmd. destAddr	Link-ID	Same as destination_address in DL_UNITDATA.request.
UnitDataCmd. data		Same as data in DL_UNITDATA.request.
UnitDataCmd. priority		Same as priority in DL_UNITDATA.request.
UnitDataCmd. parameter		Parameters to be set prior to transmission/status information of received packet. Details depend on the access technology (medium).