



**International
Standard**

ISO 25649-3

**Floating leisure articles for use on
and in the water —**

**Part 3:
Additional specific safety
requirements and test methods for
Class A devices**

Articles de loisirs flottants à utiliser sur ou dans l'eau

*Partie 3: Exigences de sécurité et méthodes d'essai
complémentaires propres aux dispositifs de Classe A*

**Second edition
2024-10**

STANDARDSISO.COM : Click to view the full PDF of ISO 25649-3:2024



COPYRIGHT PROTECTED DOCUMENT

© ISO 2024

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Safety requirements and test methods	2
4.1 General.....	2
4.2 Design, sizing, admissible number of users and maximum load capacity.....	3
4.2.1 General.....	3
4.2.2 Sizing.....	3
4.2.3 Class A1-products, space per person and admissible number of users.....	3
4.2.4 Class A2-products, space per person and admissible number of users.....	4
4.3 In water performance.....	5
4.3.1 Amount of buoyancy and stable floating position.....	5
4.3.2 Residual buoyancy of devices claiming floating stability (CASES A, B).....	6
4.3.3 Residual buoyancy of floating leisure articles not claiming floating stability (CASES C, D).....	8
4.3.4 Capsizing and escape.....	9
4.3.5 Grab handles and safety lines (not applicable to air mattresses).....	10
4.3.6 Re-embarkation from the water in normal use (all air chambers fully inflated) and/or in case of failure of one air chamber in CASE A1.....	10
4.3.7 Extreme high super structure (wind, drift).....	10
4.3.8 Fixation methods.....	10
4.3.9 Giant rings with bottom, strength of entire device.....	11
5 Consumer information	12
5.1 General.....	12
5.2 Consumer information on the packaging (point of sale information).....	12
5.3 Consumer information on the product (information related to safe use).....	12
5.4 Consumer information by instructions for use (separate written information).....	12
5.4.1 General.....	12
5.4.2 Safety and product information.....	12
5.4.3 Assembly (if applicable).....	12
5.4.4 Maintenance and repair (if applicable).....	12
6 Test report	13
7 Exclusions	13
Annex A (informative) Examples of typical products forming Class A	14
Bibliography	16

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 83, *Sports and other recreational facilities and equipment*, in collaboration with the European Committee for Standardization (CEN) Technical Committee CEN/TC 136, *Sports, playground and other recreational facilities and equipment*, in accordance with the Agreement on technical cooperation between ISO and CEN (Vienna Agreement).

This second edition cancels and replaces the first edition (ISO 25649-3:2017), which has been technically revised.

The main changes are as follows:

- update of [Clause 2](#);
- in [4.3.7.1](#), modification of the requirements for Class A products - superstructure;
- creation of new subclauses ([4.3.8.1](#) to [4.3.8.5](#)) to include other fixation methods;
- update of [4.3.8](#) and [5.4.2](#).

A list of all parts in the ISO 25649 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

According to the nature and the intended use of the products dealt with in this document the technical requirements are focused on space per person, floating stability matters and residual buoyancy in case of an emergency.

Some of the products provide dual or multiple use features.

NOTE Multiple use features product is considered as a product intended to be used for more than one purpose (e.g: trampoline for jumping or resting).

Comprehensive consumer information requirements complete the requirement profile of the document and include basic purchase information on whether a product provides floating stability or needs to be balanced by the user, to create safe floating.

Interior structure class A

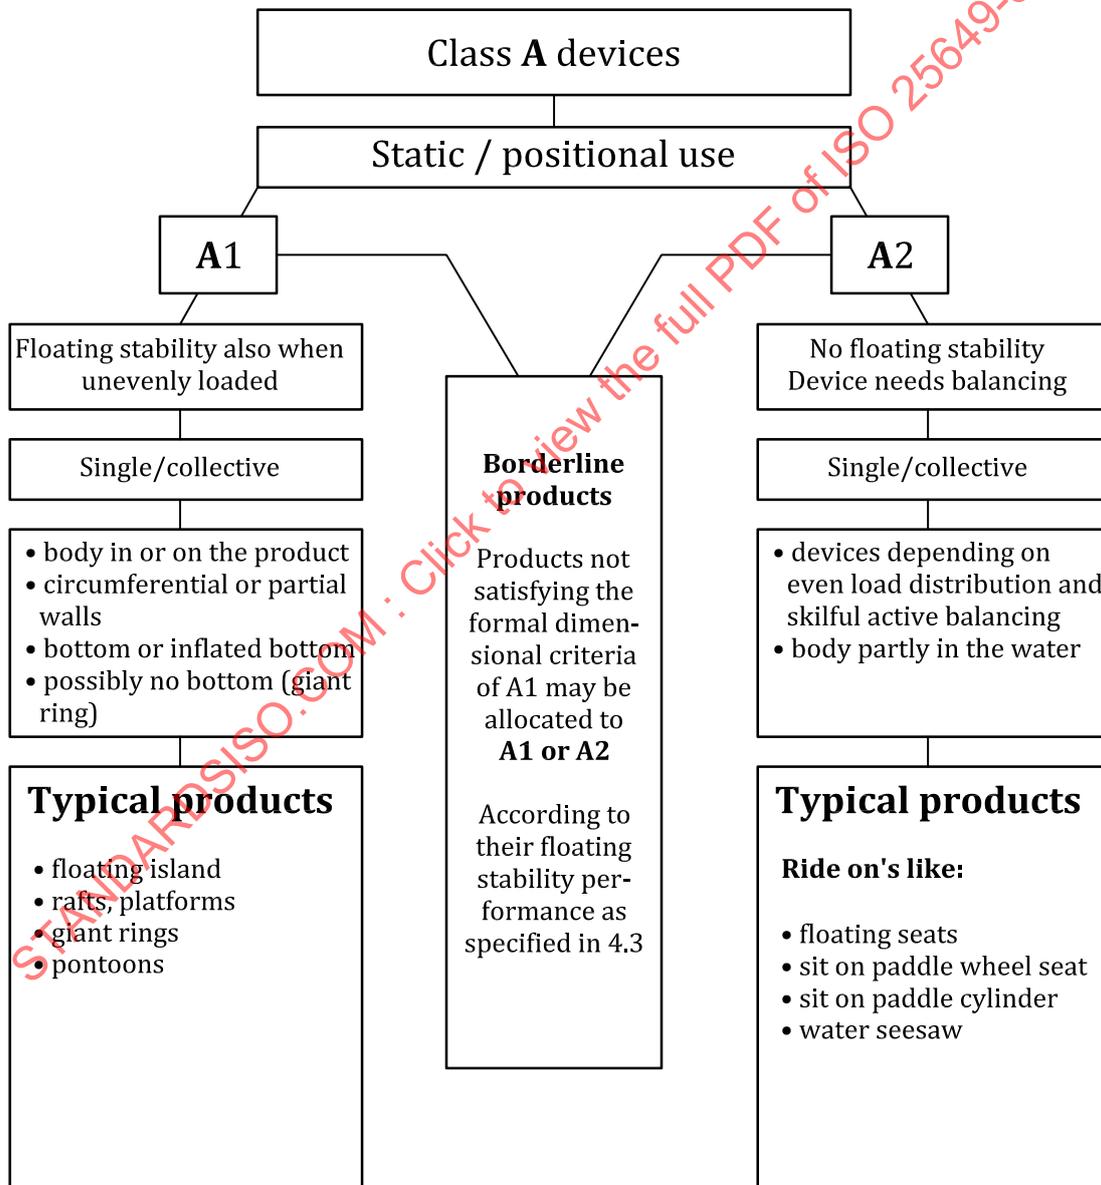


Figure 1 — Interior structure Class A devices

The risk assessment for this document is shown in [Table 1](#).

Table 1 — Introductory risk analysis

Class	Typical products	Place of usage	Function; range of usage; target / age group	Type of movement / propulsion	Position of user regarding equipment and elevation above water	Predictable misuse	Partial risk related to water environment	Final risk	1.1 Protection aims; 1.2 Related standard / regulation
A1	Floating inflatable islands; recreational raft; platform/pontoon, etc.	Sea shore, close to shore; lakes; smoothly running rivers; public or private pools; ponds.	Relaxing, resting on the water; sunbathing; basis for bathing and swimming or playing; device providing high level of floating stability; single and collective use; all age groups, swimmers.	Static use within limited area; little action; movement by pushing through swimming strokes only; no mechanical means of propulsion.	On or in (side walls) the device, laying, sitting, no direct body fit; grab handles might exist, but resting does not depend on gripping or balancing; no dangerous height of fall.	Dangerous distance from the bank/ shore; use in currents and/or dangerous offshore winds; use by non-swimmers; fall over board; no diving platform.	Unnoticed drifting to open waters; falling asleep and consequently extreme sunburn, etc.; capsizing; skin irritation due to long duration of skin contact or dangerous substances in contact with skin; climbing back; hypothermia; cold shock.	DROWNING	Floating stability; minimum buoyancy; residual buoyancy; space, safety handles or lines; anchorage; warning notes, labelling, swimmers only, age restriction according to ISO 6185-1, ISO 6185-2 and ISO 6185-3
A2	Large buoyant structures.	Sea shore/ close to shore, lakes, public or private pools; ponds.	Action, playing in the water; balancing children; collective and single use; all age groups, swimmers.	Drifting; propulsion only by swimming strokes or third party.	On the device; loose fit via handles; no dangerous height.	Use by non-swimmers; use in current, canal, lack of supervision.	Drifting away in open waters due to wind and/or current; devices provokes use in deep; used by non-swimmers; falling into deep water.	DROWNING	Labelling, residual buoyancy, grab handles, supervision; warnings.
A1/A2	Air mattress for use in water; floatable pool loungers; floating seating structures; giant rings or tubes.	Sea shore close to the shore; lakes, public or private pools; ponds; sea.	Resting on the water; observation of underwater environment; play; mainly single use; floating stability depends on design; all age groups, swimmers.	Normally no mechanical means of propulsion but possible; drifting or propulsion by swimming strokes; seats might be equipped with pedals (wheel propulsion).	On or in the device; device is floating on; device is held mainly a near horizontal posture sitting; no relevant elevation above water level.	Risks in A1 and risks in A2.	Risks in A1 and risks in A2.	DROWNING	No regulation and rule are known to provide technical substance

Floating leisure articles for use on and in the water —

Part 3:

Additional specific safety requirements and test methods for Class A devices

1 Scope

This document specifies additional specific safety requirements and test methods for Class A floating leisure articles for use on and in the water regardless whether the buoyancy is achieved by inflation or inherent buoyant material.

This document is applicable for Class A floating leisure articles as specified in ISO 25649-1:2024, Table 1.

NOTE 1 Typical products in Class A (see [Figures A.1](#) to [A.3](#)):

- “Floating Islands” in near round or square shaped forms decorated with palm tree, sun shade, etc. high superstructure;
- large floats/rafts in various shapes, from round to square;
- large floating tubes, giant tubes (inflatable or inherently buoyant);
- floating arm chairs, seats and sun beds;
- air mattresses for use on the water;
- recreational rafts/floating platforms/pontoons.

NOTE 2 Typical places for application:

- pools;
- protected areas of lakes, ponds;
- protected area sea shore (no offshore winds, no currents).

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 25649-1:2024, *Floating leisure articles for use on and in the water — Part 1: Classification, materials, general requirements and test methods*

ISO 25649-2:2024, *Floating leisure articles for use on and in the water — Part 2: Consumer information*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 25649-1:2024 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>

— IEC Electropedia: available at <https://www.electropedia.org/>

**3.1
residual buoyancy**

provision of remaining buoyancy in case of a defect of any buoyancy chamber

**3.2
floating stability**

capability of a non-moving buoyant structure to withstand internal and external forces that tend to capsize it and to maintain a stable floating position

Note 1 to entry: Internal forces leading to capsizing can result from uneven load distribution, external forces leading to capsizing can result from wind or waves.

**3.3
static use**

use that typically needs limited action from the user

Note 1 to entry: Product is mainly used for relaxing, sun bathing, lying, sitting, etc.

**3.4
escape**

easy and complete separation between the user and the device in case of capsizing of the device or system without hindrance through a part or feature of the floating device

**3.5
available area**

area on or inside a floating leisure article that can be used unrestrictedly for user accommodation when taking the intended posture(s)

**3.6
inherent buoyant material**

non-crosslinked (closed-cell) foam or other materials enclosed in (a) sealed compartment(s) in the hull that have a specific weight lower than 1 kg/dm^3

Note 1 to entry: Floating leisure articles made from inherent buoyant material are considered buoyant structures (hull) achieving all or part of its intended shape and buoyancy through soft foam, hard foam or sealed chambers filled with air, gas or granules.

4 Safety requirements and test methods

4.1 General

Construction of Class A devices shall be such that it corresponds, in terms of design, dimensions, safety, strength and durability, to its intended use.

If inflatable floating leisure articles provide buoyancy in several components, then requirements apply to all components. Floating leisure articles shall provide residual buoyancy if one air chamber fails. This residual buoyancy shall maintain the safety of the device even if its function is lost. The following safety requirements are therefore related to:

- design;
- sizing;
- materials;
- strength;
- performance;
- information.

In individual cases, due to the unpredictability of future products, a corresponding choice shall be made.

Design and appearance of floating leisure articles shall not change the intended primary function of these floating leisure articles nor introduce a toy play value.

4.2 Design, sizing, admissible number of users and maximum load capacity

4.2.1 General

Class B products shall be marked with the safety information markings, as specified in ISO 25649-2:2024, Clauses 4.1 and 4.2.1.

4.2.2 Sizing

4.2.2.1 Requirements

If a specific size/body weight correlation between user and device is relevant, the marking shall be in accordance with the range of body weights. The size/body weights of the user shall be indicated on the product by completing the relevant boxes of the appropriate safety information symbol "User's body weight range" as specified in ISO 25649-2:2024, Figure 24.

4.2.2.2 Test method

Check for correct marking and completion.

4.2.3 Class A1-products, space per person and admissible number of users

4.2.3.1 Requirements

Class A1-products shall be labelled with regard to the intended posture – lying/sitting – of the user(s) and the maximum permissible number of users. The minimum space for a user in lying posture shall correspond to a flexible template (adult/child) the dimensions of which are specified in ISO 25649-1:2024, A.1.1. The minimum space for a sitting user shall correspond to the template (adult/child) as specified in ISO 25649-1:2024, A.1.2. In cases of combined use (sitting and lying), the template for a lying person shall be applied to determine the available area.


Templates may exceed the outer circumference of the device to a total amount of 30 %. This amount is divided in 15 % of template length for the head area and 15 % of template length for the leg area (see shaded area of templates in ISO 25649-1:2024, Annex A). The angle between centre line of the template and tangential of a possible back rest, board wall, etc. shall be greater than 60° (see [Figure 2](#)).

The total amount of users determined by the templates shall not contradict to the load capacity and floating stability of the device.


Space requirement using templates is not applicable for ride-on devices where distinct upright seats and/or seating positions are imposed by the device.

4.2.3.2 Test method

Testing shall be done by applying the relevant templates as specified in ISO 25649-1:2024, A.1 and shown in [Figure 2](#). Templates shall be stretched out over the area available to the user without overlapping. Templates may be arranged to optimize the number of users and the mix of adults and children without exceeding the load capacity of the device. Blank areas of templates shall be completely inside the outer circumference. Check by visual inspection for appropriate labelling in accordance with safety information symbols "Number of users, adult/children" and/or "Maximum load capacity" as specified in ISO 25649-2:2024, Figure 22 and Figure 27.

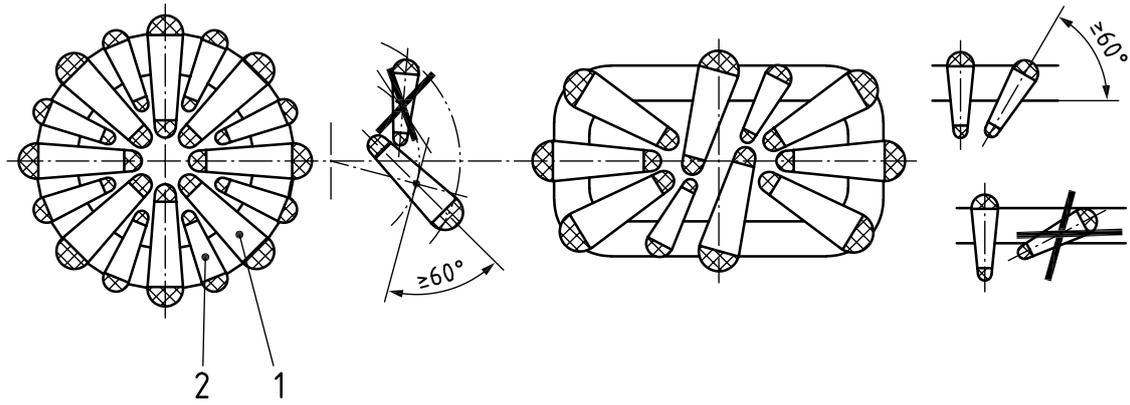

a) Class A1, "Big raft": 3,8 m in diameter / 4,8 m × 2,8 m

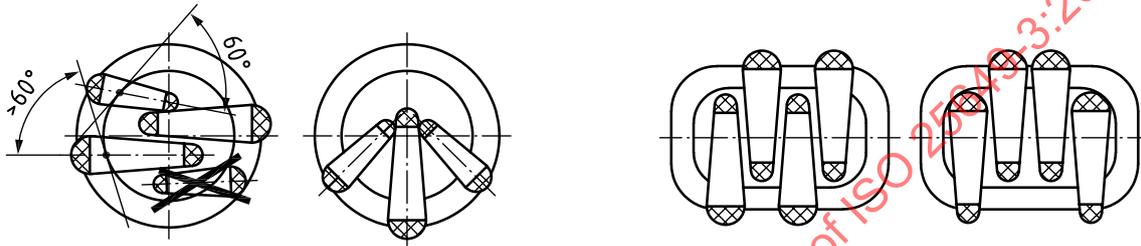

b) Class A1, "Small raft": 2,5 m in diameter / 3 m × 2 m

Key

- 1 template space per person, adult
- 2 template space per person, child

Figure 2 — Available space per person, determination of number of users

4.2.4 Class A2-products, space per person and admissible number of users

4.2.4.1 Requirements

Class A2 products shall provide distinct seat(s) or sitting areas or recognizable space where the user is to be positioned in the intended posture. Seats, etc. of ride-on devices shall be equipped with at least one grab handle for each permissible user.

If the device implies sitting in line of more than one user, the sitting space for each user shall be at least a length of:

- Child = 30 cm if the legs hang down;
- Child = 60 cm if the thighs follow the seat surface;
- Adult = 35 cm if the legs hang down;
- Adult = 70 cm if the thighs follow the seat surface.

4.2.4.2 Test method

Testing shall be by visual inspection and measurement.

4.3 In water performance

4.3.1 Amount of buoyancy and stable floating position

4.3.1.1 Requirements

All devices (Classes A1 and A2) shall provide sufficient buoyancy and adequate buoyancy distribution to bear the weight of the intended number of users. Floating devices shall float in a stable manner with all test subjects placed on the intended position and posture on the device. The design supporting area shall not be flooded – not applicable if the product is designed to provide a supporting area that is intentionally under water.

Floating leisure articles claiming to provide floating stability (Class A1) shall additionally meet the test requirements as specified in [4.3.2.2.1](#). When loaded with the maximum and minimum number of passengers, the device shall maintain the stable floating position.

The capability of stable floating performance or the need for balancing shall be marked on the packaging via the relevant pair of safety information symbols “Device provides floating stability” and “Device requires balancing” as specified in ISO 25649-2:2024, Figure 32.

4.3.1.2 Test method

The maximum number of test subjects according to manufacturer’s declaration (adults, children) shall be placed within the available area with no part of the body outside the product in a way as shown in [Figure 3](#). If a device is classified for more than one user, the array of all test subjects shall be done by applying the determined postures and positions in a way most likely to cause failure.

If there are distinct sitting or lying positions provided by the device, tests subject shall be positioned on this/these place(s) in a way most likely to cause failure.

If a floating leisure article is not shown in [Figure 3](#), the most suitable test position and posture shown in [Figure 3](#), types a) to h), shall be applied taking into consideration the foreseeable uneven load distribution.


The basic posture of test subjects shall be in accordance with manufacturers declaration (lying/sitting) and in detail in accordance with ISO 25649-1:2024, 5.5.5. If a device allows for several postures, the one most likely to cause failure shall be chosen from the standardized range.

The test shall be repeated with the minimum and maximum load applicable (one child test subject or one adult test subject) if the intended floating position depends by design, e.g. teeter-totter, on a distinct balanced weight distribution in pairs or other even-numbered groups of users.

Floating arm chairs, loungers with arm rests, etc. shall be tested so that the test subject(s) is positioned on the determined seat/sitting area but at the utmost side of the seat's sitting area (left- or right-hand side) as provided by the seat. The test subject shall then lean to the arm rest (side barrier) until this structural part bears the relevant portion of the entire load of the body. Then the outer arm shall be stretched out as to reach for something outside the seat. If the seat is equipped with a paddle wheel, propulsion feet shall be positioned on the pedals.

Check whether the device stays in a safe floating position. Verification shall be by assessment panel.

Arm chairs, etc. that do not meet this requirement shall be classified as “Balancing needed” according to the safety information symbols “Device provides floating stability” and “Device requires balancing” specified in ISO 25649-2:2024, Figure 32, because they provide floating stability only under the condition of symmetric load distribution. Drawings are to show position and posture of one test person. Multiple seaters are dealt with according to the specifications in [5.2](#).

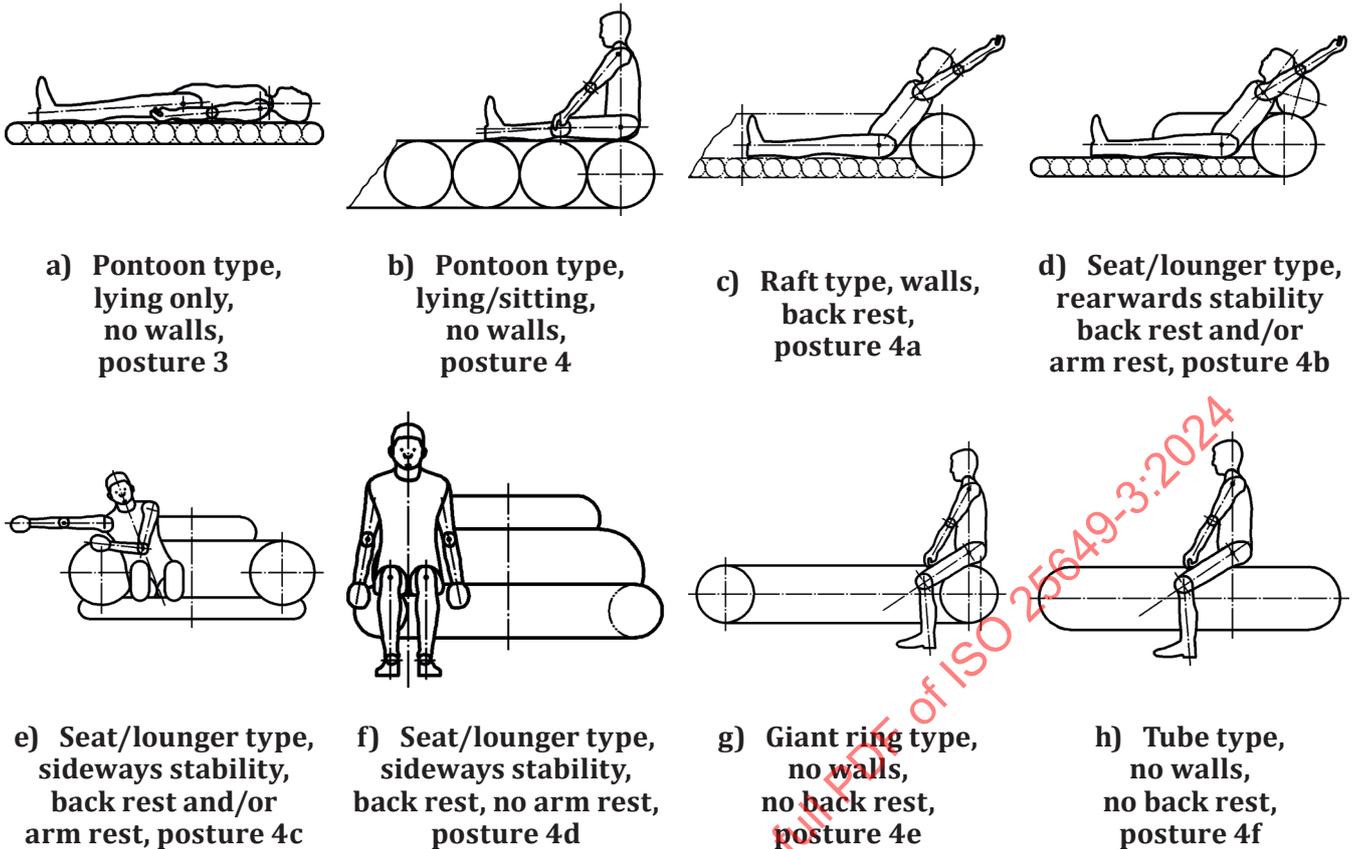

Key

- a) lying position, entire body stretched out, feet, legs, torso, arms, head resting on bottom of available area on centre line and on the outer edge (as basic posture 3);
- b) sitting upright, legs stretched out, hands on knees, torso centre line vertical, head upright (as basic posture 4);
- c) sitting reclined to a back rest, reclining angle according to back rest, arms laid back (variant 4a of basic posture 4);
- d) sitting reclined, reclining angle determined by back and head rest, arms laid back (variant 4b of basic posture 4);
- e) sitting reclined to an arm rest, reclining angle according to armrest, outer arm reaching out, inner arm resting (variant 4c of basic posture 4); on centre line of arm rest (variant 4d of basic posture 4);
- f) sitting upright at the outer edge of the floating structure, arms to right and left of thighs, legs hanging down (variant 4d of basic posture 4);
- g) sitting upright, body centre line on centre line of air chamber, legs hanging down inside floating ring or frame shaped structure, hands on thighs (variant 4e of basic posture 4);
- h) sitting upright, body centre line on centre line of longitudinal buoyant structure but at the utmost end of the available sitting length, legs hanging down to the right and left of longitudinal structure (variant 4f of basic posture 4).

Figure 3 — Class A1 products claiming floating stability, determined positions and postures of test subjects in combination with predictable uneven load distribution

NOTE [Annex A](#) shows typical widespread products.

4.3.2 Residual buoyancy of devices claiming floating stability (CASES A, B)

4.3.2.1 General requirement

Where buoyancy is not provided by inherently buoyant material, the device shall have a minimum of two separate air chambers distributing the buoyancy so that the requirements in [4.3.2.2](#) are met.

4.3.2.2 CASE A, residual buoyancy and stable floating after failure of one air chamber

4.3.2.2.1 Requirements

Class A1-devices that have a lying or seating area (cockpit) fully or partly surrounded by circumferential inflated chambers (walls) regardless of their shape or form and that provide an inner wall height of at least 15 cm when measured from top of the inflated bottom to the top of the inflated wall shall:

- a) not collapse in a way that the permissible number of users or a single user falls or slides into the water if the air chamber most likely to cause failure is fully deflated;
- b) allow the permissible number of users to stay safely on the device for at least 10 min;
- c) retain their function to stay on the device as far as there is an initial function that is relevant with regard to safety (e.g. propulsion to reach the shore).

If the device is made up by several independent components, these requirements apply to each of them. Testing shall be done in accordance with [4.3.2.2.2](#).

4.3.2.2.2 Test method

4.3.2.2.2.1 Test method for maximum number of users

Load the device with the maximum number of users within the available area. Select test persons in accordance with manufacturer's declaration regarding permissible users and in accordance with ISO 25649-1:2024, 5.5. Apply posture 4 as specified in ISO 25649-1:2024, 5.5.5. Deflate completely the air chamber most likely to cause failure by sudden deflation. Check whether the requirements in [4.3.2.2.1](#) a) to c) are met. Test subjects may take any position on the device in order to stabilize it but maintain posture 4.

Verification by assessment panel.

4.3.2.2.2.2 Test method for minimum number of users

Load the device with the minimum number of users within the available area. Select test persons in accordance with manufacturer's declaration regarding permissible users and in accordance with ISO 25649-1:2024, 5.5. Apply posture 4 as specified in ISO 25649-1:2024, 5.5.5. Deflate completely the air chamber most likely to cause failure by sudden deflation. Check whether the requirements in [4.3.2.2.1](#) a) to c) are met. Test subjects may take any position on the device in order to stabilize it but maintain posture 4.

Verification by assessment panel.

4.3.2.3 CASE B, residual buoyancy and distinct means to hold on after failure of one air chamber

4.3.2.3.1 Requirements

For Class A1-devices without distinct circumferential air chambers (walls) higher than the available area, CASE B-designs:

- a) the device shall at least provide a residual buoyancy that is sufficient to keep all permissible users afloat on the device regardless of their posture on or in the water when holding onto the device;

NOTE Persons are considered to remain on the device even if parts of the available area onto which they can remain is partly flooded, whether the device takes a crucial floating angle so that these persons get partly into the water.

- b) the achievable floating position shall enable the users to keep their airways above water level without exercising swimming strokes or any other active movements to keep them afloat except holding to the device;
- c) there shall be a means on the device to enable each user to hold on;

d) these means shall be available and reachable for each permissible user after immersion.

If the device is made up by several independent components, these requirements apply to each of them. Testing shall be done in accordance with [4.3.2.3.2](#).

Verification shall be by assessment panel.

4.3.2.3.2 Test method

Load the device with the maximum number of users within the available area. Select test persons in accordance with manufacturer's declaration regarding permissible users and in accordance with ISO 25649-1:2024, 5.5. Apply posture 4 as specified in ISO 25649-1:2024, 5.5.5 or the variation of it (see [Figure 3](#)) that corresponds most appropriately to the product design and intended function. If there are no distinct sitting positions, test subjects shall be positioned within the available area according to [4.3.1.2](#) and in a way most likely to cause failure (uneven load distribution inside the available area). Deflate the air chamber most likely to cause failure by sudden deflation. Check whether the requirements are met after test subjects have fallen into the water and take action according to [4.3.2.3.1](#).

Verification shall be by assessment panel.

4.3.3 Residual buoyancy of floating leisure articles not claiming floating stability (CASES C, D)

4.3.3.1 CASE C, residual buoyancy

4.3.3.1.1 Requirements

For Class A2-products of floating leisure articles for single and collective use, CASE C-designs:

- a) the device shall at least provide a residual buoyancy that is sufficient to keep all permissible users afloat when holding onto it;
- b) the achievable floating position shall enable the users to keep their airways above water without exercising swimming strokes or any other active movements to keep them afloat except holding to the device;
- c) there shall be a means on the device to hold on for each permissible user;
- d) these means shall be available and reachable for each permissible user after immersion.

If the device is made up by several independent components, these requirements applies to each of them.

Testing shall be done in accordance with [4.3.3.1.2](#).

Verification shall be by assessment panel.

4.3.3.1.2 Test method

Load the device according to the maximum number of users within the available area. Select test persons in accordance with manufacturer's declaration regarding permissible users and in accordance with ISO 25649-1:2024, 5.5. Apply posture 4 or the variation of it ([Figure 2](#) a) to e) in [4.3.1.2](#)) that corresponds most appropriately to the product design and intended function. If there are no distinct seats, position test subjects within the available area according to [4.3.1.2](#) and in a way most likely to cause failure through uneven load distribution inside the available area. Deflate the air chamber most likely to cause failure by sudden deflation. Check whether the requirements are met after test subjects have fallen into the water and take action according to [4.3.3.1.1](#).

Verification shall be by assessment panel.

4.3.3.2 CASE D, residual buoyancy

4.3.3.2.1 Requirements

For Class A2-products of floating articles for single use only, CASE D designs:

- a) the device shall at least provide a residual buoyancy that is sufficient to keep the user when holding on to it after immersion;
- b) it shall be shown that the user is able to grab at least the entire remaining buoyant structure or parts of it in a way enabling him to stay safely afloat with the airways above water level without exercising swimming strokes or any other active movements to keep them afloat except holding onto the device.

If the device is made up by several independent components, these requirements applies to each of them.

Testing shall be done in accordance with [4.3.3.2.2](#).

Verification shall be by assessment panel.

4.3.3.2.2 Test method

Load the device with the maximum number of users within the available area. Select test persons in accordance with manufacturer's declaration regarding permissible users and in accordance with ISO 25649-1:2024, 5.5. Apply posture 4 or the variation of it ([Figure 3 a](#)) to e) in [4.3.1.2](#)) that corresponds most appropriately to the product design and intended function. If there are no distinct seats, position test subjects within the available area according to [4.3.1.2](#) and in a way most likely to cause failure through uneven load distribution inside the available area. Deflate the air chamber most likely to cause failure by sudden deflation. Check whether the requirements are met after test subject has fallen into the water and take action according to [4.3.3.2.1](#).

Verification shall be by assessment panel.

4.3.4 Capsizing and escape

4.3.4.1 Escape from the device (body entrapment, leg or foot entanglement)

In normal foreseeable use and during incidents of sudden capsize none of the users shall become entrapped, entangled or otherwise hindered from complete separation from the device. For this purpose, this document is focusing on the following known major entrapment risks:

- foot or leg entrapment;
- head or neck entrapment;
- torso entrapment;
- entanglement due to protruding parts.

There shall be no entrapment or entanglement of the test devices/test probes if they are applied on the product in its normal working position.

4.3.4.2 Test method for foot or leg entrapment

Testing shall be done in accordance with ISO 25649-1:2024, 5.2.

4.3.4.3 Test method for torso entrapment

Testing shall be done in accordance with ISO 25649-1:2024, 5.3.

4.3.4.4 Test method for protruding parts

Testing shall be done in accordance with ISO 25649-1:2024, 5.4.

4.3.5 Grab handles and safety lines (not applicable to air mattresses)

4.3.5.1 Requirements

Floating leisure articles of CASES A, B and C in [4.3.2.2](#), [4.3.2.3](#) and [4.3.3.1](#) shall be fitted with means of holding (grab handles, safety lines, etc.) for each permissible user, which are reachable from an on-board position and for persons in the water. Safety lines shall be arranged in a way that they can be grabbed from an in-water position and shall not cause entrapment (see [4.3.2.2](#)). The means of holding shall be provided regardless of the floating stability of the device and shall be reachable also in capsized condition of the device.

4.3.5.2 Test method

Testing shall be by visual check during one of the in-water tests in [4.3](#). Verification shall be by assessment panel.

4.3.6 Re-embarkation from the water in normal use (all air chambers fully inflated) and/or in case of failure of one air chamber in CASE A1

4.3.6.1 Requirements

Floating devices shall be so designed that a normal user (test subject) is able to re-embark on the device.

This is not applicable to Class A2 products or borderline products falling under Class A2.

4.3.6.2 Test method

All test subjects of the test panel shall be able to climb back onto the device. Verification shall be by assessment panel.

4.3.7 Extreme high super structure (wind, drift)

4.3.7.1 Requirements

Floating articles of Class A having a superstructure that exceeds 100 cm above water level, excluding long thin protrusion shall be:

- restricted to pool use by marking them with the safety information symbol “Pool use only” according to ISO 25649-2:2024, Figure 31; and/or
- provided with a fixation system, according to [4.3.8.2](#).

4.3.7.2 Test method

Measure height of super structure of the floating device from floor to which the device is put to top of superstructure and check for safety information symbol if need be.

4.3.8 Fixation methods

4.3.8.1 General requirements

If the article measures more than 2,5 m, a fixation system that can be attached to a fixed point (shore, ground, anchored boat, etc.) shall be provided.

NOTE Floating leisure articles measuring less than 2,5 m are not as susceptible to the effect of wind.

The instruction for use shall require the user to connect the fixation system before using the product.

4.3.8.2 Anchorage

If a floating leisure article is equipped with an anchoring device, it shall be capable of holding the device in place up to a pulling force of 500 N.

4.3.8.3 Test method for floating leisure articles with an anchoring device

Put the device in water with a depth of preferable (200 ± 20) cm. Activate anchoring device according to supplier's instructions. Length of anchoring rope shall be 5 times the water depth. For compensating the unnatural smooth surface of the test pool bottom, fix a threshold board (preferably a steel rod) of 3 cm diameter or a board with the dimensions of $(3 \text{ cm} \times 10 \text{ cm} \times 60 \text{ cm})$ on the pool bottom in a way that it hampers the anchoring bag from slipping.

Pool/nature: apply a horizontal pulling force of 500 N. Check whether the device stays in position (except the slip through tightening of the anchor cord).

4.3.8.4 Other fixation methods

If a floating leisure article is equipped with any other fixation methods, it shall be capable to hold the device in place up to a pulling force of 500 N.

4.3.8.5 Test method for floating leisure articles with any other fixation methods

Put the device in water and attach it to a fixed point through the fixation system provided by the manufacturer.


Apply a horizontal pulling force of 500 N. Check whether the device stays in position.

4.3.9 Giant rings with bottom, strength of entire device

4.3.9.1 Test requirement

When tested in accordance with 4.3.9.2, no part or component of the body holding system or its attachment to the buoyant structure (welding seams) shall break or show any deficiency compromising safety.

Dimensions in millimetres

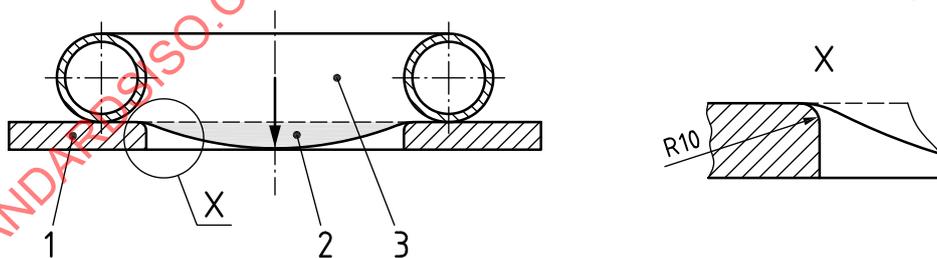

Key

- 1 test board, opening in accordance with the inner contour of the device to be tested
- 2 load, body mass of maximum designated user(s)/test manikin mass
- 3 floating device

Figure 4 — Giant rings with bottom, strength of entire device, load application

4.3.9.2 Testing giant rings with bottom

Place the device on an appropriate even surface in a way that the buoyancy structure is completely supported and the body holding system hangs freely downwards inside the opening as shown in [Figure 4](#). Load the body holding system (bottom) with a dead weight representing the body mass of the maximum user of the designated body weight range. Load duration: 10 min, ambient temperature 20 °C.

5 Consumer information

5.1 General

Consumer information on the packaging, on the product and by means of written instructions for use shall be in accordance with ISO 25649-2:2024.

5.2 Consumer information on the packaging (point of sale information)

Information on the packaging of Class A products shall:

- show a picture or dimensionally correct drawing of the floating device inside;
- disclose via the appropriate safety information symbols any warning and restriction related to use and application;
- disclose via the appropriate safety information symbols the maximum number of users and the maximum load capacity.

5.3 Consumer information on the product (information related to safe use)

Consumer information on the product shall show via the appropriate safety information symbols all warnings and obligatory instructions related to the safe use of the product. Safety information symbols related to very serious risks shall be accompanied by the plain text version as specified in ISO 25649-2:2024.

Very serious risks for Class A products are:

- Attention! No protection against drowning!
- Swimmers only!

5.4 Consumer information by instructions for use (separate written information)

5.4.1 General

Instructions of use shall be in accordance with ISO 25649-2:2024.

5.4.2 Safety and product information

Instruction for use shall contain all information provided in [4.3.8.1](#), if applicable, and [5.1](#), [5.2](#) and [5.3](#). Warnings, obligatory instructions and all restrictions in use shall be explained in a way that they can be understood and perceived by the user. Safety information symbols shall be explained by their plain text version.

5.4.3 Assembly (if applicable)

Instructions shall enable the user to assemble the floating device correctly and ready for safe use.

5.4.4 Maintenance and repair (if applicable)

Instructions shall enable the user to maintain, store and repair the floating device correctly.

6 Test report

A test report shall document all tests of this document and their results, particularly the following:

- a) all human subject testing with regard to posture, position and result;
- b) any applied worst-case positions and deviation from the document due to special circumstances of the product;
- c) a reference to this document, i.e. ISO 25649-3:2024.

7 Exclusions

The following subclasses/products dealt with in this document are exempted from the general requirements included in ISO 25649-1:2024 and ISO 25649-2:2024:

- Floating leisure articles of Class A1 for single use only and A2 products are excluded from ISO 25649-1:2024, 5.8;
- Floating leisure articles of Class A are excluded from ISO 25649-2:2024, 6.4 and they may display the safety information at a location starting within 200 mm from an inflation valve.

STANDARDSISO.COM : Click to view the full PDF of ISO 25649-3:2024