

---

# INTERNATIONAL STANDARD



# 2857

---

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

---

## Ground thread taps for ISO metric threads of tolerances 4H to 8H and 4G to 6G coarse and fine pitches – Manufacturing tolerances on the threaded portion

First edition – 1973-12-01

STANDARDSISO.COM : Click to view the full PDF of ISO 2857:1973

---

UDC 621.993

Ref. No. ISO 2857-1973 (E)

**Descriptors** : tools, taps, screw threads, dimensional tolerances

Price based on 13 pages

## FOREWORD

ISO (the International Organization for Standardization) is a worldwide federation of national standards institutes (ISO Member Bodies). The work of developing International Standards is carried out through ISO Technical Committees. Every Member Body interested in a subject for which a Technical Committee has been set up has the right to be represented on that Committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the Technical Committees are circulated to the Member Bodies for approval before their acceptance as International Standards by the ISO Council.

International Standard ISO 2857 was drawn up by Technical Committee ISO/TC 29, *Small tools*, and circulated to the Member Bodies in August 1972.

It has been approved by the Member Bodies of the following countries :

Austria	India	Romania
Belgium	Ireland	South Africa, Rep. of
Chile	Israel	Switzerland
Czechoslovakia	Italy	Thailand
Egypt, Arab Rep. of	Netherlands	Turkey
France	New Zealand	United Kingdom
Germany	Poland	

The Member Bodies of the following countries expressed disapproval of the document on technical grounds :

Japan  
Sweden

## CONTENTS

	Page
<b>1 Scope and field of application</b> . . . . .	1
<b>2 References</b> . . . . .	1
<b>3 Basic data</b> . . . . .	1
3.1 Thread profile of nuts . . . . .	1
3.2 Thread profile of tap . . . . .	2
3.3 Tolerance classes of taps . . . . .	2
3.4 Calculation of tap thread dimensions of classes 1, 2 and 3 . . . . .	3
<b>4 Manufacturing tolerances on tap threads</b> . . . . .	4
4.1 Major diameter $d$ . . . . .	4
4.2 Pitch diameter $d_2$ . . . . .	5
4.3 Minor diameter of tap $d_1$ . . . . .	6
4.4 Tolerance on the angle $\alpha$ and half angle $\alpha/2$ of thread . . . . .	6
4.5 Cumulative pitch error $T_p$ over any number of threads . . . . .	6
<b>5 Designation and marking of taps</b> . . . . .	6
<b>6 Example of calculation of the dimensions of the threaded portion of a tap</b> . . . . .	7
<b>Annexes</b>	
<b>A</b> – Ground thread taps for ISO metric threads of coarse pitch . . . . .	8
<b>B</b> – Ground thread taps for ISO metric threads of fine pitch . . . . .	10

STANDARDSISO.COM: Click to view the full PDF of ISO 2857:1973

This page intentionally left blank

STANDARDSISO.COM : Click to view the full PDF of ISO 2857:1973

# Ground thread taps for ISO metric threads of tolerances 4H to 8H and 4G to 6G coarse and fine pitches – Manufacturing tolerances on the threaded portion

## 1 SCOPE AND FIELD OF APPLICATION

This International Standard specifies the manufacturing tolerances on the threaded portion of taps for producing the ISO metric threads of tolerance classes 4H to 8H and 4G to 6G as defined in ISO/R 965/I to III (excluding, consequently, classes 7G and 8G considered as usually produced with ground thread taps).

It is valid for the short taps specified in ISO/R 529 as well as for any other kind of ground thread taps with the same diameters and pitches.

The internal threads produced with those taps are conventionally designated by the simplified denomination of "nut" in agreement with the word used in ISO/R 965 for the general designation of all internal threads.

Annexes A and B give, for all threads with coarse and fine pitches, the manufacturing tolerances on the threaded portion of taps for the following classes of nuts :

4H and 5H – 6H – 7H and 8H

and 4G and 5G – 6G

## 2 REFERENCES

ISO/R 529, *Short machine taps and hand taps.*

ISO/R 724, *ISO general purpose metric screw threads – Basic dimensions.*


ISO/R 965/I, *ISO general purpose metric screw threads – Tolerances – Principles and basic data.*

ISO/R 965/II, *ISO general purpose metric screw threads – Tolerances – Limits of sizes for commercial bolt and nut threads – Medium quality.*

ISO/R 965/III, *ISO general purpose metric screw threads – Tolerances – Deviations for constructional threads.*

## 3 BASIC DATA

3.1 Thread profile of nuts : see figure 1.

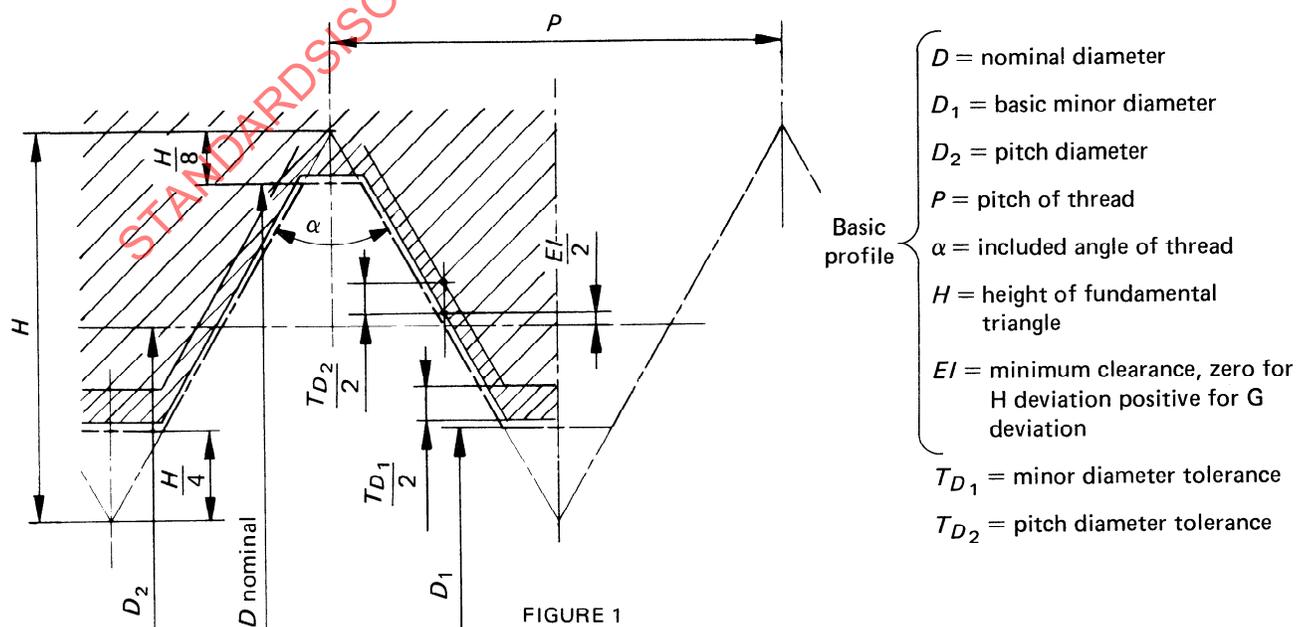

3.2 Thread profile of tap : see figure 2.

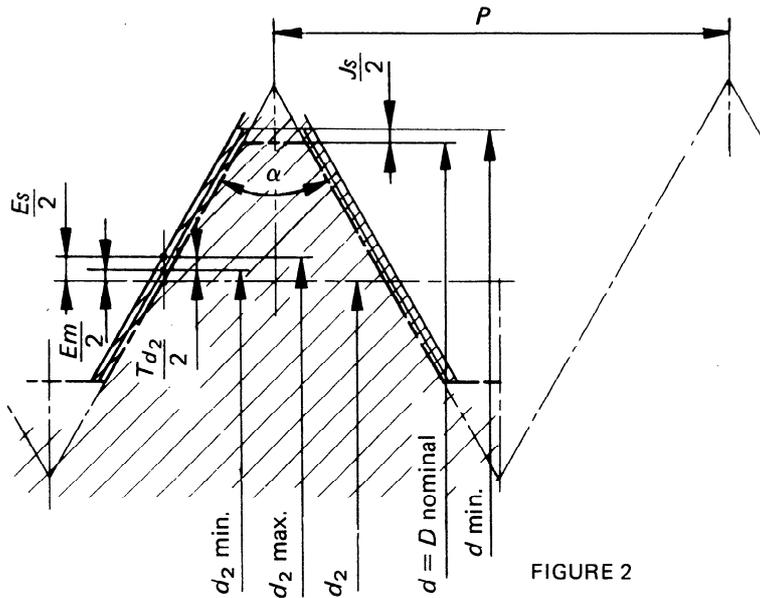


FIGURE 2

- $d = D$  = nominal diameter
- $d \text{ min.}$  = permissible minimum major diameter
- $J_s$  = minimum clearance on major diameter
- $d_2 = D_2$  = pitch diameter
- $d_2 \text{ min.}$  = minimum pitch diameter
- $d_2 \text{ max.}$  = maximum pitch diameter
- $E_s$  = upper deviation of pitch diameter
- $E_m$  = lower deviation of pitch diameter
- $T_{d_2}$  = tolerance on pitch diameter

3.3 Tolerance classes of taps

For the production of nut classes of the following classes :

4H – 5H – 6H – 7H – 8H with zero minimum clearance,

4G – 5G – 6G with positive minimum clearance,

three tolerance classes have been accepted :

Class 1 – Class 2 – Class 3

The tolerances of these three classes are determined as indicated hereafter, in terms of a tolerance unit  $t$ , the value of which is equal to the pitch tolerance value  $T_{D_2}$ , grade 5 of the nut (extrapolated up to pitch 0,2 mm) :

$$t = T_{D_2} \text{ grade 5 of the nut.}$$

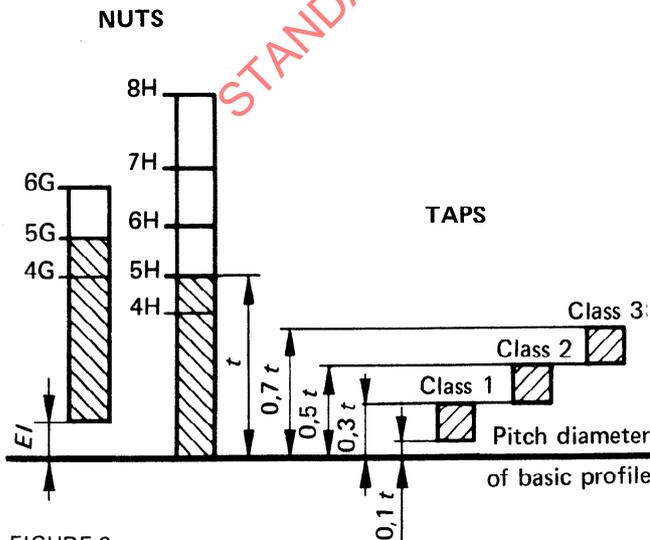


FIGURE 3

3.3.1 Tolerance on pitch diameter

The value for the tap pitch diameter tolerance  $T_{d_2}$  is the same for all three classes 1, 2 and 3 : it is equal to 20 % of  $t$ .

The position of the tolerance of the tap with respect to the basic pitch diameter results from the lower deviation  $E_m$ , the values of which are (see figure 3) :

for tap class 1 : + 0,1  $t$

for tap class 2 : + 0,3  $t$

for tap class 3 : + 0,5  $t$

3.3.2 Choice of tolerance class of the tap with respect to the class of thread to be produced






Unless otherwise specified, the taps of classes 1 to 3 will generally be used for the manufacture of nuts of the following classes :

- Class 1 : for nuts of classes 4H and 5H
- Class 2 : for nuts of classes 6H and also 4G and 5G
- Class 3 : for nuts of classes 7H – 8H and also 6G

This correspondance has, however, only an indicative nature, since the accuracy of tapping can vary as a function of a series of factors such as : the material to be tapped, the condition of the machine tool, the tapping attachment, the tapping speed, the lubricant, etc.

Users are therefore recommended to select in each case the most suitable class of tap for the manufacture of the required class of nut.

3.4 Calculation of tap thread dimensions of classes 1, 2 and 3

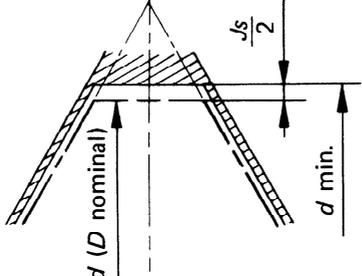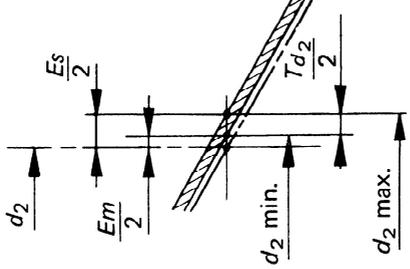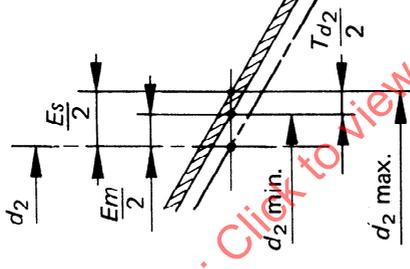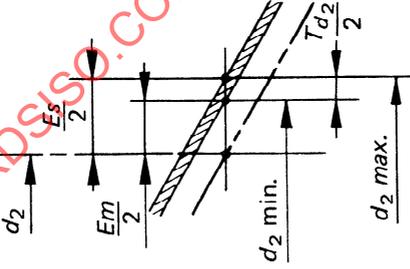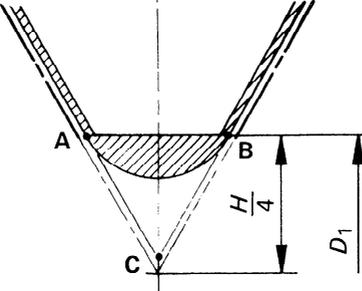Class of tap	Minimum tolerance on tap major diameter $d = D$ of tap	
all		<p><math>d = D</math> nominal diameter of tap</p> <p><math>J_s = 0,4 t^*</math></p> <p><math>d \text{ min.} = D + J_s</math></p>
1		<p><math>E_m = 0,1 t^*</math></p> <p><math>E_s = 0,3 t^*</math></p> <p><math>d_2 \text{ min.} = d_2^{**} + E_m</math></p> <p><math>d_2 \text{ max.} = d_2^{**} + E_s</math></p>
2		<p><math>E_m = 0,3 t^*</math></p> <p><math>E_s = 0,5 t^*</math></p> <p><math>d_2 \text{ min.} = d_2^{**} + E_m</math></p> <p><math>d_2 \text{ max.} = d_2^{**} + E_s</math></p>
3		<p><math>E_m = 0,5 t^*</math></p> <p><math>E_s = 0,7 t^*</math></p> <p><math>d_2 \text{ min.} = d_2^{**} + E_m</math></p> <p><math>d_2 \text{ max.} = d_2^{**} + E_s</math></p>
all	<p style="text-align: center;"><b>Tolerance on tap minor diameter</b></p> 	

\*  $t$  = tolerance unit =  $T_{D_2}$  pitch tolerance, grade 5 of the nut.  
The values are given in ISO/R 965/1, section 9.

\*\* The  $d_2$  values correspond to the values of the pitch diameter  $D_2$  of the nut in conformity with ISO/R 724.

4 MANUFACTURING TOLERANCES ON TAP THREADS

4.1 Major diameter  $d$

The minimum major diameter  $d$  min. shall be equal to the nominal diameter  $D$  of the nut, plus deviation  $J_s$ . Deviation  $J_s$  shall be greater than or equal to  $0,4 t$ .\*

The maximum major diameter  $d$  max. is not fixed and is left to the manufacturer's judgement.

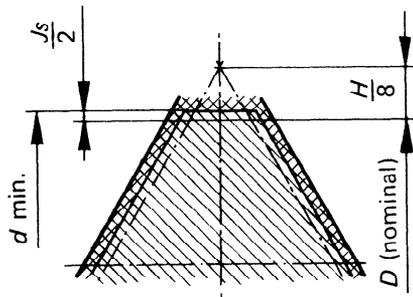


TABLE 1 – Minimum deviation  $J_s$  in micrometres

Nominal diameter		Pitch	Minimum deviation $J_s$
over	up to and including		
0,99	1,4	0,2	+ 20
		0,25	+ 22
		0,3	+ 24
1,4	2,8	0,2	+ 21
		0,25	+ 24
		0,35	+ 27
		0,4	+ 28
		0,45	+ 30
2,8	5,6	0,35	+ 28
		0,5	+ 32
		0,6	+ 36
		0,7	+ 38
		0,75	+ 38
		0,8	+ 40
5,6	11,2	0,75	+ 42
		1	+ 47
		1,25	+ 50
11,2	22,4	1,5	+ 56
		1	+ 50
		1,25	+ 56
		1,5	+ 60
		1,75	+ 64
		2	+ 68
22,4	45	2,5	+ 72
		1	+ 53
		1,5	+ 64
		2	+ 72
		3	+ 85
		3,5	+ 90
45	90	4	+ 94
		4,5	+ 100
		1,5	+ 68
		2	+ 76
		3	+ 90
		4	+ 100
		5	+ 106
		5,5	+ 112
		6	+ 120

\*  $t$  = tolerance unit =  $TD_2$ , pitch tolerance, grade 5 of the nut.  
(See ISO/R 965/1. The values given for the pitch of 0,2 have been obtained by extrapolation.)

4.2 Pitch diameter  $d_2$

The maximum and minimum permissible values on the pitch diameters,  $d_2$  max. and  $d_2$  min., of the taps are calculated in terms of the deviations  $Em$  and  $Es$  given in Table 2.


TABLE 2 – Values of deviations  $Em$  and  $Es$  in micrometres

Nominal diameter		Pitch	Deviations for pitch diameters $Em$ and $Es$		
over	up to and including		1	classes 2	3
0,99	1,4	0,2	+ 15 + 5	–	–
		0,25	+ 17 + 6	–	–
		0,3	+ 18 + 6	+ 30 + 18	–
1,4	2,8	0,2	+ 16 + 5	–	–
		0,25	+ 18 + 6	–	–
		0,35	+ 20 + 7	+ 34 + 20	–
		0,4	+ 21 + 7	+ 36 + 21	–
		0,45	+ 23 + 8	+ 38 + 23	–
2,8	5,6	0,35	+ 21 + 7	+ 36 + 21	–
		0,5	+ 24 + 8	+ 40 + 24	+ 56 + 40
		0,6	+ 27 + 9	+ 45 + 27	+ 63 + 45
		0,7	+ 29	+ 48	+ 67
		0,75	+ 10	+ 29	+ 48
5,6	11,2	0,75	+ 32 + 11	+ 53 + 32	+ 74 + 53
		1	+ 35 + 12	+ 59 + 35	+ 83 + 59
1,25		+ 38 + 13	+ 63 + 38	+ 88 + 63	
1,5		+ 42 + 14	+ 70 + 42	+ 98 + 70	
Nominal diameter		Pitch	Deviations for pitch diameters $Em$ and $Es$		
over	up to and including		1	classes 2	3
11,2	22,4	1	+ 38 + 13	+ 63 + 38	+ 88 + 63
		1,25	+ 42 + 14	+ 70 + 42	+ 98 + 70
		1,5	+ 45 + 15	+ 75 + 45	+ 105 + 75
		1,75	+ 48 + 16	+ 80 + 48	+ 112 + 80
		2	+ 51 + 17	+ 85 + 51	+ 119 + 85
22,4	45	2,5	+ 54 + 18	+ 90 + 54	+ 126 + 90
		1	+ 40 + 13	+ 66 + 40	+ 92 + 66
		1,5	+ 48 + 16	+ 80 + 48	+ 112 + 80
		2	+ 54 + 18	+ 90 + 54	+ 126 + 90
		3	+ 64 + 21	+ 106 + 64	+ 148 + 106
45	90	3,5	+ 67 + 22	+ 112 + 67	+ 157 + 112
		4	+ 71 + 24	+ 118 + 71	+ 165 + 118
		4,5	+ 75 + 25	+ 125 + 75	+ 175 + 125
		1,5	+ 51 + 17	+ 85 + 51	+ 119 + 85
		2	+ 57 + 19	+ 95 + 57	+ 133 + 95
5,6	11,2	3	+ 67 + 22	+ 112 + 67	+ 157 + 112
		4	+ 75 + 25	+ 125 + 75	+ 175 + 125
		5	+ 80 + 27	+ 133 + 80	+ 186 + 133
		5,5	+ 84 + 28	+ 140 + 84	+ 196 + 140
		6	+ 90 + 30	+ 150 + 90	+ 210 + 150

4.3 Minor diameter of tap  $d_1$

No tolerance is specified on this diameter which is governed by the wear on the tool used to produce this thread.

The profile of the radius blending with the flanks of the thread should however lie, in principle, under the line AB which corresponds with the internal diameter  $D_1$  of the basic ISO profile.

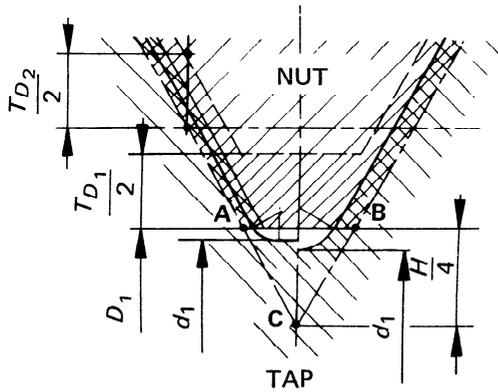

4.4 Tolerance on the angle  $\alpha$  and the half-angle  $\alpha/2$  of thread

The values for these tolerances are based on the pitch of the thread; they apply both to the angle  $\alpha$  and to the half-angle  $\alpha/2$  and shall be in accordance with the values of Table 3.

TABLE 3 – Tolerances on the angles

Pitch ranges $P$		Tolerances on angle $\alpha$ and 1/2 angle $\alpha/2$
Over	Up to and including	
0,2	0,4	$\pm 40'$
0,4	0,8	$\pm 30'$
0,8	1,5	$\pm 25'$
1,5	3	$\pm 20'$
3	6	$\pm 15'$

4.5 Cumulative pitch error  $T_p$  over any number of threads

This error is fixed at  $\pm 0,05\%$  of the considered measuring length with a minimum of  $\pm 0,008$  mm.

5 DESIGNATION AND MARKING OF TAPS

The taps shall bear, after their dimensional designation (as indicated in ISO/R 529), the nominal diameter and, if necessary, the pitch of the thread, and the symbol ISO followed by the class of the tap, a dash being placed before the ISO symbol.

Examples :

For an M6 coarse pitch tap of class 2 :

M 6 – ISO 2

For an M 20 tap with pitch of 2 of class 1 :

M 20 X 2 – ISO 1

6 EXAMPLE OF CALCULATION OF THE DIMENSIONS OF THE THREADED PORTION OF A TAP

GROUND THREAD TAPS FOR ISO METRIC PITCHES

Example for an M 14 tap, class 2

Tap designation	M 14 – ISO 2
Tap characteristics	$D = \text{nominal diameter} = 14 \text{ mm}$ Pitch = 2 mm Threaded length = 30 mm
Basic data taken from ISO/R 724	$d_2 = D_2 = \dots\dots\dots 12,701 \text{ mm}$
Minimum major diameter ( $d \text{ min.}$ )	$d \text{ min.} = D + J_s (0,4 t)$ $D = \dots\dots\dots 14,000 \text{ mm}$ $J_s (0,4 t) = \dots\dots\dots 0,068 \text{ mm}$ $d \text{ min.} = 14,000 + 0,068 = \underline{14,068 \text{ mm}}$ (see 4.1)
Minimum pitch diameter ( $d_2 \text{ min.}$ )	$d_2 \text{ min.} = d_2 + E_m (0,3 t)$ $d_2 \text{ (basic)} = \dots\dots\dots 12,701 \text{ mm}$ $E_m (0,3 t) = \dots\dots\dots 0,051 \text{ mm}$ $d_2 \text{ min.} = 12,701 + 0,051 = \underline{12,752 \text{ mm}}$ (see 4.2)
Maximum pitch diameter ( $d_2 \text{ max.}$ )	$d_2 \text{ max.} = d_2 + E_s (0,5 t)$ $d_2 \text{ (basic)} = \dots\dots\dots 12,701 \text{ mm}$ $E_s (0,5 t) = \dots\dots\dots 0,085 \text{ mm}$ $d_2 \text{ max.} = 12,701 + 0,085 = \underline{12,786 \text{ mm}}$ (see 4.2)
Minor diameter	Not specified (see 4.3)
Tolerance on the angle ( $\alpha$ ) or half-angle ( $\alpha/2$ ) of pitch	For a pitch of 2 mm $\pm 20'$ (see 4.4)
Cumulative pitch error $T_p$ over any number of threads	(see 4.5)

$t = T_{D2}$  : pitch tolerance, grade 5 of the nut. (See 3.4.)


GROUND THREAD TAPS FOR ISO METRIC THREADS OF COARSE PITCH

Dimensions and manufacturing tolerances for the threaded portion of taps of :

Class 1 (for classes 4H and 5H of nuts)

Class 2 (for classes 6H, and 4G and 5G of nuts)

Class 3 (for classes 7H and 8H, and 6G of nuts)

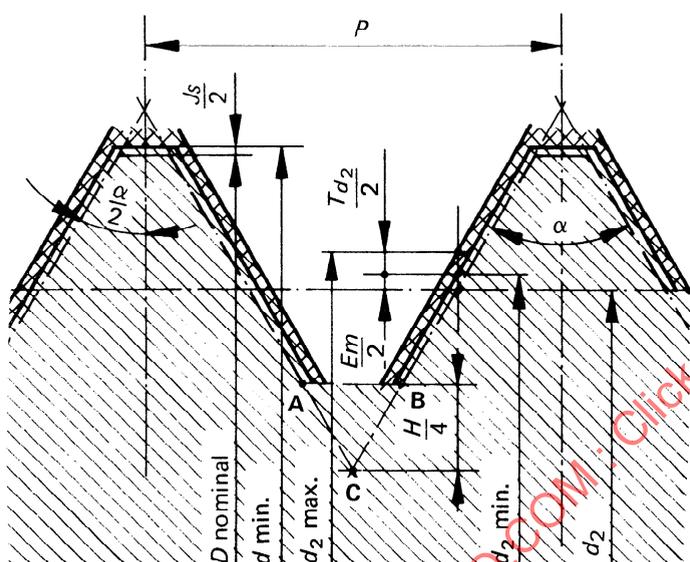

Class of taps			All classes		
Thread			Major diameter		Basic pitch diameter
Designation	d nominal	Pitch P	Min. deviation	Min. d min.	
			0,4 t	d <sub>2</sub>	
M 1	1	0,25	+ 0,022	1,022	0,838
M 1,1	1,1			1,122	0,938
M 1,2	1,2			1,222	1,038
M 1,4	1,4	0,35	+ 0,027	1,424	1,205
M 1,6	1,6			1,627	1,373
M 1,8	1,8	0,4	+ 0,028	1,827	1,573
M 2	2			2,028	1,740
M 2,2	2,2			2,230	1,908
M 2,5	2,5	0,45	+ 0,030	2,530	2,208
M 3	3			3,032	2,675
M 3,5	3,5	0,6	+ 0,036	3,536	3,110
M 4	4			4,038	3,545
M 4,5	4,5	0,75	+ 0,038	4,538	4,013
M 5	5			5,040	4,480
M 6	6			6,047	5,350
M 7	7	1	+ 0,047	7,047	6,350
M 8	8			8,050	7,188
M 9	9	1,25	+ 0,050	9,050	8,188
M 10	10			10,056	9,026
M 11	11	1,5	+ 0,056	11,056	10,026
M 12	12			12,064	10,863
M 14	14	2	+ 0,068	14,068	12,701
M 16	16			16,068	14,701
M 18	18	2,5	+ 0,072	18,072	16,376
M 20	20			20,072	18,376
M 22	22			22,072	20,376
M 24	24	3	+ 0,085	24,085	22,051
M 27	27			27,085	25,051
M 30	30	3,5	+ 0,090	30,090	27,727
M 33	33			33,090	30,727
M 36	36	4	+ 0,094	36,094	33,402
M 39	39			39,094	36,402
M 42	42	4,5	+ 0,100	42,100	39,077
M 45	45			45,100	42,077
M 48	48	5	+ 0,106	48,106	44,752
M 52	52			52,106	48,752
M 56	56	5,5	+ 0,112	56,112	52,428
M 60	60			60,112	56,428
M 64	64	6	+ 0,120	64,120	60,103
M 68	68			68,120	64,103

Minor diameter of tap

No tolerance is specified on this diameter. The thread root is generally, but not mandatorily, with a rounded form and the profile of the radius blending with the flanks of the thread, should lie, in principle, under the line AB which corresponds with the internal diameter  $D_1$  of the basic ISO profile.

Cumulative pitch error  $T_p$  over any number of threads

This error is fixed at  $\pm 0,05\%$  of the considered measuring length with a minimum of  $\pm 0,008$  mm.

Dimensions in millimetres

Class 1				Class 2				Class 3				Toler. on $\alpha$ and $\alpha/2$	$d$ nominal							
Pitch diameter																				
Min. deviat.	min.	Toler.	max.	Min. deviat.	min.	Toler.	max.	Min. deviat.	min.	Toler.	max.									
$E_m$	$d_2$ min.	$T_{d_2}$	$d_2$ max.	$E_m$	$d_2$ min.	$T_{d_2}$	$d_2$ max.	$E_m$	$d_2$ min.	$T_{d_2}$	$d_2$ max.									
+ 0,006	0,844	+ 0,011	0,855	+ 0,018	1,223	+ 0,012	1,235	+ 0,018	1,223	+ 0,012	1,235	$\pm 40'$	1							
	0,944		0,955										1,393	1,407	1,393	1,407	1,1			
	1,044		1,055										1,580	1,607	1,580	1,607	1,2			
	1,211	1,223	1,747										1,776	1,747	1,776	1,4				
+ 0,007	1,380	+ 0,013	1,393	+ 0,020	1,593	+ 0,014	1,607	+ 0,021	1,761	+ 0,015	1,776		$\pm 30'$	1,6						
	1,580		1,593											1,747	1,776	1,747	1,776	1,8		
	1,747	1,761	1,916											1,931	1,916	1,931	2			
+ 0,008	1,916	+ 0,015	1,931	+ 0,023	2,231	+ 0,015	2,246	+ 0,024	2,699	+ 0,016	2,715			$\pm 30'$	2,2					
	2,216		2,231												2,683	2,699	2,683	2,699	2,5	
	2,683	2,699	3,119												3,137	3,119	3,137	3		
+ 0,009	3,119	+ 0,018	3,137	+ 0,027	3,137	+ 0,018	3,155	+ 0,027	3,137	+ 0,018	3,173				$\pm 30'$	3,5				
	3,555		3,574													4,023	4,042	4,023	4,042	4
	4,023	4,042	4,490									4,510				4,490	4,510	4,5		
+ 0,010	3,555	+ 0,019	3,574	+ 0,029	4,042	+ 0,019	4,061	+ 0,029	4,510	+ 0,020	4,530	$\pm 30'$				5				
	4,023		4,042													4,490	4,510	4,490	4,510	6
	4,490	4,510	5,362													5,385	5,362	5,385	6	
+ 0,012	5,362	+ 0,023	5,385	+ 0,035	6,385	+ 0,024	6,409	+ 0,035	6,385	+ 0,024	6,409		$\pm 25'$			7				
	6,362		6,385													7,201	7,226	7,201	7,226	8
+ 0,013	7,201	+ 0,025	7,226	+ 0,038	8,226	+ 0,025	8,251	+ 0,038	8,226	+ 0,025	8,251					$\pm 25'$	9			
	8,201		8,226											9,040			9,068	9,040	9,068	10
+ 0,014	9,040	+ 0,028	9,068	+ 0,042	10,068	+ 0,028	10,096	+ 0,042	10,068	+ 0,028	10,124			$\pm 25'$			11			
	10,040		10,068														10,879	10,911	10,879	10,911
+ 0,016	10,879	+ 0,032	10,911	+ 0,048	10,911	+ 0,032	10,943	+ 0,048	10,911	+ 0,032	10,975				$\pm 20'$		14			
	12,718		12,752														14,718	14,752	14,718	14,752
+ 0,017	12,718	+ 0,034	12,752	+ 0,051	14,752	+ 0,034	14,786	+ 0,051	14,752	+ 0,034	14,786						$\pm 20'$	18		
	14,718		14,752									16,394						16,430	16,394	16,430
	16,394	16,430	18,394									18,430						18,394	18,430	22
+ 0,018	18,394	+ 0,036	18,430	+ 0,054	20,430	+ 0,036	20,466	+ 0,054	20,430	+ 0,036	20,466	$\pm 20'$						24		
	20,394		20,430										22,072					22,115	22,072	22,115
	22,072	22,115	25,072										25,115					25,072	25,115	27
+ 0,021	22,072	+ 0,043	22,115	+ 0,064	25,115	+ 0,042	25,157	+ 0,064	25,115	+ 0,042	25,199		$\pm 15'$			30				
	25,072		25,115													27,749		27,794	27,749	27,794
+ 0,022	27,749	+ 0,045	27,794	+ 0,067	30,794	+ 0,045	30,839	+ 0,067	30,794	+ 0,045	30,884			$\pm 15'$		36				
	30,749		30,794													33,426		33,473	33,426	33,473
+ 0,024	33,426	+ 0,047	33,473	+ 0,071	36,473	+ 0,047	36,520	+ 0,071	36,473	+ 0,047	36,567				$\pm 15'$	42				
	36,426		36,473													39,102		39,152	39,102	39,152
+ 0,025	39,102	+ 0,050	39,152	+ 0,075	42,152	+ 0,050	42,202	+ 0,075	42,152	+ 0,050	42,252					$\pm 15'$	48			
	42,102		42,152														44,779	44,832	44,779	44,832
+ 0,027	44,779	+ 0,053	44,832	+ 0,080	48,832	+ 0,053	48,885	+ 0,080	48,832	+ 0,053	48,938						$\pm 15'$	56		
	48,779		48,832									52,456						52,512	52,456	52,512
+ 0,028	52,456	+ 0,056	52,512	+ 0,084	56,512	+ 0,056	56,568	+ 0,084	56,512	+ 0,056	56,624	$\pm 15'$						64		
	56,456		56,512															60,133	60,193	60,133
+ 0,030	60,133	+ 0,060	60,193	+ 0,090	64,193	+ 0,060	64,253	+ 0,090	64,193	+ 0,060	64,313		$\pm 15'$					68		
	64,133		64,193															64,253	64,253	64,253

GROUND THREAD TAPS FOR ISO METRIC THREADS OF FINE PITCH


Diameters of 1 to 32 mm

Dimensions and manufacturing tolerances for the threaded portion of taps of :

Class 1 (for classes 4H and 5H of nuts)

Class 2 (for classes 6H, and 4G and 5G of nuts)

Class 3 (for classes 7H and 8H, and 6G of nuts)

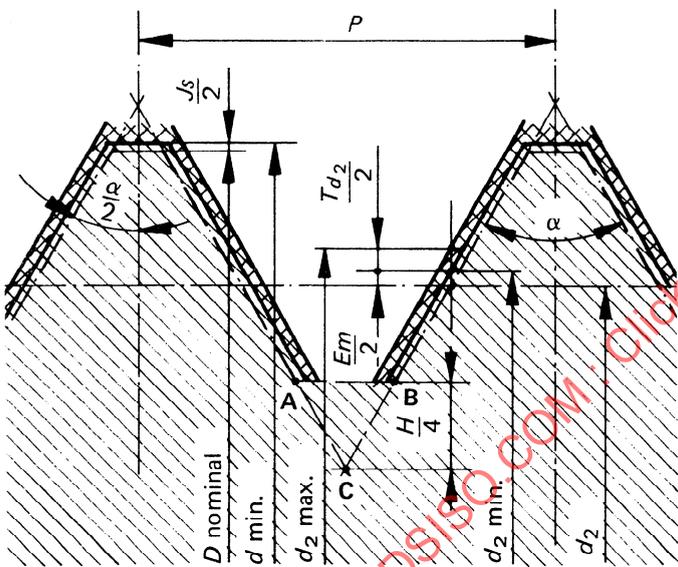

Class of taps			All classes		
Thread			Major diameter		
Designation	d nominal	Pitch P	Min. deviation	Min.	Basic pitch diameter
			0,4 t	d min.	d <sub>2</sub>
M 1 × 0,2	1	0,2	+ 0,020	1,020	0,870
M 1,1 × 0,2	1,1			1,120	0,970
M 1,2 × 0,2	1,2			1,220	1,070
M 1,4 × 0,2	1,4			1,421	1,270
M 1,6 × 0,2	1,6			1,621	1,470
M 1,8 × 0,2	1,8			1,821	1,670
M 2 × 0,25	2	0,25	+ 0,024	2,024	1,838
M 2,2 × 0,25	2,2			2,224	2,038
M 2,5 × 0,35	2,5	0,35	+ 0,027	2,527	2,273
M 3 × 0,35	3			3,028	2,773
M 3,5 × 0,35	3,5		+ 0,028	3,528	3,273
M 4 × 0,5	4	0,5	+ 0,032	4,032	3,675
M 4,5 × 0,5	4,5			4,532	4,175
M 5 × 0,5	5			5,032	4,675
M 5,5 × 0,5	5,5			5,532	5,175
M 6 × 0,75	6	0,75	+ 0,042	6,042	5,513
M 7 × 0,75	7			7,042	6,513
M 8 × 1	8	1	+ 0,047	8,047	7,350
M 9 × 1	9			9,047	8,350
M 10 × 1	10			10,047	9,350
M 10 × 1,25	10	1,25	+ 0,050	10,050	9,188
M 12 × 1,25		1,25	+ 0,056	12,056	11,188
M 12 × 1,5	12	1,5	+ 0,060	12,060	11,026
M 14 × 1,25	14	1,25	+ 0,056	14,056	13,188
M 14 × 1,5		1,5	+ 0,060	14,060	13,026
M 15 × 1,5	15	15,060		14,026	
M 16 × 1,5	16	16,060		15,026	
M 17 × 1,5	17	17,060		16,026	
M 18 × 1,5	18	18,060		17,026	
M 18 × 2	18	2		+ 0,068	18,068
M 20 × 1,5	20	1,5	+ 0,060	20,060	19,026
M 20 × 2		2	+ 0,068	20,068	18,701
M 22 × 1,5	22	1,5	+ 0,060	22,060	21,026
M 22 × 2		2	+ 0,068	22,068	20,701
M 24 × 1,5	24	1,5	+ 0,064	24,064	23,026
M 24 × 2		2	+ 0,072	24,072	22,701
M 25 × 1,5	25	1,5	+ 0,064	25,064	24,026
M 25 × 2		2	+ 0,072	25,072	23,701
M 27 × 1,5	27	1,5	+ 0,064	27,064	26,026
M 27 × 2		2	+ 0,072	27,072	25,701
M 28 × 1,5	28	1,5	+ 0,064	28,064	27,026
M 28 × 2		2	+ 0,072	28,072	26,701
M 30 × 1,5	30	1,5	+ 0,064	30,064	29,026
M 30 × 2		2	+ 0,072	30,072	28,701
M 30 × 3	30	3	+ 0,085	30,085	28,051
M 32 × 1,5	32	1,5	+ 0,064	32,064	31,026
M 32 × 2		2	+ 0,072	32,072	30,701

Minor diameter of tap

No tolerance is specified on this diameter. The thread root is generally, but not mandatorily, with a rounded form and the profile of the radius blending with the flanks of the thread, should lie, in principle, under the line AB which corresponds with the internal diameter D<sub>1</sub> of the basic ISO profile.

Cumulative pitch error T<sub>p</sub> over any number of threads

This error is fixed at ± 0,05 % of the considered measuring length with a minimum of ± 0,008 mm.

Dimensions in millimetres

Class 1				Class 2				Class 3				Toler. on $\alpha$ and $\alpha/2$	d nominal	
Pitch diameter														
Min. deviat.	min.	Toler.	max.	Min. deviat.	min.	Toler.	max.	Min. deviat.	min.	Toler.	max.			
$E_m$	$d_2$ min.	$T_{d_2}$	$d_2$ max.	$E_m$	$d_2$ min.	$T_{d_2}$	$d_2$ max.	$E_m$	$d_2$ min.	$T_{d_2}$	$d_2$ max.			
+ 0,005	0,875	+ 0,010	0,885									$\pm 40'$	1	
	0,975		0,985										1,1	
	1,075		1,085											1,2
	1,275		1,285											1,4
	1,475		1,485											1,6
	1,675		1,685											
+ 0,006	1,844	+ 0,012	1,856									$\pm 40'$	2	
	2,044		2,056											2,2
+ 0,007	2,280	+ 0,013	2,293	+ 0,020	2,293	+ 0,014	2,307					$\pm 40'$	2,5	
	2,780	+ 0,014	2,794	+ 0,021	2,794	+ 0,015	2,809							3
	3,280		3,294		3,294		3,309							
+ 0,008	3,683	+ 0,016	3,699	+ 0,024	3,699	+ 0,016	3,715	+ 0,040	3,715	+ 0,016	3,731	$\pm 30'$	4	
	4,183		4,199		4,199		4,215		4,215		4,231		4,5	
	4,683		4,699		4,699		4,715		4,715		4,731		5	
	5,183		5,199		5,199		5,215		5,215		5,231		5,5	
+ 0,011	5,524	+ 0,021	5,545	+ 0,032	5,545	+ 0,021	5,566	+ 0,053	5,566	+ 0,021	5,587	$\pm 25'$	6	
	6,524		6,545		6,545		6,566		6,566		6,587		7	
+ 0,012	7,362	+ 0,023	7,385	+ 0,035	7,385	+ 0,024	7,409	+ 0,059	7,409	+ 0,024	7,433	$\pm 25'$	8	
	8,362		8,385		8,385		8,409		8,409		8,433		9	
	9,362		9,385		9,385		9,409		9,409		9,433		10	
+ 0,013	9,201	+ 0,025	9,226	+ 0,038	9,226	+ 0,025	9,251	+ 0,063	9,251	+ 0,025	9,276		10	
+ 0,014	11,202	+ 0,028	11,230	+ 0,042	11,230	+ 0,028	11,258	+ 0,070	11,258	+ 0,028	11,286		12	
+ 0,015	11,041	+ 0,030	11,071	+ 0,045	11,071	+ 0,030	11,101	+ 0,075	11,101	+ 0,030	11,131		12	
+ 0,014	13,202	+ 0,028	13,230	+ 0,042	13,230	+ 0,028	13,258	+ 0,070	13,258	+ 0,028	13,286		14	
+ 0,015	13,041	+ 0,030	13,071	+ 0,045	13,071	+ 0,030	13,101	+ 0,075	13,101	+ 0,030	13,131	$\pm 25'$	14	
	14,041		14,071		14,071		14,101		14,101		14,131		15	
	15,041		15,071		15,071		15,101		15,101		15,131		16	
	16,041		16,071		16,071		16,101		16,101		16,131		17	
	17,041		17,071		17,071		17,101		17,101		17,131		18	
+ 0,017	16,718	+ 0,034	16,752	+ 0,051	16,752	+ 0,034	16,786	+ 0,085	16,786	+ 0,034	16,820	$\pm 20'$	18	
+ 0,015	19,041	+ 0,030	19,071	+ 0,045	19,071	+ 0,030	19,101	+ 0,075	19,101	+ 0,030	19,131	$\pm 25'$	20	
+ 0,017	18,718	+ 0,034	18,752	+ 0,051	18,752	+ 0,034	18,786	+ 0,085	18,786	+ 0,034	18,820	$\pm 20'$	20	
+ 0,015	21,041	+ 0,030	21,071	+ 0,045	21,071	+ 0,030	21,101	+ 0,075	21,101	+ 0,030	21,131	$\pm 25'$	22	
+ 0,017	20,718	+ 0,034	20,752	+ 0,051	20,752	+ 0,034	20,786	+ 0,085	20,786	+ 0,034	20,820	$\pm 20'$	22	
+ 0,016	23,042	+ 0,032	23,074	+ 0,048	23,074	+ 0,032	23,106	+ 0,080	23,106	+ 0,032	23,138	$\pm 25'$	24	
+ 0,018	22,719	+ 0,036	22,755	+ 0,054	22,755	+ 0,036	22,791	+ 0,090	22,791	+ 0,036	22,827	$\pm 20'$	24	
+ 0,016	24,042	+ 0,032	24,074	+ 0,048	24,074	+ 0,032	24,106	+ 0,080	24,106	+ 0,032	24,138	$\pm 25'$	25	
+ 0,018	23,719	+ 0,036	23,755	+ 0,054	23,755	+ 0,036	23,791	+ 0,090	23,791	+ 0,036	23,827	$\pm 20'$	25	
+ 0,016	26,042	+ 0,032	26,074	+ 0,048	26,074	+ 0,032	26,106	+ 0,080	26,106	+ 0,032	26,138	$\pm 25'$	27	
+ 0,018	25,719	+ 0,036	25,755	+ 0,054	25,755	+ 0,036	25,791	+ 0,090	25,791	+ 0,036	25,827	$\pm 20'$	27	
+ 0,016	27,042	+ 0,032	27,074	+ 0,048	27,074	+ 0,032	27,106	+ 0,080	27,106	+ 0,032	27,138	$\pm 25'$	28	
+ 0,018	26,719	+ 0,036	26,755	+ 0,054	26,755	+ 0,036	26,791	+ 0,090	26,791	+ 0,036	26,827	$\pm 20'$	28	
+ 0,016	29,042	+ 0,032	29,074	+ 0,048	29,074	+ 0,032	29,106	+ 0,080	29,106	+ 0,032	29,138	$\pm 25'$	30	
+ 0,018	28,719	+ 0,036	28,755	+ 0,054	28,755	+ 0,036	28,791	+ 0,090	28,791	+ 0,036	28,827	$\pm 20'$		
+ 0,021	28,072	+ 0,043	28,115	+ 0,064	28,115	+ 0,042	28,157	+ 0,106	28,157	+ 0,042	28,199	$\pm 20'$	30	
+ 0,016	31,042	+ 0,032	31,074	+ 0,048	31,074	+ 0,032	31,106	+ 0,080	31,106	+ 0,032	31,138	$\pm 25'$		
+ 0,018	30,719	+ 0,036	30,755	+ 0,054	30,755	+ 0,036	30,791	+ 0,090	30,791	+ 0,036	30,827	$\pm 20'$	32	

GROUND THREAD TAPS FOR ISO METRIC THREADS OF FINE PITCH (concluded)


Diameters of 33 to 90 mm

Dimensions and manufacturing tolerances for the threaded portion of taps of :

Class 1 (for classes 4H and 5H of nuts)

Class 2 (for classes 6H, and 4G and 5G of nuts)

Class 3 (for classes 7H and 8H, and 6G of nuts)

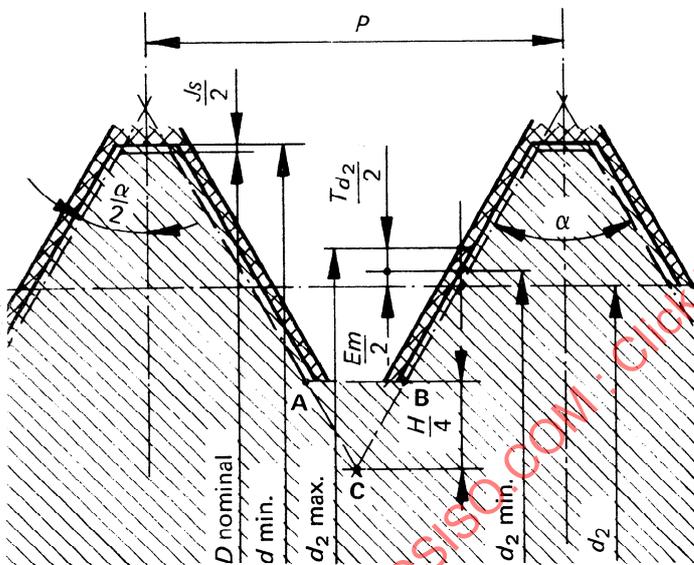

Class of taps		All classes			
Thread		Major diameter			
Designation	d nominal	Pitch P	Min. deviation	Min.	Basic pitch diameter
			0,4 t	d min.	d <sub>2</sub>
M 33 × 1,5	33	1,5	+ 0,064	33,064	32,026
M 33 × 2		2	+ 0,072	33,072	31,701
M 33 × 3		3	+ 0,085	33,085	31,051
M 35 × 1,5	35	1,5	+ 0,064	35,064	34,026
M 36 × 1,5	36	1,5	+ 0,064	36,064	35,026
M 36 × 2		2	+ 0,072	36,072	34,701
M 36 × 3		3	+ 0,085	36,085	34,051
M 39 × 1,5	39	1,5	+ 0,064	39,064	38,026
M 39 × 2		2	+ 0,072	39,072	37,701
M 39 × 3		3	+ 0,085	39,085	37,051
M 40 × 1,5	40	1,5	+ 0,064	40,064	39,026
M 40 × 2		2	+ 0,072	40,072	38,701
M 40 × 3		3	+ 0,085	40,085	38,051
M 42 × 1,5	42	1,5	+ 0,064	42,064	41,026
M 42 × 2		2	+ 0,072	42,072	40,701
M 42 × 3		3	+ 0,085	42,085	40,051
M 42 × 4		4	+ 0,094	42,094	39,402
M 45 × 1,5	45	1,5	+ 0,064	45,064	44,026
M 45 × 2		2	+ 0,072	45,072	43,701
M 45 × 3		3	+ 0,085	45,085	43,051
M 45 × 4		4	+ 0,094	45,094	42,402
M 48 × 1,5	48	1,5	+ 0,068	48,068	47,026
M 48 × 2		2	+ 0,076	48,076	46,701
M 48 × 3		3	+ 0,090	48,090	46,051
M 48 × 4		4	+ 0,100	48,100	45,402
M 50 × 1,5	50	1,5	+ 0,068	50,068	49,026
M 50 × 2		2	+ 0,076	50,076	48,701
M 50 × 3		3	+ 0,090	50,090	48,051
M 52 × 1,5	52	1,5	+ 0,068	52,068	51,026
M 52 × 2		2	+ 0,076	52,076	50,701
M 52 × 3		3	+ 0,090	52,090	50,051
M 52 × 4		4	+ 0,100	52,100	49,402
M 55 × 1,5	55	1,5	+ 0,068	55,068	54,026
M 55 × 2		2	+ 0,076	55,076	53,701
M 55 × 3		3	+ 0,090	55,090	53,051
M 55 × 4		4	+ 0,100	55,100	52,402
M 56 × 1,5	56	1,5	+ 0,068	56,068	55,026
M 56 × 2		2	+ 0,076	56,076	54,701
M 56 × 3		3	+ 0,090	56,090	54,051
M 56 × 4		4	+ 0,100	56,100	53,402
M 70 × 6	70	6	+ 0,120	70,120	66,103
M 72 × 6	72			72,120	68,103
M 75 × 6	75			75,120	71,103
M 76 × 6	76			76,120	72,103
M 80 × 6	80			80,120	76,103
M 85 × 6	85			85,120	81,103
M 90 × 6	90			90,120	86,103

Minor diameter of tap

No tolerance is specified on this diameter. The thread root is generally, but not mandatorily, with a rounded form and the profile of the radius blending with the flanks of the thread, should lie, in principle, under the line AB which corresponds with the internal diameter D<sub>1</sub> of the basic ISO profile.

Cumulative pitch error T<sub>p</sub> over any number of threads

This error is fixed at ± 0,05 % of the considered measuring length with a minimum of ± 0,008 mm.