

---

# INTERNATIONAL STANDARD



# 2905

---

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

---

## Modular units for machine tool construction — Spindle noses and adjustable adaptors for multi-spindle heads

*Éléments standard pour la construction des machines-outils — Nez de broches et douilles de réglage pour têtes multibroches*

First edition — 1974-12-01

STANDARDSISO.COM : Click to view the full PDF of ISO 2905:1974

---

UDC 621.9-112

Ref. No. ISO 2905-1974 (E)

**Descriptors** : machine tools, modular structures, spindles, adaptors, dimensions.

Price based on 6 pages

## FOREWORD

ISO (the International Organization for Standardization) is a worldwide federation of national standards institutes (ISO Member Bodies). The work of developing International Standards is carried out through ISO Technical Committees. Every Member Body interested in a subject for which a Technical Committee has been set up has the right to be represented on that Committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the Technical Committees are circulated to the Member Bodies for approval before their acceptance as International Standards by the ISO Council.

International Standard ISO 2905 was drawn up by Technical Committee ISO/TC 39, *Machine tools*. It is a combination of drafts ISO/DIS 2905 and 2956, which were circulated to the Member Bodies in August 1972 and February 1973 respectively.

Draft ISO/DIS 2905 has been approved by the Member Bodies of the following countries :

Austria	India	Thailand
Belgium	Ireland	Turkey
Czechoslovakia	New Zealand	United Kingdom
Egypt, Arab Rep. of	Romania	U.S.A.
France	South Africa, Rep. of	U.S.S.R.
Germany	Sweden	
Hungary	Switzerland	

The Member Bodies of the following countries expressed disapproval of the document on technical grounds :

Italy  
Japan

Draft ISO/DIS 2956 has been approved by the Member Bodies of the following countries :

Austria	India	Switzerland
Belgium	Italy	Thailand
Bulgaria	New Zealand	Turkey
France	Poland	United Kingdom
Germany	Romania	U.S.A.
Hungary	South Africa, Rep. of	U.S.S.R.

The Member Bodies of the following countries expressed disapproval of the document on technical grounds :

Czechoslovakia  
Japan

# Modular units for machine tool construction — Spindle noses and adjustable adaptors for multi-spindle heads

## 1 SCOPE AND FIELD OF APPLICATION

This International Standard specifies dimensions for spindle noses for use with adjustable adaptors and quick-change adaptors used in multi-spindle heads.

It specifies requirements for three types of adjustable adaptors for the receipt of taper shank drills, reamers and spot-facing cutters, used in multi-spindle heads.

## 2 REFERENCES

ISO 296, *Self-holding tapers for tool shanks.*

ISO 2901, *ISO metric trapezoidal screw threads — Basic profile and maximum material profiles.*<sup>1)</sup>

ISO 2903, *ISO metric trapezoidal screw threads — Tolerances.*<sup>1)</sup>

## 3 SPINDLE NOSES

### 3.1 Nominal sizes

The nominal size of the spindle nose shall be its nominal

bore, which shall be identical with the nominal diameter of the adjustable adaptor with which it is to be used.

The range of nominal sizes is as follows :

8, 10, 12, 16, 20, 25, 28, 36 and 48 mm

### 3.2 Interchangeability

Spindle noses shall be capable of accepting adjustable adaptors manufactured in accordance with clause 4.

### 3.3 Dimensions

Dimensions shall comply with those given in table 1.

### 3.4 Locking screw

For reasons of safety, it is important that the locking screw when tightened does not protrude beyond the outside diameter of the spindle nose. Therefore, locking screws are to be reduced in length if necessary; this correction should be carried out when the position of the adjustable adaptor in the spindle nose corresponds with the maximum wear of the tool.

1) At present at the stage of draft.

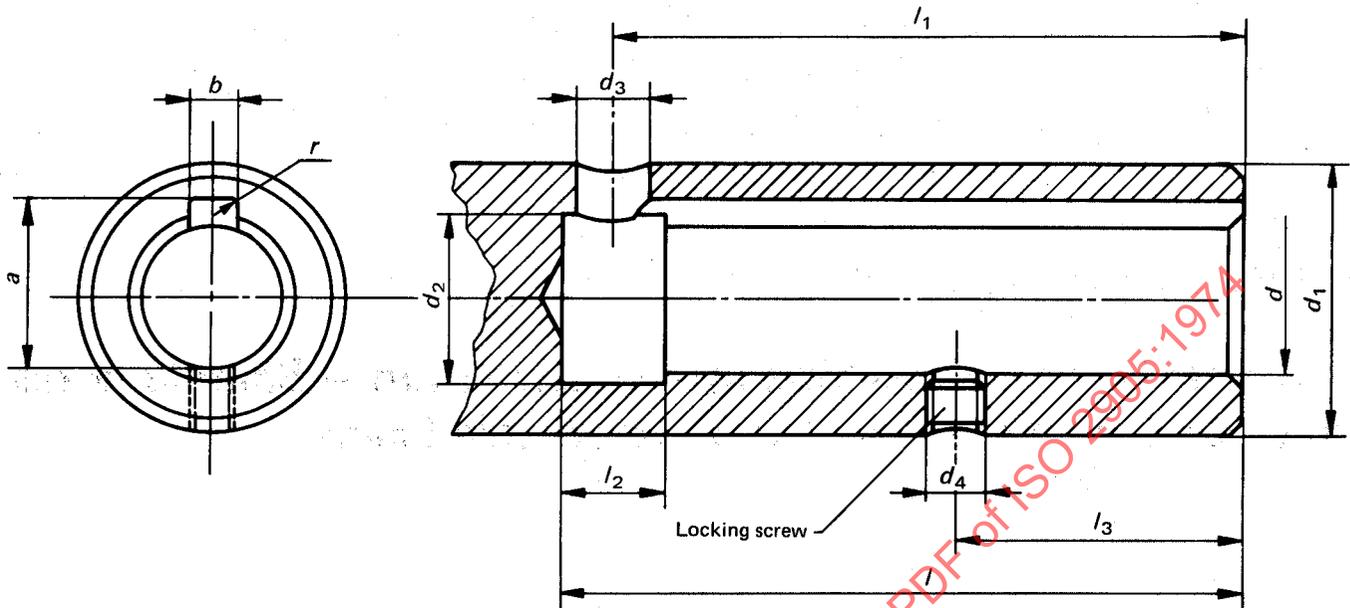


TABLE 1

Dimensions in millimetres

$d$ H7	$a$ $+0,3$ $0$	$b$ C11	$d_1^{1)}$	$d_2^{2)}$	$d_3$	$d_4$ 6H	$l$ min.	$l_1$	$l_2$	$l_3$ $\pm 0,1$	$r$ max.	Locking screw
8	9	2	15	8,6	3,5	M4	42	35	8	16	0,2	M4-5
10	11	3	18	10,6	5	M5	52	48	8	22	0,2	M5-5
12	13	3	20	12,6	5	M5	52	48	8	22	0,2	M5-5
16	17,3	5	25	16,4	6	M6	74	70	8	34	0,2	M6-6
20	21,3	5	32	20,4	6	M6	77	73	8	34	0,2	M6-6
25	26,7	6	37	25,4	8	M8	85	80	10	38	0,4	M8-6
28	29,7	6	40	28,4	8	M8	85	80	10	38	0,4	M8-8
36	37,7	8	50	36,6	10	M8	106	101	10	45	0,4	M8-8
48	50,1	10	67	48,6	12	M10	129	123	12	57	0,4	M10-10

1) For nominal diameters 8 to 12, diameter  $d_1$  depends on the design requirements; the values are therefore given for information only.

For nominal diameters 16 to 48, the tolerance on  $d_1$  is f7 only if quick-change adaptors are to be used.

2) These values are given for information only.

## 4 ADJUSTABLE ADAPTORS

### 4.1 Nominal sizes

The nominal size of an adaptor shall be its nominal outside diameter, which shall be identical with the nominal bore of the spindle nose with which it is to be used.

The range of nominal sizes is as follows :

8, 10, 12, 16, 20, 25, 28, 36 and 48 mm

### 4.2 Interchangeability

Adaptors shall be capable of fitting spindle noses manufactured in accordance with clause 3.

### 4.3 Dimensions

Dimensions shall comply with those given in tables 2 and 3.

### 4.4 Threads

Threads shall comply with ISO 2901 and ISO 2903, except, in the case of special material requirements for major diameter on which the tolerance shall be h6 and for the pitch of 1 mm provided for the nominal size of 8 mm.

### 4.5 Bore taper

The bore of the adaptor body shall be tapered in accordance with ISO 296.

### 4.6 Drift slot

The drift slot of the appropriate self-holding taper complying with ISO 296 shall be provided 90° from the Woodruff key.

### 4.7 Locking screw (for nominal diameters 16 to 48)

For reasons of safety, it is important that the locking screw when tightened does not protrude beyond the outside diameter of the knurled portion of the nut. Therefore, locking screws are to be reduced in length if necessary so that they do not protrude when the nut is locked.

### 4.8 Lead-in of the adjustable adaptors in the spindle noses

For the types A and B, a suitable form of lead-in shall be machined on the closed end of the adaptor body, to facilitate insertion into the spindle nose.


### 4.9 Marking

The body of the adaptor shall be marked with the type, nominal size, size of Morse taper and, for type B adaptors only, the extension length.

*Examples :* A 10/Metr. 6  
B 20/1/50  
C 28/3

STANDARDSISO.COM : Click to view the full PDF of ISO 2905:1974

Type A – Short

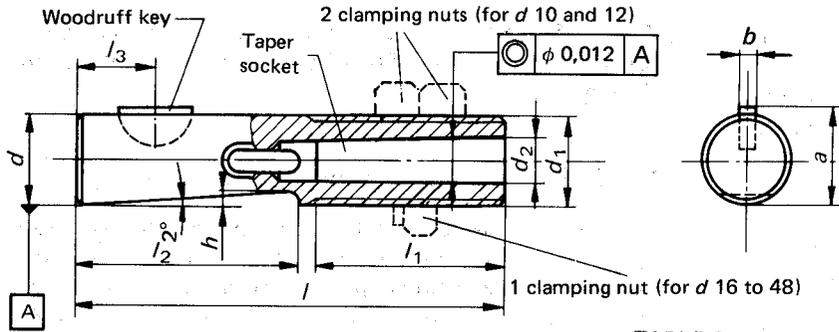

Type B – Long

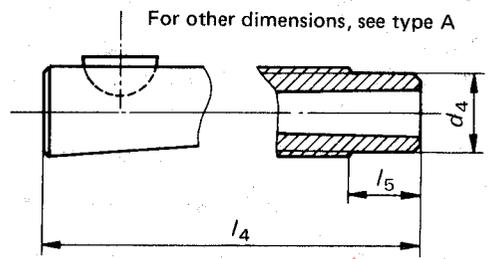


TABLE 2

Dimensions in millimetres

d h6	d <sub>1</sub> *	d <sub>2</sub> Taper	Basic φ	a Tol.	b P9/h9	h max.	l	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	d <sub>4</sub>	l <sub>4</sub>	l <sub>5</sub>	Woodruff key	Range of adjustment	
10	Tr 10 X 1,5	Metr. No. 6	6	10,9	0 -0,15	3	1	62	28	32	10	8	72	10	3 X 5	16
												82	20			
												92	30			
12	Tr 12 X 1,5	Metr. No. 6	6	12,9	0 -0,20	3	1	62	28	32	10	10	72	10	3 X 5	16
												82	20			
												92	30			
16	Tr 16 X 1,5	Morse No. 0 or 1	9,045 or 12,065	17,1	0 -0,25	5	1,3	85	40	43	11	14	110	25	5 X 6,5	28
												135	50			
												160	75			
												185	100			
20	Tr 20 X 2	Morse No. 1	12,065	21,1	0 -0,25	5	1,3	88	40	46	13	17	113	25	5 X 7,5	28
												138	50			
												163	75			
												188	100			
25	Tr 25 X 2	Morse No. 1 or 2	12,065 or 17,780	26,5	0 -0,25	6	1,5	95	42	51	15	22	120	25	6 X 9	30
												145	50			
												170	75			
												195	100			
28	Tr 28 X 2	Morse No. 1 or 2	12,065 or 17,780	29,5	0 -0,25	6	1,5	95	42	51	15	25	120	25	6 X 9	30
												145	50			
												170	75			
												195	100			
36	Tr 36 X 2	Morse No. 2 or 3	17,780 or 23,825	37,5	0 -0,35	8	1,7	118	50	65	20	33	148	30	8 X 11	36
												178	60			
												208	90			
												238	120			
48	Tr 48 X 2	Morse No. 3 or 4	23,825 or 31,267	49,9	0 -0,35	10	2,2	144	65	76	24	45	184	40	10 X 13	47
												224	80			
												264	120			
												304	160			

\* Tolerance h6 on the major diameter.