

---

---

**Building information models —  
Information delivery manual —**

**Part 1:  
Methodology and format**

*Modèles des informations de la construction — Contrat  
d'échange —*

*Partie 1: Méthodologie et format*

STANDARDSISO.COM : Click to view the full PDF of ISO 29481-1:2016



STANDARDSISO.COM : Click to view the full PDF of ISO 29481-1:2016



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Ch. de Blandonnet 8 • CP 401  
CH-1214 Vernier, Geneva, Switzerland  
Tel. +41 22 749 01 11  
Fax +41 22 749 09 47  
copyright@iso.org  
www.iso.org

# Contents

	Page
<b>Foreword</b> .....	<b>iv</b>
<b>Introduction</b> .....	<b>v</b>
<b>1 Scope</b> .....	<b>1</b>
<b>2 Normative references</b> .....	<b>1</b>
<b>3 Terms and definitions</b> .....	<b>1</b>
<b>4 Information delivery manual</b> .....	<b>3</b>
4.1 General.....	3
4.2 Users of this part of ISO 29481.....	3
4.3 Business context.....	4
4.4 Complete schema.....	5
4.5 Breaking a complete schema to support requirements.....	5
4.6 Supporting the building information modelling process.....	5
4.7 Supporting the business process.....	5
4.8 Supporting the software solution.....	6
4.9 Content in the specific IDM.....	6
<b>5 IDM Framework</b> .....	<b>6</b>
5.1 General.....	6
5.2 Basic framework.....	8
5.2.1 General.....	8
5.2.2 IDM component header information.....	8
5.2.3 IDM component overview.....	9
5.3 Interaction map/transaction map.....	9
5.4 Process maps.....	9
5.5 Exchange requirements.....	10
5.5.1 General.....	10
5.5.2 Information units.....	10
5.5.3 Information constraints.....	10
5.6 Technical implementation.....	11
5.6.1 General.....	11
5.6.2 Implementation of metadata.....	11
5.6.3 Interaction framework.....	11
5.6.4 Model view definition (MVD).....	11
<b>Annex A (informative) IDM development process</b> .....	<b>13</b>
<b>Annex B (informative) Examples of simplified IDM components</b> .....	<b>17</b>
<b>Annex C (informative) Reference life cycle stages</b> .....	<b>22</b>
<b>Annex D (informative) IDM use of BPMN methods</b> .....	<b>24</b>
<b>Bibliography</b> .....	<b>29</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#)

The committee responsible for this document is ISO/TC 59, *Buildings and civil engineering works*, Subcommittee SC 13, *Organization of information about construction works*.

This second edition cancels and replaces the first edition (ISO 29481-1:2010), which has been technically revised.

ISO 29481 consists of the following parts, under the general title *Building information models — Information delivery manual*:

- *Part 1: Methodology and format*
- *Part 2: Interaction framework*

## Introduction

This International Standard has undergone a major review in the light of refined approaches to the development of information delivery manuals and their technical implementation in software readable forms. It is important to note that these changes do not render existing information delivery manuals (IDM) invalid.

Building information modelling provides a digital technology for describing and displaying information required in the planning, design, construction and operation of constructed facilities. Increasingly, this modelling approach is expanding to encompass all aspects of the built environment, including civil infrastructure, utilities and public space. These are collectively referred to as construction processes. This approach to managing information brings together the diverse sets of information used during the life cycle of the built environment into a common information environment, reducing, and often eliminating the need for the many types of paper documentation currently in use.

This approach is commonly referred to as building information modelling (BIM; reflecting its initial application in the architectural domain), while the same acronym is used to refer to the product of the process, the information model itself, or building information model (BIM).

Though the focus of construction processes described above is on the physical fabric of the built environment, BIM technology can also benefit the processes associated with managing the use of space within buildings, urban neighbourhoods and cities at the broader scale, as well as infrastructure networks and facilities. These are referred to here as use cases.

An IDM provides help in getting the full benefit from a BIM. If the required information is available in the BIM to support a construction process or use case, and the quality of information is satisfactory, then the process itself will be greatly improved.

For this to happen, there needs to be a common understanding of the processes involved across the entire life cycle development of a built environment project, including the information that is required for and results from the execution of that process. This applies to any activity that results in an exchange of information and may not relate directly to a BIM, e.g. the process to arrive at a work plan or contractual agreement.

This part of ISO 29481 sets out a methodology for the provision of an integrated reference document that describes the processes and data required in the development or management of a constructed facility. It describes how to identify and describe the processes undertaken within that context, the information required for their execution and the results. This part of ISO 29481 also describes in general terms how this information can be further detailed to support solutions provided by software developers, enabling its reuse, and configured to meet national, local and project needs.

In summary, this part of ISO 29481 provides a basis for reliable information exchange/sharing for users so that they can be confident that the information they are receiving is accurate and sufficient for the activities they need to perform. The development of this part of ISO 29481 has been driven by the need of users for reliability in information exchange.

[STANDARDSISO.COM](https://standardsiso.com) : Click to view the full PDF of ISO 29481-1:2016

# Building information models — Information delivery manual —

## Part 1: Methodology and format

### 1 Scope

This part of ISO 29481 specifies

- a methodology that links the business processes undertaken during the construction of built facilities with the specification of information that is required by these processes, and
- a way to map and describe the information processes across the life cycle of construction works.

This part of ISO 29481 is intended to facilitate interoperability between software applications used during all stages of the life cycle of construction works, including briefing, design, documentation, construction, operation and maintenance, and demolition. It promotes digital collaboration between actors in the construction process and provides a basis for accurate, reliable, repeatable and high-quality information exchange.

### 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 6707-1, *Buildings and civil engineering works — Vocabulary — Part 1: General terms*

### 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 6707-1 and the following apply.

#### 3.1 actor

person, organization or organizational unit (such as a department, team, etc.) involved in a construction process

#### 3.2 building information modelling BIM

use of a shared digital representation of a built object (including buildings, bridges, roads, process plants, etc.) to facilitate design, construction and operation processes to form a reliable basis for decisions

Note 1 to entry: The acronym BIM also stands for the shared digital representation of the physical and functional characteristics of any construction works.

#### 3.3 BIM software application

software application that is used to create, modify, analyze, manage, publish, share, expire, or otherwise manipulate elements of a BIM

**3.4  
business requirement**

requirement that describes in business terms what needs to be delivered or accomplished

**3.5  
information constraint**

statement that formally defines or constrains the scope of a piece of information due to some aspect of the business, a rule under which an organisation operates or a policy or decision that influences a process

**3.6  
class**

type or collection of things that share common attributes

**3.7  
construction works**

everything that is constructed or results from construction operations

[SOURCE: ISO 6707-1:2014, 3.1.1]

Note 1 to entry: This can refer to a building, piece of civil infrastructure (road, bridge, pipeline, etc.) or a landscape element and is extended to include aggregations of those elements to form an urban precinct, campus, or other institutional facility.

**3.8  
construction process**

process that uses *construction resources* to achieve *construction results*

Note 1 to entry: Each construction process can be split up into its component processes.

**3.9  
exchange requirement**

**ER**  
defined set of information units that needs to be exchanged to support a particular business requirement at a particular process phase (or phases)/stage (or stages)

**3.10  
information delivery manual**

**IDM**  
documentation which captures the business process and gives detailed specifications of the information that a user fulfilling a particular role would need to provide at a particular point within a project

Note 1 to entry: This can be referred to as an information delivery specification (IDS).

**3.11  
IDM components**

basic elements that form an IDM: interaction maps/transaction maps, process maps and exchange requirements

**3.12  
information unit**

individual information item, such as a window identifier or a room depth

**3.13  
interaction map**

representation of the roles and transactions relevant for a defined purpose

**3.14  
interaction framework**

formal description of the elements of interaction, including definition of roles, transactions, messages in transaction, and data elements in messages

### 3.15 model

representation of a system that allows for investigation of the properties of the system

### 3.16 model view definition MVD

computer-interpretable definition of an exchange requirement, specifically bound to one or more particular standard information schemas

Note 1 to entry: A model view definition (MVD) is also referred to as a view definition, a subset (of a schema) and a conformance class (CC) especially in ISO 10303.

### 3.17 object

part of the perceivable or conceivable world

Note 1 to entry: An object is something mental or physical toward which thought, feeling, or action is directed.

### 3.18 process map PM

representation of the relevant characteristics of a process associated with a defined business purpose

### 3.19 role

functions being performed by an actor at a point in time

Note 1 to entry: The role of an actor is determined by action and outcome and not necessarily by the profession or trade followed by the actor.

### 3.20 transaction

communication event that fulfils a relationship between two roles

### 3.21 transaction map

representation of a set of messages that are exchanged between participating roles for a particular purpose

## 4 Information delivery manual

### 4.1 General

This Clause describes a series of concepts and principles that inform the development of an IDM.

### 4.2 Users of this part of ISO 29481

The main users are expected to be the IDM developers who create interaction maps, process maps, exchange requirements and information constraints using knowledge elicited from end users and solution providers.

In addition, some users of specific IDMs might identify needs for new IDMs and thus become users of this part of ISO 29481. These users include the following:


- professional IDM-developers and solution providers;
- information users, i.e. executive users and end users concerned with producing the content of the IDMs and benefiting from the result.

Another group of users will be those who use the documentation that results from the use of the standard, taking note of the business process and detailed specifications of the information that a user fulfilling a particular role would need to provide at a particular point within a project. Such users include the following:

- project manager, responsible for organizing the business process and ensuring that the information exchange is appropriately managed;
- BIM manager, making the necessary arrangements to support an exchange requirement;
- client, who initiates (develops) and includes an IDM in the contract;
- contractor/consultant, using the IDM to make the necessary arrangements to comply with the required business process and to comply with the required information delivery;
- business manager, using an IDM as a template or standard to be applied in many projects within its organization;
- construction organization, using an IDM for a specific project type as a template or standard to be applied in the sector.

### 4.3 Business context

Figure 1 shows an example of a business context that requires an IDM: a client (Role 1) engages a consultant (Role 2) to deliver some service. In such a scenario, there is a need to understand and formalize both the collaborative and contractual aspects of their relationship and how information will be delivered within that context. The IDM describes the information requirements associated with all the transactions (both ways) associated with that relationship. Some of that information will be held within a BIM, while other may originate from either party or from an external source.

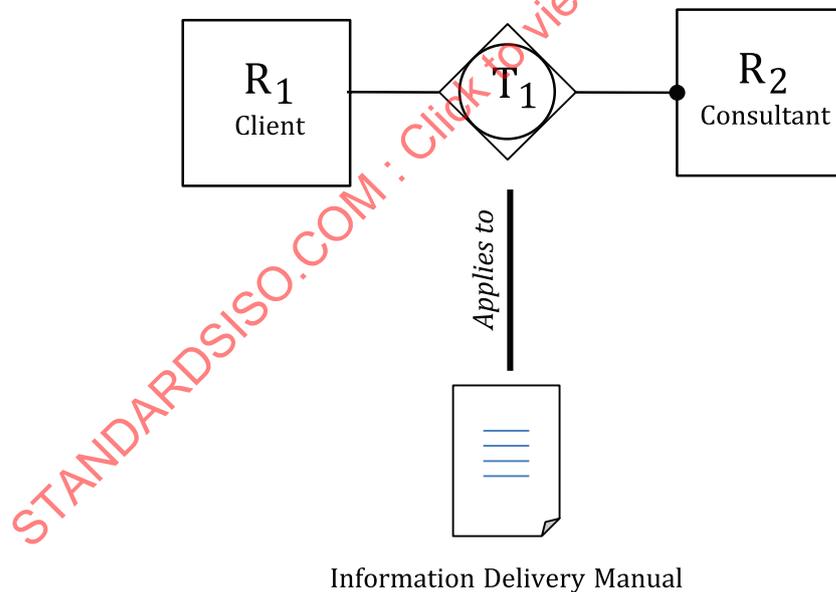

**Figure 1 — Example of a simple business context requiring an IDM**

The first step in developing an IDM is to consider the nature or context of the information exchange. There are two ways of looking at that, each with an associated methodology.

- Process maps are most useful when the focus is on the business processes (defined by activities executed by actors with roles) that need to be followed to deliver a service or produce an end product (such as a design). In this case, the information that is the focus of the IDM is associated with a business requirement.

- Interaction maps/transaction maps are most useful within a business process when the focus is on the interactions between actors with roles who are to deliver a service or product and the concern is to ensure that agreed communication protocols are in place to ensure that the project goals are achieved. In this case, the information that is the focus of the IDM is associated with a transaction.

These are complementary approaches and are explained in further detail in later sections. Within a given business context, it may be appropriate to use both methodologies: process mapping can be used to clarify the details of a transaction identified in an interaction mapping exercise, while an interaction map can be used to rigorously understand an information transaction defined in a process map.

#### 4.4 Complete schema

Where the information requirements are satisfied by a BIM, a complete information schema that covers all of the information required for all actors throughout the construction process will be large and comprehensive. Such a schema is relevant in defining all of the project information needs for all business processes at all life cycle stages, but it is not the way that project information is usually delivered.

#### 4.5 Breaking a complete schema to support requirements

It is more usual for information to be exchanged about a particular topic and the level of detail provided to be driven by the life cycle stage. This may be a single business process at a specific point in the project life cycle, but commonly consists of information units that may be relevant to more than one life cycle stage or business processes. This is commonly referred to as a model view and is a matter of deciding which components of the information schema should be used to meet requirements.

#### 4.6 Supporting the building information modelling process

Elements of the overall information schema are used in a building information model (see [Figure 2](#)). For a particular business process, only certain classes of information are required. Multiple objects are derived from each class, each object having an identity (determined by a unique identifier) and a state (determined by the values given to each attribute of the object). The classes that support the business process form a unique and identifiable standard schema or model view.

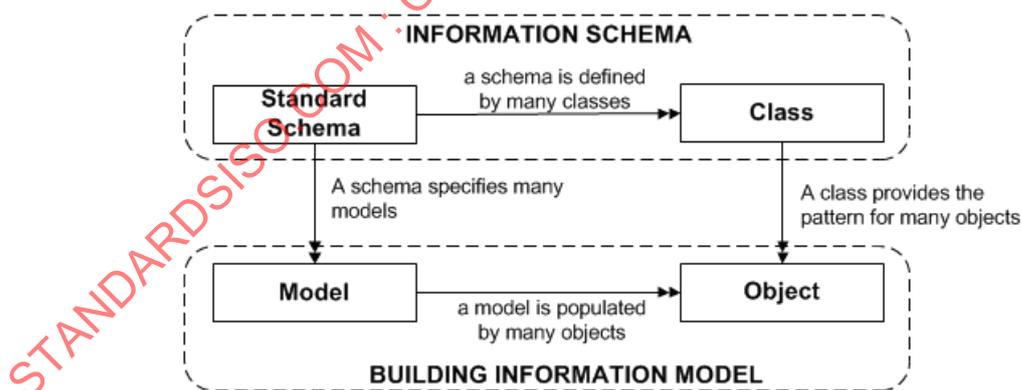


Figure 2 — Supporting the BIM process

#### 4.7 Supporting the business process

To do this means that the set of information required to be exchanged to support a particular business process or interaction in the relevant life cycle stages (within a business process) shall be established. This is termed an exchange requirement.

An exchange requirement provides a description of the information to be exchanged in non-technical terms. An exchange requirement may support the communication of object information enabling

the construction and operation of a project or it may support the communication of management information that controls the project execution.

#### 4.8 Supporting the software solution

Moving from the defined exchange requirement to a software implementation provided by a solution provider involves the development of a model view definition (MVD). This approach supersedes the need to implement functional parts as defined in earlier versions of this International Standard.

#### 4.9 Content in the specific IDM

The content in a specific IDM shall

- describe the need for information exchange within the business context,
- identify the actors sending and receiving information,
- define, specify and describe the information being exchanged to satisfy the requirements at each point within the business context,
- ensure that definitions, specifications and descriptions are provided in a form that is useful and easily understood,
- create detailed specifications of the information captured within exchange requirements to facilitate the development of BIM software applications, and
- ensure that the information specifications can be made relevant to local working practices.

Guidance for development of content and the approach to follow is given in [Annex A](#).

### 5 IDM Framework

#### 5.1 General

An information delivery manual comprises ([Figure 3](#)) the following:

- an interaction map/transaction map and/or a process map;
- one or more exchange requirements.

The interaction map defines the roles involved and the transactions between roles. For each defined transaction, one role is initiator while another is executor. The corresponding transaction map defines the messages in a transaction and the rules that apply on the sequence of execution.

The process map shows a swim lane for each role and defines within the lane the relevant sequence of activities to be executed by that role. Activities undertaken by different roles may have relations that require an exchange of information in the form of a message. Such messages correspond to a message in a transaction shown in a transaction map.

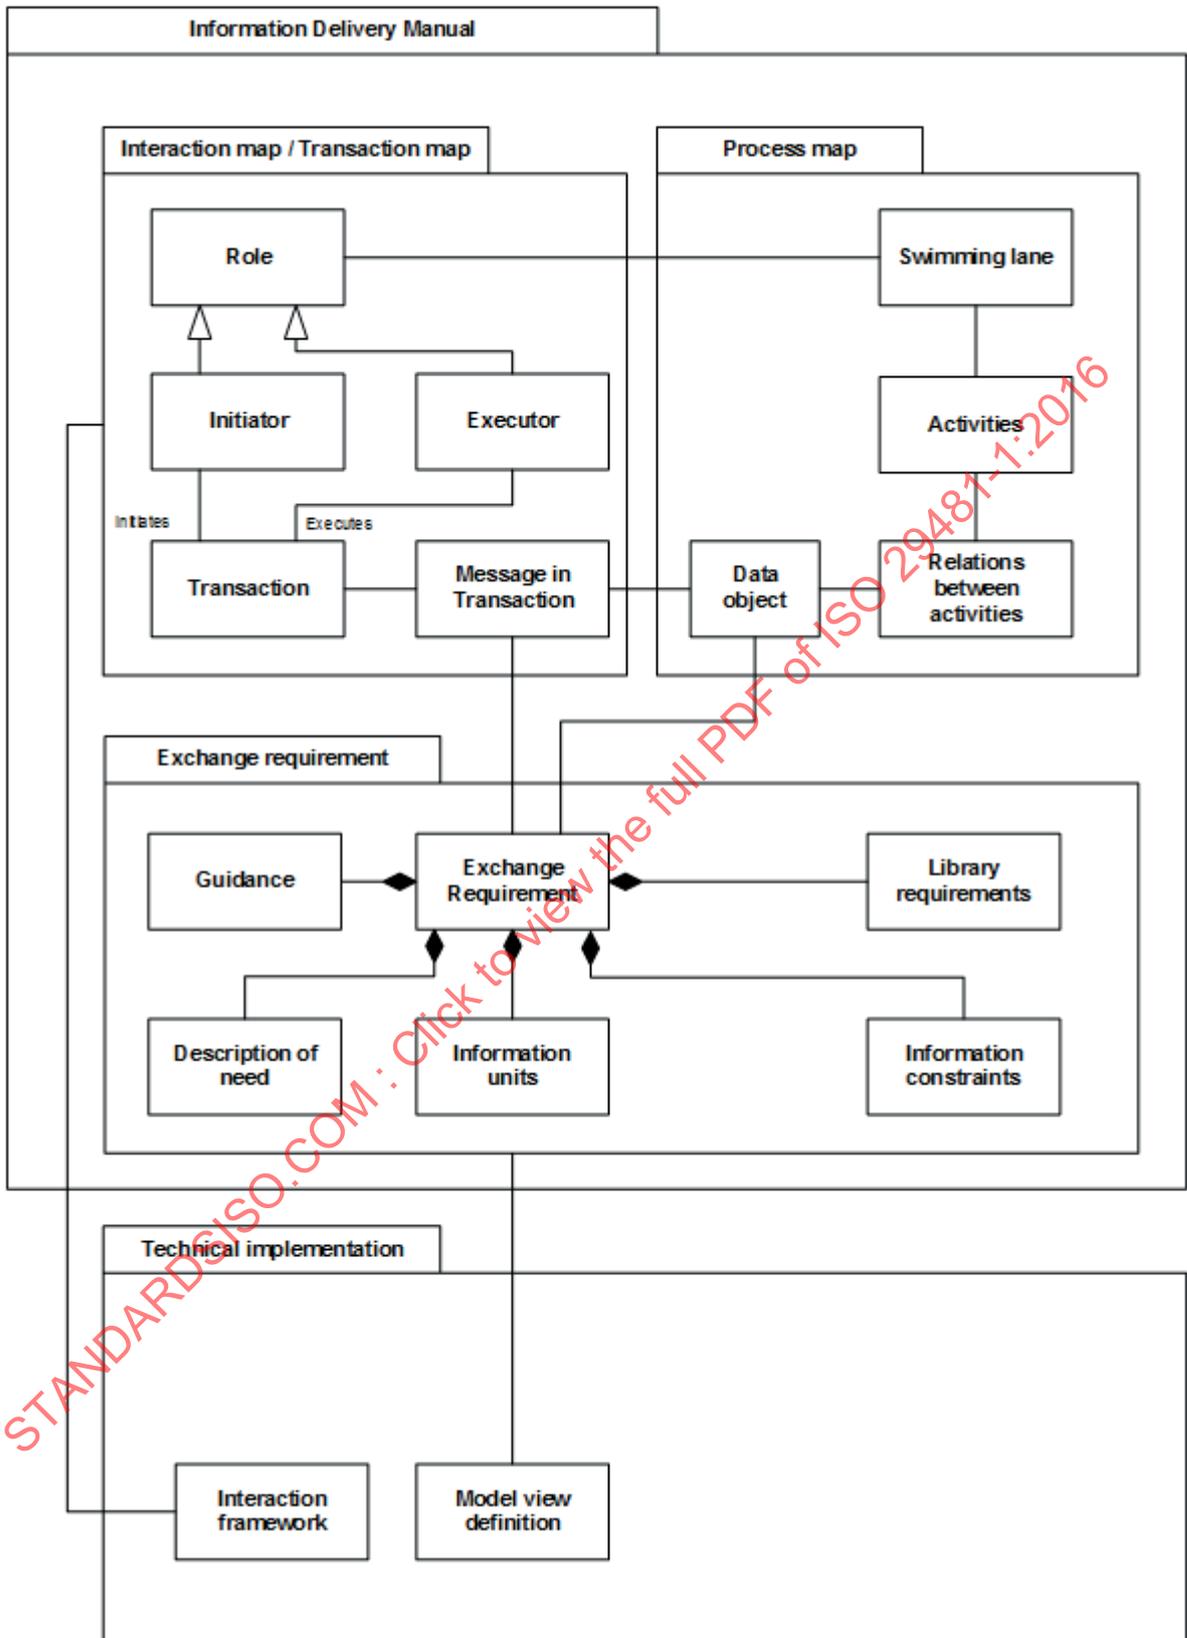


Figure 3 — IDM basic framework

Some messages can carry a package of BIM information, giving rise to the need to define an exchange requirement.

An exchange requirement comprises a comprehensive description of the information that shall be included in a BIM that is associated with a message passed between roles. It includes definitions of the information requirements, including references to library objects where relevant, as well as a description of need, guidance in its use and any information constraints that may apply.

The technical implementation of an exchange requirement is achieved through a model view definition. The technical implementation of an interaction map/transaction map is delivered in an interaction framework.

## 5.2 Basic framework

### 5.2.1 General

Each IDM component (process map, interaction/transaction map or exchange requirement) shall include header information and overview as follows.

### 5.2.2 IDM component header information

Each IDM component shall include at least the following administrative information:

- name or title conforming to the naming rules given in [Table 1](#);
- unique identifier;
- project stage supported by the component;
- change log that identifies both creation and any change made together with the author and date.

**Table 1 – Naming rules**

Nr.	Naming rule
1	Each IDM component shall have a name.
2	The first part of the name is the prefix: <ul style="list-style-type: none"> <li>— er_ for exchange requirement;</li> <li>— im_ for interaction map;</li> <li>— pm_ for process map;</li> <li>— tm_ for transaction map.</li> </ul>
3	The name given to each IDM component is an imperative that has two parts: <ul style="list-style-type: none"> <li>— the first part of the name is an action (or activity) required and is expressed as a verb;</li> <li>— the second part of the name is an object that receives the action and is expressed as a noun or noun phrase. This may be a direct object (as in “model wall”) or an implied indirect object (as in “associate material” which means associate {to wall} {the} material).</li> </ul>
4	All identifiable words in a name are separated using an underscore character “_”.
5	IDM components may have parameters that enable further qualification. Parameters are expressed as a list within parentheses, for example, (a,b,c,d).

A project stage shall be identified through a life cycle stage. A reference for life cycle stages is given in [Annex C](#).

With the delivery of each information unit, it may be expedient to make reference to the exchange requirement that specified the content.

### 5.2.3 IDM component overview

Each IDM component shall start with a short plain language description of the contents, use case, aims and scope that the component is intended to address or about which particular topic or business requirement information shall be exchanged.

Examples of simplified IDM components are given in [Annex B](#).

### 5.3 Interaction map/transaction map

The purpose of an interaction map is to identify the relevant roles and transactions for a specific purpose, typically the completion of a team-based project task. IDM draws a distinction between a role that makes a request (initiator) and the role that gives effect to that request (executor). If there is such a required communication between two roles, then it is termed a transaction.

The approach recommended to prepare an interaction map is according to the CRISP Model (Dietz, J.L.G.: Enterprise Ontology, Springer, 2006).

In an interaction map, all transactions needed for the handling of required contributions of relevant roles to the BIM shall be included. All transactions within the interaction map have a unique identity and name.

A transaction map is a representation of the messages that can be exchanged between the participating roles in a particular transaction, including constraints on the sequence. The approach recommended to prepare a transaction map is UML (sequence diagram).

Messages are exchanged for a certain purpose (e.g. a request for change or the delivery of an information package). A message is a populated information model and contains data relevant for the process. A message can have one or more attachments.

Using transactions, the business cooperation and communication requirements are defined, allowing the contributions of relevant roles to the BIM to be controlled. For that purpose, in specific transactions, the following components can be added as attachments to specific messages:

- exchange requirement;
- information package (a set of object data which is the actual information delivery that satisfies an exchange requirement);
- window of authorization: in the context of a transaction, an executive role (executor) can access the BIM software applications. The window of authorization describes what information in this transaction by the role may be read or changed.

### 5.4 Process maps

The purpose of a process map is to describe the flow of activities within the boundary of a particular business process, the roles played by the actors involved together with the information required, consumed and produced.

The approach recommended for representing process maps is the Business Process Modelling Notation (BPMN). Further information on BPMN is given in [Annex D](#).

Within an IDM, a process map

- sets the boundary for the extent of the information contained within the process,
- establishes the activities within the process, and
- shows the logical sequence of the activities.

The actual information that is within the process boundary is determined by the contents of the exchange requirements specified in the process.

A process map includes the following administrative information:

- the exchange requirements that are within the boundary of the process;
- an overview that provides a comprehensive description of the overall process. Diagrams may be used to illustrate particular points within the overview.

### 5.5 Exchange requirements

#### 5.5.1 General

An exchange requirement defines the information that shall be exchanged to support a particular business process at a particular stage of a project. It is intended to provide a description of the information in non-technical terms. An exchange requirement shall be understandable to end users (architect, engineer, constructor, etc.). The exchange requirements are used to create an MVD, which is a technical specification that is used in software development and specified in 5.6.3.

An exchange requirement represents the connection between process and data. It describes a set of information from a process that has been performed by an actor in the role of initiator to enable a downstream process to be performed by another actor in the role of executor. It should be defined with a clear understanding of the information needs of the downstream actor.

#### 5.5.2 Information units

The information required is provided in a set of information units. An information unit typically deals with one type of information or concept of interest. An information unit may be composed of an entity alone, such as project and wall or an entity (e.g. project) and its attribute (e.g. name), such as project name and wall lengths.

Preconditions for the exchange requirement are identified first. A precondition is an exchange requirement that should have been completed prior to the execution of the current exchange requirement.

Information units should be specified further to provide the following:

- a description of the information unit: The description should be as explicit as possible and unambiguous enough not to confuse MVD modellers with other concepts;
- the information which needs to be exchanged for the provisions of this information unit to be satisfied. This should include any special provisions, propositions or rules related to the information.

#### 5.5.3 Information constraints

Information constraints specify the data type of an information unit, and a context, rules, and the restrictions on using the specified information unit. Here are some examples of the data type and rules.

- Data types
  - text, integer, number, 2D graphic, 3D model, etc.
- Context, rules, and the limits of use
  - a table shall have at least three legs,
  - a precast concrete piece shall have at least three identifiers: a piece mark (a production serial number), a mark number (a designed number), and an installation location identifier
  - a room area cannot be smaller than 0 m<sup>2</sup>, and

- the largest panel size should not exceed 14 m to be delivered by a normal truck.

## 5.6 Technical implementation

### 5.6.1 General

This part of ISO 29481 is specifically concerned with the preparation of a common language description of the information requirements of business processes, particularly where those include the exchange of BIM data. These information specifications can be used as the basis for automated processes involving the use of software applications, referred to here as technical implementations.

This Clause describes the principles and scope of available technical implementations, each the subject of a separate part in this standard series.

### 5.6.2 Implementation of metadata

An overriding intention behind all technical implementations is that the specification shall be converted to a machine-readable form that includes key metadata (header, overview, classification) required for the automated process.

### 5.6.3 Interaction framework

An interaction framework is a formal description of the elements of interaction, including definition of roles, transactions, messages in transaction, the sequence of messages, and data elements in messages. The methodology for the development of an interaction framework and its format is included in ISO 29481-2.

### 5.6.4 Model view definition (MVD)

An MVD defines a data model or a subset of an existing data model that is necessary to support one or many specific data exchange requirements ([Figure 4](#)). MVDs are used in software development and should have a machine-readable representation. A MVD that is dedicated to a single IDM can be used to filter information in software tools to a specific exchange requirement. If information constraints are added to a MVD the combination can be used for data validation purposes. Software products supporting a number of exchange requirements may implement a consolidated MVD that refers to several IDMs. These MVDs are often used in certification of software products, but data validation should always be done on individual MVDs.

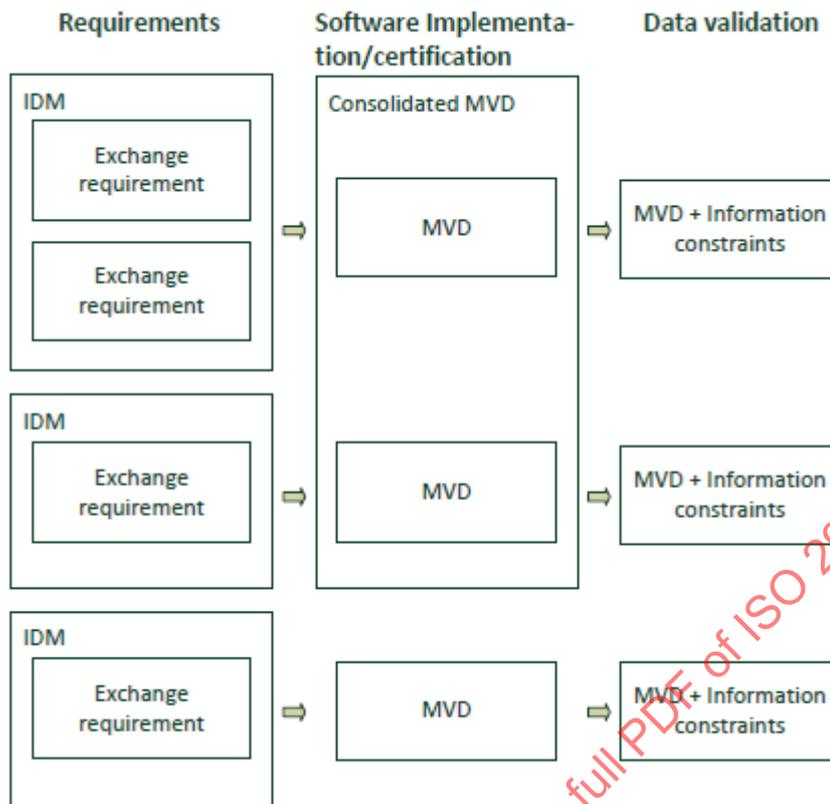


Figure 4 — Relation between IDM and MVD

STANDARDSISO.COM : Click to view the full PDF of ISO 29481-1:2016

## Annex A (informative)

### IDM development process

#### A.1 Propose an IDM development

##### A.1.1 General information

A proposal to undertake an IDM development is a preliminary stage that sets the scene for work to be done. It is concerned with

- defining the scope,
- establish the development approach,
- identifying resources, and
- establishing a project plan.

##### A.1.2 Define scope

The scope should set the boundaries for the work that is to be done and provide a continuing reference to ensure that the work boundaries do not grow beyond a point at which the planned or available resource ceases to be sufficient.

The following questions should be answered in the preparation:

- What are the business needs for the information exchange?
- Who is able to describe these needs?
- Who are the actors and what are their roles and interests?
- How can the information exchange be prepared and handled?
- Will existing agreements, contractual conditions, standards, etc. support the information exchange?

The preparation ends up with an assessment of whether it is possible to reach the stated scope and success criteria. If the assessment is positive, the actual IDM development can be initiated. If the assessment turns out to be negative, you may choose to revise the use case or stop the development.

An overview of the existing resources should be provided, along with any prerequisite IT resources. The overview may show that the goals can be reached, enabling IDM development.

The overview may demonstrate that the business goals cannot be achieved. In that instance, goals shall be reviewed to fit available and possibly new IT resources specified. Conversely, the actors may choose not to proceed with the IDM development.

The practical and legal information exchange issues shall be described to clarify who is doing what, and who is responsible. Agreement and contractual conditions may prevent previously defined goals and success criteria from being met. Possibly, the goals can be revised to conform to the agreement and standard conditions.

### A.1.3 Establish the development approach

The development approach selected will be determined by the extent of information, software or other exchange requirements available. The approaches are described under [A.2.1](#).

### A.1.4 Identify resources

Resources are the people who need to participate in an IDM development. Resources need to be properly balanced between project management, development of IDM components and industry knowledge to guide both component development and provision of software solutions. The balance of resources required will be affected by the development route that is selected.

### A.1.5 Project plan

The project plan sets the period over which the development is to occur, determines the tasks to be undertaken, assigns the available resources and sets the deliverables required.

## A.2 Undertake an IDM development

### A.2.1 General information

There are three approaches to IDM development:

- process discovery;
- information constraint customisation;
- reverse engineering.

### A.2.2 Process discovery

#### A.2.2.1 General information

Process discovery is the conventional approach used in IDM development. It assumes that there is no existing software from which requirements may be mined or other exchange requirements that may be customised.

The development approach is described below as a linear sequence. In practice, feedback between development stages and cyclic developments can be expected.

#### A.2.2.2 Discover process

There are two alternate methodologies proposed: process mapping and interaction mapping. A decision needs to be made about the approach most applicable to the business context.

The discover process involves working primarily with industry experts and specialist building information system providers to determine the defined scope, the process map or interaction framework.

This process usually requires several cycles of development and review to achieve a satisfactory conclusion. On completion, the process map or interaction framework may represent current practice or it may represent a proposal for an improved business practice. Whether to create an “as-is” process or a “to-be” process is a decision that needs to be taken as part of the development.

The process maps or interaction maps will identify the “packages” of data that need to be exchanged at various points in the business process. These are the exchange requirements.

### **A.2.2.3 Create exchange requirement**

Exchange requirements should then be created. Wherever possible, they should re-use the resources of existing exchange requirements.

## **A.2.3 Information constraint customisation**

### **A.2.3.1 Define information constraints**

The set of information constraints that may need to be applied to further configure an existing (or newly defined) exchange requirement should be defined. These may be used to control properties to be asserted or values that can be assigned.

### **A.2.3.2 Information constraint localization**

Information constraint localization assumes that an exchange requirement exists for the purpose required but that it does not meet the needs for use within a particular location. Location may be a place (country, region, etc.), a project or a framework of working agreed between members of a project team.

Information constraints are applied to individual units of information within the context of the exchange requirement to make it applicable at a particular location. Note that the same information unit may have different information constraints applied in the context of a different exchange requirement or for a different location.

## **A.2.4 Reverse engineering**

### **A.2.4.1 General information**

Reverse engineering assumes that software already exists that is capable of importing the information required to perform a target task, but the specific information items are not clearly documented. This process is not suitable for identifying the information requirement for export data because various information use cases of the export data may exist. Hence, the information requirement for export data should be specified from the receiving application perspective. The typical way of doing reverse engineering is to define each step in a software tool for achieving a target result and then work through the scenario to identify and specify individual data items that are required from upstream software applications.

### **A.2.4.2 Define scenario**

Define each step to achieve the target result within a software application as a scenario. This scenario may be defined as a process map or as a detailed textual description that can be used as the overview description of an exchange requirement.

### **A.2.4.3 Identify required data**

Work through the defined scenario within the software application and specify all the data required to achieve a target result. For each data item specified, check if it should be acquired from other software applications. If so, it should be included in an exchange requirement for import data.

### **A.2.4.4 Create exchange requirement**

Create an exchange requirement using the defined scenario as the overview section and adding the identified data to the technical section. The scenario can be also specified as a process map.

#### A.2.4.5 Define Information constraints

The set of Information constraints that may need to be applied to further configure the exchange requirements should be defined. These may be used to control properties to be asserted or values that can be assigned.

#### A.2.4.6 Capture process

As one or more exchange requirements are reverse engineered from software applications, they can be captured in a process map or interaction map.

#### A.2.5 Implementation and use of IDMs

Once the IDM has been prepared and implemented, the information exchange can begin. The exchange shall be validated before sending and on receipt.

When the actors have gained adequate information exchange experience, an evaluation can be made. The evaluation covers the preparation, as well as the IDM development and practical implementation issues.

If the involved actors want software certification according to the developed IDM, specific actions shall be made. During the certification process, software products should demonstrate that they are able to export/import data according to the exchange requirements. In order to make it trustworthy, the certification process should be monitored by an independent organization. There needs to be a business case for the software vendors to apply for certification since the cost for preparation and certification itself can be high.

STANDARDSISO.COM : Click to view the full text of ISO 29481-1:2016

## Annex B (informative)

### Examples of simplified IDM components

#### B.1 Business context of the examples

The following examples are provided to illustrate each of the components of an IDM using a simple business context where a client engages a consultant team to undertake a design task. The task is to define the layout of building facilities. The outcome is described by means of 3D bounding boxes. The actual information delivery is a set of bounding boxes and a cost estimation.

This example has been greatly simplified and is not intended to reflect real-world application.

#### B.2 Process map

Name: pm\_29481\_sample

Identification: pm\_29481\_sample\_1

Project stage: Outline feasibility

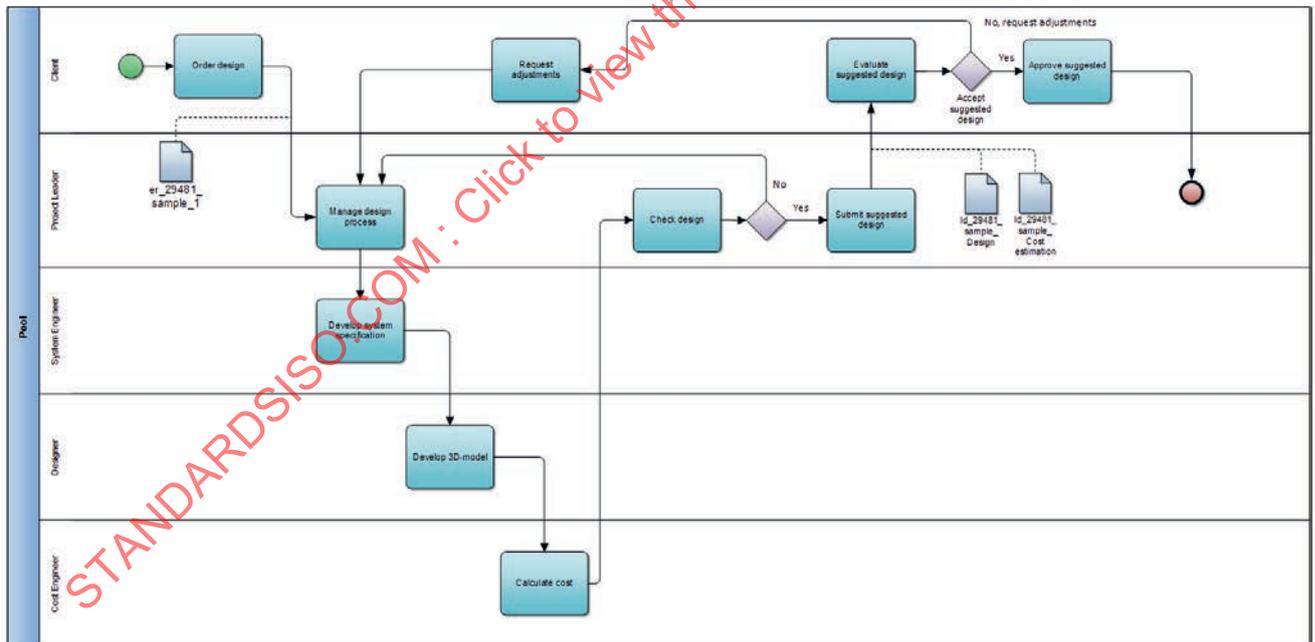


Figure B.1 — Process map

### B.3 Interaction map

Name: im\_29481\_sample

Identification: im\_29481\_sample\_1

Project stage: Outline feasibility

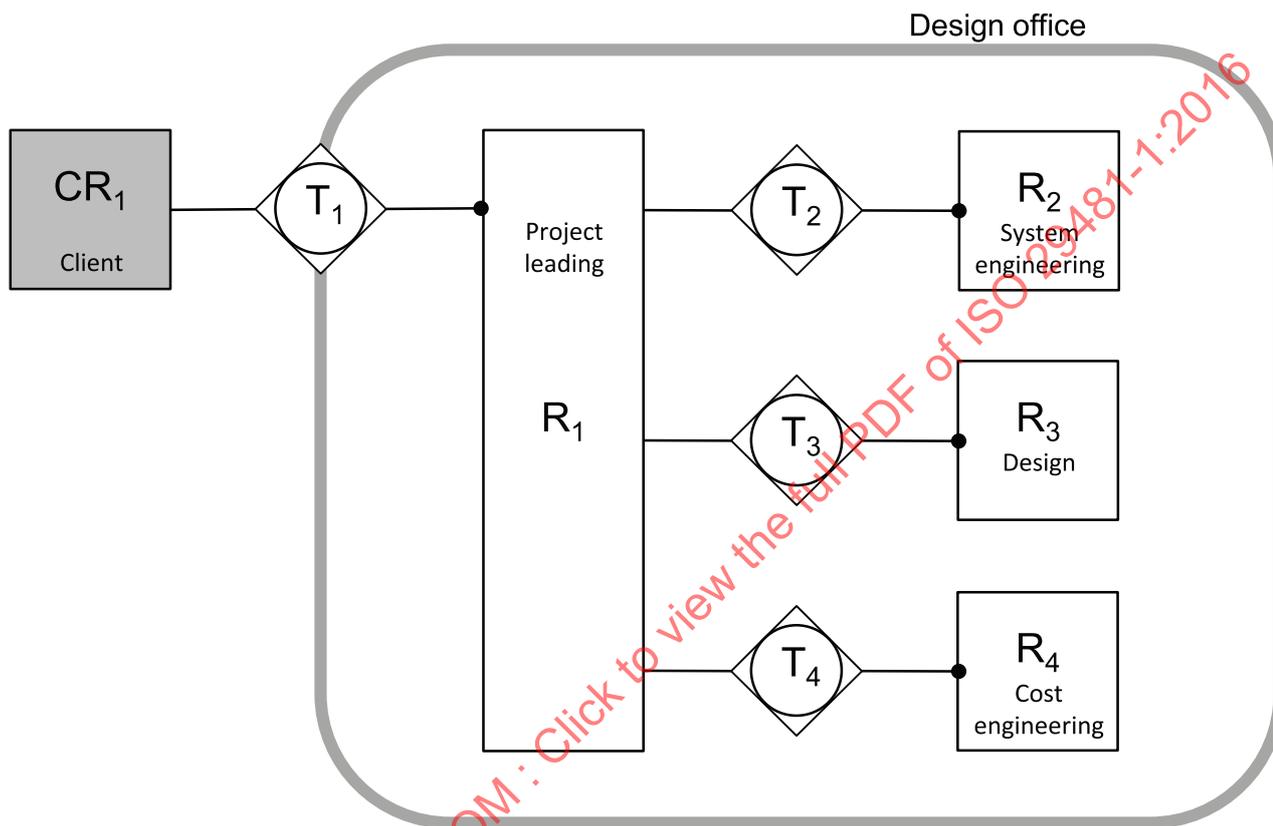



Figure B.2 — Interaction map

**B.4 Transaction map**

Name: tm\_29481\_sample

Identification: tm\_29481\_sample\_1

Project stage: Outline feasibility

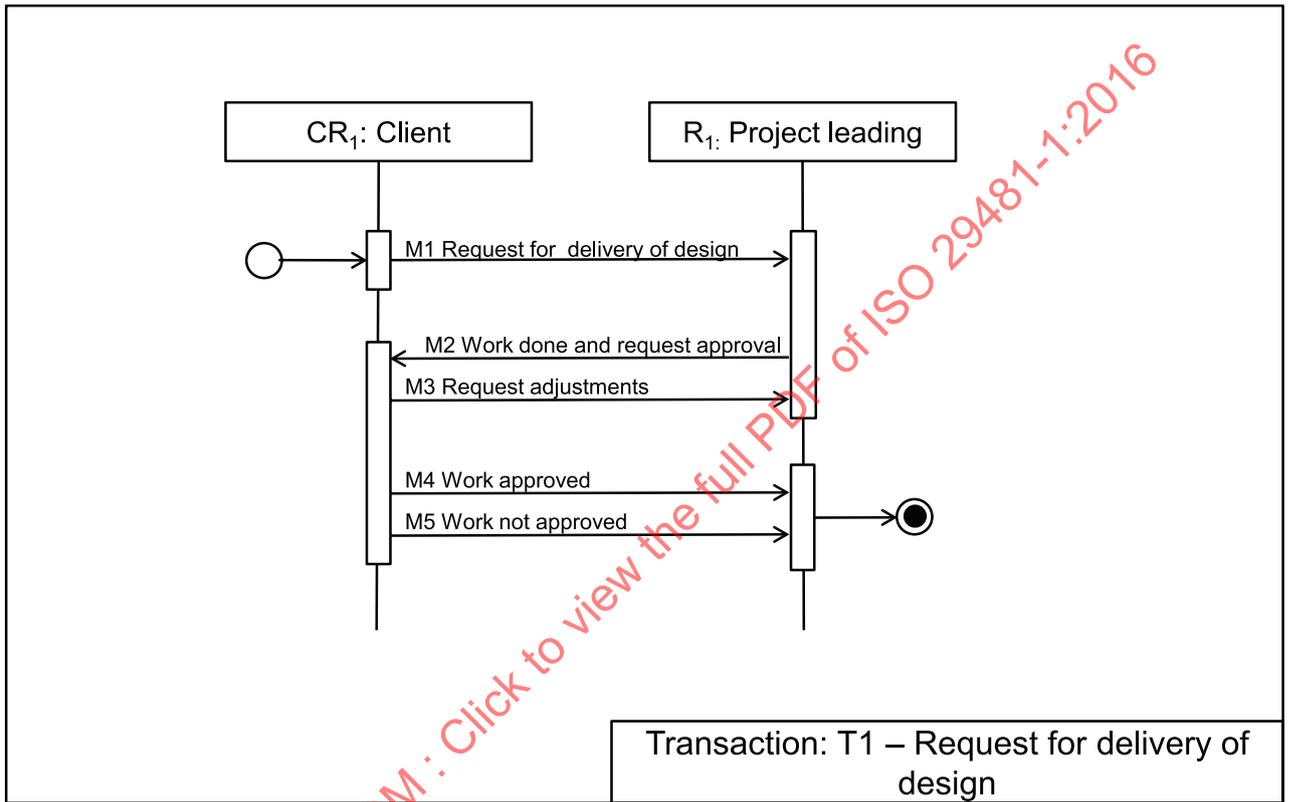

**Figure B.3 — Transaction map**

## B.5 Exchange requirement

Name: er\_29481\_sample

Identification: er\_29481\_sample\_1

Project stage: Outline feasibility

### Guidance

This exchange requirement applies to the delivery of three-dimensional boxes representing the minimum or smallest bounding box of facilities.

Each instance of a facility requires a bounding box.

Each bounding box is referenced to a given central design orientation.

### Description of need

The required information will be used for a feasibility study with regard to the physical layout of a building.

### Information units

**Table B.1 — Information units**

Object type	Property concept	Property	Definition	Example and further explanations	Mandatory	Optional
Facility			Something designed, built, installed, etc., to serve a specific function affording a convenience or service:	Transportation facilities; educational facilities; a new research facility.		
	3D Model		Three-dimensional bounding box	The minimum or smallest bounding or enclosing box is a term used in geometry, with plans parallel to the axis in a coordinate system.		
		Identification	A short name used for reference purposes.		X	
		Description	Optional description, provided for exchanging informative comments.			X
		Length	Length of bounding box	Length measured, e.g. in mm.	X	
		Width	Width of bounding box	Width measured, e.g. in mm.	X	
		Height	Height of bounding box	Height measured, e.g. in mm.	X	
		Location	Location of the bounding box in a coordinate system	Vector and rotation from the origin of the coordinate system to insertion point of the bounding box.	X	

Library requirements

All object types, property concepts and properties need to be structured according to the content of an object type library that will be made available by the client.

Information constraints

All information constraints, as defined in the object type library, shall be followed.

Meta information should be delivered according to Dublin core.

Format requirements

Information units shall be delivered in XML-format; all units may be packaged in one file.

Information units shall be delivered as an attachment of a message in transaction.

Meta information is supplied through the message in transaction.

STANDARDSISO.COM : Click to view the full PDF of ISO 29481-1:2016

## Annex C (informative)

### Reference life cycle stages

#### C.1 Standard life cycle stages

Exchange requirements are identified as being relevant to particular stages in a project. For consistency, life cycle stages should always be defined on a common basis. The primary reference used for identifying life cycle stages here is ISO 22263 which suggests the following principal stage identification:

- inception;
- brief;
- design;
- production;
- maintenance;
- demolition.

For the purposes of this part of ISO 29481, the principal stages identified in ISO 22263 are further decomposed to provide a meaningful set of stages for the development of process maps and exchange requirements. The decomposed stages are shown below with a cross reference to the ISO 22263 stage name.

**Table C.1 — Life cycle stages in ISO 22263**

ISO 22263 name	Standard stage	Standard name	Standard definition
<b>Pre-life cycle stages</b>			
Inception	0	Portfolio requirements	Establish the need for a project to satisfy the clients business requirement
Brief	1	Conception of need	Identify potential solutions to the need and plan for feasibility
	2	Outline feasibility	Examine the feasibility of options presented in phase 1 and decide which of these should be considered for substantive feasibility
	3	Substantive feasibility	Gain financial approval
<b>Pre-Construction stages</b>			
Design	4	Outline conceptual design	Identify major design elements based on the options presented
	5	Full conceptual design	Conceptual design and all deliverables ready for detailed planning approval
	6	Coordinated design (and procurement)	Fix all major design elements to allow the project to proceed. Gain full financial approval for the project