
International Standard



3019/3

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

Hydraulic fluid power — Positive displacement pumps and motors — Dimensions and identification code for mounting flanges and shaft ends — Part 3 : Polygonal flanges (including circular flanges)

Transmissions hydrauliques — Pompes volumétriques et moteurs — Dimensions et code d'identification des flasques de montage et des bouts d'arbres — Partie 3 : Flasques polygonaux (y compris les flasques circulaires)

First edition — 1981-12-15

STANDARDSISO.COM : Click to view the full PDF of ISO 3019-3:1981

UDC 621.225 : 621.651 : 621.8.032

Ref. No. ISO 3019/3-1981 (E)

Descriptors : hydraulic fluid power, hydraulic equipment, pumps, positive displacement pumps, hydraulic motors, shaft ends, dimensions, designation, codes, metric system.

Price based on 5 pages

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards institutes (ISO member bodies). The work of developing International Standards is carried out through ISO technical committees. Every member body interested in a subject for which a technical committee has been set up has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council.

International Standard ISO 3019/3 was developed by Technical Committee ISO/TC 131, *Fluid power systems and components*, and was circulated to the member bodies in October 1980.

It has been approved by the member bodies of the following countries :

Australia	Hungary	Romania
Austria	India	Sweden
Belgium	Ireland	Switzerland
China	Italy	United Kingdom
Czechoslovakia	Japan	USA
Finland	Netherlands	USSR
France	Norway	
Germany, F. R.	Poland	

No member body expressed disapproval of the document.

This International Standard is Part 3 of ISO 3019 and is based upon a metric series of mounting flanges and shaft ends for hydraulic pumps and motors. It contains polygonal flanges including circular flanges.

Part 3 is an additional document to Part 2 and includes special figures depending on special construction.

Hydraulic fluid power — Positive displacement pumps and motors — Dimensions and identification code for mounting flanges and shaft ends — Part 3 : Polygonal flanges (including circular flanges)

0 Introduction

In hydraulic fluid power systems, power is transmitted and controlled through a liquid under pressure within an enclosed circuit. Pumps are components which convert rotary mechanical power into hydraulic fluid power. Motors are components which convert hydraulic fluid power into rotary mechanical power.

1 Scope and field of application

1.1 This part of ISO 3019 specifies dimensions and an identification code for mounting flanges of positive displacement hydraulic fluid power pumps and motors whose geometry cannot accept a flange covered in part 2.

1.2 It also specifies dimensions and an identification code for positive displacement hydraulic fluid power pump and motor shaft ends of the following types :

- cylindrical shaft end with key;
- conical shaft end with key and external thread.

NOTE — A series of metric involute spline shaft ends will be added later taking into account ISO 4156.

1.3 This part of ISO 3019 establishes a metric series of mounting flanges and shaft ends for positive displacement hydraulic fluid power pumps and motors.

1.4 This part of ISO 3019 provides :

- a minimum number of flanges and shaft sizes to cover probable present and future requirements;
- dimensional interchangeability of flange and shaft end mountings;
- flange and spigot dimensions that allow for recommended sealing arrangements when sealing is required between a flange and its mating housing;

— identification codes for flanges and shaft ends. These codes can be used separately or in combination.

2 References

ISO 261, *ISO general purpose metric screw threads — General plan.*

ISO 286, *ISO system of limits and fits.*¹⁾

ISO/R 773, *Rectangular or square parallel keys and their corresponding keyways (Dimensions in millimetres).*

ISO/R 775, *Cylindrical and 1/10 conical shaft ends.*

ISO 1101, *Technical drawings — Geometrical tolerancing — Tolerances of form, orientation, location and run-out — Part 1 : Generalities, definitions, symbols, indications on drawings.*²⁾

ISO 1302, *Technical drawings — Method of indicating surface texture on drawings.*

ISO 2692, *Technical drawings — Geometrical tolerancing — Maximum material principle.*³⁾

ISO 3019/1, *Hydraulic fluid power — Positive displacement pumps and motors — Dimensions and identification code for mounting flanges and shaft ends — Part 1 : Inch series shown in metric units.*

ISO 3019/2, *Hydraulic fluid power — Positive displacement pumps and motors — Dimensions and identification code for mounting flanges and shaft ends — Part 2 : 2 and 4-hole flanges and shaft ends — Metric series.*

ISO 3912, *Woodruff keys and keyways.*

ISO 4156, *Straight cylindrical involute splines — Metric module, side fit — Generalities, dimensions and inspection.*

ISO 5598, *Fluid power systems and components — Vocabulary.*⁴⁾

1) At present at the stage of draft. (Revision of ISO/R 286-1962.)

2) At present at the stage of draft. (Revision of ISO/R 1101/1-1969.)

3) At present at the stage of draft. (Revision of ISO/R 1101/2-1974.)

4) At present at the stage of draft.

3 Definitions

See ISO 5598 for definitions of terms used.

4 Dimensions

4.1 Tolerances

4.1.1 Dimensions shown without tolerances are nominal.

4.1.2 Tolerances of form and of position are shown in accordance with ISO 1101 and ISO 2692.

4.2 Selection of sizes

Select mounting flange and shaft dimensions for pumps and motors manufactured in accordance with this International Standard as follows :

- flanges from the table;
- shaft ends from 4.4.

4.3 Mounting flanges — polygonal and circular flanges

Select mounting flange dimensions from figure 1 and the table.

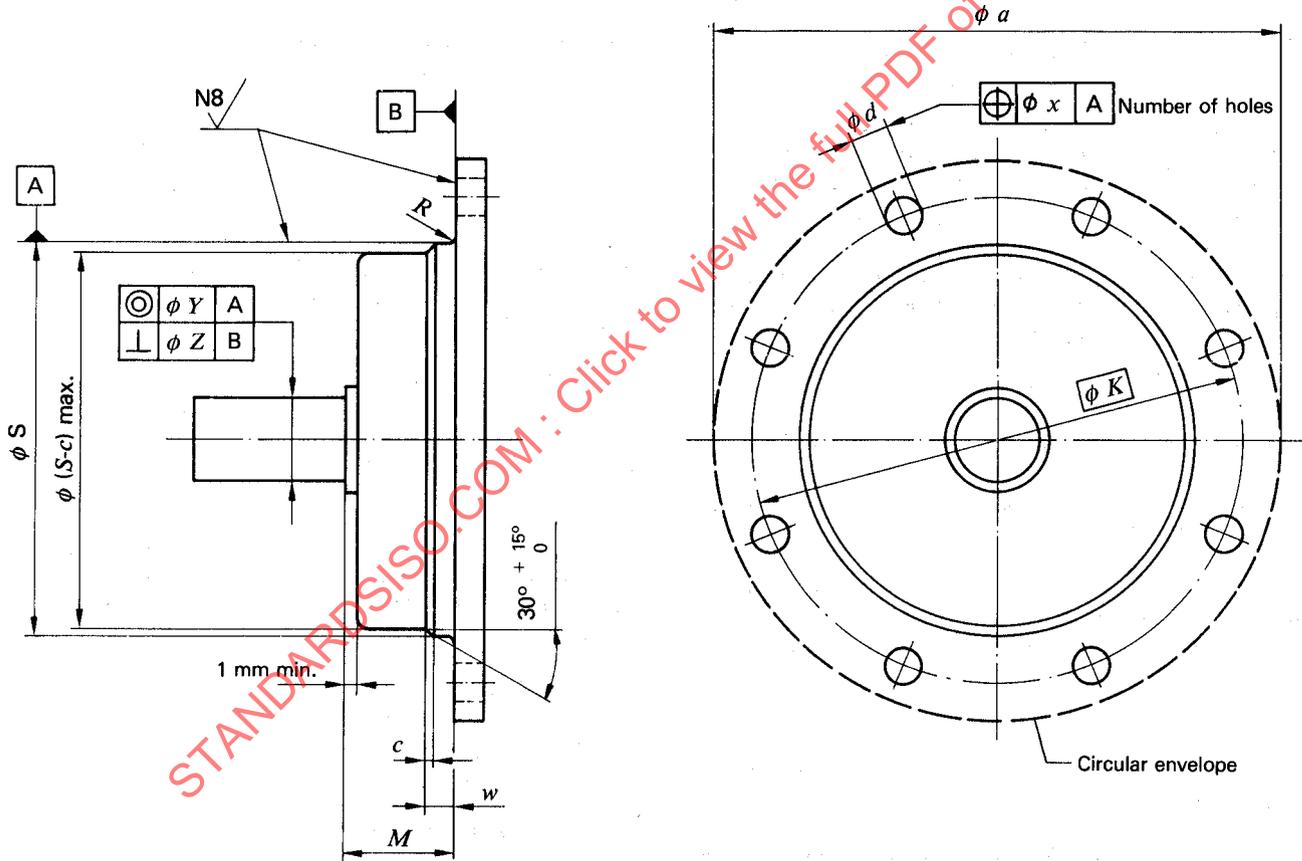


Figure 1 — Basic layout of polygonal flanges

Table — Range of polygonal flanges

Dimensions in millimetres

S (h8) ¹⁾	K	Fixings				a max.	w + 1 0	c max.	R max. (R min. = 0)	γ ³⁾	Z ³⁾ mm/mm	M
		Bolts		Clearance holes ²⁾								
		Number	Nom. dia.	d (H13) ¹⁾	x							
80	103	5, 6, 7 or 8	M8	9	0,5	125	7	1,6	0,25	0,0015	20 ± 1	
100	125		M10	11		160	9		0,30			
125	160		M12	13,5		200	12		2	0,35	0,002	25 ± 1
160	200		M20	22	250							
180	224				280							
200	250				300							
224	280				335							
250	300				355							
280	320				375							
315	360		5, 7, 8, 10, 12 or 14	M24	26	1,0	425		16	3	50 ± 2	
355	400						465					
400	450						515					
450	510					585	20		5	60 ± 3		
500	560					635						
560	630					710						
630	710	800										
710	800	900										
800	900	1 000										
900	1 000	1 100										
1 000	1 100	M30	33	1,5	1 200							

1) For tolerance values, see ISO 286.

2) Threaded holes or slots instead of clearance holes by agreement between purchaser and supplier.

3) Tolerances stated are for the unladen condition (rigid coupling may require closer tolerances).