

---

---

**Aerospace — Lead and runout threads —**

**Part 1:  
Rolled external threads**

*Aéronautique et espace — Filets incomplets, débuts et fins de filets —  
Partie 1: Filetages extérieurs roulés*

STANDARDSISO.COM : Click to view the full PDF of ISO 3353-1:2002



**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 3353-1:2002

© ISO 2002

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.ch](mailto:copyright@iso.ch)  
Web [www.iso.ch](http://www.iso.ch)

Printed in Switzerland

**Contents**

Page

Foreword .....	iv
1 Scope .....	1
2 Terms and definitions .....	1
3 Symbols for threads .....	2
4 Requirements .....	2
4.1 General requirements .....	2
4.2 Lead threads .....	2
4.3 Runout threads .....	3
5 Inspection method .....	7
5.1 General .....	7
5.2 Use of the charts .....	7
5.3 Procedure .....	8
Annex A (informative) Comments on inspection method .....	11

STANDARDSISO.COM : Click to view the full PDF of ISO 3353-1:2002

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this part of ISO 3353 may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 3353-1 was prepared by Technical Committee ISO/TC 20, *Aircraft and space vehicles*, Subcommittee SC 4, *Aerospace fastener systems*.

This first edition of ISO 3353-1 cancels and replaces ISO 3353:1992, which has been technically revised.

ISO 3353 consists of the following parts, under the general title *Aerospace — Lead and runout threads*:

- *Part 1: Rolled external threads*
- *Part 2: Internal threads*

Annex A of this part of ISO 3353 is for information only.

# Aerospace — Lead and runout threads —

## Part 1: Rolled external threads

### 1 Scope

This part of ISO 3353 specifies the lead and runout requirements for rolled external threads for aerospace construction, and the inspection method to be used in case of dispute.

It is applicable whenever it is referenced in a definition document.

### 2 Terms and definitions

For the purposes of this part of ISO 3353, the following terms and definitions apply.

#### 2.1

##### **lead threads**

part of screw threads consisting of threads incompletely formed during rolling, beginning at the entering chamfer of the thread

#### 2.2

##### **runout threads**

part of screw threads in which are located threads incompletely formed during rolling, between the completely formed threads and the part which has not been rolled

#### 2.3

##### **completely formed thread**

thread, the profile of which (ABC) is located, over an axial distance of  $1P$ , within the limits specified in the definition document for the thread

See Figure 1.

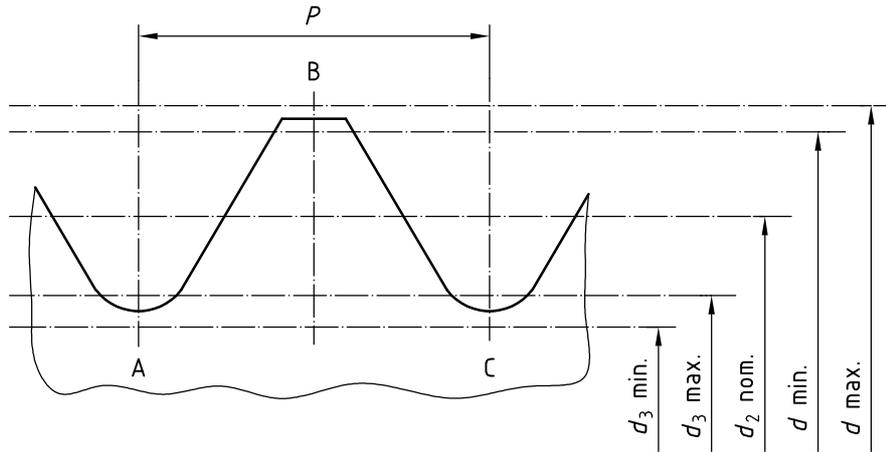


Figure 1

### 3 Symbols for threads

- $d$  is the major diameter of the thread.
- $d_2$  is the pitch diameter of the thread.
- $d_3$  is the minor diameter of the thread.
- $P$  is the thread pitch.


### 4 Requirements

#### 4.1 General requirements

The flanks at the root of the incompletely formed threads shall be joined by a radius or by two radii and a flat, that are smooth and devoid of abrupt tool marks. This radius, or these radii and the radius  $r$  (see Figures 3 to 9) shall be greater than or equal to the minimum root radius specified for the complete threads in the definition document for the thread.

#### 4.2 Lead threads

See Figure 2.

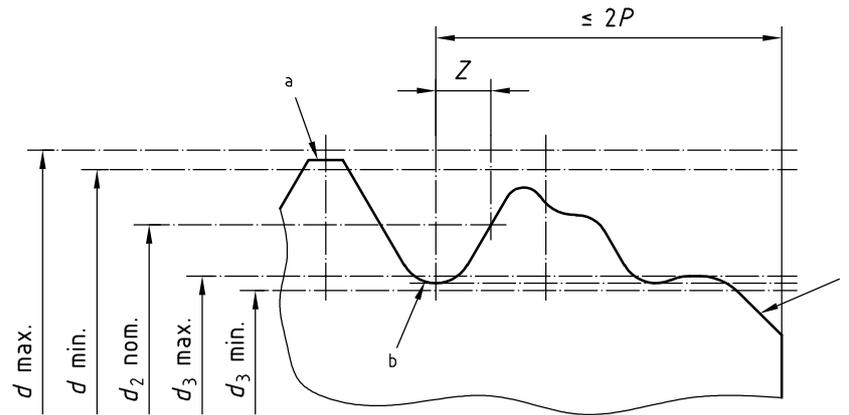

Over the area  $Z$ , the thread shall lie within the limits specified in the definition document for the thread.

- a Crest of first completely formed thread.
- b Root of first completely formed thread.
- c Chamfer.


Figure 2

The possible profile projection comparator inspection shall be carried out using a chart drawn in accordance with Figure 10.

### 4.3 Runout threads


#### 4.3.1 Normal shank

See Figures 3 and 4.

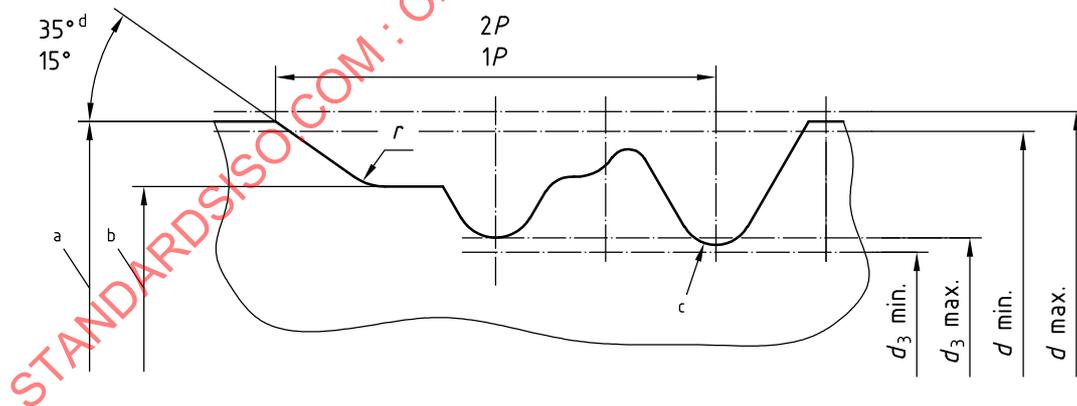

- a Shank diameter having a nominal value equal to the nominal diameter of the thread =  $\delta$ .
- b Blank diameter.
- c Root of last completely formed thread.
- d Angle before rolling. The shape is optional within these limits.

Figure 3

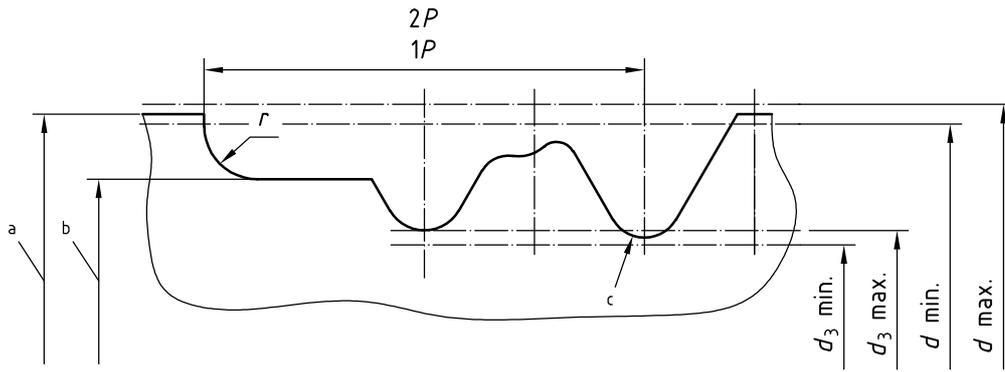


- a Shank diameter having a nominal value equal to the nominal diameter of the thread =  $\delta$ .
- b Blank diameter.
- c Root of last completely formed thread.

Figure 4

The possible profile projection comparator inspection shall be carried out using a chart drawn in accordance with Figure 11.

#### 4.3.2 Pitch diameter shank

See Figure 5.

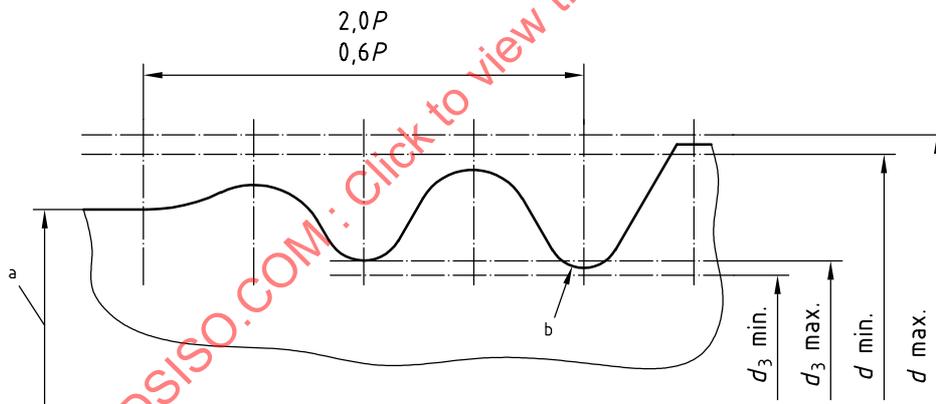


- a Shank diameter having a nominal value equal to the maximum pitch diameter =  $\delta$ .
- b Root of last completely formed thread.

Figure 5

The possible profile projection comparator inspection shall be carried out using a chart drawn in accordance with Figure 12.

4.3.3 Stepped shank

See Figure 6.

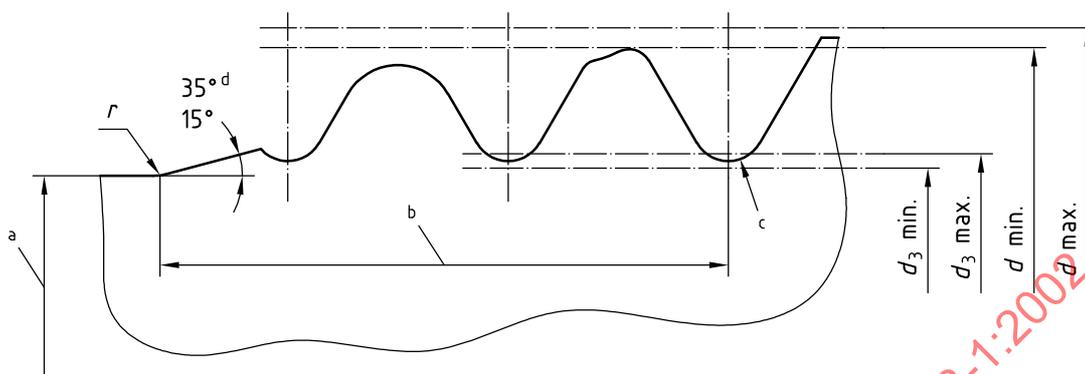

- a Diameter of stepped shank, having a nominal value equal to  $d_3 \text{ min.} - 0,1 \text{ mm} = \delta$ .
- b  $\left[ 1P + \frac{(d \text{ max.} - \delta \text{ nom.})}{2 \tan 35^\circ} \right]$  to  $\left[ 2P + \frac{(d \text{ max.} - \delta \text{ nom.})}{2 \tan 15^\circ} \right]$
- c Root of last completely formed thread.
- d Angle before rolling. The shape is optional within these limits.


Figure 6

The possible profile projection comparator inspection shall be carried out using a chart drawn in accordance with Figure 13.

4.3.4 Screws threaded to the head and bolts threaded to a shoulder

4.3.4.1 Protruding head

See Figure 7.

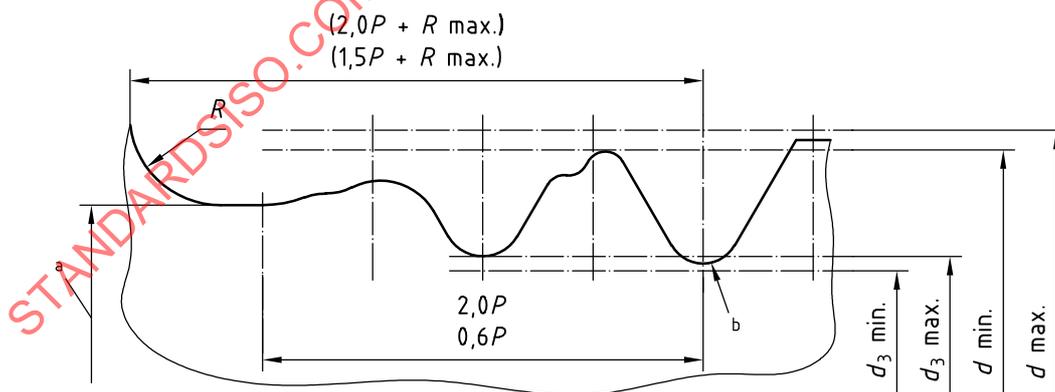

The beginning of the first thread shall not encroach on the radius  $R$ .


- a Blank diameter.
- b Root of last completely formed thread.

Figure 7

The possible profile projection comparator inspection shall be carried out using a chart drawn in accordance with Figure 12.

4.3.4.2 Flush head

See Figure 8.

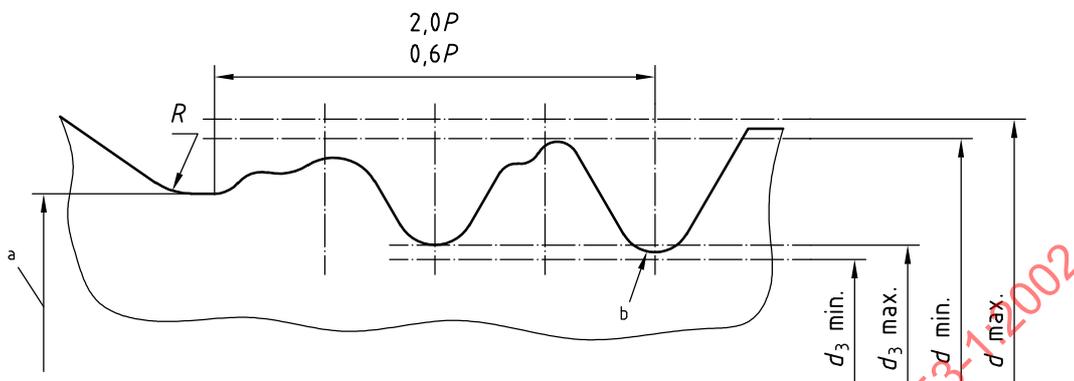

The beginning of the first thread shall not encroach on the radius  $R$ .

- a Blank diameter.
- b Root of last completely formed thread.

Figure 8


The possible profile projection comparator inspection shall be carried out using a chart drawn in accordance with Figure 12.

STANDARDSISO.COM : Click to view the full PDF of ISO 3353-1:2002

### 4.3.5 Oversized bolts

EXAMPLE Bolts for repairs.

See Figure 9.

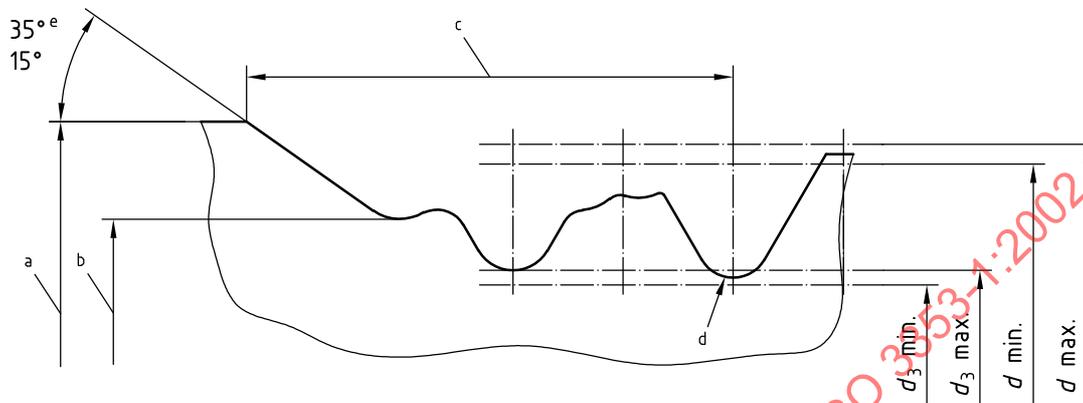

- a Diameter of oversized shank =  $\delta$ .
- b Blank diameter.
- c  $\left[ 1P + \frac{(\delta \text{nom.} - d \text{max.})}{2 \tan 35^\circ} \right]$  to  $\left[ 2P + \frac{(\delta \text{nom.} - d \text{max.})}{2 \tan 15^\circ} \right]$
- d Root of last completely formed thread.
- e Angle before rolling. The shape is optional within these limits.

Figure 9

The possible profile projection comparator inspection shall be carried out using a chart drawn in accordance with Figure 14.

## 5 Inspection method

### 5.1 General

The method is left to the discretion of the manufacturer, provided that it ensures conformity with the requirements given in clause 4.

In case of dispute, the method by optical projection, defined hereafter, shall be used. See comments in annex A (informative).

### 5.2 Use of the charts

The charts shall be used in conjunction with a profile projection comparator having a magnifying power equal to or greater than  $\times 20$ .

5.3 Procedure

5.3.1 For lead threads

The inspection shall be carried out using a chart drawn in accordance with Figure 10.

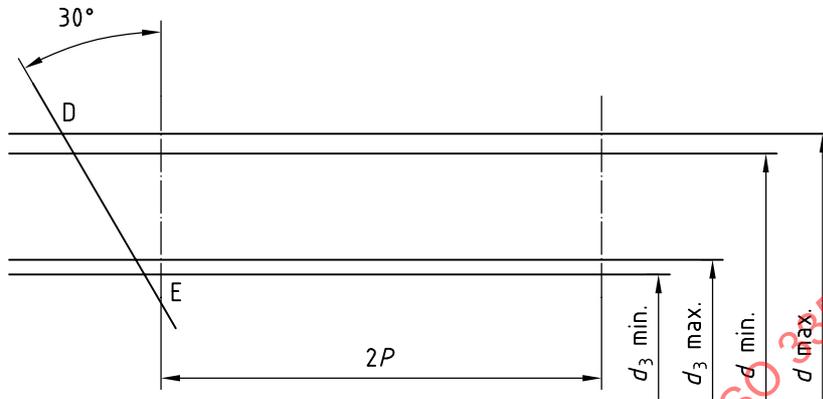


Figure 10

Rotate the bolt to find the first complete thread (see Figure 1) nearest to the end of the shank which has the thread crest and root not extending beyond the limits defined by the horizontal lines.

Then move the bolt horizontally until the right flank of the above thread coincides with line DE.

5.3.2 For runout threads

The inspection shall be carried out using a chart drawn in accordance with Figures 11 to 14.

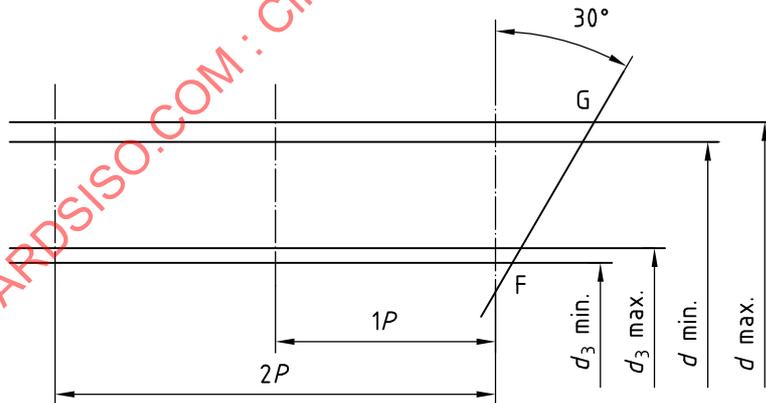


Figure 11