
**Measurement of noise emitted by
accelerating road vehicles — Engineering
method —**

**Part 1:
M and N categories**

*Mesurage du bruit émis par les véhicules routiers en accélération —
Méthode d'expertise —*

Partie 1: Catégories M et N



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 362-1:2007



COPYRIGHT PROTECTED DOCUMENT

© ISO 2007

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword.....	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	2
4 Symbols and abbreviated terms	7
5 Specification of the acceleration for vehicles of categories M1 and M2 having a maximum authorized mass not exceeding 3 500 kg, and of category N1	9
5.1 General	9
5.2 Calculation of acceleration	9
5.3 Calculation of the target acceleration	10
5.4 Calculation of the reference acceleration	10
5.5 Partial power factor k_p	11
6 Instrumentation	11
6.1 Instruments for acoustical measurement	11
6.2 Instrumentation for speed measurements	11
6.3 Meteorological instrumentation	12
7 Acoustical environment, meteorological conditions and background noise	12
7.1 Test site	12
7.2 Meteorological conditions	13
7.3 Background noise	13
8 Test procedures	14
8.1 Microphone positions	14
8.2 Conditions of the vehicle	14
8.3 Operating conditions	17
8.4 Measurement readings and reported values	20
8.5 Measurement uncertainty	22
9 Test report	22
Annex A (informative) Technical background for development of vehicle noise test procedure based on in-use operation in urban conditions	24
Annex B (informative) Measurement uncertainty — Framework for analysis according to ISO Guide 98 (GUM)	44
Annex C (informative) Flowchart of the procedure for categories M1 and M2 having a maximum authorized mass not exceeding 3 500 kg, and category N1	47
Annex D (informative) Flowchart for vehicles of category M2 having a maximum authorized mass exceeding 3 500 kg, and categories M3, N2 and N3	51
Annex E (informative) Indoor test operation	52
Bibliography	55

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 362-1 was prepared by Technical Committee ISO/TC 43, *Acoustics*, Subcommittee SC 1, *Noise*.

This first edition of ISO 362-1, together with ISO 362-2, cancels and replaces ISO 362:1998 and ISO 7188:1994, which have been technically revised.

ISO 362 consists of the following parts, under the general title *Measurement of noise emitted by accelerating road vehicles — Engineering method*:

- *Part 1: M and N categories*
- *Part 2: L category*

Introduction

An extensive review was conducted of actual in-use vehicle operations, beginning with data from the TUV Automotive study in the early 1990s, and continuing with data developed through other committee members from 1996 through 2000. It includes nearly 100 vehicles operated on a variety of urban roads in Europe and Asia. The primary focus of the in-use measurements was to determine how vehicles are driven with a variety of vehicles, driving behaviours and traffic situations. The in-use behaviour determined from these studies was successfully correlated to urban traffic use in the United States by evaluation of the fuel economy test cycles used by the United States Environmental Protection Agency (USEPA). The resulting test specifications are therefore valid for all global urban use conditions.

The procedure defined here provides a measure of the sound pressure level from vehicles under controlled and repeatable conditions. The definitions have been made according to the needs of vehicle categories. In cases of vehicles other than very heavy trucks and buses, the working group found that attempts to conduct a partial load test as in actual use resulted in considerable run-to-run variability that significantly interfered with the repeatability and reproducibility of the test cycle. Therefore, two primary operating conditions (i.e. a wide-open-throttle acceleration phase, and a constant speed phase) were used to guarantee simplicity. The combination was found to be equivalent to the partial throttle and partial power (engine load) actually used.

As a further consequence of the investigation of the needs for an efficient test, it was decided to design a test which is independent of vehicle design and therefore safe and adaptable for future technologies, as well as for future traffic conditions. The test guarantees an excitation of all relevant noise sources, and the final test result will reflect a combination of these sources as a compromise between normal urban use and “worst case”.

In 2004, the given test for M and N category vehicles was evaluated for technical accuracy and practical considerations by test programmes carried out by the Japan Automobile Standards Internationalization Center (JASIC), the European Automotive Manufacturers Association (ACEA), and the Society of Automotive Engineers, Inc. (SAE) in the United States. Over 180 vehicles were included in these tests. The reports of these test programmes were considered prior to preparation of this part of ISO 362.

This part of ISO 362 was developed following demands for a new test procedure:

- “The test procedure (ISO 362) doesn't reflect realistic driving conditions” (1996 EU Green Paper).
- “In the case of motor vehicles, other factors are also important such as the dominance of tyre noise above quite low speeds (50 km/h)” (1996 EU Green Paper).
- “A new measurement procedure should require that the major noise sources of a vehicle be measured” (2001 Noise Emission of Road Vehicles – I-INCE).

[STANDARDSISO.COM](https://standardsiso.com) : Click to view the full PDF of ISO 362-1:2007

Measurement of noise emitted by accelerating road vehicles — Engineering method —

Part 1: M and N categories

1 Scope

This part of ISO 362 specifies an engineering method for measuring the noise emitted by road vehicles of categories M and N under typical urban traffic conditions. It excludes vehicles of category L1 and L2, which are covered by ISO 9645, and vehicles of category L3, L4 and L5 covered by ISO 362-2.

The specifications are intended to reproduce the level of noise generated by the principal noise sources during normal driving in urban traffic (see Annex A).

The method is designed to meet the requirements of simplicity as far as they are consistent with reproducibility of results under the operating conditions of the vehicle.

The test method requires an acoustical environment that is only obtained in an extensive open space. Such conditions are usually provided for

- type approval measurements of a vehicle,
- measurements at the manufacturing stage, and
- measurements at official testing stations.

NOTE 1 The results obtained by this method give an objective measure of the noise emitted under the specified conditions of test. It is necessary to consider the fact that the subjective appraisal of the noise annoyance of different classes of motor vehicles is not simply related to the indications of a sound measurement system. As annoyance is strongly related to personal human perception, physiological human conditions, culture and environmental conditions, there is a large variation and it is therefore not useful as a parameter to describe a specific vehicle condition.

NOTE 2 Spot checks of vehicles chosen at random are rarely made in an ideal acoustical environment. If measurements are carried out on the road in an acoustical environment which does not fulfil the requirements stated in this International Standard, the results obtained can deviate appreciably from the results obtained using the specified conditions.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 1176:1990, *Road vehicles — Masses — Vocabulary and codes*

ISO 2416:1992, *Passenger cars — Mass distribution*

ISO 5725:1994 (all parts), *Accuracy (trueness and precision) of measurement methods and results*

ISO 10844:1994, *Acoustics — Specification of test tracks for the purpose of measuring noise emitted by road vehicles*

ISO Guide 98:1995, *Guide to the expression of uncertainty in measurement (GUM)*

IEC 60942:2003, *Electroacoustics — Sound calibrators*

IEC 61672-1:2002, *Electroacoustics — Sound level meters — Part 1: Specifications*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 1176, ISO 2416 and the following apply.

3.1 Vehicle mass

3.1.1

kerb mass

complete shipping mass of a vehicle fitted with all equipment necessary for normal operation plus the mass of the following elements for M1, N1 and M2 having a maximum authorized mass not exceeding 3 500 kg:

- lubricants, coolant (if needed), washer fluid;
- fuel (tank filled to at least 90 % of the capacity specified by the manufacturer);
- other equipment if included as basic parts for the vehicle, such as spare wheel(s), wheel chocks, fire extinguisher(s), spare parts and tool kit

NOTE The definition of kerb mass may vary from country to country, but in this part of ISO 362 it refers to the definition contained in ISO 1176.

3.1.2

maximum authorized mass

kerb mass plus the maximum allowable payload

3.1.3

target mass

actual vehicle mass used during test as determined by Table 3

NOTE Test mass for N2 and N3 vehicles can be lower than the target mass due to axle-loading limitations.

3.1.4

test mass

actual vehicle mass used during test as determined by Table 3

NOTE Test mass for N2 and N3 vehicles can be lower than the target mass due to axle-loading limitations.

3.1.5

unladen vehicle mass

nominal mass of a complete N2, N3 or M2 vehicle having a maximum authorized mass greater than 3 500 kg, or an M3 vehicle as determined by the following conditions:

- a) mass of the vehicle includes the bodywork and all factory-fitted equipment, electrical and auxiliary equipment for normal operation of the vehicle, including liquids, tools, fire extinguisher, standard spare parts, chocks and spare wheel, if fitted;
- b) the fuel tank is filled to at least 90 % of rated capacity and the other liquid-containing systems (except those for used water) are filled to 100 % of the capacity specified by the manufacturer

3.1.6**driver mass**

nominal mass of a driver

3.1.7**mass in running order**

nominal mass of an N2, N3 or M2 vehicle having a maximum authorized mass greater than 3 500 kg, or an M3 vehicle as determined by the following conditions:

- a) the mass is taken as the sum of the unladen vehicle mass and the driver's mass;
- b) in the case of category M2 and M3 vehicles that include seating positions for additional crewmembers, their mass is incorporated in the same way and equal to that of the driver

NOTE The driver's mass is calculated in accordance with ISO 2416.

3.1.8**maximum axle (group of axles) capacity**

permissible mass corresponding to the maximum mass to be carried by the axle (group of axles) as defined by the vehicle manufacturer, not exceeding the axle manufacturer's specifications

3.1.9**unladen axle (group of axles) load**

actual mass carried by the axle (group of axles) in an unladen condition

NOTE The unladen vehicle mass is equal to the sum of the unladen axles (group of axles) load.

3.1.10**extra loading**

mass which is to be added to the unladen vehicle mass

3.1.11**laden axle (group of axles) load**

actual mass carried by the axle (group of axles) in a laden condition

3.2**power-to-mass ratio index****PMR**

dimensionless quantity used for the calculation of acceleration according to the equation

$$\text{PMR} = \frac{P_n}{m_t} \times 1000 \quad (1)$$

where

P_n is the numerical value of engine power, expressed in kilowatts;

m_t is the numerical value of the test mass, expressed in kilograms

3.3**rated engine speed**

S

engine speed at which the engine develops its rated maximum net power as stated by the manufacturer

NOTE 1 If the rated maximum net power is reached at several engine speeds, S used in this part of ISO 362 is the highest engine speed at which the rated maximum net power is reached.

NOTE 2 ISO 80000-3 defines this term as "rated engine rotational frequency". The term "rated engine speed" was retained due to its common understanding by practitioners and its use in government regulations.

3.4 Vehicle categories

3.4.1

category L

motor vehicles with fewer than four wheels

NOTE United Nations Economic Commission for Europe (UNECE) document TRANS/WP.29/78/Rev.1/Amend.4 (26 April 2005) extended the L category to four-wheeled vehicles as defined by L6 and L7.

3.4.1.1

category L1 and L2

mopeds

NOTE See ISO 9645 for further details.

3.4.1.2

category L3

two-wheeled motor vehicles with an engine cylinder capacity greater than 50 cm³ or maximum speed greater than 50 km/h

3.4.1.3

category L4

three-wheeled motor vehicles with an engine cylinder capacity greater than 50 cm³ or maximum speed greater than 50 km/h, the wheels being attached asymmetrically along the longitudinal vehicle axis

3.4.1.4

category L5

three-wheeled motor vehicles with an engine cylinder capacity greater than 50 cm³ or maximum speed greater than 50 km/h, having a gross vehicle mass rating not exceeding 1 000 kg and wheels attached symmetrically along the longitudinal vehicle axis

3.4.1.5

category L6

four-wheeled vehicles whose unladen mass is not more than 350 kg, not including the mass of the batteries in the case of electric vehicles, whose maximum design speed is not more than 45 km/h, and whose engine cylinder capacity does not exceed 50 cm³ for spark (positive) ignition engines, or whose maximum net power output does not exceed 4 kW in the case of other internal combustion engines, or whose maximum continuous rated power does not exceed 4 kW in the case of electric engines

3.4.1.6

category L7

four-wheeled vehicles, other than those classified as category L6, whose unladen mass is not more than 400 kg (550 kg for vehicles intended for carrying goods), not including the mass of the batteries in the case of electric vehicles, and whose maximum continuous rated power does not exceed 15 kW

3.4.2

category M

power-driven vehicles having at least four wheels and used for the carriage of passengers

3.4.2.1

category M1

vehicles used for the carriage of passengers and comprising no more than eight seats in addition to the driver's seat

3.4.2.2

category M2

vehicles used for the carriage of passengers and comprising more than eight seats in addition to the driver's seat and having a maximum mass not exceeding 5 000 kg

NOTE In this definition, "maximum mass" is equivalent to "maximum authorized mass" used elsewhere in this part of ISO 362.

3.4.2.3**category M3**

vehicles used for the carriage of passengers and comprising more than eight seats in addition to the driver's seat and having a maximum mass exceeding 5 000 kg

NOTE In this definition, "maximum mass" is equivalent to "maximum authorized mass" used elsewhere in this part of ISO 362.

3.4.3**category N**

power-driven vehicles having at least four wheels and used for the carriage of goods

3.4.3.1**category N1**

vehicles used for the carriage of goods and having a maximum authorized mass not exceeding 3 500 kg

3.4.3.2**category N2**

vehicles used for the carriage of goods and having a maximum authorized mass exceeding 3 500 kg but not exceeding 12 000 kg

3.4.3.3**category N3**

vehicles used for the carriage of goods and having a maximum authorized mass exceeding 12 000 kg

3.5**reference point**

point depending on the design and category of the vehicle

3.5.1**reference point for category M1 and N1 vehicles**

point on the vehicle as follows:

- for front engine vehicles, it is the front end of the vehicle;
- for mid-engine vehicles, it is the centre of the vehicle;
- for rear engine vehicles, it is the rear end of the vehicle

3.5.2**reference point for category M2, M3, N2, and N3 vehicles**

point on the vehicle as follows:

- for front engine vehicles, it is the front end of the vehicle;
- for all other vehicles, it is the border of the engine closest to the front of the vehicle

3.6**target acceleration**

acceleration at a partial throttle condition in urban traffic, derived from statistical investigations

NOTE Refer to Annex A for more detailed explanations.

3.7**reference acceleration**

required acceleration during the acceleration test on the test track

NOTE Refer to Annex A for more detailed explanations.

3.8
gear ratio weighting factor

k

dimensionless quantity used to combine the test results of two gear ratios for the acceleration test and the constant-speed test

3.9
partial power factor

k_p

dimensionless quantity used for the weighted combination of the test results of the acceleration test and the constant-speed test for vehicles of categories M1, N1 and M2 having a maximum authorized mass not exceeding 3 500 kg

NOTE Refer to Annex A for more detailed explanations.

3.10
pre-acceleration

application of acceleration control device prior to the position AA' for the purpose of achieving stable acceleration between AA' and BB'

NOTE See Figure 1 for additional details.

3.11
locked gear ratio

control of transmission such that the transmission gear cannot change during a test

3.12
engine

power source without detachable accessories

3.13
test track length

l_{10}

length of test track used in the calculation of acceleration from points PP' to BB'

3.14
test track length

l_{20}

length of test track used in the calculation of acceleration from points AA' to BB'

4 Symbols and abbreviated terms

Table 1 lists the symbols used in this document and the clause where they are used for the first time.

Table 1 — Symbols and abbreviated terms used, and corresponding clauses

Symbol	Unit	Clause	Explanation
AA'	—	3.10	line perpendicular to vehicle travel which indicates beginning of zone in which to record sound pressure level during test
a_i	m/s ²	A.2.6	partial throttle acceleration in gear i
a_{\max}	m/s ²	A.2.2.3	maximum acceleration during an acceleration phase measured in in-use studies
$a_{\max 90}$	m/s ²	A.2.3.1	90 th percentile of maximum acceleration during an acceleration phase measured in in-use studies
a_{wot}	m/s ²	A.2.2.1	in-use acceleration measured in urban traffic for a specific vehicle
$a_{\text{wot } 50}$	m/s ²	A.2.8.1	acceleration at 90 th percentile of noise emission and 50 km/h vehicle velocity for a specific vehicle
$a_{\text{wot } i}$	m/s ²	5.1	acceleration at wide-open-throttle in gear i
$a_{\text{wot } (i+1)}$	m/s ²	5.1	acceleration at wide-open-throttle in gear $(i+1)$
$a_{\text{wot test}}$	m/s ²	5.1	acceleration at wide-open throttle in single gear test cases
$a_{\text{wot ref}}$	m/s ²	5.4	reference acceleration for the wide-open-throttle test
a_{urban}	m/s ²	5.3	target acceleration representing urban traffic acceleration
BB'	—	3.10	line perpendicular to vehicle travel which indicates end of zone in which to record sound pressure level during test
CC'	—	8.1	line of vehicle travel through test surface defined in ISO 10844
$\delta_1 - \delta_7$	dB	B.2	input quantities to allow for any uncertainty
gear i	—	8.3.1.3.2	first of two gear ratios for use in the vehicle test
gear $(i+1)$	—	8.3.1.3.2	second of two gear ratios, with an engine speed lower than gear ratio i
j	—		index for single test run within overall acceleration or constant speed test series i or $(i+1)$
k_P	—	3.9	partial power factor
k	—	3.8	gear ratio weighting factor
k_n	—	A.2.8.1	interpolation factor between gears
l_{ref}	m	5.1	reference length
l_{veh}	m	5.1	length of vehicle
l_{10}	m	3.13	length of test section for calculation of acceleration from PP' to BB'
l_{20}	m	3.14	length of test section for calculation of acceleration from AA' to BB'
$L_{\text{crs } i}$	dB	8.4.3.2	vehicle sound pressure level at constant speed test for gear i
$L_{\text{crs } (i+1)}$	dB	8.4.3.2	vehicle sound pressure level at constant speed test for gear $(i+1)$
$L_{\text{crs rep}}$	dB	8.4.3.2	reported vehicle sound pressure level at constant speed test
$L_{\text{wot } i}$	dB	8.4.3.2	vehicle sound pressure level at wide-open-throttle test for gear i
$L_{\text{wot } (i+1)}$	dB	8.4.3.2	vehicle sound pressure level at wide-open-throttle test for gear $(i+1)$
$L_{\text{wot rep}}$	dB	8.4.3.2	reported vehicle sound pressure level at wide-open-throttle

Table 1 — (continued)

Symbol	Unit	Clause	Explanation
L_{urban}	dB	8.4.3.2	reported vehicle sound pressure level representing urban operation
$m_{fa\ load\ unladen}$	kg	8.2.2.1	unladen front axle load
$m_{ac\ ra\ max}$	kg	8.2.2.1	maximum rear axle capacity
$m_{ra\ load\ unladen}$	kg	8.2.2.1	unladen rear axle load
m_d	kg	8.2.2.1	mass of driver
m_{kerb}	kg	8.2.2.1	kerb mass of the vehicle
$m_{fa\ load\ laden}$	kg	8.2.2.2.2	laden front axle load
$m_{ra\ load\ laden}$	kg	8.2.2.2.2	laden rear axle load
m_{ref}	kg	8.2.2.1	kerb mass + 75 kg for the driver (75 kg ± 5 kg in the case of category L)
m_{ro}	kg	8.2.2.1	mass in running order
m_t	kg	3.2	test mass of the vehicle
m_{target}	kg	8.2.2.1	target mass of the vehicle
$m_{unladen}$	kg	8.2.2.1	unladen vehicle mass
m_{xload}	kg	8.2.2.1	extra loading
n	1/min	A.2.4	engine rotational speed of the vehicle
$n_{PP'}$	1/min	9	engine rotational speed of the vehicle when the reference point passes PP'
$n_{BB'}$	1/min	8.3.2.2.1	engine rotational speed of the vehicle, when the reference point passes BB'
$(n/S)_{a\ 90}$	—	A.2.8.1	dimensionless engine rotational speed ratio at 90 th percentile acceleration
$(n/S)_{L\ 90}$	—	A.2.6	dimensionless engine rotational speed ratio at 90 th percentile noise emission
$(n/S)_i$	—	A.2.8.1	dimensionless engine rotational speed ratio at maximum acceleration of i gear
$(n/S)_{(i+1)}$	—	A.2.8.1	dimensionless engine rotational speed ratio at maximum acceleration of $(i+1)$ gear
PMR	—	3.2	power-to-mass ratio index to be used for calculations
P_n	kW	3.2	rated engine power (see ISO 1585)
PP'	—	3.13	line perpendicular to vehicle travel which indicates location of microphones
S	1/min	3.3	rated engine rotational speed in revs per minute, synonymous with the engine rotational speed at maximum power
$v_{AA'}$	km/h	5.2.1	vehicle velocity when reference point passes line AA' (see 5.1 for definition of reference point)
$v_{BB'}$	km/h	5.2.1	vehicle velocity when reference point or rear of vehicle passes line BB' (see 5.1 for definition of reference point)
$v_{PP'}$	km/h	5.2.2	vehicle velocity when reference point passes line PP' (see 5.1 for definition of reference point)
v_{test}	km/h	8.3.1.2	target vehicle test velocity
$v_{a\ max\ 50}$	km/h	A.2.3.1	50 th percentile vehicle velocity at maximum acceleration during an acceleration phase measured in in-use studies
$v_{a\ max\ 90}$	km/h	A.2.3.1	90 th percentile vehicle velocity at maximum acceleration during an acceleration phase measured in in-use studies

5 Specification of the acceleration for vehicles of categories M1 and M2 having a maximum authorized mass not exceeding 3 500 kg, and of category N1

5.1 General

All accelerations are calculated using different speeds of the vehicle on the test track. The formulas given in 5.2 are used for the calculation of $a_{\text{wot } i}$, $a_{\text{wot } (i+1)}$ and $a_{\text{wot test}}$. The speed either at AA' ($v_{\text{AA}'}$) or PP' ($v_{\text{PP}'}$) is defined by the vehicle speed when the reference point passes AA' or PP'. The speed at BB' ($v_{\text{BB}'}$) is defined when the rear of the vehicle passes BB'. The method used for determination of the acceleration shall be indicated in the test report

Due to the definition of the reference point for the vehicle, the length of the vehicle is considered to be different in Equations (2) and (3). If the reference point is the front of the vehicle, $l_{\text{ref}} = l_{\text{veh}}$ (i.e. the length of vehicle); if the reference point is the midpoint of the vehicle, $l_{\text{ref}} = 0,5 l_{\text{veh}}$ (i.e. 0,5 times the length of vehicle); if the reference point is the rear of the vehicle, $l_{\text{ref}} = 0$.

The dimensions of the test track are used in the calculation of acceleration. These dimensions are defined as follows: $l_{20} = 20$ m, $l_{10} = 10$ m.

Due to the large variety of technologies, it is necessary to consider different modes of calculation. New technologies (such as continuously variable transmission) and older technologies (such as automatic transmission) which have no electronic control, require a more specific treatment for a proper determination of the acceleration. The given possibilities for calculation of the acceleration shall cover these needs.

5.2 Calculation of acceleration

5.2.1 Calculation procedure for vehicles with manual transmission, automatic transmission, adaptive transmission and continuously variable transmission (CVT) tested with locked gear ratios

The value of $a_{\text{wot test}}$ used in the determination of gear selection shall be the average of the four $a_{\text{wot test}, j}$ values during each valid measurement run.

Calculate $a_{\text{wot test}, j}$ using the equation:

$$a_{\text{wot test}, j} = \frac{(v_{\text{BB}', j} / 3,6)^2 - (v_{\text{AA}', j} / 3,6)^2}{2(l_{20} + l_{\text{ref}})} \quad (2)$$

where

$a_{\text{wot test}, j}$ is the numerical value of the acceleration, expressed in metres per second squared;

$v_{\text{BB}', j}$, $v_{\text{AA}', j}$ are numerical values of the velocity, expressed in kilometres per hour;

l_{20} , l_{ref} are numerical values of the length, expressed in metres.

Pre-acceleration may be used.

5.2.2 Calculation procedure for vehicles with automatic transmission, adaptive transmission and CVT tested with non-locked gear ratios

The value of $a_{\text{wot test}}$ used in the determination of gear selection shall be the average of the four $a_{\text{wot test}, j}$ values during each valid measurement run.

If the devices or measures described in 8.3.1.3.3 are used to control transmission operation for the purpose of achieving test requirements, calculate $a_{\text{wot test}, j}$ using Equation (2).

Pre-acceleration may be used.

If the devices or measures described in 8.3.1.3.3 are not used, calculate $a_{\text{wot test},j}$ using Equation (3):

$$a_{\text{wot test},j} = \frac{(v_{\text{BB}'}/3,6)^2 - (v_{\text{PP}'}/3,6)^2}{2(l_{10} + l_{\text{ref}})} \quad (3)$$

where

$a_{\text{wot test},j}$ is the numerical value of the acceleration, expressed in metres per second squared;

$v_{\text{PP}'}$, $v_{\text{BB}'}$ are numerical values of the velocity, expressed in kilometres per hour;

l_{10} , l_{ref} are numerical values of the length, expressed in metres.

Pre-acceleration shall not be used.

NOTE It would be useful for these types of vehicles to record the vehicle speeds at AA', PP', and BB' to provide information for a future revision of this part of ISO 362.

5.3 Calculation of the target acceleration

Calculate a_{urban} using the equation:

$$a_{\text{urban}} = 0,63 \lg(\text{PMR}) - 0,09 \quad (4)$$

where

a_{urban} is the numerical value of the acceleration, expressed in metres per second squared;

PMR is the dimensionless value of the power-to-mass index.

5.4 Calculation of the reference acceleration

Calculate $a_{\text{wot ref}}$ using the equations:

$$a_{\text{wot ref}} = 1,59 \lg(\text{PMR}) - 1,41 \text{ for } 25 \leq \text{PMR} \quad (5)$$

or

$$a_{\text{wot ref}} = a_{\text{urban}} = 0,63 \lg(\text{PMR}) - 0,09 \text{ for } 25 > \text{PMR} \quad (6)$$

where

$a_{\text{wot ref}}$ is the numerical value of the reference acceleration, expressed in metres per second squared;

a_{urban} is the numerical value of the acceleration relative to urban traffic, expressed in metres per second squared;

PMR is the dimensionless value of the power-to-mass index.

NOTE Calculations of $a_{\text{wot ref}}$ and a_{urban} for a specific vehicle are based on statistical analyses of in-use vehicle data. As such, this is not strictly a calculation of acceleration based on the independent non-dimensional variable PMR, since this is used as a function to identify the appropriate target acceleration.

5.5 Partial power factor k_P

Partial power factor k_P is:

$$k_P = 1 - (a_{\text{urban}}/a_{\text{wot test}}) \quad (7)$$

In cases other than a single gear test, $a_{\text{wot ref}}$ shall be used instead of $a_{\text{wot test}}$, as defined in 8.4.3.2.

6 Instrumentation

6.1 Instruments for acoustical measurement

6.1.1 General

The apparatus used for measuring the sound pressure level shall be a sound level meter or equivalent measurement system meeting the requirements of Class 1 instruments (inclusive of the recommended windscreen, if used). These requirements are described in IEC 61672-1.

The entire measurement system shall be checked by means of a sound calibrator that fulfils the requirements of Class 1 sound calibrators according to IEC 60942.

Measurements shall be carried out using the time weighting "F" of the acoustic measurement instrument and the "A" frequency weighting curve also described in IEC 61672-1. When using a system that includes periodic monitoring of the A-weighted sound pressure level, a reading should be made at a time interval not greater than 30 ms.

The instruments shall be maintained and calibrated in accordance with the instructions of the instrument manufacturer.

6.1.2 Calibration

At the beginning and at the end of every measurement session, the entire acoustic measurement system shall be checked by means of a sound calibrator as described in 6.1.1. Without any further adjustment, the difference between the readings shall be less than or equal to 0,5 dB. If this value is exceeded, the results of the measurements obtained after the previous satisfactory check shall be discarded.

6.1.3 Compliance with requirements

Compliance of the sound calibrator with the requirements of IEC 60942 shall be verified once a year. Compliance of the instrumentation system with the requirements of IEC 61672-1 shall be verified at least every 2 years. All compliance testing shall be conducted by a laboratory which is authorized to perform calibrations traceable to the appropriate standards.

6.2 Instrumentation for speed measurements

The rotational speed of the engine shall be measured with an instrument meeting specification limits of at least $\pm 2\%$ at the engine speeds required for the measurements being performed.

The road speed of the vehicle shall be measured with instruments meeting specification limits of at least $\pm 0,5$ km/h when using continuous measuring devices.

If testing uses independent measurements of speed, this instrumentation shall meet specification limits of at least $\pm 0,2$ km/h.

NOTE Independent measurements of speed are when two or more separate devices will determine the v_{AA} , v_{BB} , and v_{PP} values. A continuous measuring device will determine all required speed information with one device.

6.3 Meteorological instrumentation

The meteorological instrumentation used to monitor the environmental conditions during the test shall meet the following specifications:

- at least ± 1 °C for a temperature measuring device;
- at least $\pm 1,0$ m/s for a wind speed measuring device;
- at least ± 5 hPa for a barometric pressure measuring device;
- at least ± 5 % for a relative humidity measuring device.

7 Acoustical environment, meteorological conditions and background noise

7.1 Test site

The test site shall be substantially level. The test track construction and surface shall meet the requirements of ISO 10844. The test site dimensions are shown in Figure 1.


NOTE The symbols in Figure 1 are directly copied from ISO 10844 and are not necessarily consistent with the symbols in this part of ISO 362.

Within a radius of 50 m around the centre of the track, the space shall be free of large reflecting objects such as fences, rocks, bridges or buildings. The test track and the surface of the site shall be dry and free from absorbing materials such as powdery snow or loose debris.

In the vicinity of the microphone, there shall be no obstacle that could influence the acoustical field and no person shall remain between the microphone and the noise source. The meter observer shall be positioned so as not to influence the meter reading.

NOTE Buildings outside the 50 m radius can have significant influence if their reflection focuses on the test track.

Dimensions in metres

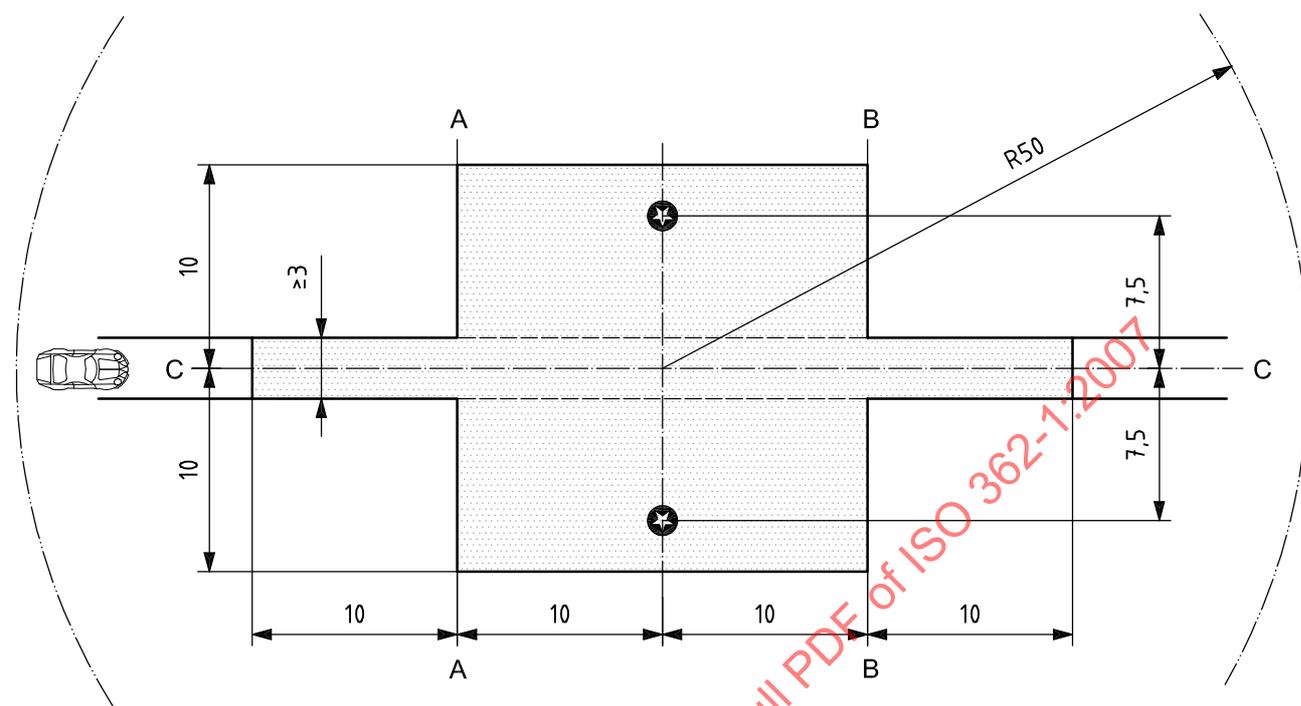**Key**

minimum area covered with test road surface, i.e. test area



microphone positions (height 1,2 m)

NOTE Shaded area ("test area") is the minimum area to be covered with a surface complying with ISO 10844.

Figure 1 — Test site dimensions

7.2 Meteorological conditions

The meteorological instrumentation shall deliver data representative of the test site, and shall be positioned adjacent to the test area at a height representative of the height of the measuring microphone.

The measurements shall be made when the ambient air temperature is within the range from 5 °C to 40 °C. The tests shall not be carried out if the wind speed, including gusts, at microphone height exceeds 5 m/s during the sound measurement interval.

A value representative of temperature, wind speed and direction, relative humidity and barometric pressure shall be recorded during the sound measurement interval.

NOTE Refer to Annex B for the effects of temperature and other factors.

7.3 Background noise

Any sound peak which appears to be unrelated to the characteristics of the general sound level of the vehicle shall be ignored when taking the readings.

The background noise shall be measured for a duration of 10 s immediately before and after a series of vehicle tests. The measurements shall be made with the same microphones and microphone locations used during the test. The maximum A-weighted sound pressure level shall be reported.

The background noise (including any wind noise) shall be at least 10 dB below the A-weighted sound pressure level produced by the vehicle under test. If the difference between the ambient sound pressure level and the measured sound pressure level is between 10 dB and 15 dB, in order to calculate the *j*th test result the appropriate correction shall be subtracted from the readings on the sound level meter, as given in Table 2.

Table 2 — Correction applied to an individual measured test value

Background sound pressure level difference to measured sound pressure level, in dB	10	11	12	13	14	greater than or equal to 15
Correction, in dB	0,5	0,4	0,3	0,2	0,1	0,0

8 Test procedures

8.1 Microphone positions

The distance from the microphone positions on the microphone line PP' to the perpendicular reference line CC' (see Figure 1) on the test track shall be 7,5 m ± 0,05 m.

The microphone shall be located 1,2 m ± 0,02 m above the ground level. The reference direction for free-field conditions (see IEC 61672-1) shall be horizontal and directed perpendicularly towards the path of the vehicle line CC'.

8.2 Conditions of the vehicle

8.2.1 General conditions

The vehicle shall be supplied as specified by the vehicle manufacturer.

Before the measurements are started, the vehicle shall be brought to its normal operating conditions.

The variation of results between runs may be reduced if there is a 1-min wait, at idle in neutral, between runs.

8.2.2 Test mass of the vehicle

8.2.2.1 General

Measurements shall be made on vehicles at the test mass m_t specified in Table 3.

Table 3 — Test mass, m_t

Vehicle category	Vehicle test mass kg
M1	$m_t = m_{ref} = m_{kerb} + 75$ kg. The 75 kg added mass accounts for the mass of the driver according to ISO 2416.
N1 ^{a, b}	$m_t = m_{ref} = m_{kerb} + 75$ kg. The 75 kg added mass accounts for the mass of the driver according to ISO 2416.
N2, N3	<p>m_{target} (per kW rated power) = 50 kg. Extra loading, m_{xload}, to reach the target mass, m_{target}, of the vehicle shall be placed above the rear axle.</p> <p>The sum of the extra loading and the unladen rear axle load, $m_{ra load unladen}$, is limited to 75 % of the maximum axle capacity, $m_{ac ra max}$, allowed for the rear axle. The target mass shall be achieved with a tolerance of ± 5 %.</p> <p>If the centre of gravity of the extra loading cannot be aligned with the centre of the rear axle, the test mass, m_t, of the vehicle shall not exceed the sum of the unladen front axle load, $m_{fa load unladen}$, and the unladen rear axle load plus the extra loading and the mass of driver, m_d.</p> <p>The test mass for vehicles with more than two axles shall be the same as for a two-axle vehicle.</p> <p>If the unladen vehicle mass, $m_{unladen}$, of a vehicle with more than two axles is greater than the test mass for the two-axle vehicle, then this vehicle shall be tested without extra loading.</p>
M2, M3	$m_t = m_{ro}$
<p>^a N1 category vehicles may be loaded, at the decision of the vehicle manufacturer, for practical reasons during the test. This practice is acceptable, however it may lead to a higher level of vehicle noise (typically 1 dB).</p> <p>^b If load is added to these vehicles during testing, the added payload shall be noted in the test report.</p>	

8.2.2.2 Calculation procedure to determine extra loading of N2 and N3 vehicles only

8.2.2.2.1 Calculation of extra loading

The target mass m_{target} (per kW rated power) for two-axle vehicles of category N2 and N3 is specified in Table 3:

$$m_{target} = 50 \text{ kg} \quad (8)$$

To reach the required target mass m_{target} for a vehicle to be tested, the unladen vehicle, including the mass of the driver m_d , shall be loaded with an extra mass m_{xload} which shall be placed above the rear axle:

$$m_{target} = m_{unladen} + m_d + m_{xload} \quad (9)$$

The target mass m_{target} shall be achieved with a tolerance of ± 5 %.

The vehicle mass of the test vehicle in the unladen condition $m_{unladen}$ is calculated by measuring on a scale the unladen front axle load $m_{fa load unladen}$ and the unladen rear axle load $m_{ra load unladen}$:

$$m_{unladen} = m_{fa load unladen} + m_{ra load unladen} \quad (10)$$

By using Equations (9) and (10), the extra loading m_{xload} is calculated as follows:

$$m_{xload} = m_{target} - (m_d + m_{unladen}) \quad (11)$$

$$m_{xload} = m_{target} - (m_d + m_{fa load unladen} + m_{ra load unladen}) \quad (12)$$

The sum of the extra loading, m_{xload} , and the unladen rear axle load, $m_{ra\ load\ unladen}$, is limited to 75 % of the maximum axle capacity for the rear axle, $m_{ac\ ra\ max}$:

$$0,75\ m_{ac\ ra\ max} \geq m_{xload} + m_{ra\ load\ unladen} \quad (13)$$

The m_{xload} is limited according to Equation (14):

$$m_{xload} \leq 0,75\ m_{ac\ ra\ max} - m_{ra\ load\ unladen} \quad (14)$$

If the calculated extra loading m_{xload} in Equation (12) fulfils Equation (14), then the extra loading is equal to Equation (12). The test mass m_t of the vehicle is equal to

$$m_t = m_{xload} + m_d + m_{fa\ load\ unladen} + m_{ra\ load\ unladen} \quad (15)$$

In this case, the test mass of the vehicle is equal to the target mass

$$m_t = m_{target} \quad (16)$$

If the calculated extra loading m_{xload} in Equation (12) does not fulfil Equation (14), but rather fulfils Equation (17)

$$m_{xload} > 0,75\ m_{ac\ ra\ max} - m_{ra\ load\ unladen} \quad (17)$$

the extra loading m_{xload} shall be equal to

$$m_{xload} = 0,75\ m_{ac\ ra\ max} - m_{ra\ load\ unladen} \quad (18)$$

and the test mass m_t of the vehicle shall be equal to

$$m_t = 0,75\ m_{ac\ ra\ max} + m_d + m_{fa\ load\ unladen} \quad (19)$$

In this case, the test mass of the vehicle is lower than the target mass

$$m_t < m_{target} \quad (20)$$

8.2.2.2.2 Loading considerations if load cannot be aligned with the centre of rear axle

If the centre of gravity of the extra loading m_{xload} cannot be aligned with the centre of the rear axle, the test mass of the vehicle m_t shall not exceed the sum of the unladen front axle load $m_{fa\ load\ unladen}$ and the unladen rear axle load $m_{ra\ load\ unladen}$ plus the extra loading m_{xload} and the mass of the driver m_d .

This means that if the actual front and rear axle load are measured on a scale when the extra loading m_{xload} is placed onto the vehicle and it is aligned with the centre of the rear axle, the test mass of the vehicle minus the mass of the driver is equal to

$$m_t - m_d = m_{fa\ load\ laden} + m_{ra\ load\ laden} \quad (21)$$

where

$$m_{fa\ load\ laden} = m_{fa\ load\ unladen} \quad (22)$$

If the centre of gravity of the extra loading cannot be aligned with the centre of the rear axle, Equation (21) is still fulfilled, but

$$m_{fa\ load\ laden} > m_{fa\ load\ unladen} \quad (23)$$

because the extra loading has partly distributed its mass to the front axle. In that case, it is not allowed to add more mass onto the rear axle to compensate for the mass moved to the front axle.

8.2.2.2.3 Test mass for vehicles with more than two axles

If a vehicle with more than two axles is tested, then the test mass of this vehicle shall be the same as the test mass for the two-axle vehicle.

If the unladen vehicle mass of a vehicle with more than two axles is greater than the test mass for the two-axle vehicle, then this vehicle shall be tested without extra loading.

8.2.3 Tyre selection and condition

The tyres shall be appropriate for the vehicle and shall be inflated to the pressure recommended by the tyre manufacturer for the test mass of the vehicle.

For certification and related purposes, additional requirements for the tyres, defined by regulation, are necessary. The tyres for such a test shall be selected by the vehicle manufacturer, and shall correspond to one of the tyre sizes and types designated for the vehicle by the vehicle manufacturer. The tyre shall be commercially available on the market at the same time as the vehicle. The minimum tread depth shall be at least 80 % of the full tread depth.

NOTE The tread depth can have a significant influence on the test result.

8.3 Operating conditions

8.3.1 Vehicles of categories M1 and M2 having a maximum authorized mass not exceeding 3 500 kg, and category N1

8.3.1.1 General conditions

The path of the centreline of the vehicle shall follow line CC' as closely as possible throughout the entire test, from the approach to line AA' until the rear of the vehicle passes line BB' (see Figure 1). Any trailer that is not readily separable from the towing vehicle shall be ignored when considering the crossing of the line BB'. If the vehicle is fitted with more than two-wheel drive, test it in the drive selection that is intended for normal road use. If the vehicle is fitted with an auxiliary manual transmission or a multi-gear axle, the position used for normal urban driving shall be used. In all cases, the gear ratios for slow movements, parking or braking, shall be excluded.

8.3.1.2 Test speed

The test speed v_{test} shall be $50 \text{ km/h} \pm 1 \text{ km/h}$. The test speed shall be reached when the reference point according to 3.5 is at line PP'.

8.3.1.3 Gear ratio selection

8.3.1.3.1 General

It is the responsibility of the manufacturer to determine the correct manner of testing to achieve the required accelerations.

Annex C gives gear selection criteria and test run criteria for categories M1 and M2 having a maximum authorized mass not exceeding 3 500 kg, and for category N1, in a flowchart form as an aid to test operation.

8.3.1.3.2 Manual transmission, automatic transmissions, adaptive transmissions or transmissions with continuously variable gear ratios (CVTs) tested with locked gear ratios

The selection of gear ratios for the test depends on the specific acceleration achieved $a_{\text{wot}, i}$ under full-throttle condition according to the specification in 5.2.1 in relation to the reference acceleration $a_{\text{wot ref}}$ required for the full-throttle acceleration test according to Equation (5) in 5.4.

The following conditions for selection of gear ratios are possible.

- a) If one specific gear ratio gives acceleration in a tolerance band of $\pm 5\%$ of the reference acceleration $a_{\text{wot ref}}$, not exceeding $2,0 \text{ m/s}^2$, test with that gear ratio.
- b) If none of the gear ratios gives the required acceleration, then choose a gear ratio i , with an acceleration higher and a gear ratio $(i + 1)$, with an acceleration lower than the reference acceleration $a_{\text{wot ref}}$. If the acceleration value in gear ratio i does not exceed $2,0 \text{ m/s}^2$, use both gear ratios for the test. The gear ratio weighting factor k in relation to the reference acceleration $a_{\text{wot ref}}$ is calculated by:

$$k = (a_{\text{wot ref}} - a_{\text{wot } (i+1)}) / (a_{\text{wot } i} - a_{\text{wot } (i+1)}) \quad (24)$$

- c) If the acceleration value of gear ratio i or $(i + 1)$ exceeds $2,0 \text{ m/s}^2$, the first gear ratio shall be used that gives an acceleration below $2,0 \text{ m/s}^2$ unless gear ratio $(i + 1)$ provides acceleration less than a_{urban} . The achieved acceleration $a_{\text{wot test}}$ during the test shall be used for the calculation of the partial power factor k_p instead of $a_{\text{wot ref}}$ for tests using one gear.
- d) In the case where gear ratio $(i + 1)$ provides acceleration less than a_{urban} , two gears, i and $(i + 1)$ shall be used, including the gear i with acceleration exceeding $2,0 \text{ m/s}^2$. The gear ratio weighting factor k in relation to the reference acceleration $a_{\text{wot ref}}$ is calculated by Equation (24).

If the vehicle has a transmission in which there is only one selection for the gear ratio, the full-throttle test is carried out in this vehicle gear selection. The achieved acceleration $a_{\text{wot test}}$ is then used for the calculation of the partial power factor k_p (see 3.9) instead of $a_{\text{wot ref}}$.

If rated engine speed is exceeded in a gear ratio before the vehicle passes BB', the next higher gear shall be used.

8.3.1.3.3 Automatic transmission, adaptive transmissions and transmissions with variable gear ratios tested with non-locked gear ratios

The gear selector position for full automatic operation shall be used.

The acceleration $a_{\text{wot test}}$ shall be calculated by Equation (2) or (3) as specified in 5.2.

The test may then include a gear change to a lower range and a higher acceleration. A gear change to a higher range and a lower acceleration is not allowed. In any case, a gear shifting to a gear ratio which is typically not used at the specified condition in urban traffic shall be avoided.

Therefore, it is permitted to establish and use electronic or mechanical devices, including alternative gear selector positions, to prevent a downshift to a gear ratio which is typically not used at the specified test condition in urban traffic.

The achieved acceleration $a_{\text{wot test}}$ shall be greater than or equal to a_{urban} .

If possible, the manufacturer shall take measures to avoid an acceleration value $a_{\text{wot test}}$ greater than $2,0 \text{ m/s}^2$.

The achieved acceleration $a_{\text{wot test}}$ is then used for the calculation of the partial power factor k_p (see 3.9) instead of $a_{\text{wot ref}}$.

8.3.1.4 Acceleration test

The acceleration test shall be carried out in all gear ratios specified for the vehicle according to 8.3.1.3 with the test speed specified in 8.3.1.2.

When the front of the vehicle reaches the AA', the acceleration control unit shall be fully engaged and held fully engaged until the rear of the vehicle reaches BB'. The acceleration control unit shall then be released. Pre-acceleration may be used if acceleration is delayed beyond AA'. The location of the start of the acceleration shall be reported.

The calculated acceleration $a_{\text{wot test}}$ shall be noted to the second digit after the decimal place.

8.3.1.5 Constant-speed test

The constant-speed test is not required for vehicles with a $PMR \leq 25$.

For vehicles with transmissions specified in 8.3.1.3.2, the constant-speed test shall be carried out with the same gears specified for the acceleration test. For vehicles with transmissions specified in 8.3.1.3.3, the gear selector position for full automatic operation shall be used. If the gear is locked for the acceleration test, the same gear shall be locked for the constant-speed test.

During the constant-speed test, the acceleration control unit shall be positioned to maintain a constant speed between AA' and BB' as specified in 8.3.1.2.

8.3.2 Vehicles of category M2 having a maximum authorized mass exceeding 3 500 kg, and categories M3, N2 and N3

8.3.2.1 General conditions

The path of the centreline of the vehicle shall follow line CC' as closely as possible throughout the entire test, from the approach to line AA' until the rear of the vehicle passes line BB' (see Figure 1) and the reference point is 5 m behind line BB'. The test shall be conducted without a trailer or semi-trailer. If a trailer is not readily separable from the towing vehicle, it shall be ignored when considering the crossing of line BB'. If the vehicle incorporates equipment such as a concrete mixer, a compressor, etc., this equipment shall not be in operation during the test. The test mass of the vehicle including the test payload shall be according to Table 3.

Annex D gives gear selection criteria and test run criteria for category M2 having a maximum authorized mass exceeding 3 500 kg, and for categories M3, N2 and N3, in a flowchart form as an aid to test operation.

8.3.2.2 Target conditions

8.3.2.2.1 Vehicles of category M2 having a maximum authorized mass exceeding 3 500 kg, and category N2

When the reference point passes BB', the engine rotational speed $n_{BB'}$ shall be between 70 % and 74 % of the speed S . The vehicle test speed v_{test} shall be 35 km/h \pm 5 km/h.

8.3.2.2.2 Categories M3 and N3

When the reference point passes BB', the engine rotational speed $n_{BB'}$ shall be between 85 % and 89 % of speed S . The vehicle test speed v_{test} shall be 35 km/h \pm 5 km/h.

8.3.2.3 Gear selection

8.3.2.3.1 General

It is the responsibility of the manufacturer to determine the correct manner of testing to achieve the required conditions.

8.3.2.3.2 Manual transmission

Stable acceleration conditions shall be ensured. The gear choice is determined by the target conditions.

If more than one gear fulfils the target conditions, take the gear which gives velocity closest to 35 km/h. If no single transmission gear fulfils the target condition for v_{test} , then two gears shall be tested, one above and one below v_{test} . The target engine speed shall be reached in any condition.

A stable acceleration condition shall be ensured. If a stable acceleration cannot be ensured in a gear, this gear shall be disregarded.

8.3.2.3.3 Automatic transmission, adaptive transmissions and transmissions with variable gear ratio

The gear selector position for full automatic operation shall be used. The test may then include a gear change to a lower range and a higher acceleration. A gear change to a higher range and a lower acceleration is not allowed. A gear change to a gear ratio that is not used in urban traffic, at the specified test condition, shall be avoided.

Therefore, it is permitted to establish and use electronic or mechanical devices to prevent a downshift to a gear ratio that is typically not used at the specified test condition in urban traffic.

If the vehicle includes a transmission design, which provides only a single gear selection (D) that limits engine speed during the test, the vehicle shall be tested using only a target vehicle speed.

If the vehicle uses an engine and transmission combination that does not fulfil 8.3.2.2.1 or 8.3.2.2.2, the vehicle shall be tested using only the target vehicle speed. The target vehicle speed for the test shall be $v_{\text{test}} = v_{\text{BB}'} = 35 \text{ km/h} \pm 5 \text{ km/h}$. A gear change to a higher range and a lower acceleration is allowed after the vehicle passes line PP'. Two tests shall be performed, one with an end speed, $v_{\text{BB}'}$, of $40 \text{ km/h} \pm 5 \text{ km/h}$, and one with an end speed, $v_{\text{BB}'}$, of $30 \text{ km/h} \pm 5 \text{ km/h}$.

If the vehicle uses an engine and transmission combination that cannot fulfil both the target speed criteria, it shall be tested to fulfil the end speed, $v_{\text{BB}'}$, $40 \text{ km/h} \pm 5 \text{ km/h}$ criterion only.

The reported sound pressure level shall be that result which is related to the test with the highest engine speed for internal combustion engines, or highest sound pressure level for vehicles with hybrid or electrical engines, obtained during the test from AA' to BB'.

8.3.2.4 Wide-open-throttle test

When the reference point of the vehicle reaches AA', the acceleration control unit shall be fully engaged and held fully engaged until the rear of the vehicle passes BB', but the reference point shall be at least 5 m behind BB'. The acceleration control unit shall then be released.

8.4 Measurement readings and reported values

8.4.1 General

At least four measurements for all test conditions shall be made on each side of the vehicle and for each gear ratio.

The maximum A-weighted sound pressure level indicated during each passage of the vehicle between AA' and BB' (see Figure 1) shall be noted, to the first significant digit after the decimal place (e.g. XX,X). If a sound peak obviously out of character with the general sound pressure level is observed, that measurement shall be discarded.

The first four *j*th valid consecutive measurement results for any test condition, within 2,0 dB, allowing for the deletion of non-valid results, shall be used for the calculation of the appropriate intermediate or final result.

The speed measurements at AA' ($v_{\text{AA}'}$), BB' ($v_{\text{BB}'}$), and PP' ($v_{\text{PP}'}$) shall be noted and used in the calculations to one digit after the decimal place.

8.4.2 Data compilation

For a given test condition, the results of each side of the vehicle shall be averaged separately. The intermediate result shall be the higher value of the two averages mathematically rounded to the first decimal place.

All further calculations to derive L_{urban} shall be done separately for the left and right vehicle side. The final value to be reported as the test result shall be the higher value of the two sides.

8.4.3 Vehicles of categories M1 and M2 having a maximum authorized mass not exceeding 3 500 kg, and category N1

8.4.3.1 Acceleration

The acceleration for further use is the average acceleration of the four runs:

$$a_{\text{wot test}} = \frac{1}{4 [a_{\text{wot test}(1)} + a_{\text{wot test}(2)} + a_{\text{wot test}(3)} + a_{\text{wot test}(4)}]} \quad (25)$$

where the numbers in brackets symbolize the test runs j .

8.4.3.2 Reported value and final results

Calculate the reported value $L_{\text{wot rep}}$ for the wide-open-throttle test using the equation:

$$L_{\text{wot rep}} = L_{\text{wot}(i+1)} + k(L_{\text{wot } i} - L_{\text{wot}(i+1)}) \quad (26)$$

where k is the gear ratio weighting factor.

Calculate the reported value $L_{\text{crs rep}}$ for the constant speed test using the equation

$$L_{\text{crs rep}} = L_{\text{crs}(i+1)} + k(L_{\text{crs } i} - L_{\text{crs}(i+1)}) \quad (27)$$

In the case of a single gear ratio test, the reported values are directly derived from the test result itself.

The equations used to determine the partial power factor, k_P , are as follows:

- a) in cases other than a single gear test, k_P is calculated by

$$k_P = 1 - (a_{\text{urban}}/a_{\text{wot ref}}) \quad (28)$$

- b) if only one gear was specified for the test, k_P is given by

$$k_P = 1 - (a_{\text{urban}}/a_{\text{wot test}}) \quad (29)$$

- c) in cases where $a_{\text{wot test}}$ is less than a_{urban}

$$k_P = 0 \quad (30)$$

The final result is calculated by combining Equation (26) for $L_{\text{wot rep}}$ and Equation (27) for $L_{\text{crs rep}}$:

$$L_{\text{urban}} = L_{\text{wot rep}} - k_P (L_{\text{wot rep}} - L_{\text{crs rep}}) \quad (31)$$

8.4.4 Vehicles of category M2 having a maximum authorized mass exceeding 3 500 kg, and categories M3, N2 and N3

When one gear is tested, the final result, L_{urban} , is the maximum value as specified in 8.4.2.

When two gears are tested, the arithmetic mean of the two averages for each side of these two conditions shall be calculated. The final result, L_{urban} , is the maximum value of the two calculated averages.

8.5 Measurement uncertainty

The measurement procedure described in 8.4 is affected by several parameters (e.g. ISO 10844 surface texture variation, environmental conditions, measurement system uncertainty, etc.) that lead to variation in the resulting level observed for the same subject. The source and nature of these perturbations are not completely known and sometimes affect the end result in a non-predictable way. The uncertainty of results obtained from measurements according to this part of ISO 362 can be evaluated by the procedure given in ISO Guide 98 (GUM), or by interlaboratory comparisons in accordance with ISO 5725 (parts 1 to 6). Since extensive inter- and intra-laboratory data were not available, the procedure given in ISO Guide 98 was followed to estimate the uncertainty associated with this part of ISO 362. The uncertainties given below were based on existing statistical data, analysis of tolerances stated in this part of ISO 362, and engineering judgement. The uncertainties so determined were grouped as follows:

- a) variations expected within the same test laboratory and slight variations in ambient conditions found within a single test series (run-to-run);
- b) variations expected within the same test laboratory but with variation in ambient conditions and equipment properties that can normally be expected during the year (day-to-day);
- c) variations between test laboratories where, apart from ambient conditions, equipment, staff and road surface conditions will also be different (site-to-site).

If reported, the expanded uncertainty together with the corresponding coverage factor for the stated coverage probability of 80 % as defined in ISO Guide 98 shall be given. Information on the determination of the expanded uncertainty is given in Annex B.

NOTE Annex B gives a framework for analysis in accordance with ISO Guide 98, which can be used to conduct future research on measurement uncertainty for this part of ISO 362.

These data are given in Table 4 for two different vehicle categories. The variability is given for a coverage probability of 80 %. The data express the variability of results for a certain measurement object and do not cover product variation.

Table 4 — Variability of measurement results for a coverage probability of 80 %

Vehicle category	Run-to-run dB	Day-to-day dB	Site-to-site dB
M1, M2 having a maximum authorized mass not exceeding 3 500 kg, and N1	0,5	0,9	1,4
M2 having a maximum authorized mass exceeding 3 500 kg, and N2, M3, N3	0,5	0,9	1,4

Until more specific knowledge is available, the data for site-to-site variability might be used in test reports to state the expanded measurement uncertainty for a coverage probability of 80 %.

9 Test report

The test report shall include the following information:

- a) reference to this part of ISO 362;
- b) details of the test site, site orientation, and weather conditions including wind speed and air temperature, wind direction, barometric pressure and humidity;
- c) the type of measuring equipment, including the windscreen;
- d) the maximum A-weighted sound pressure level typical of the background noise;

- e) the identification of the vehicle, its engine, its transmission system, including available transmission ratios, size and type of tyres, tyre pressure, tyre production type, power, test mass, power-to-mass ratio, vehicle length and location of the reference point;
- f) the transmission gears or gear ratios used during the test;
- g) the vehicle speed and engine speed at the beginning of the period of acceleration, and the location of the beginning of the acceleration;
- h) the vehicle speed ($v_{PP'}$, $v_{BB'}$) and engine rotational speed ($n_{BB'}$, $n_{PP'}$) at PP' and at end of the acceleration;
- i) the method used for calculation of the acceleration;
- j) the auxiliary equipment of the vehicle, where appropriate, and its operating conditions;
- k) all valid A-weighted sound pressure level values measured for each test, listed according to the side of the vehicle and the direction of the vehicle movement on the test site.

STANDARDSISO.COM : Click to view the full PDF of ISO 362-1:2007

Annex A (informative)

Technical background for development of vehicle noise test procedure based on in-use operation in urban conditions

A.1 Introduction

A.1.1 General

This annex gives general technical background relating to the urban noise situation and the approach chosen to measure the noise contribution of a single vehicle in the overall urban noise situation. This annex is intended to provide information to evaluate the concepts used to guide the development of the procedures defined in this part of ISO 362. In support of the goal of providing background information, this annex uses examples drawn from the actual in-use studies, but does not present the full in-use databases.

As vehicle noise emission is subject to regulation, an exterior noise measurement procedure for vehicles is used to evaluate the noise emission of the measured vehicle in typical urban traffic. The test procedures defined in this part of ISO 362 will provide a measure of the noise emission of different vehicles in typical urban use. The noise emission so measured assumes a road surface with similar characteristics as defined in ISO 10844. ISO 10844 is representative of well-constructed and maintained asphalt road surfaces with small aggregate sizes. Reference [6] has shown the ISO 10844 surface to fall within the range of actual road surfaces in both the United States and Europe. Road surfaces which were specifically designed to be 'silent' provided lower noise emission than the ISO 10844 surface. As a result, the procedures described in this part of ISO 362 represent a measure of the vehicle noise emission which is controllable by the vehicle manufacturer. Other contributors to the traffic noise situation are outside the control of vehicle manufacturers. These items include road surfaces, traffic regulations, aftermarket part control, in-use noise emission monitoring and effective enforcement mechanisms.

A.1.2 Why a new procedure is necessary

The present procedure which supports regulation in all global markets is specified in ISO 362:1998. The measurement is performed on a specified test surface (see ISO 10844). The vehicle drives with wide-open-throttle, in second and/or third gear. The entry speed 10 m prior to the microphone position is 50 km/h. The resulting sound pressure level is the result of the single gear test for 2nd or 3rd gear only, and the average of the measured sound pressure levels for the 2nd and 3rd gear test. With the support of this procedure, the regulated limit has been strongly reduced in most countries (from 82 dB to 74 dB in 20 years by ECE). However, the noise reduction observed in front of buildings measured in the same traffic conditions and during the same period has been weak.

A significant reason is the poor simulation of typical urban vehicle noise performed by the procedure (wide-open throttle, second and third gear). Many current regulatory implementations of ISO 362:1998 further impact the poor correlation between real traffic and the reported regulatory results by allowing the use of minimum tread depth tyres. A further reason for the poor simulation of typical urban vehicle noise is the technical development of vehicle engine technology and transmission technology which cause some of the original technical assumptions behind ISO 362:1998 to no longer be valid.

The result of these conditions is that ISO 362:1998, as implemented in regulations, measures vehicle noise in a condition dominated by powertrain noise. Since this condition is only rarely observed in urban traffic and tire/road noise has been deliberately suppressed, the reported regulated levels do not provide a good measure of typical vehicle noise in urban traffic. Therefore, a new procedure which enables improved measurement of the actual level of noise due to vehicle emission in urban traffic and accounts for the technical developments in vehicle propulsion and transmission technology is a positive development for both directing government policy actions and for indicating to vehicle manufacturers an improved metric for optimizing vehicle noise emission.

A.1.3 What is the contribution of an individual vehicle to overall traffic noise?

Reference [9] showed that noise is an important concern for people living in large cities. The noise they endure is due to different sources: neighbours, city noises (street sweepers, sirens, etc.), aircraft, railways and road traffic. The noise of these different sources may be subject to regulations with the goal of controlling the maximum noise in front of buildings.

The noise in front of buildings due to road traffic noise depends on different factors:

- a) the way cities are built (primarily the distance between living houses and roads);
- b) the actual traffic on the roads (number of vehicles);
- c) the road surface as a contributing factor to tire/road noise;
- d) the sound path (noise transmission) control between the source and receiver (noise barriers, sound insulation, etc.);
- e) the behaviour of drivers, which depends on
 - speed limits (traffic laws),
 - traffic density,
 - road arrangement (traffic lights, corners, etc.),
 - driving purpose (commuting, pleasure, commercial, etc.),
 - enforcement of traffic laws, and
 - the way the vehicle behaves as an acoustical source under these conditions.

A vehicle noise measurement procedure intended to describe the actual behaviour should take the actual driving conditions into account. Because there are many different driving conditions, the choice of a "representative" driving condition is difficult.

A.1.4 Information from previous traffic noise studies

Actual driving conditions do not all have the same influence on road traffic noise. As an example, some conditions occur on country roads, where nobody is annoyed by the noise.

In what conditions is road traffic noise the most disturbing for dwellers?

A response to this question has been given by a study ^[10], see Table A.1.

Table A.1 — Where are dwellers disturbed by vehicle traffic noise emission?

Street-type	V_{allowed} in Kph	Annoyed people	Road Length in m	Annoyed people in %	Road Length in %
motorway	80 – 120	1 145	11 250	2,0	6,9
residential streets	30	13 501	27 060	23,1	16,6
main streets	50	42 704	109 233	73,0	67,1
main streets	60	583	2 130	1,0	1,3
arterials	70	139	3 390	0,2	2,1
arterials	80	407	4 500	0,7	2,8
arterials	100	21	5 300	0,0	3,3
Total number of inhabitants	220 000	58 500	162 863	100 %	100 %
	100 %	26,6 %			

Percentage of Various Road Categories in Terms of Network Length and Noise-Affected Residents in a Medium-Sized City (FIGE Study from Dec. 98)

+ 3 % of all people feel annoyed from noise emission during high acceleration

NOTE Table A.1 and all other figures in this Annex are directly copied from the literature; therefore the notations of quantities and units do not always follow the use in this part of ISO 362.

Inquiries among dwellers along various streets show that noise disturbance happens mainly

- along urban main streets, and
- during vehicle acceleration transients.

The mean traffic speed is 50 km/h on these main streets (for the roads on which maximum allowed speed is 50 km/h) as shown in Figure A.1 based on research from Reference [9].

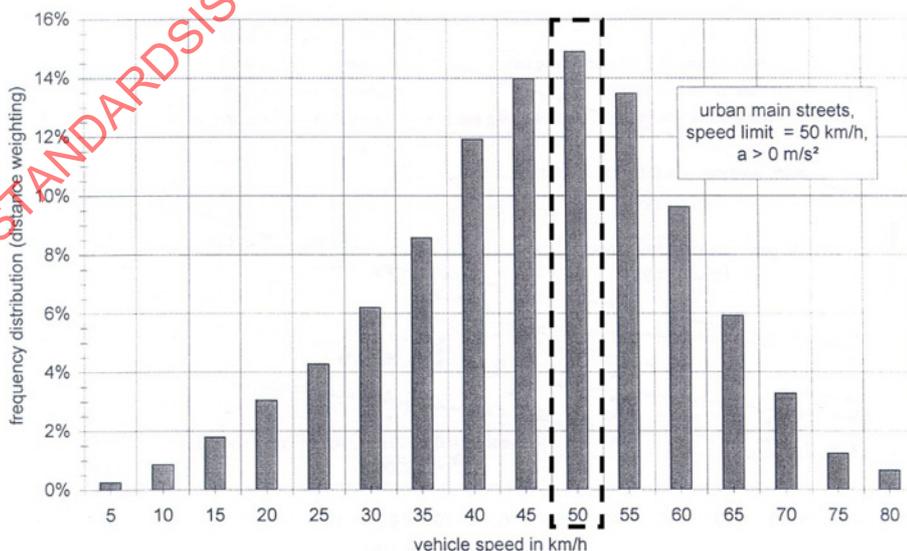


Figure A.1 — Measured vehicle speed in urban traffic and on the main roads

Based on these statistics, it was decided to perform the test at 50 km/h, in conditions representing the noisiest realistic case on main streets.

A.2 Concepts used in developing the new procedure for categories M1 and M2 having a maximum authorized mass not exceeding 3 500 kg, and category N1

A.2.1 General

The first and main task of developing the new procedure was to describe the driving behaviour in urban traffic. Once this task was achieved, a new procedure was defined, which is a compromise between requirements.

- Measure the 90th percentile noise emission in typical urban driving (representative and reproducible).
- The test shall specify performance requirements only (no design-specific requirements).
- The test shall be applicable to all types of vehicles (technology neutral).
- The test shall be easy to run, consistent with the above requirements (practical).

A.2.2 Technical concepts for in-use vehicle measurement of urban driving behaviour

A.2.2.1 General

The vehicle noise depends mainly on three vehicle parameters:

- vehicle speed;
- vehicle acceleration (engine load);
- engine rotational speed (for internal combustion engines only).

Tyre/road noise is incorporated by its dependence on vehicle speed and vehicle acceleration. Two of the three parameters, vehicle speed and vehicle acceleration, describe driving behaviour. The vehicle parameters depend on the driver's commands (input), but also on the vehicle performance and the traffic environment.

The third condition, engine rotational speed, is an additional parameter which is managed by the driver, or the transmission computer in the case of automatic transmissions, in order to achieve vehicle acceleration and vehicle speed. Thus the urban traffic study has to identify the independent parameters of

- vehicle speed, and
- vehicle acceleration.

In order to obtain this information, a study of the actual urban driving has been performed, including the following:

- a) recording of vehicles in urban traffic;
- b) extraction of acceleration phases;
- c) identification of the highest acceleration (noisiest condition) as a function of vehicle speed;
- d) identification of the highest acceleration (noisiest condition) at 50 km/h;
- e) identification of the corresponding engine rotational speed;

- f) for all vehicles, the urban behaviour is assumed to depend mainly on the vehicle performances, which can be described by the power-to-mass ratio (PMR). A regression analysis is thus performed between the PMR and the highest urban acceleration, and the corresponding engine rotational speed is recorded.

For manual transmission cars, the engine rotational speed is used by the driver to keep an “acceleration reserve”, i.e. a ratio between achieved and possible accelerations. Because the engine rotational speed is a “technological” or “design” parameter, it was decided to replace it by the acceleration ability, i.e. wide-open-throttle acceleration in urban driving conditions, a_{wot} . This way of describing the driver behaviour will thus be applicable to very different kinds of engines (gasoline, diesel, wankel, hybrid, etc.).

An additional sample of vehicles was studied, and the correlation between a_{wot} and the PMR has been found. Since this information is only needed to describe the way the driver manages the available power, it is only necessary for manual transmission cars. For automatic transmission vehicles, this parameter is controlled by the automatism.

The test procedure is then defined so as to reproduce the noisiest realistic urban driving conditions:

- 50 km/h;
- urban acceleration;
- for manual transmission cars: engine rotational speed conditions enabling a_{wot} .

Automatic transmission vehicles are covered as a subset of manual transmission vehicles. In actual in-use behaviour, automatic transmissions will provide noise emissions equal to or lower than manual transmission vehicles.

A.2.2.2 Recording vehicle behaviour

In order to collect data about real urban use, 61 vehicles were driven in cities and their behaviour was recorded. This list includes European and Japanese vehicles of all types (M1, N1, N2 and one N3 up to 19 tons). The power ranged from 40 kW to 440 kW, whereas the power-to-mass ratio ranged from 12,7 to 380. The ratio between manual transmissions (52 manual transmission) and automatics (9 including 2 CVT) approximately represents the European market.

The vehicles were driven in eight different cities in Europe and Japan. The route selected to record the driving parameters (see Figure A.2) is representative of the different types of roadway, having different speed limits. The distance travelled on each type of roadway is proportional to the product of the roadway length and the traffic, which guarantees the same probability of occurrence as for a non-moving observer beside the road. During the recording, the driver had to maintain normal driving behaviour in the traffic. Recording time was about 2 h of driving.

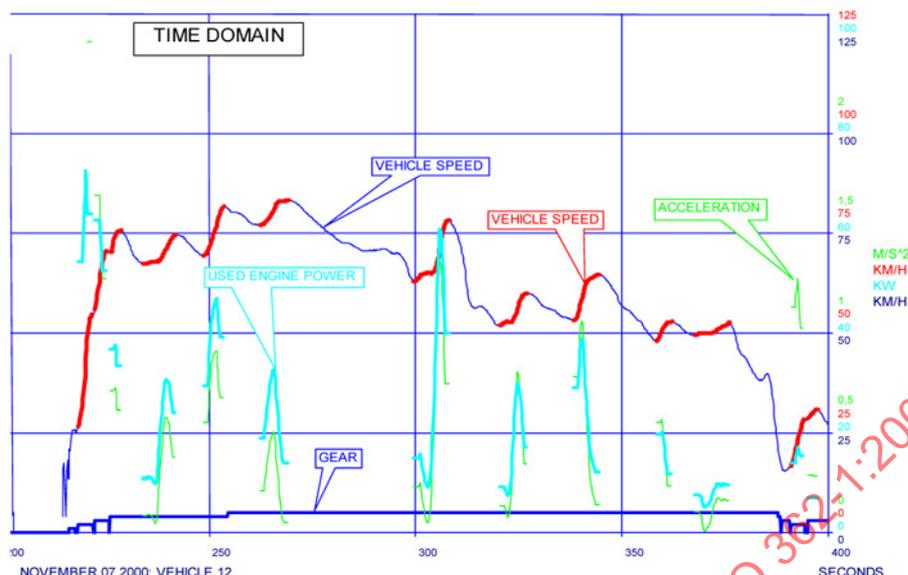


Figure A.2 — Time history of driving parameters

A.2.2.3 Identification of time events

First, the acceleration during driving was determined from the driving studies. To provide a figure for evaluation, the average value of the acceleration over a 2 s moving period was calculated. The maximum value for each 2 s acceleration phase was extracted (maximum acceleration a_{max}), together with the vehicle speed at which it occurred (v_{amax}). This was carried out according to the method shown in Figure A.3.

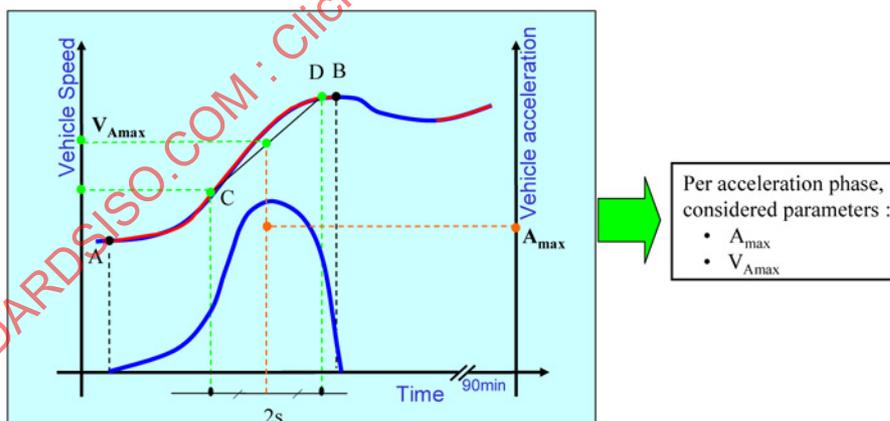


Figure A.3 — Maximum acceleration definition

Each acceleration peak a_{max} was stored together with the speed v_{amax} and the gear ratio as a single event.

A.2.3 Statistical analysis of in-use data

A.2.3.1 One-dimensional analysis for a single vehicle

The maximum acceleration a_{max} and the vehicle speed $v_{a\ max}$ at which this maximum acceleration occurs, as shown in Figure A.3, are represented as a histogram and as a cumulative probability function for each gear. See Figure A.4 for peak acceleration and Figure A.5 for vehicle speed.

For each gear ratio and for all roads, the 90th percentile of peak acceleration $a_{max\ 90}$ at the most probable speed (50th percentile) $v_{a\ max\ 50}$, and the 90th percentile of peak acceleration a_{max90} at the maximum speed (90th percentile) $v_{a\ max\ 90}$ are considered.

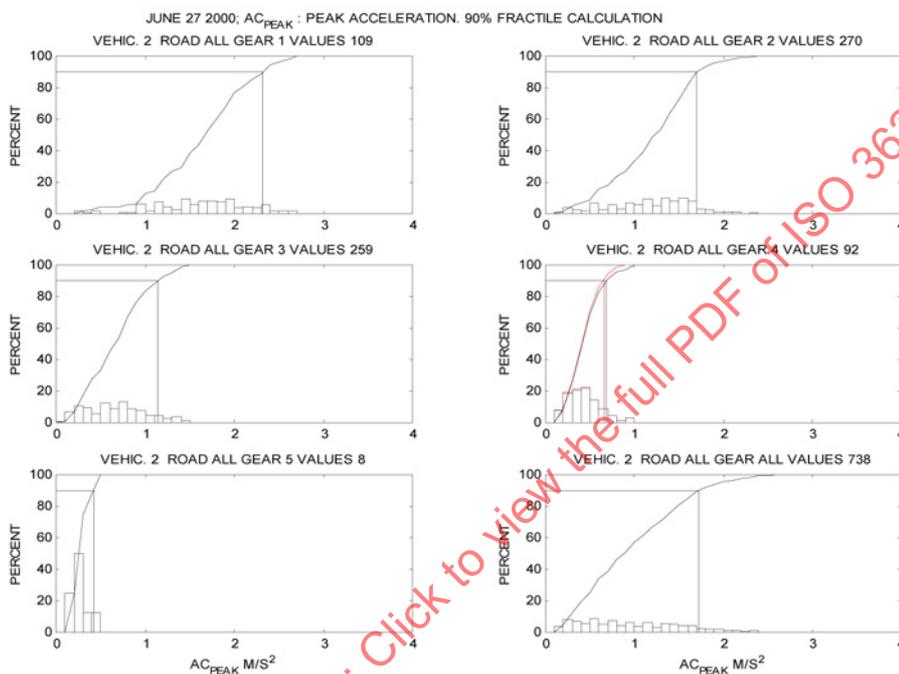


Figure A.4 — Histograms and cumulative probability functions of maximum acceleration

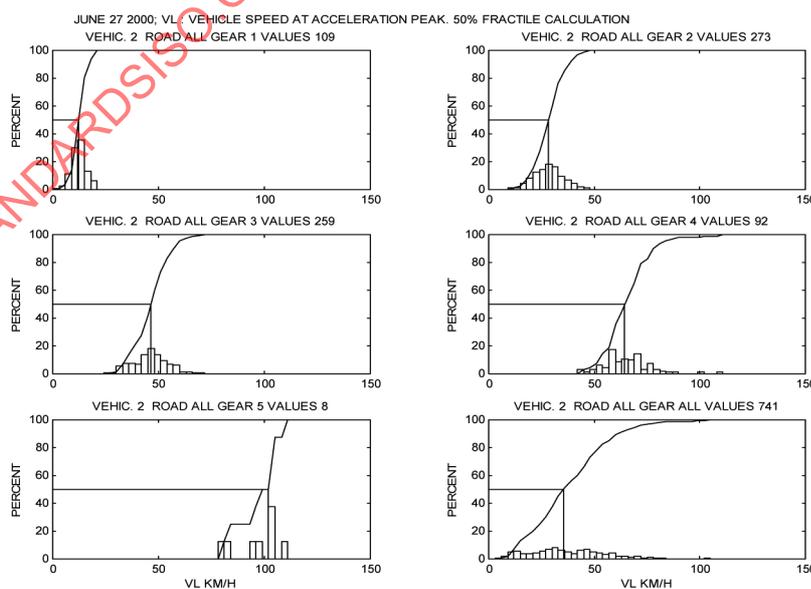


Figure A.5 — Histograms and cumulative probability functions of vehicle speed at maximum acceleration $v_{a\ max}$

This analysis, as shown above for one vehicle, has been done for each vehicle in the test.

A.2.3.2 Two-dimensional analysis

The results have also been combined in a two-dimensional diagram showing the density of probability of the individual events a_{\max} and $v_{a \max}$, see Figure A.6. This figure shows the probability density for each gear ratio, and for all gear ratios together.

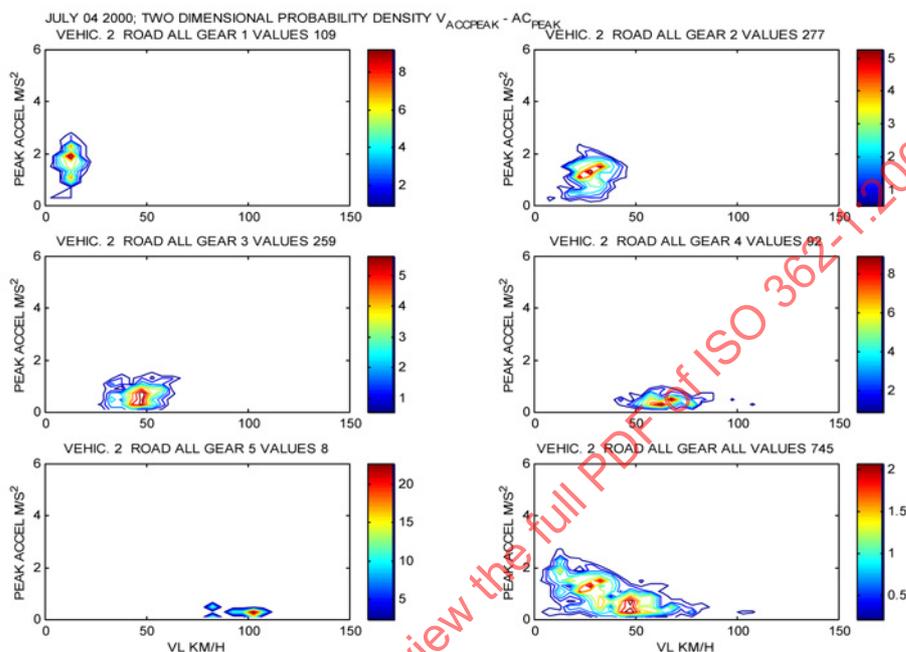


Figure A.6 — Two-dimensional probability density (a_{\max} , $v_{a \max}$) for each gear for vehicle number 2

Looking at this diagram, one can see the maximum value of the acceleration for each gear ratio. The last graph of all the gears and all the values shows that the maximum acceleration depends on the vehicle speed, with acceleration decreasing with increasing vehicle speed.

It is possible to place in the last graph the points $[a_{\max 90}, v_{a \max 50}]$ corresponding to each gear ratio using values from Figures A.4 and A.5. This has been done in Figure A.7, which includes a schematic representation of Figure A.6. The points $[a_{\max 90}, v_{a \max 90}]$ are also drawn for each gear ratio.

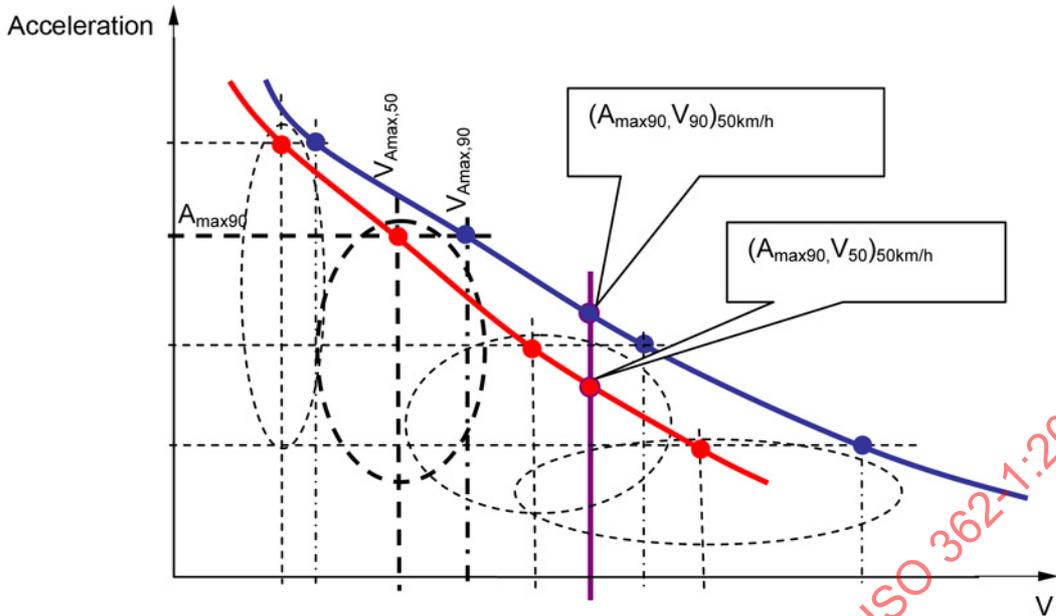


Figure A.7 — Interpolation at 50 km/h

The curve passing through the points $[a_{\max 90}, v_{a \max 50}]$ corresponding to each gear ratio gives an estimate of the typical in-use limit of vehicle acceleration as a function of vehicle speed. But this lower curve is still below the maximum value observed for the acceleration in traffic. To estimate an acceleration curve representing a maximum, one can also consider the curve passing through the points $[a_{\max 90}, v_{a \max 90}]$. This curve is entirely above the maximum acceleration. Thus, the limit value is somewhere between the two curves.

Interpolating the two curves at 50 km/h enables one to estimate the 90th percentile of the acceleration for the 50th percentile of the velocity at 50 km/h, and the 90th percentile of the acceleration for the 90th percentile of the velocity at 50 km/h. The limit value of the acceleration at 50 km/h will be somewhere between these two points.

A.2.4 Maximum acceleration and engine speed at 50 km/h

For each gear ratio, the vehicle speed corresponds to an engine rotational speed n . To be independent of rated engine rotational speed S , all engine speeds are expressed as a ratio between engine rotational speed and rated engine rotational speed, called n/S . Performing the same interpolation, one can obtain n/S at 50 km/h.

The way this interpolation is performed is described in Figure A.8, where

- accelerations come from Figure A.4,
- speeds come from Figure A.5 (50th percentile or 90th percentile), and
- engine rotational speeds are derived using gear ratios.

Figure A.8 uses the same scales as Figure A.7, vehicle speed and acceleration on the right scale, and adds engine rotational speed on the left scale.

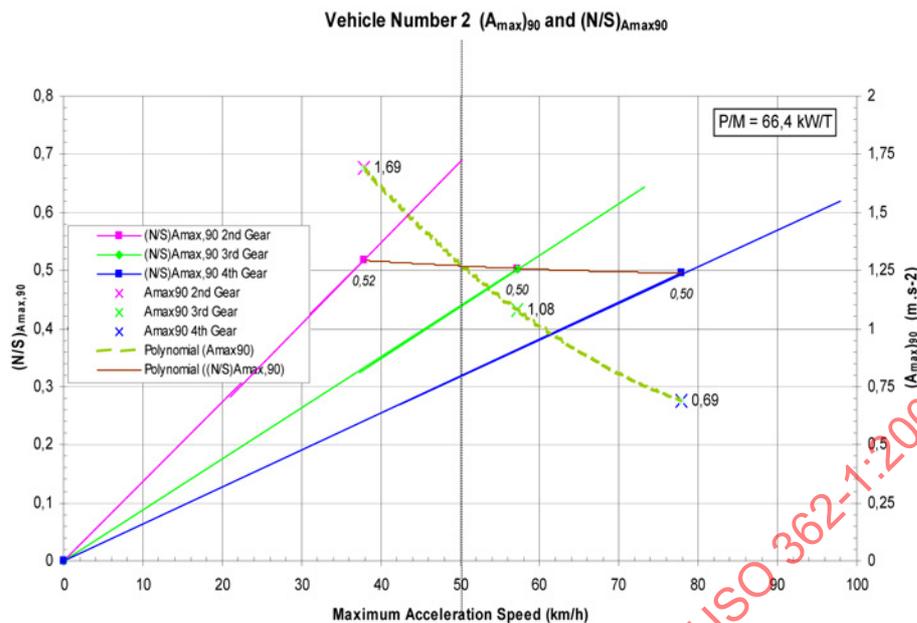


Figure A.8 — Interpolation ($a_{\max/90} = f(v)$, $n/S(a_{\max})$) between gears, for vehicle number 2

At this stage, it is not yet known how to describe precisely the noisiest behaviour in urban traffic.

A.2.5 Acceleration as a function of engine speed

Looking at the detailed results in Figure A.8, it can be seen that the engine speed is generally independent of the gear ratio at $a_{\max/90}$. Of course, the vehicle speeds will be different for each gear at the $a_{\max/90}$ condition. This observation leads to the idea that it is possible to “merge” the results of all gear ratios in order to get an “average behaviour” at 50 km/h. This is carried out as follows:

- peak accelerations are “compressed” using the ratio $(a_{\max/90} \cdot 50 \text{ km/h}) / (a_{\max/90} \cdot v_{a \max})$, one ratio for each gear;
- engine speeds are calculated using $v_{a \max}$ and the corresponding gear ratio.

This interpolation gives the acceleration that would have occurred at the same engine speed if the vehicle speed had been 50 km/h. This leads to the two-dimensional diagram of Figure A.9. The noisiest behaviour in urban traffic can be found from this diagram.

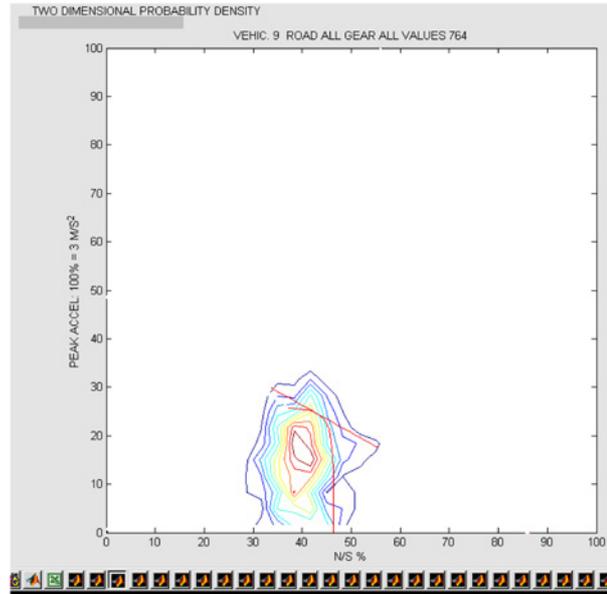


Figure A.9 — Bi-dimensional density of probability $a = f(n/S)$ at 50 km/h

A.2.6 Noise behaviour on a test track

In order to study the partial load vehicle noise, an assumption has to be made that noise behaves in a linear way, at least as a function of the engine load and engine speed. Under this assumption, the noise will be interpolated between a wide-open-throttle sound pressure level and a constant-speed sound pressure level.

Since only the acceleration is known, the acceleration ability (wide-open-throttle acceleration) of each vehicle is needed. This value is measured on a test track at different speeds and with all gear ratios. The results are presented in Figure A.10.

The acceleration is evaluated during a stabilized acceleration starting before the measurement point. Different starting speeds lead to different vehicle speeds at the measurement point, which allows a curve to be drawn of the acceleration at the measurement point as a function of the speed at the measurement point.

From these curves, the 50 km/h value is extracted and is used to calculate the partial load factor defined by the quotient $a_i / a_{wot i}$

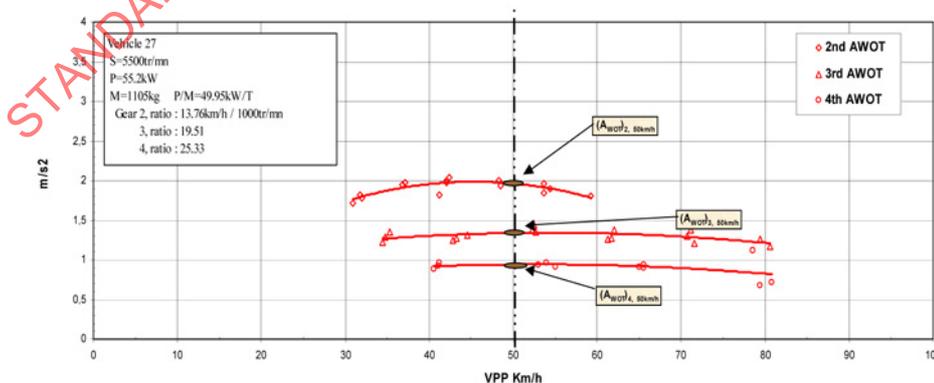


Figure A.10 — Wide-open-throttle vehicle acceleration ($a_{wot} = f(v)$)

The level of noise is also measured on an ISO 10844 test track. The measurement is presented as a function of the vehicle speed in front of the microphone, of the gear, and of the engine load by using constant speed and wide-open-throttle. A typical result is presented in Figure A.11.

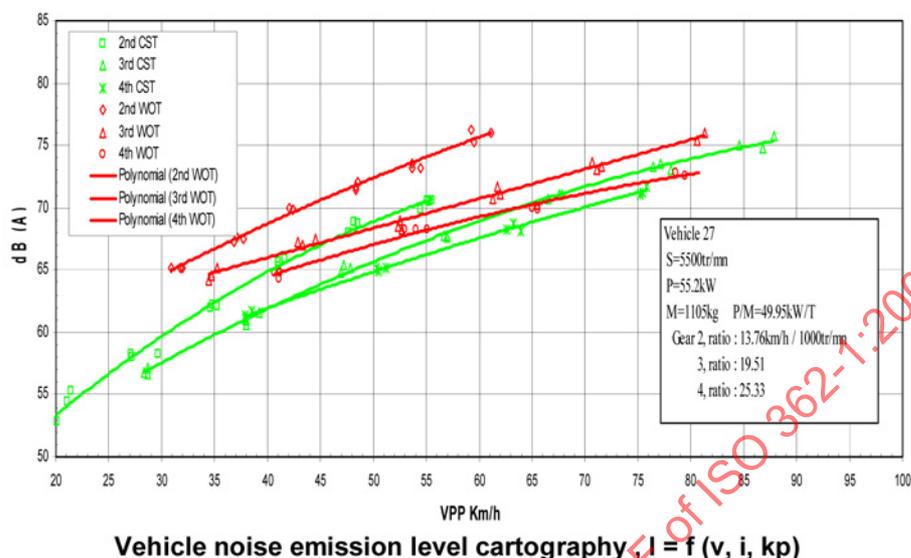


Figure A.11 — Vehicle noise emission levels as a function of gear, throttle and vehicle speed

From the graph of Figure A.11, vehicle accelerations and the level of noise at 50 km/h are determined in each gear. This information can be used to find the iso-noise curve, using a bi-linear interpolation between the full-load and constant-speed measurements as shown in Figure A.12. This iso-noise curve can be approximated by a straight line, defined by the slope at the intersection between the wide-open-throttle test sound pressure level and the cruise-test sound pressure level.

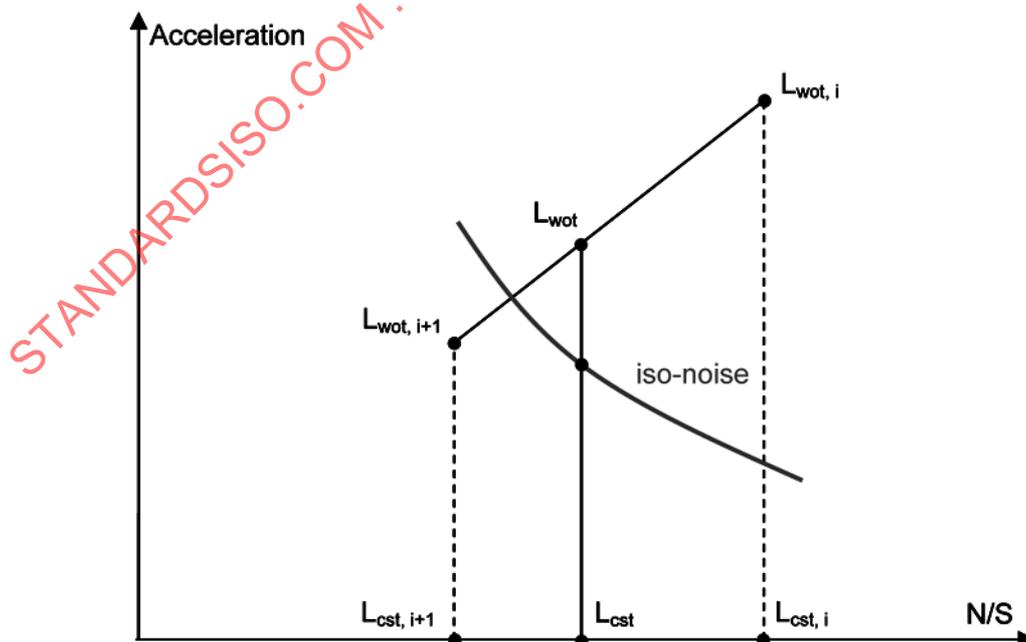


Figure A.12 — Constant-noise curve

This straight line is placed in Figure A.9 and moved parallel until 90 % of the acceleration events are below the line as shown in Figure A.13. All driving events below this line are less noisy and this position of the line defines the 90th percentile of the level of noise. The intersection of the tangent to the constant-noise line with 90th percentile acceleration gives the engine speed at the 90th percentile of noise emission.

NOTE iso-noise as used in Figure A.12 is equivalent to “constant noise”.



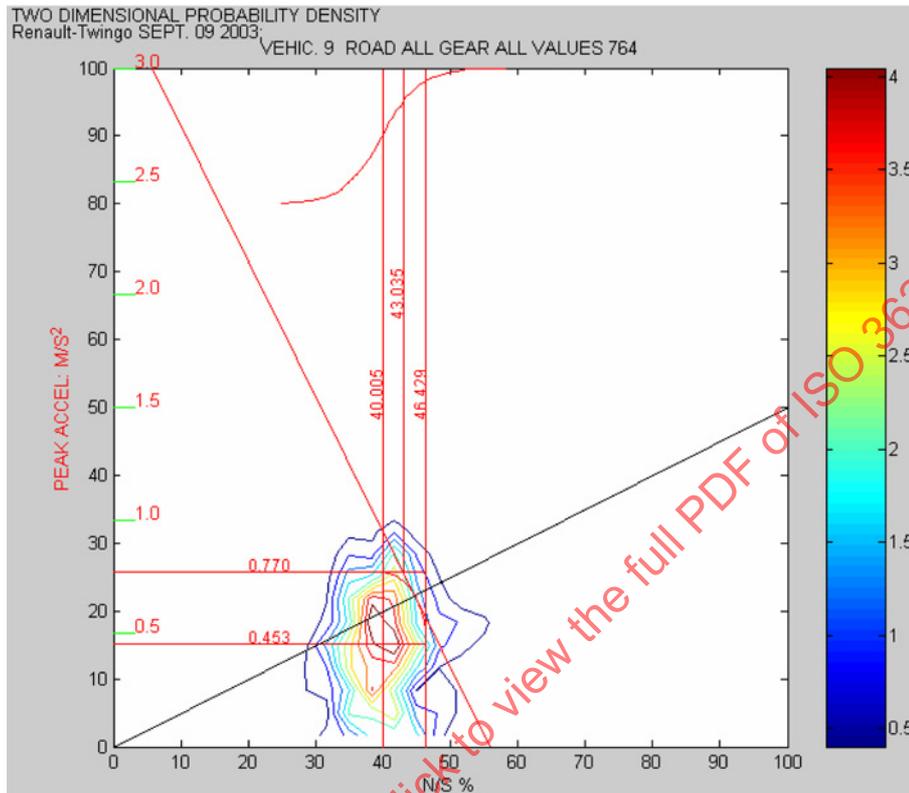


Figure A.13 — Definition of $(n/S)_{L90,a90}$ at 50 km/h

The point n/S at the 90th percentile of noise and 90th percentile of acceleration gives the “noisiest” case under the “highest” acceleration and will be retained as the noisiest realistic urban case. This calculation was performed on each vehicle tested to develop a database of vehicle performance during urban driving.

A.2.7 Average behaviour during urban driving

Results from 52 vehicles with manual gearbox were analysed according to the above described procedure. The nine additional vehicles with automatic gearbox were analysed separately. For these vehicles, the 90th percentile peak acceleration at 50 km/h and the corresponding engine rotational speed n/S have been correlated to the power-to-mass ratio (PMR). A logarithmic regression has been performed for $12 < (PMR) < 400$ and is shown in Figures A.14 and A.15.

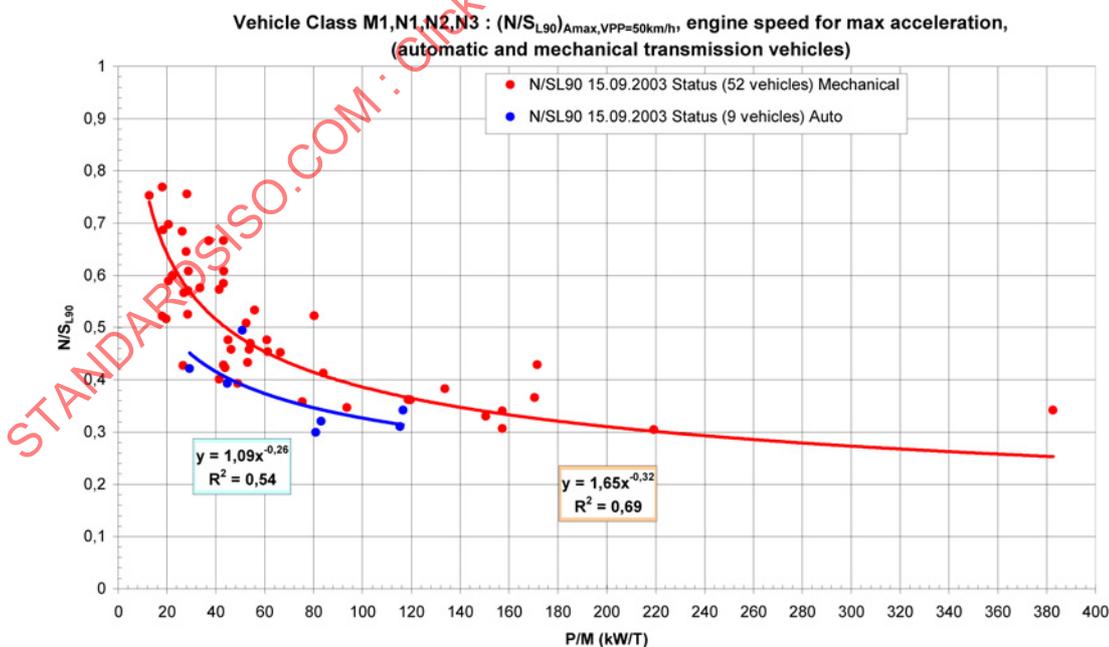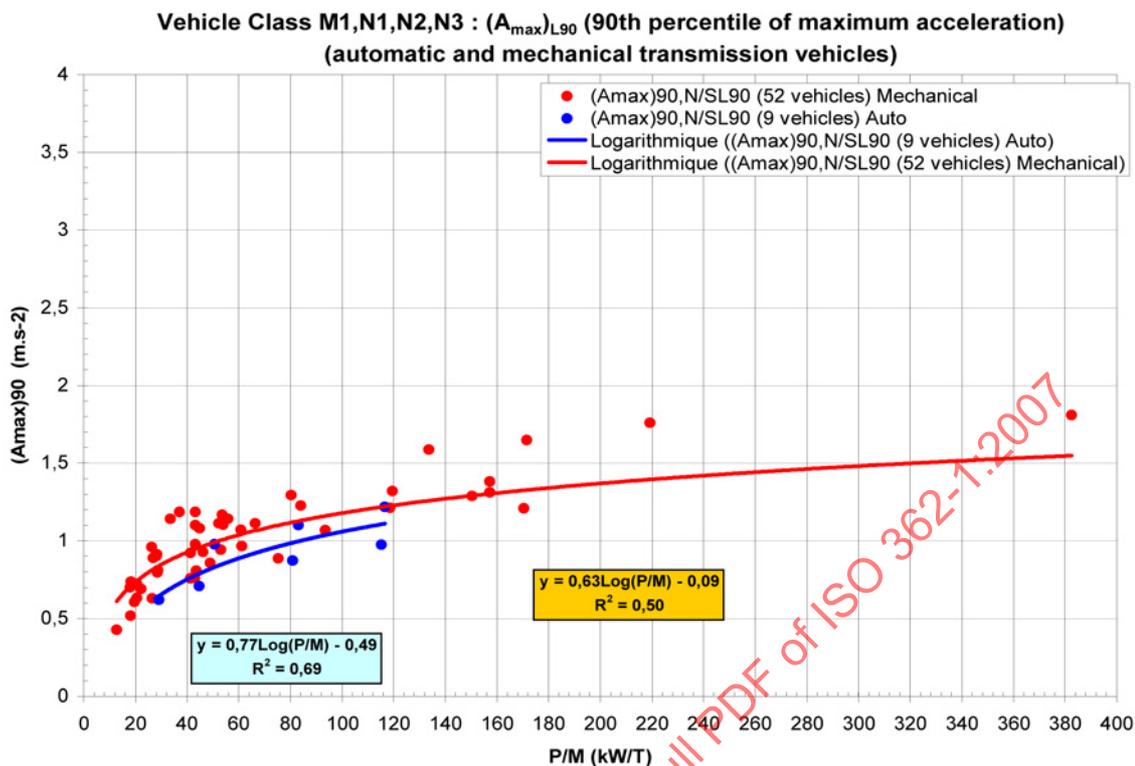

Examining these figures, it can be concluded that

- the urban traffic behaviour described by peak acceleration and engine rotational speed is well correlated to the power-to-mass ratio (PMR),
- the peak acceleration in urban traffic increases with the PMR, and
- the engine rotational speed at which this peak acceleration takes place decreases with the PMR and it is weakly dependent on the vehicle speed (for 30 km/h < vehicle speed < 60 km/h).

These conclusions are consistent with intuitive expectations of vehicle behaviour in real traffic. A driver uses the acceleration capability of the vehicle to maintain position in the traffic flow. The percentage of the vehicle's acceleration capability used is higher for lower power-to-mass ratio vehicles and lower for higher power-to-mass ratio vehicles. The corollary result is that lower power vehicles use higher engine rotational speeds, and higher power vehicles use lower engine rotational speeds. The results for automatic transmission vehicles show that urban acceleration and engine rotational speeds are less. These vehicles have not been included in the statistical curves as the manual transmission results define the worst case (highest) sound pressure levels.

A.2.8 Wide-open-throttle acceleration

A.2.8.1 Individual vehicle analysis

For manual transmission vehicles, the engine speed is not known. It depends on the gear ratio, which is selected by the driver. A typical driver tries to keep an acceleration reserve which depends on the available power (PMR) of the car. The acceleration capability under typical urban driving conditions must be determined.

On a test track complying with ISO 10844, measurements were performed with wide-open throttle and on a distance of (20 m + vehicle length) for each gear i .

The values $a_{\text{wot } i}$ as a function of vehicle velocity were recorded and are shown in Figure A.10.

From these curves, the 50 km/h value was obtained.

The interpolation factor, k_n , between gears i and $(i + 1)$ was then calculated, using the statistical value of $(n/S)_{a90}$:

$$k_n = \frac{(n/S)_{a90} - (n/S)_{(i+1)}}{(n/S)_i - (n/S)_{(i+1)}}$$

Finally, the wide-open-throttle acceleration at 50 km/h with the corresponding non-dimensional engine rotational speed at the 90th percentile of noise was calculated:

$$a_{\text{wot } 50} = a_{\text{wot } (i+1)} + k_n [(a_{\text{wot } i} - a_{\text{wot } (i+1)})]$$

as shown in Figure A.16.


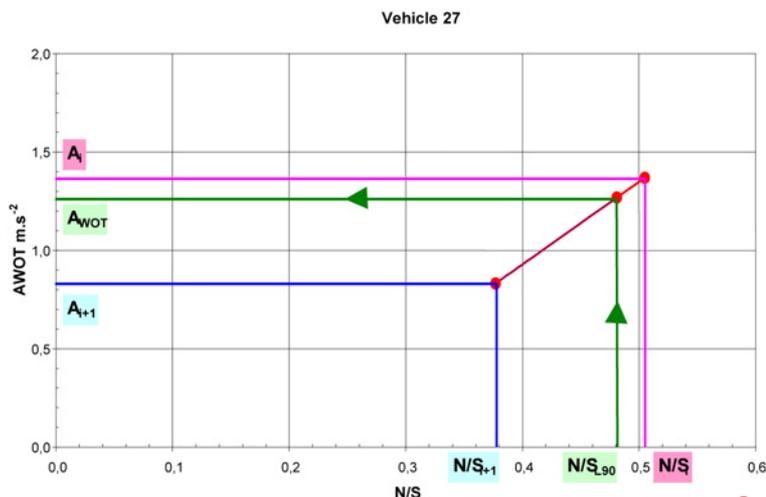


Figure A.16 — Determination of wide-open-throttle acceleration $a_{wot\ 50}$

A.2.8.2 Statistical analysis of wide-open-throttle acceleration

The measurements were performed for 127 vehicles. These were different from the vehicles used for the initial in-use driving behaviour studies. The logarithmic regression through the individual vehicle $a_{wot\ 50}$ points as a function of the power-to-mass ratio gives $a_{wot\ ref}$ and is represented in Figure A.17 for $20 < PMR < 220$.

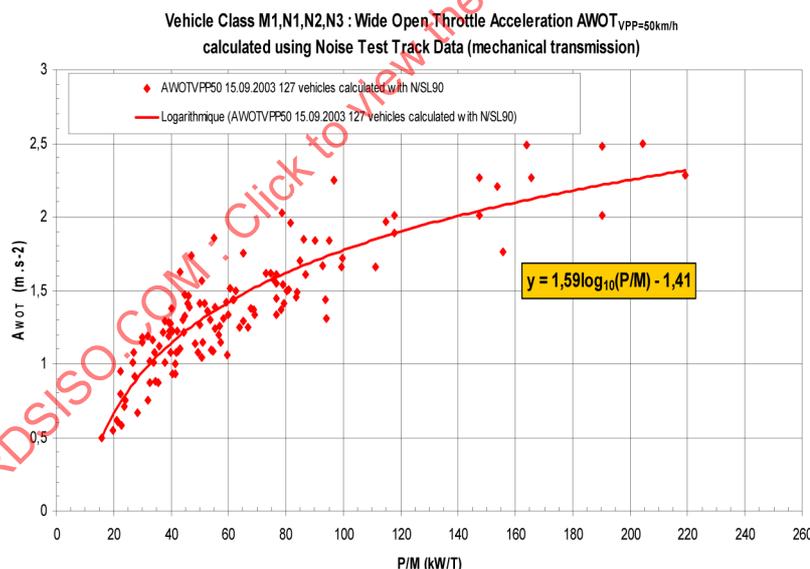

Wide Open Throttle Acceleration (V=50km/h)
Regression curve $A_{wot} = f(P/M)$ (127 vehicles)

Figure A.17 — Regression curve $a_{wot\ ref}$ as a function of the power-to-mass ratio (127 vehicles)

The wide-open-throttle acceleration, $a_{wot\ ref}$, at the same peak acceleration engine rotational speed, $(n/S)_{L90}$, which was measured in urban traffic, increases with the power-to-mass ratio. Also, the wide-open-throttle acceleration, $a_{wot\ ref}$, at the same engine rotational speed as the urban traffic peak acceleration $(n/S)_{L90}$ is almost always greater than the urban traffic peak acceleration, i.e. $a_{wot\ ref} > a_{max\ 90}$.

A.2.9 Partial power factor, k_p


A parameter $(1 - k_p)$ is defined as the ratio of the vehicle urban traffic peak acceleration $a_{\max 90}$ to the vehicle wide-open-throttle acceleration $a_{\text{wot ref}}$ at the same engine rotational speed $(n/S)_{L90}$ and at the same vehicle speed:

$$1 - k_p = \frac{a_{\max 90}}{a_{\text{wot ref}}} \text{ for vehicle velocities at } (n/S)_{L90}$$

If vehicle velocities are 50 km/h

$$1 - k_p = \frac{a_{\max 90}}{a_{\text{wot ref}}}$$

with $a_{\max 90}$ measured at 50 km/h and a_{wot} measured at 50 km/h, and a non-dimensional engine speed equal to 90th percentile noise emission. With this definition, $(1 - k_p)$ can be interpreted as the acceleration reserve which the driver maintains above the maximum acceleration used in urban traffic.

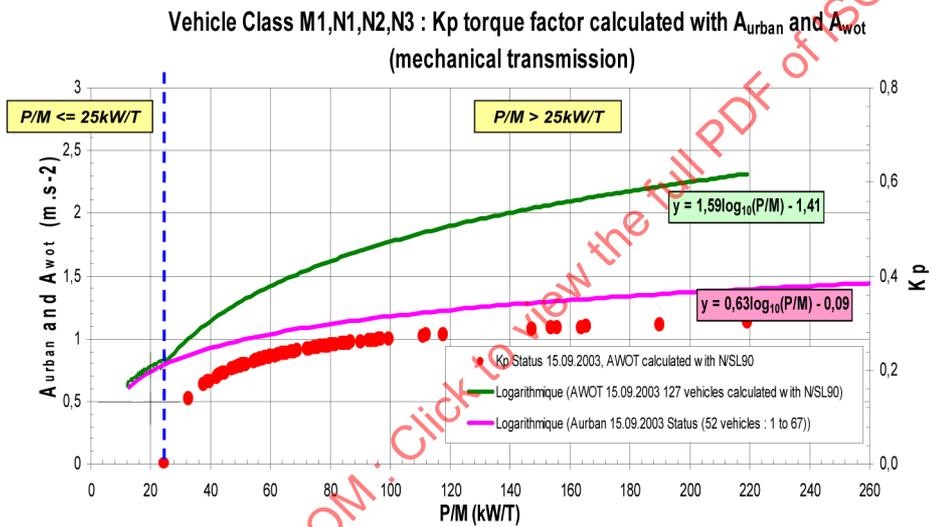

Wide Open Throttle Acceleration A_{WOT}
 Maximum acceleration in urban driving conditions A_{urban}
 Load factor $K_p = 1 - (A_{\text{urban}} / A_{\text{WOT}})$ ($K_p = 0$ if Wide Open Throttle)

Figure A.18 — k_p factor

A.2.10 New method for measuring 90th percentile level of noise

The analysis of vehicle in-use driving behaviour and vehicle noise emission behaviour leads to the following procedure to measure a condition representing the noisiest realistic urban traffic condition:

- vehicle speed of 50 km/h;
- vehicle at peak acceleration, $a_{\text{wot ref}}$;
- partially open throttle (partial power factor).

This measurement is implemented as follows:

- the measurement is performed on the same test track complying with ISO 10844;
- for all measurements, the vehicle speed is measured in front of the microphones at PP';
- the vehicle acceleration is the average acceleration value between AA' and BB' according to the formula

$$a_{\text{wot test},j} = \left[(v_{\text{BB}'}/3,6)^2 - (v_{\text{AA}'}/3,6)^2 \right] / 2(l_{20} + l_{\text{ref}})$$

where

- $a_{\text{wot test},j}$ is the numerical value of the acceleration, expressed in metres per second squared;
- $v_{\text{BB}'}, v_{\text{AA}'}$ are numerical values of the velocity, expressed in kilometres per hour;
- l_{20}, l_{ref} are numerical values of the length, expressed in metres.

A.2.11 Vehicle noise emission for partial throttle

The vehicle noise emission L_{urban} for partial power is simulated by the combination of two test results using the hypothesis that for one vehicle speed and one engine rotational speed, the vehicle sound pressure level is proportional to the engine torque:

- the wide-open-throttle test in which the vehicle acceleration reaches the $a_{\text{wot ref}}$ acceleration and emits the measured level of noise $L_{\text{wot rep}}$;
- the constant-speed test (50 km/h) with the vehicle emitting the measured level of noise $L_{\text{crs rep}}$.

The final result is given by the weighted average of these two results:

$$L_{\text{urban}} = L_{\text{wot rep}} - k_{\text{P}}(L_{\text{wot rep}} - L_{\text{crs rep}})$$

A.2.12 Choice of the i and $(i + 1)$ gears

The wide-open-throttle acceleration $a_{\text{wot ref}}$ is simulated by the combination of the $a_{\text{wot } i}$ and $a_{\text{wot } (i + 1)}$ accelerations corresponding to the two i and $(i + 1)$ gears with

$$a_{\text{wot } (i + 1)} < a_{\text{wot ref}} < a_{\text{wot } i} \text{ and}$$

$$k = (a_{\text{wot ref}} - a_{\text{wot } (i + 1)}) / (a_{\text{wot } i} - a_{\text{wot } (i + 1)})$$

where k is defined as the interpolation factor between the i and $(i + 1)$ gears.

A.2.13 Wide-open-throttle noise and constant-speed noise

The wide-open-throttle level of noise $L_{\text{wot rep}}$ or constant-speed level of noise $L_{\text{crs rep}}$ of a vehicle is a combination of the measured level of noise for the i and $(i + 1)$ gears at wide-open throttle and at constant speed, using the hypothesis that noise is proportional to engine speed if vehicle speed and engine load are constant.

$$L_{\text{wot rep}} = L_{\text{wot } (i + 1)} + k(L_{\text{wot } i} - L_{\text{wot } (i + 1)})$$

$$L_{\text{crs rep}} = L_{\text{crs } (i + 1)} + k(L_{\text{crs } i} - L_{\text{crs } (i + 1)})$$

The sound pressure level L_{urban} (which is obtained as a combination of the wide-open-throttle and constant-speed level of noise for two different gears) is the vehicle urban traffic level of noise during the 90th percentile acceleration phase at 50 km/h. As such, L_{urban} represents the 90th percentile of noise emission during typical urban conditions. Figure A.19 summarizes the procedure for cars and light vans.

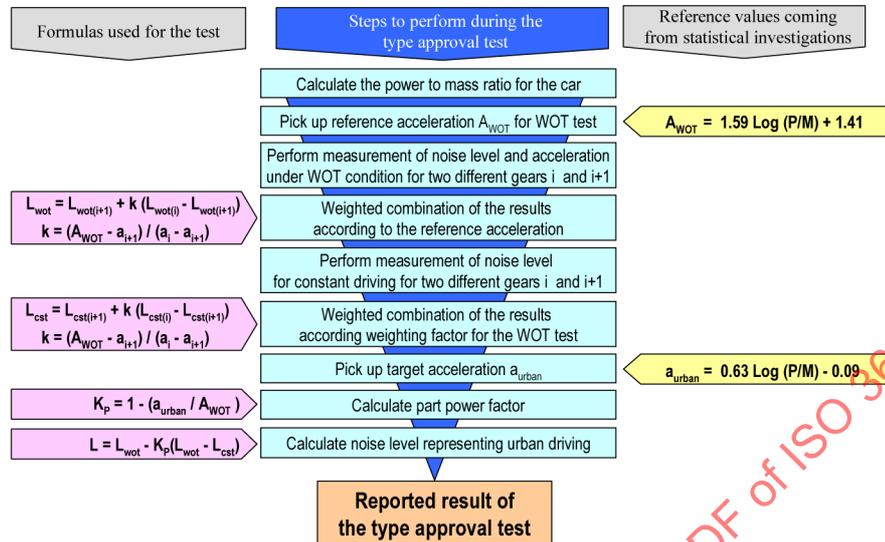


Figure A.19 — Pass-by noise measurement procedure

NOTE This is only a conceptual flow diagram. Refer to the actual procedure for specific requirements.

A.2.14 Period exceeding the measured level of noise

During urban driving, what is the time percentage during which the vehicle level of noise exceeds the one which is measured according to the suggested procedure? Figure A.20 describes a vehicle noise map, measured for all throttle conditions, all gear ratios and all vehicle speeds.

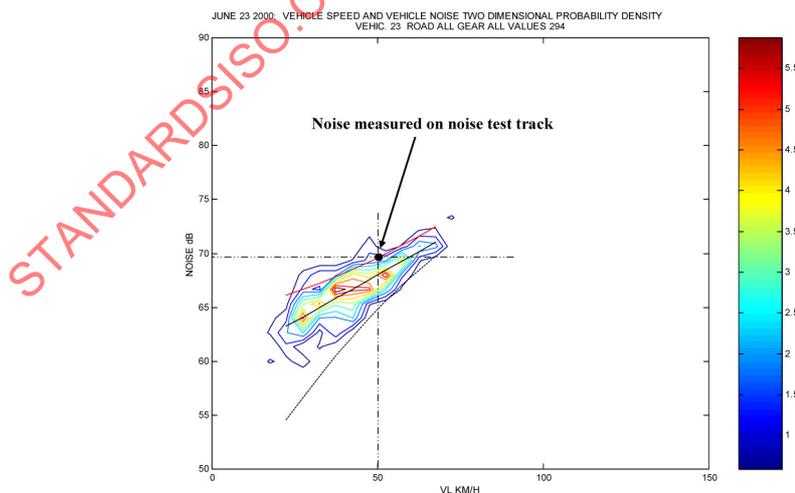


Figure A.20 — Maximum level of noise emitted by vehicle in urban driving conditions at the maximum acceleration (density of probability along the trip)

Knowing that the noise emission is a function of the partial power, gear ratio and vehicle velocity, it is possible to compute an instantaneous urban traffic noise emission for a vehicle. The required information is vehicle speed, the gear ratio and the vehicle acceleration during driving time. This results in noise emission as a function of time.

The maximum level of noise of the acceleration phases is statistically analysed. Figure A.20 is the two-dimensional probability density diagram of the maximum level of noise of a vehicle at the speed at which maximum noise takes place. As an example, this vehicle's measured sound pressure level is 70 dB according to this procedure.

It can be seen that on an urban route, the maximum noise emission for the acceleration phase does not exceed the on-track-edge-measured level of noise according to the procedure defined in this part of ISO 362, except for a small percent (2 % in the given example) of acceleration phases under 50 km/h and for vehicle speeds greater than 50 km/h.

A.2.15 Summary of procedure for categories M1 and M2 having maximum authorized mass not exceeding 3 500 kg, and category N1

The procedure defined in this part of ISO 362, outlined in Figure A.19, enables one to measure a vehicle's urban traffic sound pressure level during the driving phase causing most disturbance, i.e. acceleration phases at 50 km/h. The measured sound pressure level corresponds to the 90th percentile of the maximum noise emitted during the acceleration phases in urban traffic. The method provides excitation of all significant vehicle noise sources to provide the 90th percentile estimate of a vehicle's noise emission in an urban environment. This noise estimate should provide good correlation to actual vehicle noise emissions in the environment when the road surface is in good condition and approximates the noise characteristics specified in ISO 10844. Road surfaces of this type are presently in use, with road surfaces specifically designed to be "low noise", having lower noise emission levels than the ISO 10844 surface for typical M1 and N1 vehicles.

This method takes into account real driving behaviour, which depends on the acceleration potential and on the power-to-mass ratio of a vehicle. The method is based on the performance criteria of acceleration and is independent of the vehicle technology, transmission type, number of transmission gears, and the type of engine. These performance criteria make this method applicable to current and future vehicles, including adaptive automatic transmissions, hybrid vehicles, electric vehicles and fuel cell vehicles.